
© Siemens 2022

SIEMENS

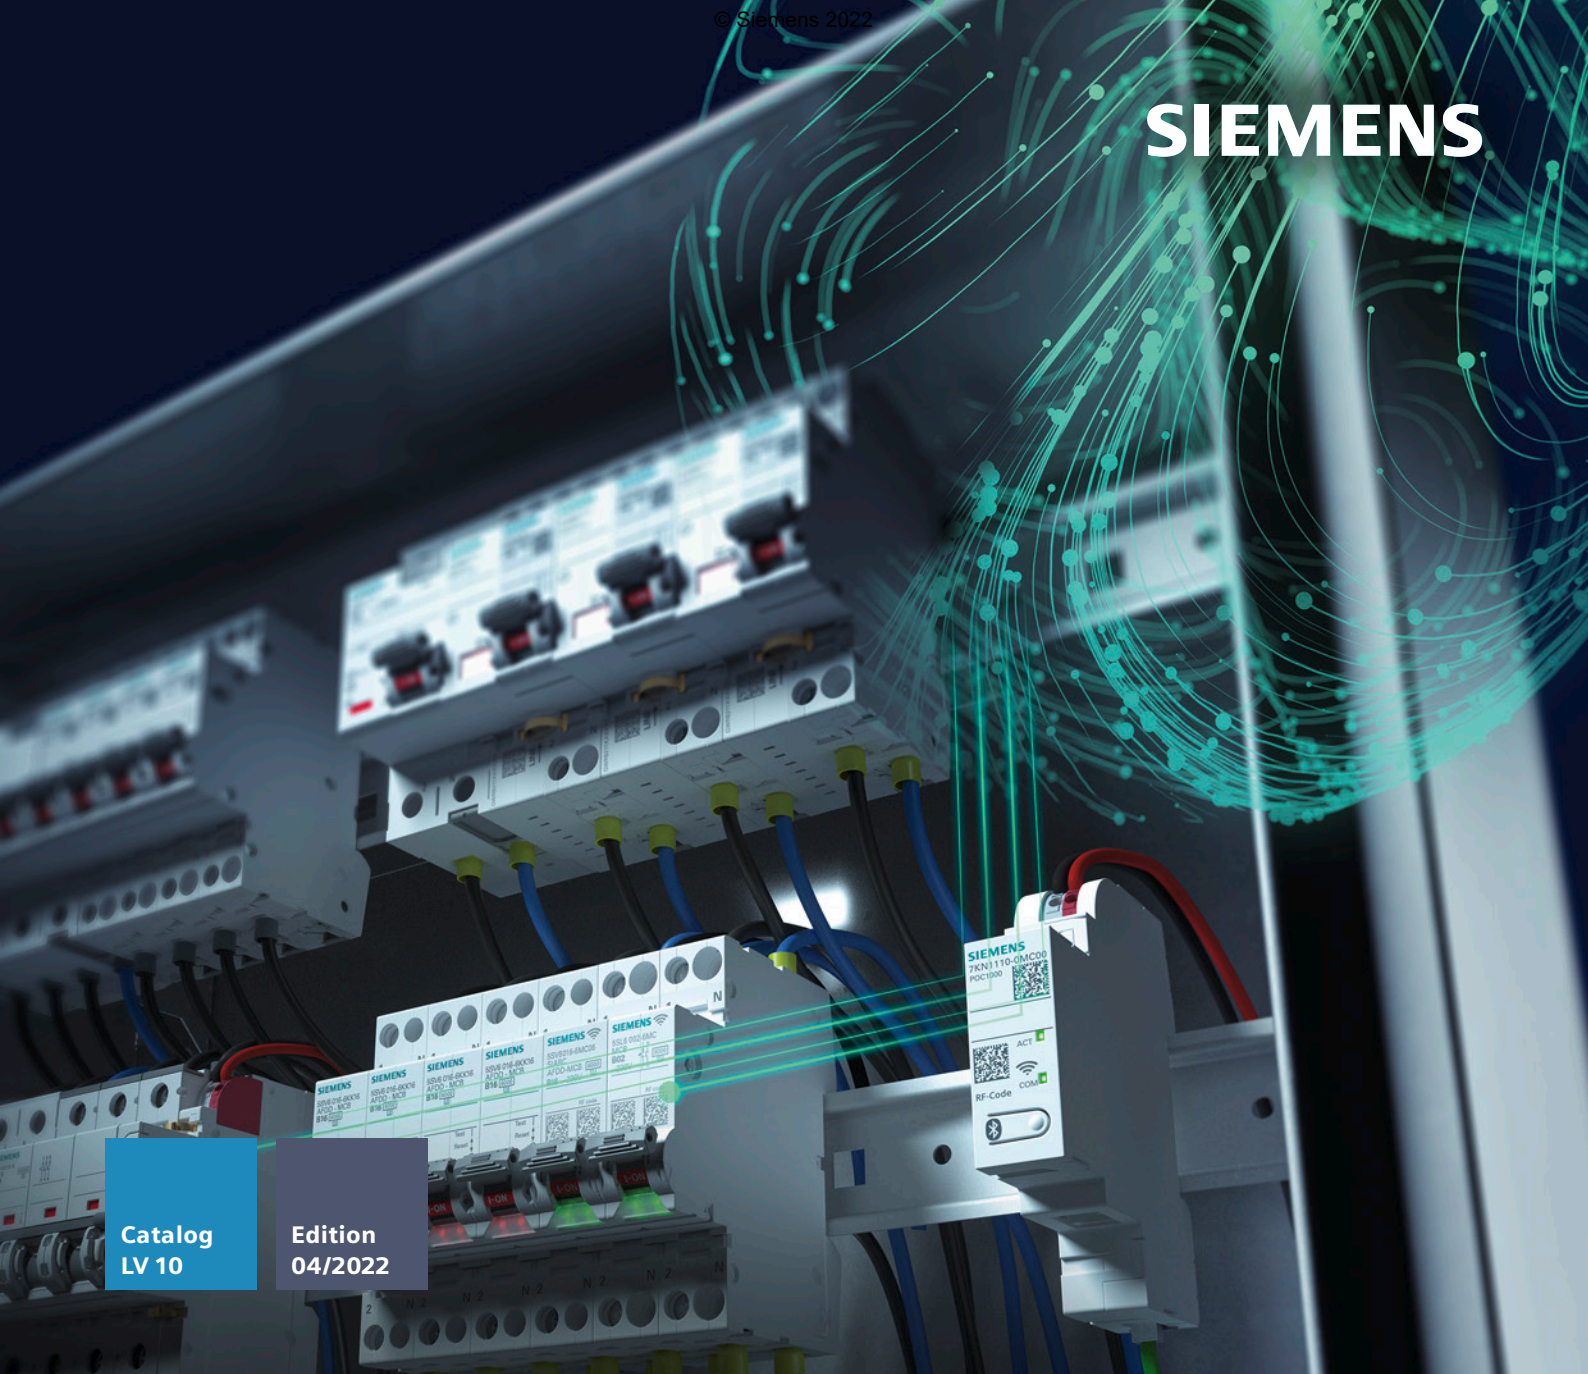

Catalog
LV 10

Edition
04/2022

SENTRON • SIVACON • ALPHA

Low-Voltage Power Distribution and Electrical Installation Technology

Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems

siemens.com/lowvoltage

© Siemens 2022

Innovative solutions for industrial controls and power distribution

In ensuring smooth operation of digital production environments and in the construction and operation of industrial or commercial buildings, the underlying power distribution and industrial controls are decisive:

SIRIUS, SENTRON, SIVACON and ALPHA provide a broad portfolio of systems and components for this purpose that can be used for standard-compliant, requirement-based electrification.

Efficient engineering tools and cloud-based solutions are part of the portfolio, which you can flexibly adapt to your specific requirements over the entire value-added process.



We are there when you need us

Your personal contact can be found at
www.siemens.de/lowvoltage/kontakt

Catalog LV 10 · 04/2022

You will find the latest edition and all future editions in the Siemens Industry Online Support at
www.siemens.com/lowvoltage/catalogs

Refer to the Industry Mall for current prices
www.siemens.de/lowvoltage/mall

The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with EN ISO 9001 (for the Certified Registration Nos., see **www.siemens.com/system-certificates/ep**).
The certificate is recognized by all IQNet countries.

Technical specifications
The technical specifications are for general information purposes only. Always heed the operating instructions and notices on individual products during assembly, operation and maintenance.

All illustrations are not binding.

© Siemens 2022

© Siemens 2022

Low-Voltage Power Distribution and Electrical Installation Technology

	Introduction	I/2
Protecting	Air Circuit Breakers	1/1
	Molded Case Circuit Breakers	2/1
	Miniature Circuit Breakers	3/1
	Residual Current Protective Devices/Arc Fault Detection Devices (AFDDs)	4/1
	Switching Devices	5/1
	Overvoltage Protection Devices	6/1
	Fuse Systems	7/1
Protecting, Switching and Isolating	Switch Disconnectors	8/1
Switching and Isolating	Transfer Switching Equipment and Load Transfer Switches	9/1
Measuring and Monitoring	Measuring Devices, Power Monitoring and Digitalization Solutions	10/1
	Monitoring Devices	11/1
Distribution	Transformers, Power Supply Units and Socket Outlets	12/1
	Busbar Systems	13/1
	Terminal Blocks	14/1
	Power Distribution Boards, Motor Control Centers and Distribution Boards	15/1
	Busbar Trunking Systems	16/1
	System Cubicles, System Lighting and System Air-Conditioning	17/1
	Appendix	A/1

© Siemens 2022

New products

SENTRON powermanager – Version 5.1



- Simplified installation routine
- Stability and system improvements
- Number of supported devices increased to 700
- "Condition Monitoring" for MCCBs and ACBs
- Extended device library
- Additional reports such as Sankey diagram and third-party quantity delimitation report

See chapter 10
Page 10/14

7KN Powercenter 3000 – Version 1.4.1



- Data transfer to SENTRON powermind for
  - 3WA air circuit breakers
  - SENTRON circuit protection devices with measuring and communication function (MCB, AFDD, 3NA COM)
  - PAC1600
- Time synchronization
  - Now also for devices connected to 7KN Powercenter 3000 via Modbus RTU (serial communication)

See chapter 10
Page 10/18

© Siemens 2022

SENTRON powermind – Version 1.4.1



- Support of CP-COM devices and data preparation in predefined dashboards
  - Support of 3WA air circuit breaker and data preparation in predefined dashboards
  - Support of PAC1600
  - Support with engineering and operation of SENTRON powermind

See chapter 10
Page 10/20

SENTRON PROFINET Proxy SPP2000




- Proxy for transition from Modbus TCP-capable measuring devices to PROFINET IO. Connection of up to 8 devices from the PAC2200, PAC2200 CLP, PAC2200 MID and PAC3200T product ranges
- Configuration in TIA Portal according to individual system and application requirements
- No additional software required
- Full support of PROFINET feature sets (Conformance Class C (IRT), system and media redundancy)
- Small width of only 1 MW (modular width)

See chapter 10
Page 10/26

© Siemens 2022


The fast route to the product

Overviews and matrix tables for better orientation within the catalog

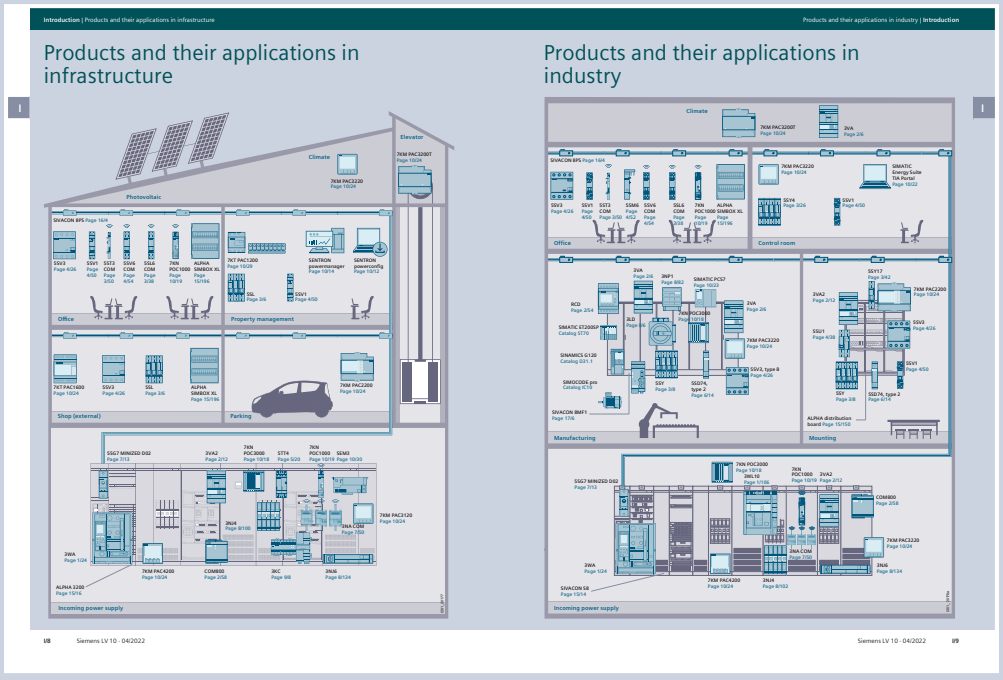

Overview of products and their applications


On pages I/8 to I/9 you can find an overview of the diverse portfolio of catalog LV 10.

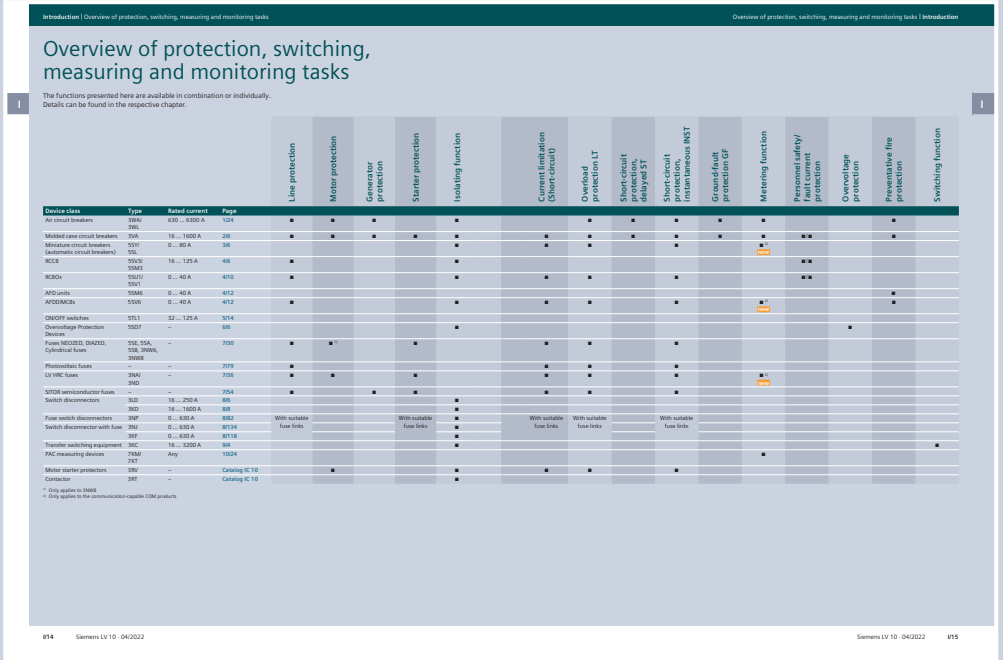

Protection, switching, measuring and monitoring tasks

From page 1/24 onwards, the catalog LV 10 portfolio is dedicated to the most important protection, switching, measuring and monitoring tasks.

© Siemens 2022

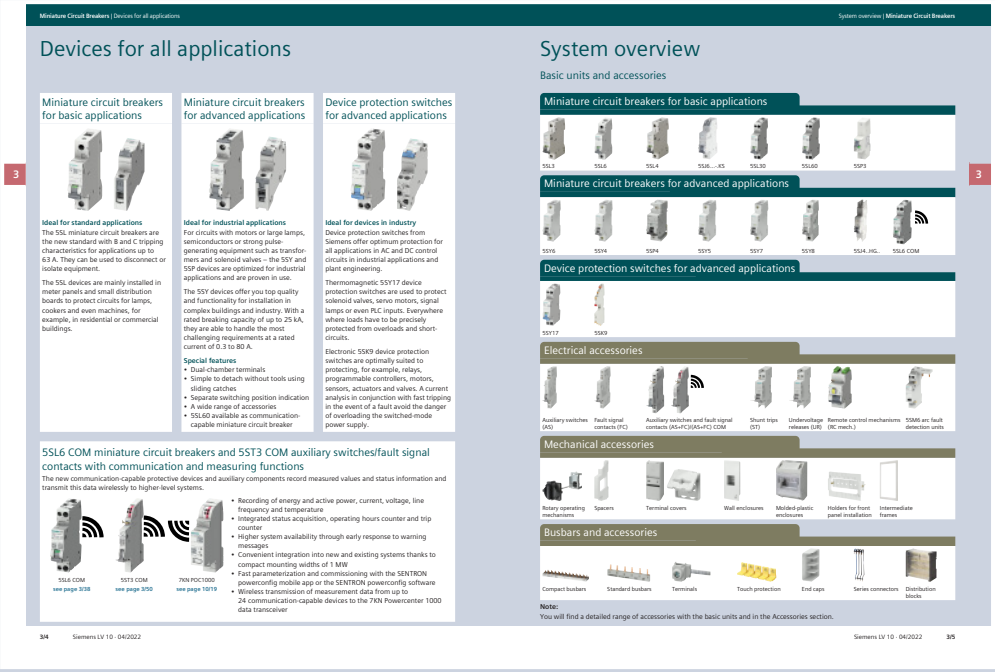

Miniature Circuit Breakers | Devices for all applications

System overview | Miniature Circuit Breakers

Devices for all applications

Miniature circuit breakers for basic applications

Ideal for standard applications
The 5SL miniature circuit breakers are the new standard with B and C tripping characteristics for applications up to 63 A. They can be used to disconnect or isolate equipment.

The 5SL devices are mainly installed in meter panels and small distribution boards to protect circuits for lamps, cookers and even machines, for example, in residential or commercial buildings.

Miniature circuit breakers for advanced applications

Ideal for industrial applications
For circuits with motors or large lamps, semiconductors or strong pulse-generating equipment such as transformers and solenoid valves – the 5SY and 5SP devices are optimized for industrial applications and are proven in use.

The 5SY devices offer you top quality and functionality for installation in complex buildings and industry. With a rated breaking capacity of up to 25 kA, they are able to handle the most challenging requirements at a rated current of 0.3 to 80 A.

Special features
- Dual-chamber terminals
- Simple to detach without tools using sliding catches
- Separate switching position indication
- A wide range of accessories
- 5SL60 available as communication-capable miniature circuit breaker

Device protection switches for advanced applications

Ideal for devices in industry
Device protection switches from Siemens offer optimum protection for all applications in AC and DC control circuits in industrial applications and plant engineering.

Thermomagnetic 5SY17 device protection switches are used to protect solenoid valves, servo motors, signal lamps or even PLC inputs. Everywhere where loads have to be precisely protected from overloads and short-circuits.

Electronic 5SK9 device protection switches are optimally suited to protecting, for example, relays, programmable controllers, motors, sensors, actuators and valves. A current analysis in conjunction with fast tripping in the event of a fault avoid the danger of overloading the switched-mode power supply.

5SL6 COM miniature circuit breakers and 5ST3 COM auxiliary switches/fault signal contacts with communication and measuring functions

The new communication-capable protective devices and auxiliary components record measured values and status information and transmit this data wirelessly to higher-level systems.

5SL6 COM see page 3/38
5ST3 COM see page 3/50
7KN POC1000 see page 10/19

- Recording of energy and active power, current, voltage, line frequency and temperature
- Integrated status acquisition, operating hours counter and trip counter
- Higher system availability through early response to warning messages
- Convenient integration into new and existing systems thanks to compact mounting widths of 1 MW
- Fast parameterization and commissioning with the SENTRON powerconfig mobile app or the SENTRON powerconfig software
- Wireless transmission of measurement data from up to 24 communication-capable devices to the 7KN Powercenter 1000 data transceiver

System overview

Basic units and accessories

Miniature circuit breakers for basic applications

5SL3 | 5SL6 | 5SL4 | 5SL6...-XS | 5SL30 | 5SL60 | 5SP3

Miniature circuit breakers for advanced applications

5SY6 | 5SY4 | 5SP4 | 5SY5 | 5SY7 | 5SY8 | 5SJ4..HG.. | 5SL6 COM

Device protection switches for advanced applications

5SY17 | 5SK9

Electrical accessories

Auxiliary switches (AS) | Fault signal contacts (FC) | Auxiliary switches and fault signal contacts (AS+FC)/(AS+FC) COM | Shunt trips (ST) | Undervoltage releases (UR) | Remote control mechanisms (RC mech.) | 5SM6 arc fault detection units

Mechanical accessories

Rotary operating mechanisms | Spacers | Terminal covers | Wall enclosures | Molded-plastic enclosures | Holders for front panel installation | Intermediate frames

Busbars and accessories

Compact busbars | Standard busbars | Terminals | Touch protection | End caps | Series connectors | Distribution blocks


Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

3/4 Siemens LV 10 · 04/2022

Siemens LV 10 · 04/2022 3/5

System overview

An overview of the basic units and accessories can be found in the system overview at the beginning of the chapters or sections. The color helps you recognize the accessory at a glance.

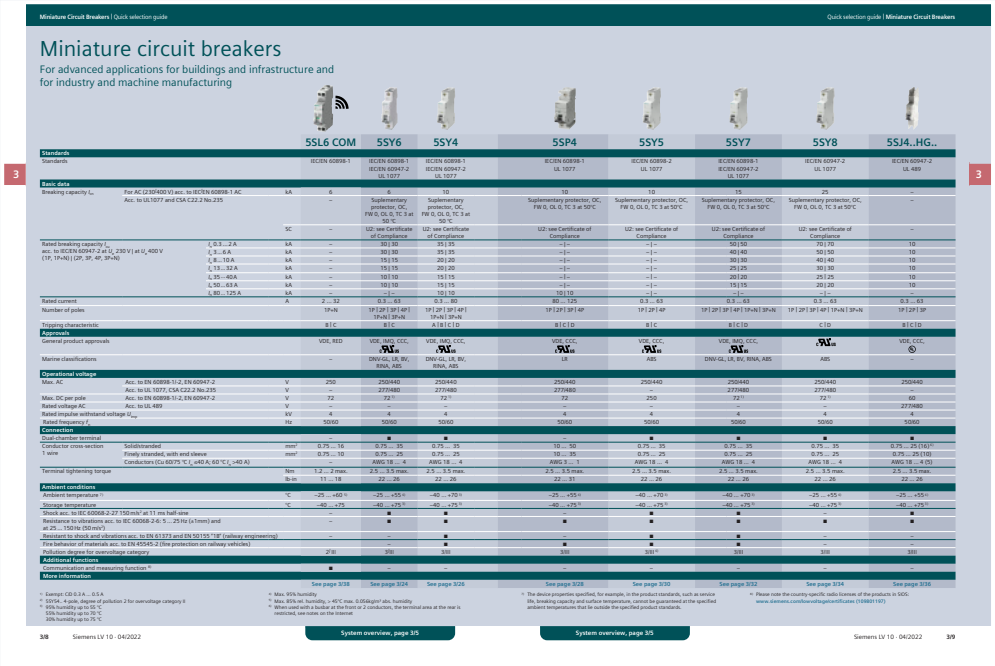

Miniature Circuit Breakers | Quick selection guide

Quick selection guide | Miniature Circuit Breakers

Miniature circuit breakers

For advanced applications for buildings and infrastructure and for industry and machine manufacturing

				5SL6 COM	5SY6	5SY4	5SP4	5SY5	5SY7	5SY8	5SJ4..HG..
Standards											
Standards				IEC/EN 60898-1	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60898-1 UL 1077	IEC/EN 60898-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 489
Basic data											
Breaking capacity I_{cn}	For AC (230/400 V) acc. to IEC/EN 60898-1 AC	kA	6	6	10	10	10	15	25	–
	Acc. to UL1077 and CSA C22.2 No.235	kA	–	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Supplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	–
		SC	–	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	–
Rated breaking capacity I_{cn} acc. to IEC/EN 60947-2 at U_e 230 V | at U_e 400 V (1P, 1P+N) | (2P, 3P, 4P, 3P+N)	I_n 0.3 ... 2 A	kA	–	30 | 30	35 | 35	– | –	– | –	50 | 50	70 | 70	10
	I_n 3 ... 6 A	kA	–	30 | 30	35 | 35	– | –	– | –	40 | 40	50 | 50	10
	I_n 8 ... 10 A	kA	–	15 | 15	20 | 20	– | –	– | –	30 | 30	40 | 40	10
	I_n 13 ... 32 A	kA	–	15 | 15	20 | 20	– | –	– | –	25 | 25	30 | 30	10
	I_n 35 ... 40 A	kA	–	10 | 10	15 | 15	– | –	– | –	20 | 20	25 | 25	10
	I_n 50 ... 63 A	kA	–	10 | 10	15 | 15	– | –	– | –	15 | 15	20 | 20	10
	I_n 80 ... 125 A	kA	–	– | –	10 | 10	10 | 10	– | –	– | –	– | –	–
Rated current		A	2 ... 32	0.3 ... 63	0.3 ... 80	80 ... 125	0.3 ... 63	0.3 ... 63	0.3 ... 63	0.3 ... 63
Number of poles			1P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P	1P | 2P | 3P | 4P	1P | 2P | 3P | 4P | 1P+N	1P | 2P | 3P | 4P | 1P+N	1P | 2P | 3P
Tripping characteristic			B | C	B | C	A | B | C | D	B | C	B | C	B | C | D	C | D	B | C | D
Approvals											
General product approvals			VDE, RED	VDE, KEMA, CCC, cULus	VDE, KEMA, CCC, cULus	VDE, KEMA, CCC, cULus	cULus, CCC, cULus	VDE, KEMA, CCC, cULus	cULus	VDE, CCC,
Marine classifications			–	DNV-GL, LR, BV, RINA, ABS	DNV-GL, LR, BV, RINA, ABS	LR	ABS	DNV-GL, LR, BV, RINA, ABS	ABS	–
Operational voltage											
Max. AC	Acc. to EN 60898-1/-2, EN 60947-2	V	250	250/440	250/440	250/440	250/440	250/440	250/440	250/440
	Acc. to UL 1077, CSA C22.2 No.235	V	–	277/480	277/480	277/480	–	277/480	277/480	–
Max. DC per pole	Acc. to EN 60898-1/-2, EN 60947-2	V	72	72 [1]	72 [1]	72	250	72 [1]	72 [1]	60
Rated voltage AC	Acc. to UL 489	V	–	–	–	–	–	–	–	277/480
Rated impulse withstand voltage U_{imp}		kV	4	4	4	4	4	4	4	4
Rated frequency f_n		Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Connection											
Dual-chamber terminal			–	■	■	■	■	■	■	■
Conductor cross-section 1 wire	Solid/stranded	mm²	0.75 ... 16	0.75 ... 35	0.75 ... 35	10 ... 50	0.75 ... 35	0.75 ... 35	0.75 ... 35	0.75 ... 25 (16) [6]
	Finely stranded, with end sleeve	mm²	0.75 ... 10	0.75 ... 25	0.75 ... 25	10 ... 35	0.75 ... 25	0.75 ... 25	0.75 ... 25	0.75 ... 25 (10)
	Conductors (Cu 60/75 °C, I_n ≤40 A, 60 °C, >40 A)	–	–	AWG 18 ... 4	AWG 18 ... 4	AWG 3 ... 1	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4 (1)
Terminal tightening torque		Nm	1.2 ... 2 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
		lb-in	11 ... 18	22 ... 26	22 ... 26	22 ... 31	22 ... 26	22 ... 26	22 ... 26	22 ... 26
Ambient conditions											
Ambient temperature [3]		°C	–25 ... +60 [3]	–25 ... +55 [4]	–25 ... +55 [4]	–40 ... +70 [4]	–25 ... +55 [4]	–40 ... +70 [4]	–40 ... +70 [4]	–25 ... +55 [4]
Storage temperature		°C	–40 ... +75	–40 ... +75 [5]	–40 ... +75 [5]	–40 ... +75 [5]	–40 ... +75 [5]	–40 ... +75 [5]	–40 ... +75 [5]	–40 ... +75 [5]
Shock acc. to IEC 60068-2-27 150 m/s² at 11 ms half-sine		–	–	■	■	–	■	■	–	■
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s²)		–	–	■	■	■	■	■	■	■
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)		–	–	–	■	–	■	■	–	–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)		–	–	–	■	■	■	■	–	–
Pollution degree for overvoltage category		2 [2]	3 [2]	3 [2]	3 [2]	3 [2]	3 [2]	3 [2]	3 [2]	3 [2]
Additional functions											
Communication and measuring function [8]		■	–	–	–	–	–	–	–	–
More information											
				See page 3/38	See page 3/24	See page 3/26	See page 3/28	See page 3/30	See page 3/32	See page 3/34	See page 3/36

[1] Example: CID 0.3 A ... 0.5 A
[2] 5SY54.. 4-pole, degree of pollution 2 for overvoltage category II
[3] 95% humidity up to 55 °C
55% humidity up to 70 °C
30% humidity up to 75 °C
[4] Max. 95% humidity
[5] Max. 85% rel. humidity, + 45°C max. 0.056kg/m³ abs. humidity
[6] When used with a busbar at the front or 2 conductors, the terminal area at the rear is restricted, see notes on the Internet.
[7] The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.
[8] Please note the country-specific radio licenses of the products in SIOS: www.siemens.com/lowvoltagecertificates (10980197)

System overview, page 3/5

System overview, page 3/5

3/8 Siemens LV 10 · 04/2022

Siemens LV 10 · 04/2022 3/9


Overview of basic units

The overviews at the beginning of the chapters and sections help you make a quick advance selection of the basic units. You can use the important technical specifications to compare the basic units. Page references quickly take you to the suitable devices.

© Siemens 2022


The fast route to the product

Overviews and matrix tables for better orientation within the catalog

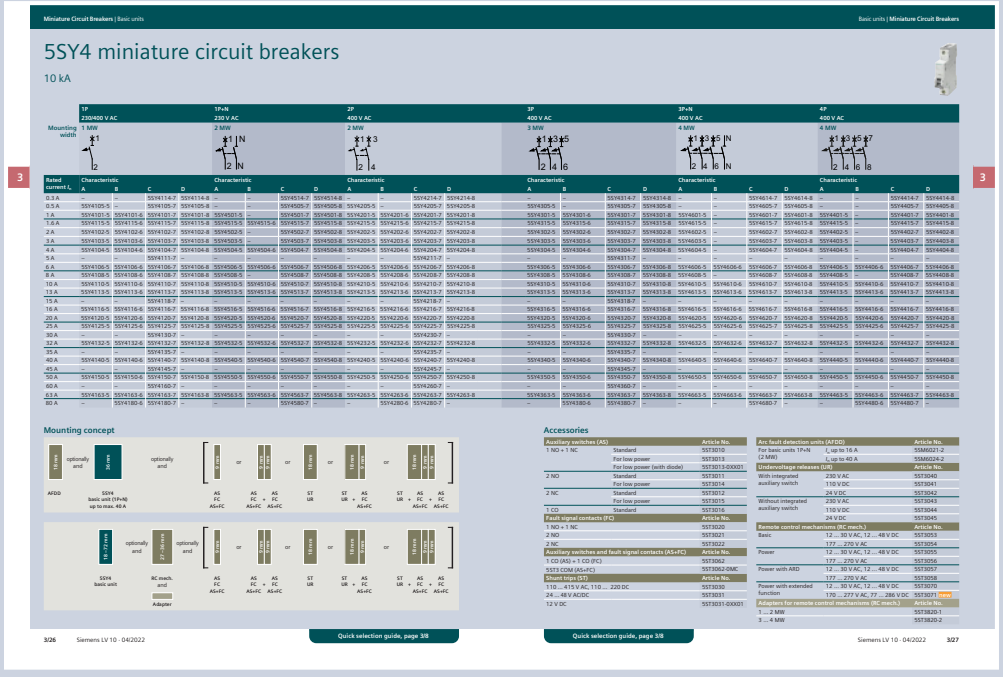

Product page

The article number matrix shows you on the spot which product variants are available. The matching accessories are clearly dedicated to each basic unit – often directly on the same page.

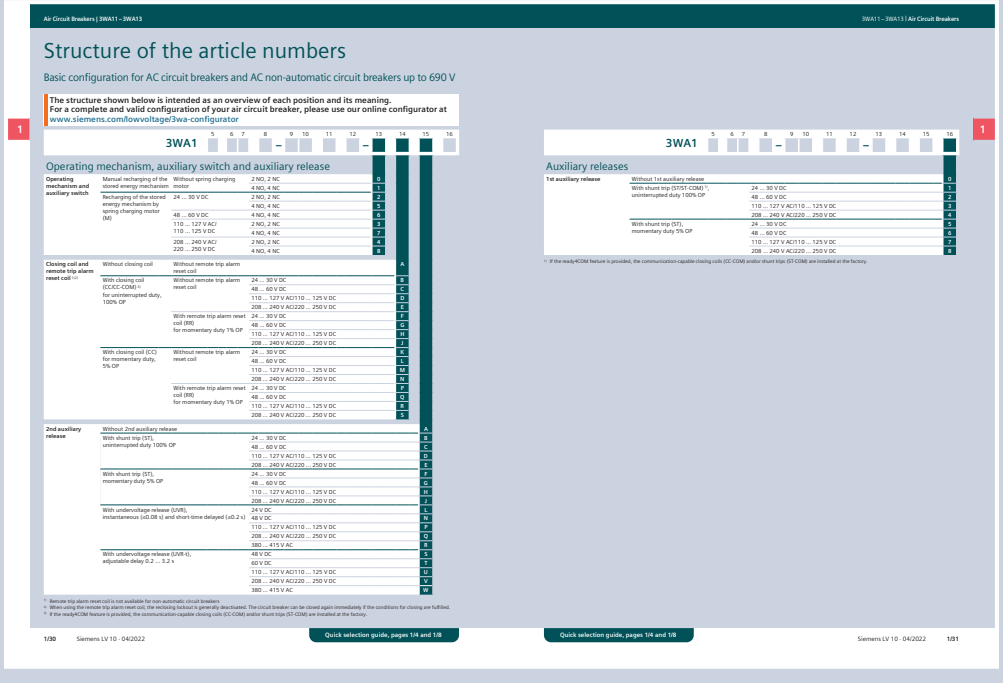

Configurable products

For products which are conveniently configurable online, the structure of the article numbers is clearly displayed. A link takes you directly to the configurator which permits complete and valid configuration.

© Siemens 2022

Clickable article numbers

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog



or by entering this web address incl. article number
www.siemens.com/product?Article No.


new Search function

Search for new products by entering "new" in the text field of the search function




© Siemens 2022

Products and their applications in infrastructure

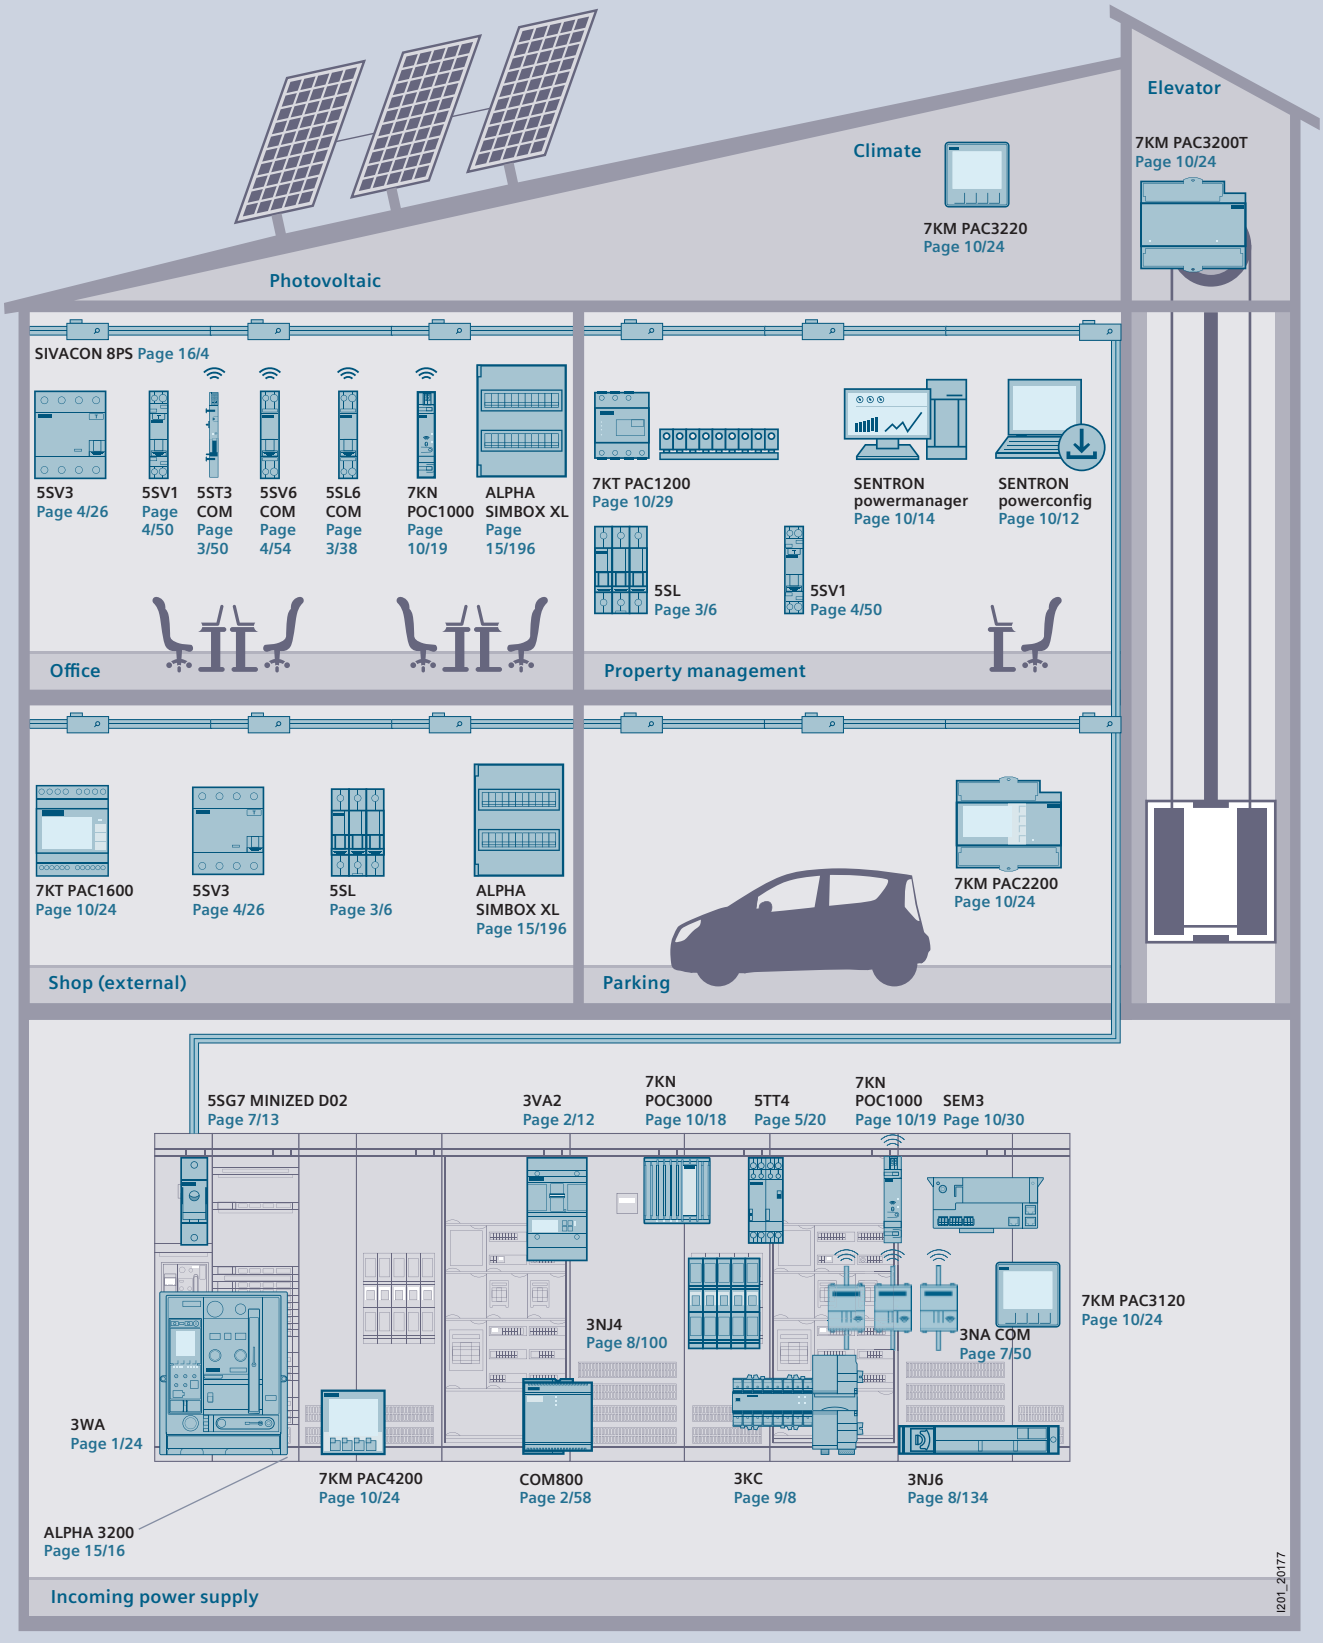


© Siemens 2022

Products and their applications in industry

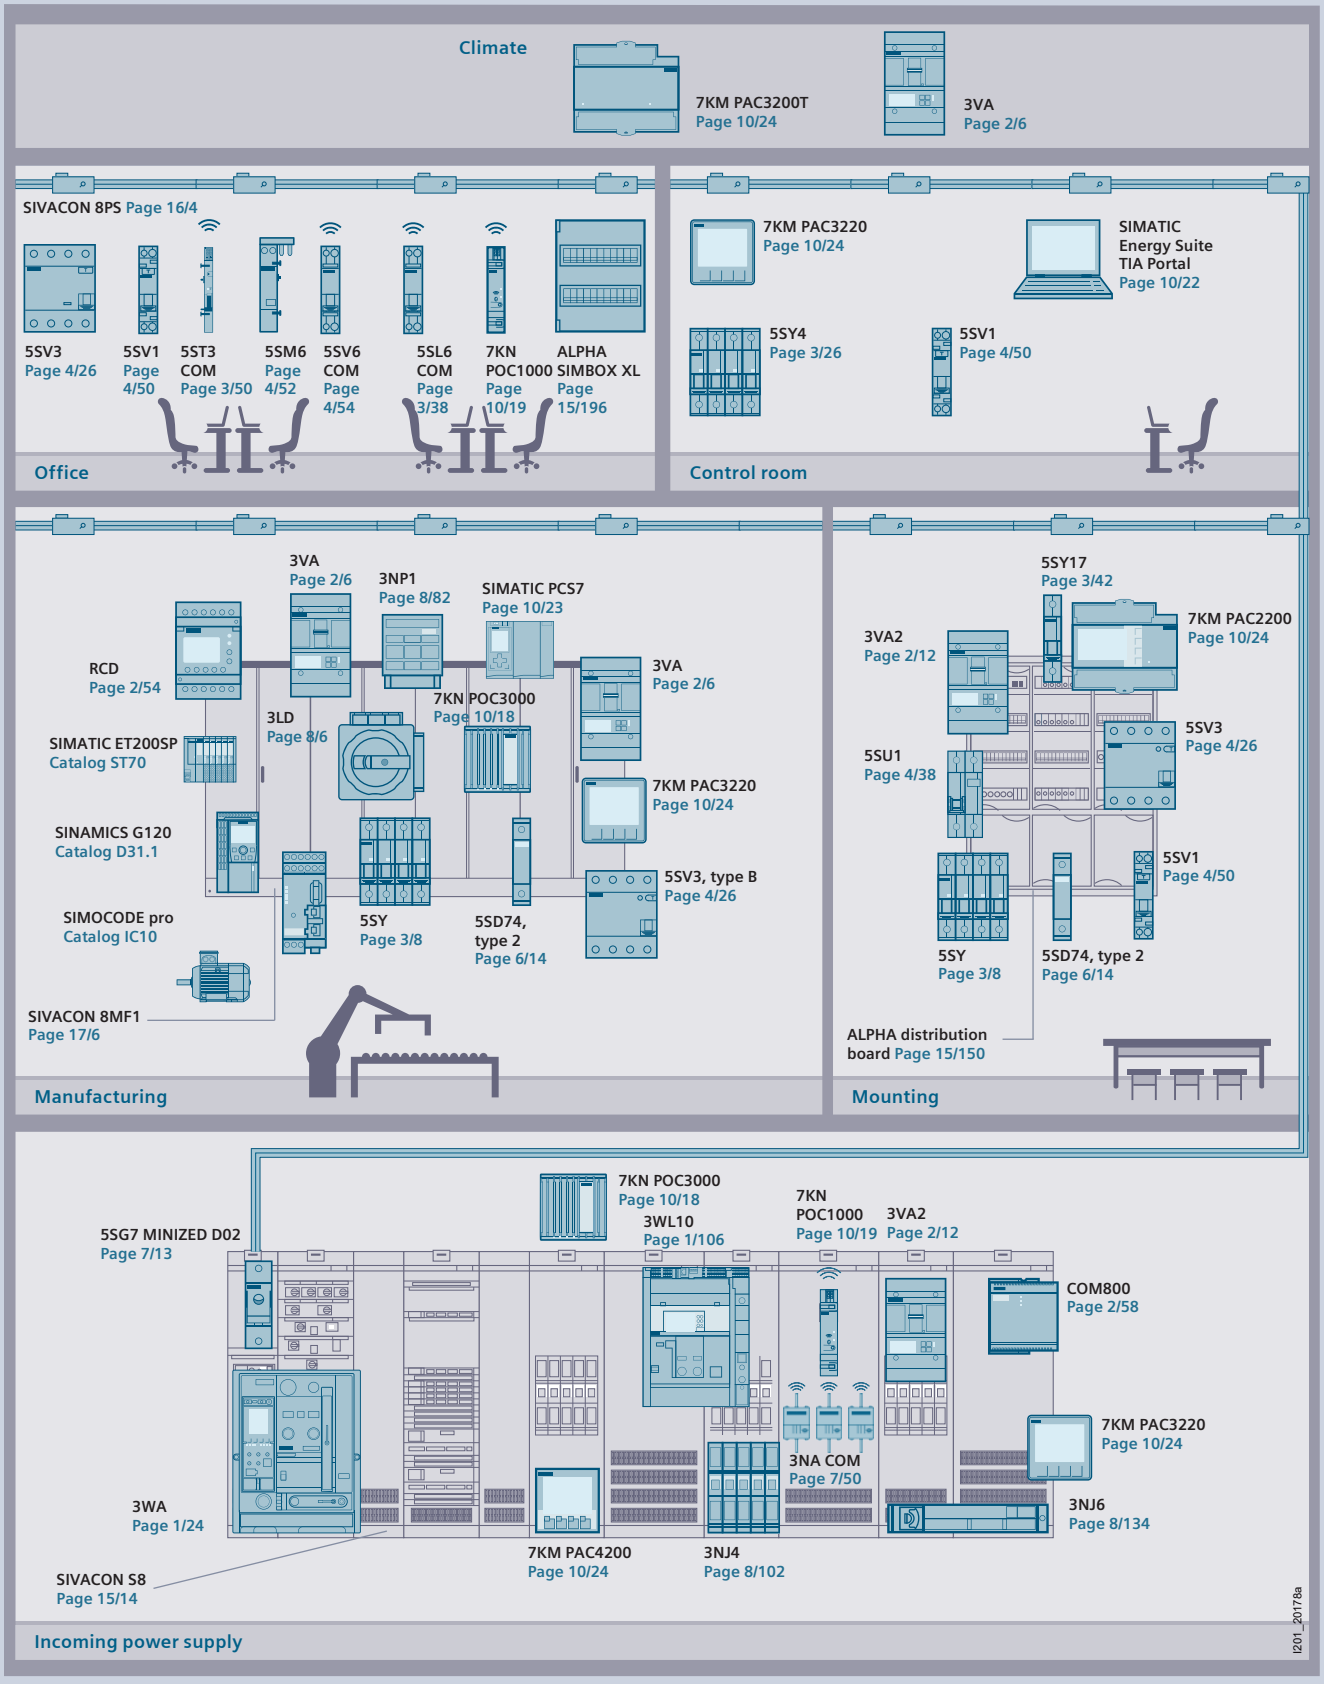

© Siemens 2022

Examples of digitalization in infrastructure

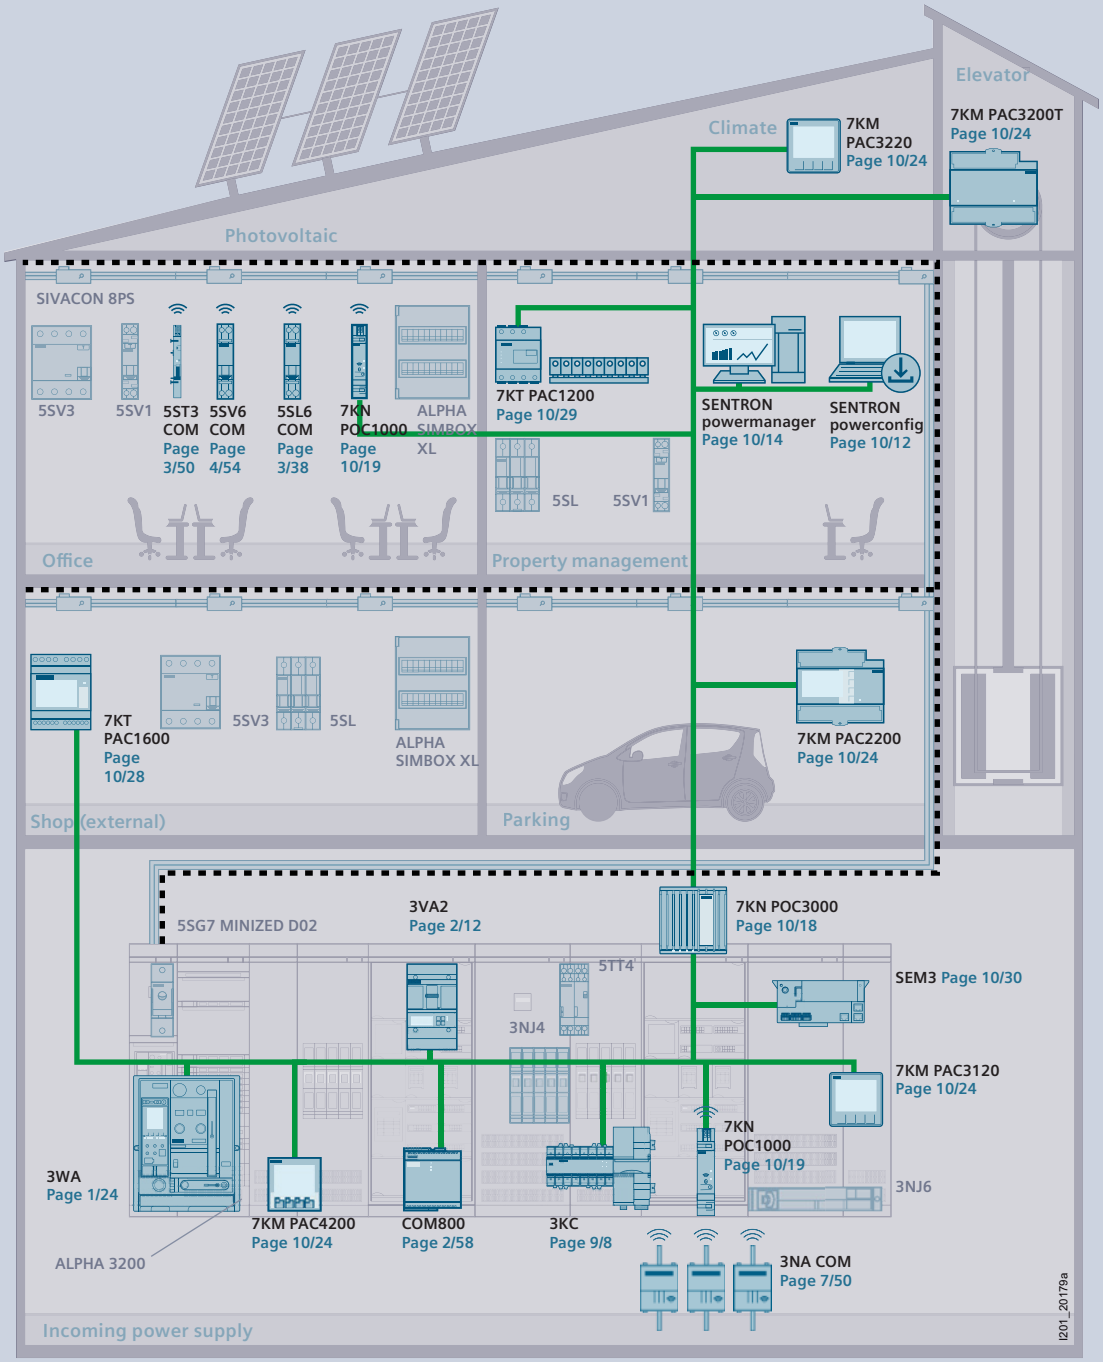

Cloud-based analysis



Condition monitoring

Predictive maintenance

Power monitoring

On premises



Measuring, evaluating and controlling with SENTRON powermanager / Desigo CC power monitoring software

Stand-alone



Decentralized visualization of measured values, states and alarms via integrated web servers in measuring devices and Powercenter 3000

Industrial Ethernet
3VA-line
powerline

© Siemens 2022

Examples of digitalization in industry

Cloud-based analysis



Condition monitoring

Predictive maintenance

Power monitoring

On premises




Measuring, evaluating and controlling with SIMATIC Energy Suite / TIA Portal

Stand-alone



Decentralized visualization of measured values, states and alarms via integrated web servers in measuring devices and Powercenter 3000

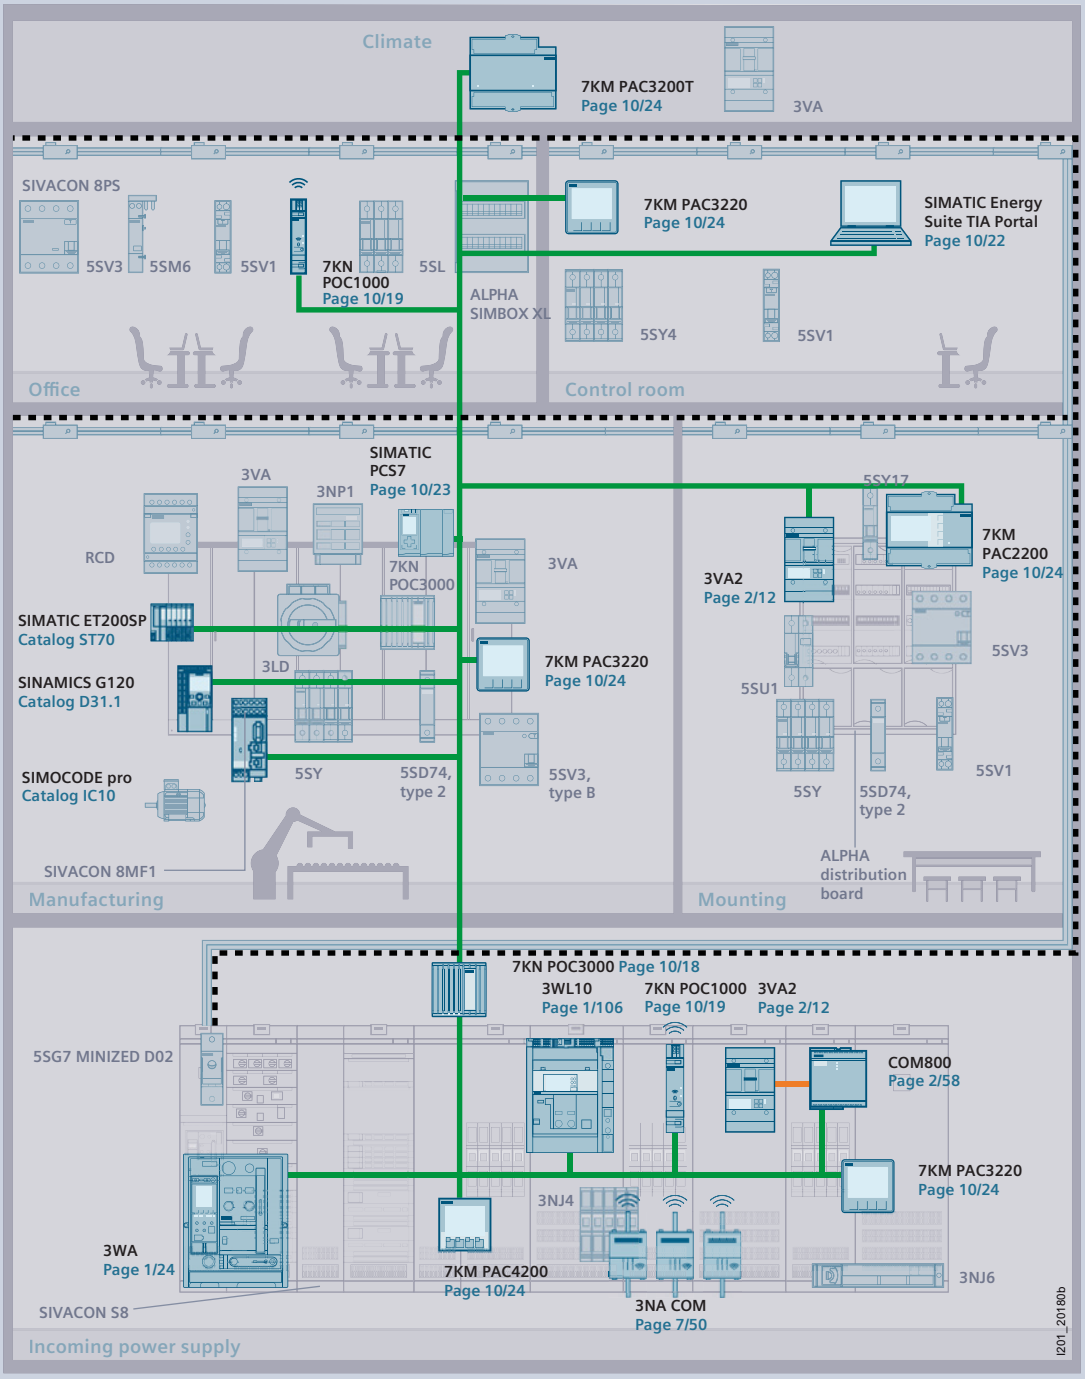

Industrial Ethernet
3VA-line
powerline

© Siemens 2022

Introduction to the topic of digitalization and Industry 4.0

In industrial automation, the demand for communication capability, data transparency and flexibility is growing constantly. To enable industrial switchgear technology to meet this demand, the use of bus systems and intelligent switching devices is unavoidable.

Digitalization

Protection, switching and measuring devices in power distribution systems can display important information on local visualization via integrated communication, e.g. in Powercenter, or transmit it to energy data management systems (EDMS), e.g. SENTRON powermanager, as well as to cloud systems and applications.

- Diagnostics management
- Fault management – Email alarm
- Maintenance management – predictive maintenance
- Cost center management

1. Visualization and plant transparency



- Greater operational reliability thanks to remote access to the plant.
- Plant visualization for central and simple access to all device information.

2. Digital documentation



- Uniform access to digital data and documentation.
- Provision of extensive CAx data for systems and components during planning and operation.
- Support in planning and process creation using SIMARIS planning tools, product and system configurators.

3. Power monitoring



- Fulfilling the ISO 50001 by detecting and transparently presenting the energy flows within energy distribution.

4. Optimization and retrofit



- Retrofitting solutions such as SEM3 offer a simple option for integrating energy monitoring into existing systems.
- Energy monitoring and plant transparency help you efficiently plan plant expansion.

5. Maintenance management



- Maintenance support, even remotely, by transparently presenting the status of a switchgear and controlgear assembly.

6. Emergency management




- Quick error localization which therefore leads to a minimization of outage times.

7. Cybersecurity



- Protection from unauthorized access and manipulation to switchgear and controlgear assemblies and devices ensures integrity, availability and confidentiality.

© Siemens 2022

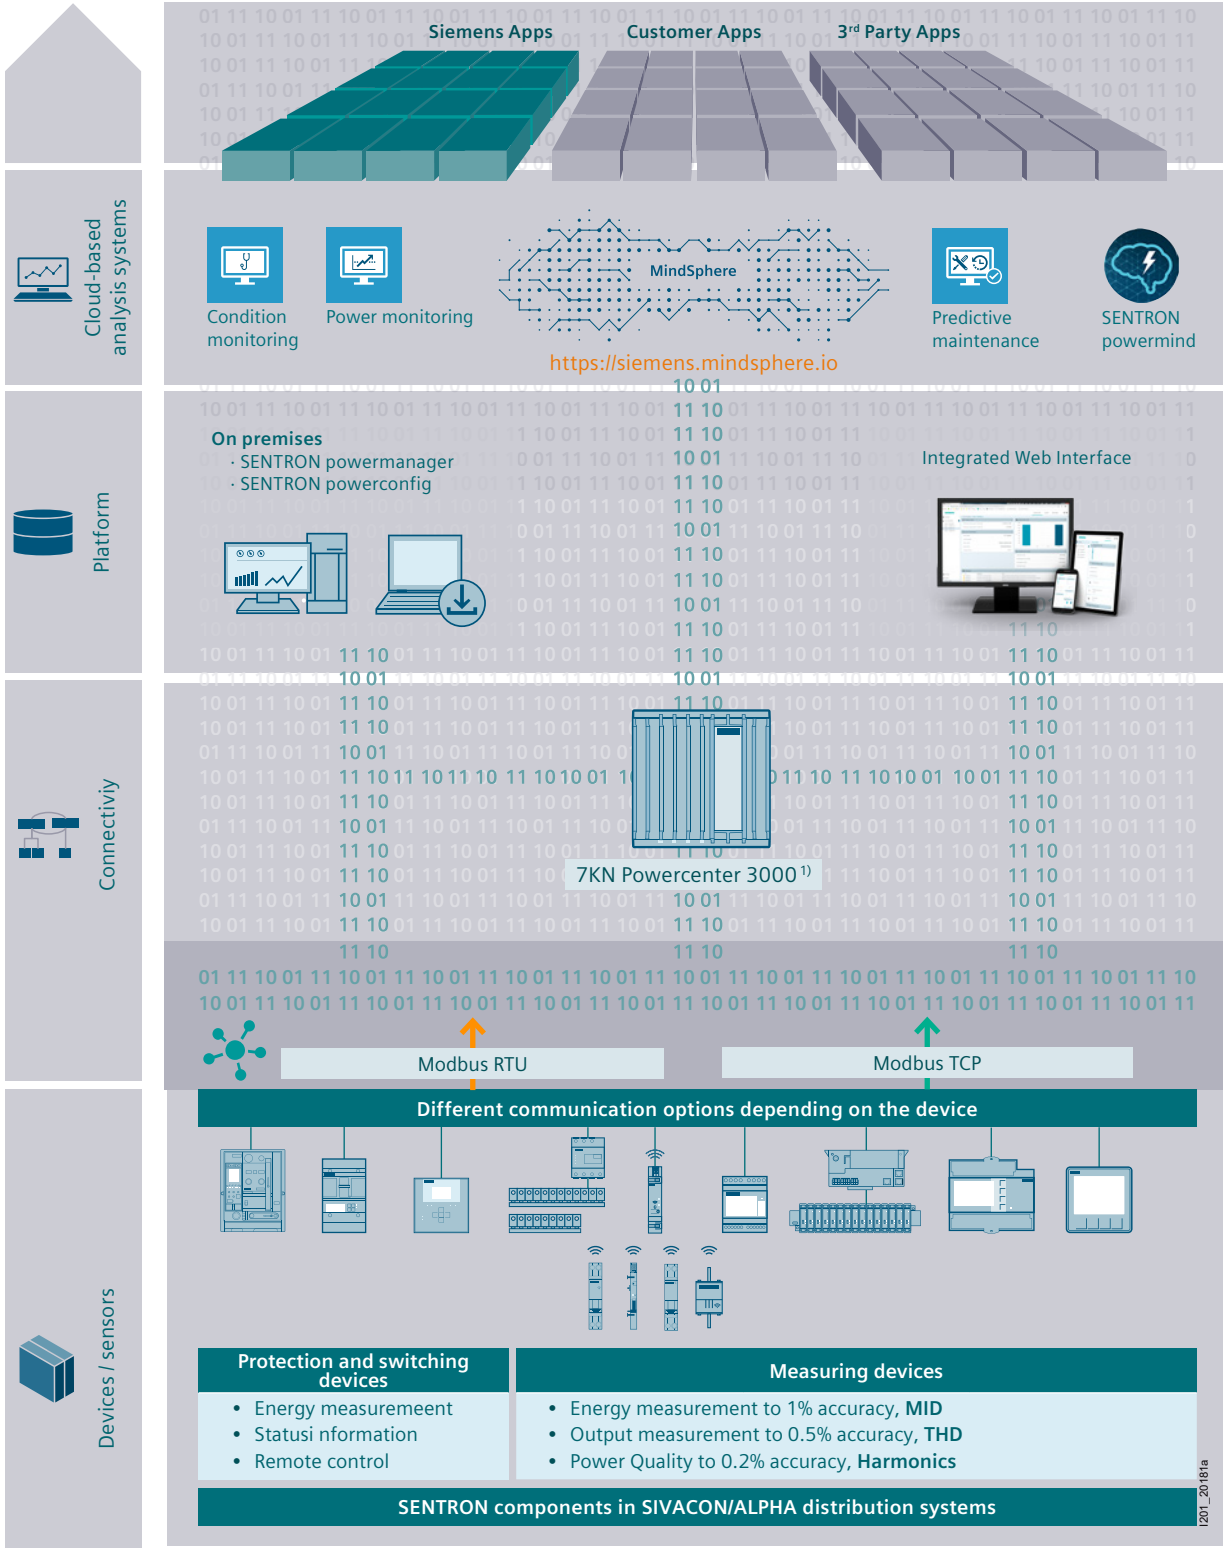

1) Modbus TCP

© Siemens 2022

Overview of protection, switching, measuring and monitoring tasks

The functions presented here are available in combination or individually.
Details can be found in the respective chapter.

Device class	Type	Rated current	Page	Line protection	Motor protection	Generator protection	Starter protection	Isolating function
Air circuit breakers	3WA/ 3WL	630 ... 6300 A	1/24	■	■	■		■
Molded case circuit breakers	3VA	16 ... 1600 A	2/6	■	■	■	■	■
Miniature circuit breakers (automatic circuit breakers)	5SY/ 5SL	0 ... 80 A	3/6					■
RCCB	5SV3/ 5SM3	16 ... 125 A	4/6	■				■
RCBOs	5SU1/ 5SV1	0 ... 40 A	4/10	■				■
AFD units	5SM6	0 ... 40 A	4/12					
AFDD/MCBs	5SV6	0 ... 40 A	4/12	■				■
ON/OFF switches	5TL1	32 ... 125 A	5/14					
Overvoltage Protection Devices	5SD7	–	6/6					■
Fuses NEOZED, DIAZED, Cylindrical fuses	5SE, 5SA, 5SB, 3NW6, 3NW8	–	7/30	■	■ [1]		■	
Photovoltaic fuses	–	–	7/79	■				
LV HRC fuses	3NA/ 3ND	–	7/36	■	■		■	
SITOR semiconductor fuses	–	–	7/54	■		■	■	
Switch disconnectors	3LD	16 ... 250 A	8/6					■
	3KD	16 ... 1600 A	8/8					■
Fuse switch disconnectors	3NP	0 ... 630 A	8/82	With suitable fuse links			With suitable fuse links	■
Switch disconnector with fuse	3NJ	0 ... 630 A	8/134					■
	3KF	0 ... 630 A	8/118					■
Transfer switching equipment	3KC	16 ... 3200 A	9/4					■
PAC measuring devices	7KM/ 7KT	Any	10/24					
Motor starter protectors	3RV	–	Catalog IC 10		■			■
Contactor	3RT	–	Catalog IC 10					■

[1] Only applies to 3NW8
[2] Only applies to the communication-capable COM products

© Siemens 2022


I

Current limitation (Short-circuit)	Overload protection LT	Short-circuit protection, delayed ST	Short-circuit protection, instantaneous INST	Ground-fault protection GF	Metering function	Personnel safety/ fault current protection	Overvoltage protection	Preventative fire protection	Switching function
	■	■	■	■	■			■	
■	■	■	■	■	■	■/■		■	
■	■		■		■ [2] new				
						■/■			
■	■		■			■/■			
								■	
■	■		■		■ [2] new			■	
							■		
■	■		■						
■	■		■						
■	■		■		■ [2] new				
■	■		■						
With suitable fuse links	With suitable fuse links		With suitable fuse links						
									■
					■				
■	■		■						

© Siemens 2022

Overview of protection, switching, measuring and monitoring tasks


Line protection

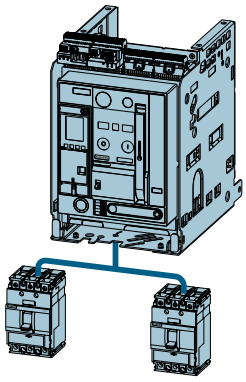

The trip units for line protection are designed to provide overload and short-circuit protection for:


- Cables
- Leads
- Non-motor loads

Generator protection



The setting values of the trip units are matched to protecting generators.

Motor protection

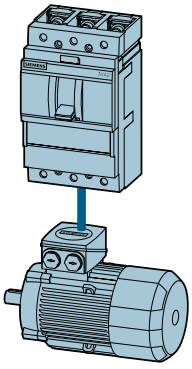


The overload and short-circuit releases are designed for optimal protection and direct starting of three-phase AC squirrel-cage motors.

The molded case circuit breakers for motor protection have phase-failure sensitivity and a thermal image that protects the motor against overheating.

The adjustable time lag class enables users to adjust the overload release to the startup conditions of the motor to be protected.

Starter protection

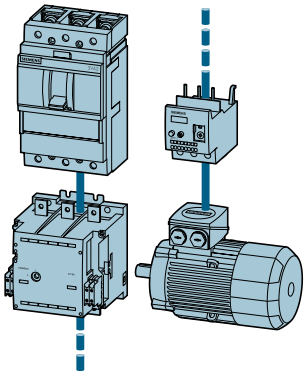

Starter combinations consist of:

Molded case circuit breaker + contactor + overload relay.

The molded case circuit breaker handles short-circuit protection and the isolating function. The task of the contactor is the operational switching of the feeder. The overload relay handles overload protection that can be specially matched to the motor.

The molded case circuit breaker for the starter combination is therefore equipped with an adjustable and instantaneous short-circuit release.

© Siemens 2022

Isolating function

Switching devices are described that meet the requirements defined for the isolating function when in the open position.

- Load switches, disconnectors, switch disconnectors according to IEC 60947-3

Switching operational currents up to the maximum rated current of the switching devices is part of the tasks performed by these devices (**See chapter 8**).



- Non-automatic circuit breakers according to IEC 60947-2 Annex L


Non-automatic circuit breakers can disconnect operational currents up to the maximum rated current, including fault currents up to the specified I_{cc} value.



Metering function

There are two possibilities for selecting the metering function in low-voltage power distribution (**See chapter 10**):

- Measuring devices (stand-alone) combined with protection and switching devices



- Protection and switching devices with integrated metering function (all-in-one), metering function equivalent to a measuring device



Current limitation (Short-circuit)

Current limitation means that the peak value of the prospective peak short-circuit current is limited to a smaller let-through current.

- Current-limiting devices include molded case circuit breakers (MCCBs), motor starter protectors (MSPs), miniature circuit breakers (MCBs) and fuses



- Air circuit breakers (ACBs) are non-current-limiting devices




Transfer switching function

In the selection of transfer switch equipment, the following functions are distinguished (**See chapter 9**):

- Transfer control
- Load transfer

The following possibilities for transfer switching are available:

- MTSE = manual transfer switch equipment
- RTSE = remote transfer switch equipment
- ATSE = automatic transfer switch equipment



© Siemens 2022

Tripping characteristics

The protection function of protection and switching devices in low-voltage power distribution systems is determined by the correct selection of the respective tripping characteristic (fuses, miniature circuit breakers) or TMTU/ETU trip units (air circuit breakers, molded case circuit breakers).

All current-limiting protection devices, such as MCCBs, MSPs, MCBs and fuses, can be described in terms of three characteristic curves:

- Tripping curve (time/current)
- Let-through current curve
- Let-through energy curve


In the following, the functions of the tripping curves are presented as an example.

Fuses

The time-current characteristic curve of fuses denotes the virtual melting time as a function of the overload or short-circuit current.

Different characteristics must be considered in dimensioning depending on the protection requirement and operational class (e.g. gG, gR, aR, etc.).

See configuration manual – Fuse systems
www.siemens.com/lowvoltage/manuals (45314810)

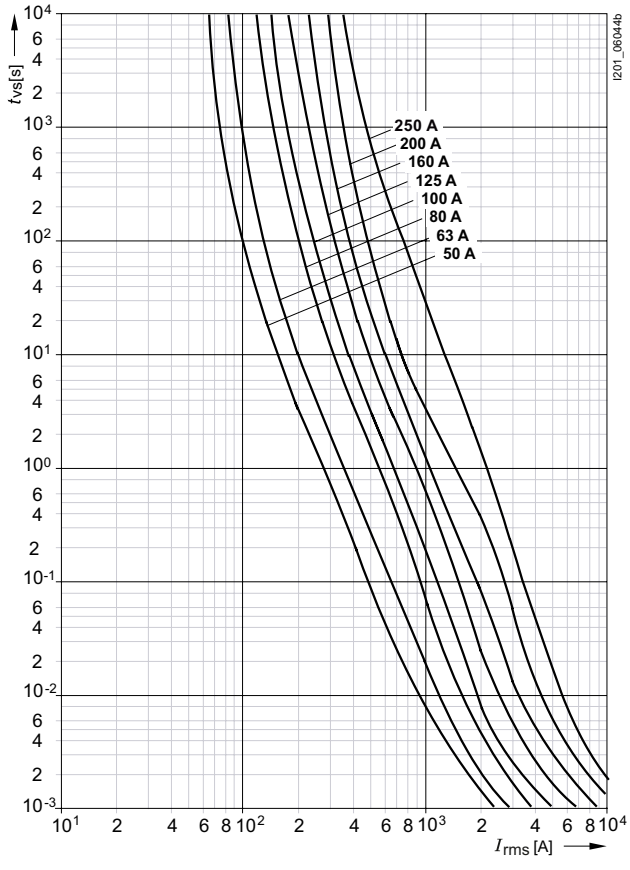


Miniature circuit breakers (MCBs)

The characteristic curve is chosen based on the application and is classified, for example, as tripping characteristic A, B, C or D.

Tripping curve = tripping characteristics according to IEC/EN 60898-1

See configuration manual – Miniature circuit breakers
www.siemens.com/lowvoltage/manuals (45302792)

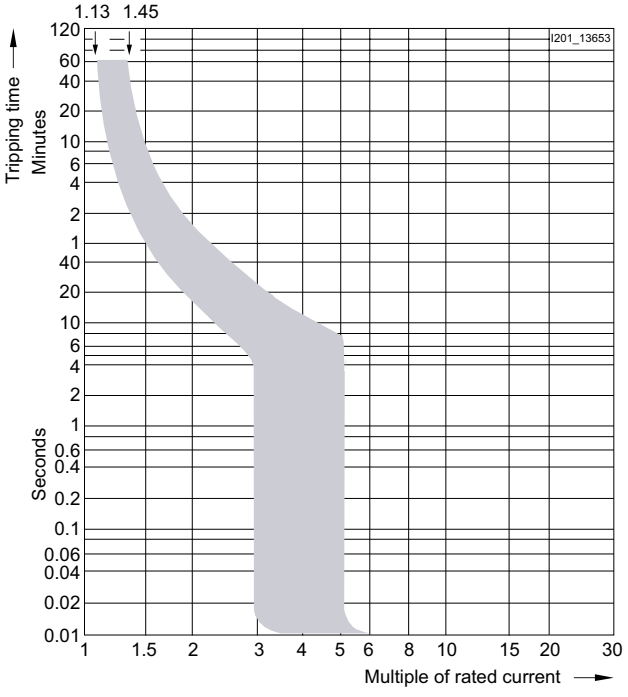

© Siemens 2022

Molded case circuit breakers (MCCBs)

The choice of electronic trip unit is based on the protection function required in power distribution.


The trip units are classified as:

- thermal-magnetic trip units (TMTU; previously known as electromechanical trip units)
- electronic trip units (ETU).

Depending on the application and requirements, TMTUs are available with different protection setting options for both overload and short-circuit.


See equipment manual – 3VA molded case circuit breakers with IEC certificate
www.siemens.com/lowvoltage/manuals (90318775)

FTFM (Fixed Thermal Fixed Magnetic)

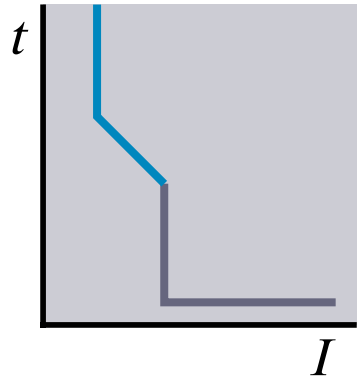


Permanently set thermal overload trip unit, permanently set magnetic trip unit with short-circuit protection

ATFM (Adjustable Thermal Fixed Magnetic)

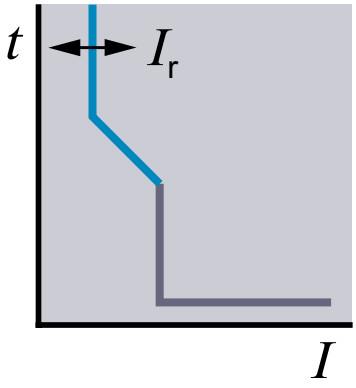

Adjustable thermal overload trip unit, permanently set magnetic trip unit with short-circuit protection

ATAM (Adjustable Thermal Adjustable Magnetic)

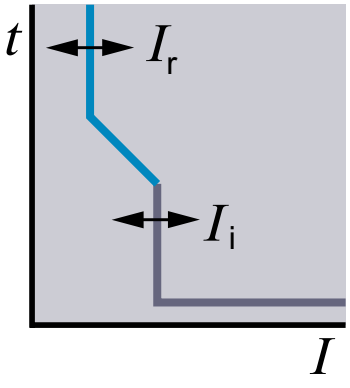

Adjustable thermal overload trip unit, adjustable magnetic trip unit with short-circuit protection

© Siemens 2022


Tripping characteristics

Molded case circuit breakers (MCCBs)/air circuit breakers (ACBs) with ETU

Selection of the electronic trip unit determines the protection function in power distribution.
Electronic trip units offer the most extensive and variable protection settings of all protection and switching devices for low-voltage power distribution.

- See equipment manual – 3VA molded case circuit breakers with IEC certificate **www.siemens.com/lowvoltage/manuals (90318775)**
- See operating Instructions – SENTRON WL – 3WL1 circuit breaker (IEC) **www.siemens.com/lowvoltage/manuals (109761064)**

The graphs below show an overview of the time-current characteristic curve.

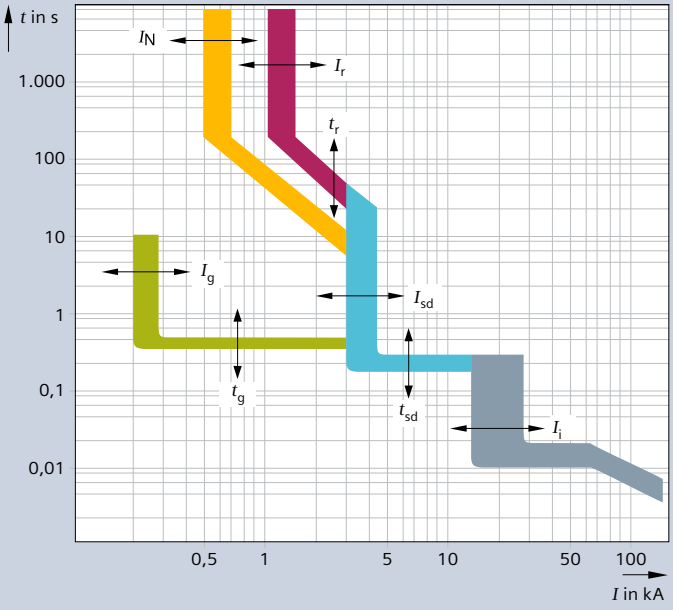

LT Overload protection LT

N Neutral conductor overload protection N

ST Short-circuit protection, delayed ST

INST Short-circuit protection, instantaneous INST


GF Ground-fault protection GF

Overload protection LT

The ID letter for overload protection is LT (stands for "Long-time delay"). The trip unit is inverse-time delayed and exhibits the following characteristics depending on the trip unit type:

- Bimetal characteristic with thermal-magnetic trip units
- I^2t characteristics for molded case circuit breakers MCCBs and I^2t and I^4t characteristics for ACBs
- Depending on the electronic trip units, only I^2t characteristic or I^2t and I^4t characteristic

The letters I_r refer to the current setting value; the associated tripping time is identical to t_r.

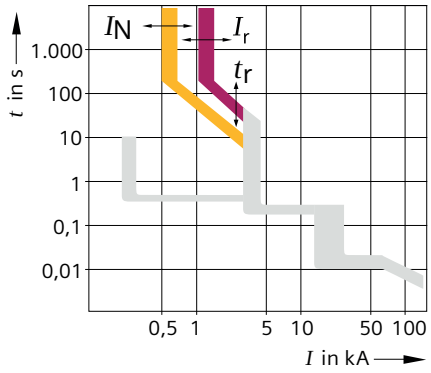

Neutral conductor overload protection N

The ID letter for neutral conductor overload protection is N. The letters I_N refer to the current setting value for the overload protection; the associated tripping time is identical to t_r.

The short-circuit protection of the circuit breaker also protects the neutral conductor.

Possible reasons for implementing overload protection in the neutral conductor include:


- The neutral conductor has a smaller cross-section than the phase conductors.
- Higher harmonic components in the system can be expected.
- A large number of loads, or predominantly 1-phase loads, are connected.

© Siemens 2022

Short-circuit protection, delayed ST


The ID letter for short-time delayed short-circuit protection is ST (stands for "Short-time"). The ST function of the electronic trip unit can be used to implement time-selective short-circuit tripping in low-voltage networks in which multiple circuit breakers are installed in series.

The short-time delayed short-circuit protection function protects phases L1 to L3 and the neutral conductor. The protection function responds if the current in at least one phase exceeds the set tripping current I_{sd} for the set delay period t_{sd}.

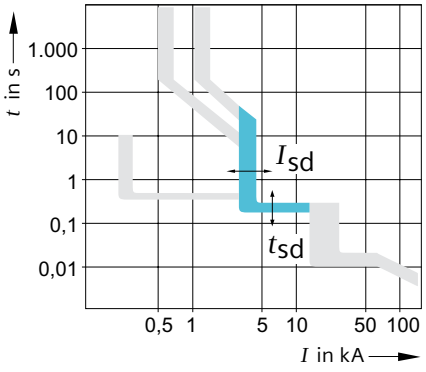


Short-circuit protection, instantaneous INST

The ID letter for instantaneous short-circuit protection is INST (stands for "Instantaneous"). This short-circuit protection function protects phases L1 to L3. The instantaneous short-circuit protection function responds if the instantaneous value equal to the rms of the current in at least one phase exceeds the instantaneous tripping current I_i.

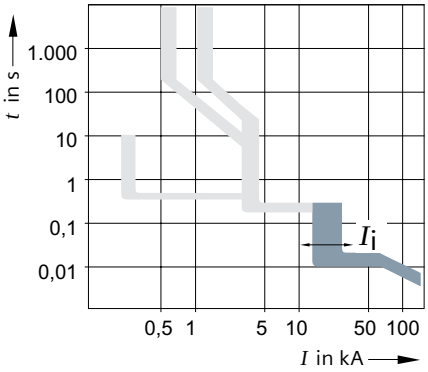

Ground-fault protection GF

The ID letter for ground-fault protection is GF (ground fault). The G release measures fault currents between phases and grounded, electrically conductive parts. Ground-fault protection protects against the flow of current to ground in the rated current range. As ground-fault currents can produce arcing, ground-fault protection consequently offers extended fire protection.

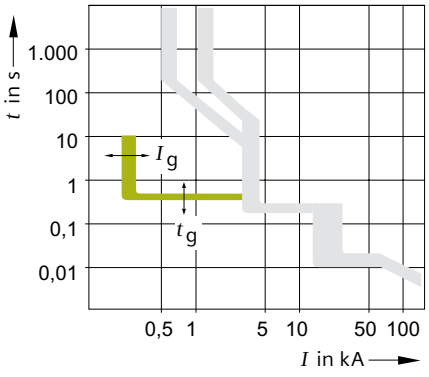


© Siemens 2022

Overview of protection, switching, measuring and monitoring tasks

Overvoltage protection


Overvoltage protection refers to the protection of electrical and electronic devices against excessively high electrical voltages. Overvoltage can be caused by switching operations or electrostatic discharging (ESD).

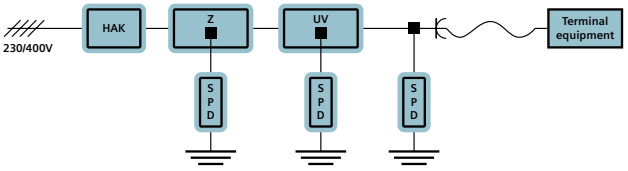

Personnel safety/fault current protection


Protection in the event of direct contact:
Additional protection contact refers to direct contact with a part that is live under operating conditions.

Protection in the case of indirect contact:
Fault protection refers to contact with an electrically conductive part which is not live under operating conditions.

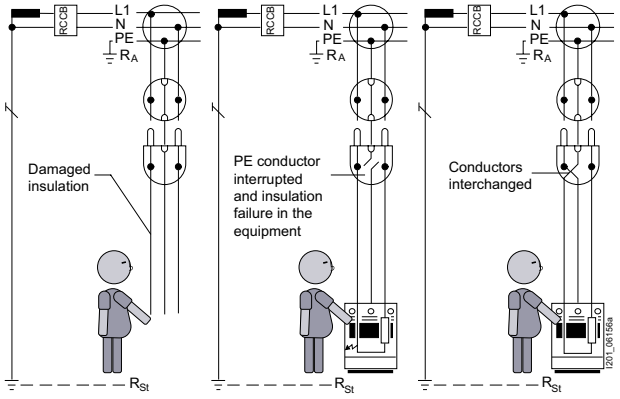

Preventative fire protection

Arc-fault detection devices evaluate occurring faults in the current and voltage wave using an electronic switch and shutting off the current when it recognizes a contact fault. This prevents overheating at poor contact points which can prevent fires.

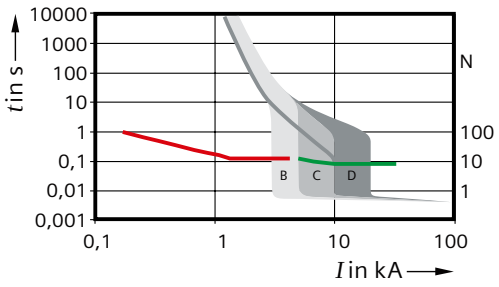

Potential failure causes


- Damaged cable insulation, e.g. by nails, screws or brackets
- The risk of a cable break exists for cables with a too-tight bending radius
- Cables which are laid through open doors and windows can be crushed when doors or windows are closed resulting in damaged insulation and arcing faults
- Environmental influences such as UV rays, temperature, humidity, gases can damage or age the insulation
- Damage caused by rodents
- Loose contact, e.g. caused by too low torque
- Conductor damaged by claw fixing

© Siemens 2022

SIMARIS planning tools

For planning and visualizing the power distribution system

From planning to operation

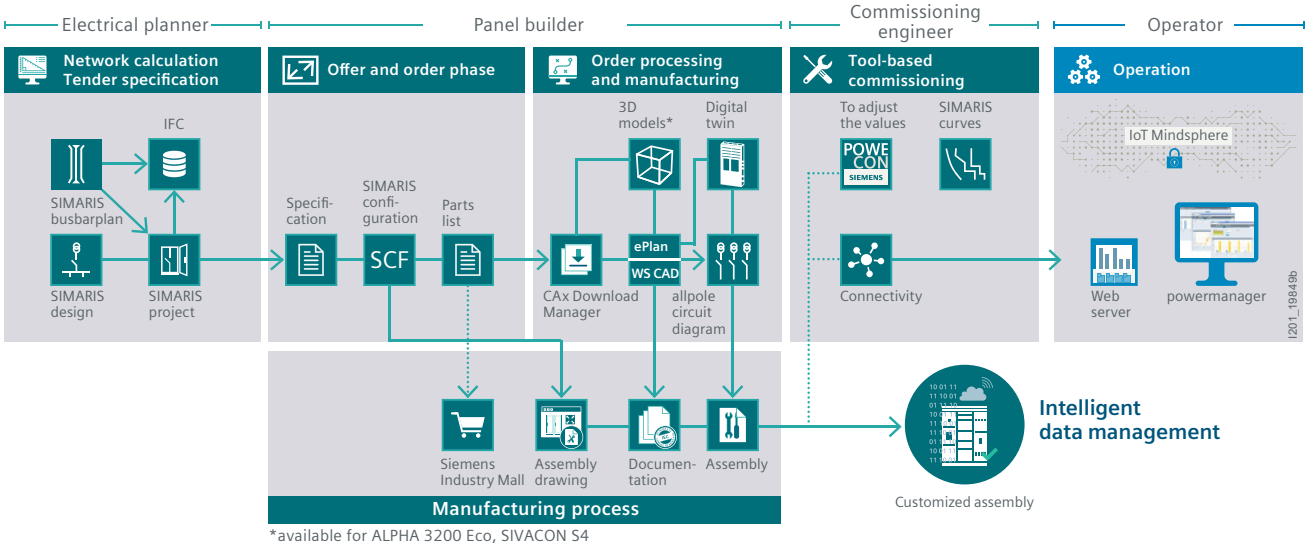

Highlights

- Thorough support of the engineering process with interlinked software tools
- Provision of extensive CAx data for systems and components
- Reduction of cost and time aspects during planning

© Siemens 2022

Distribution systems

For industrial plants or in infrastructure

SIVACON S8 power distribution boards and motor control centers

- Reliable, economical, flexible and communication-capable
- For all applications in infrastructure and process industry



Overview, see page 15/14

SIVACON 8PS busbar trunking systems

- For economic and reliable power supply
- Space-saving and simple to install
- Low fire load, good electromagnetic compatibility



Overview, see page 16/4

ALPHA 3200 power distribution boards (DIN technology)

- Safe investment, enhances productivity and performance
- Optimized for applications in modern building infrastructures
- Integrated system for all SENTRON components



Overview, see page 15/16

ALPHA 3200 Eco power distribution boards (DIN technology)

- **Saves resources:** lower use of copper with centrally positioned busbar
- **Practical:** optimized performance – from the transformer connection via the busbar to the outgoing feeders
- **Modular:** a high packing density in a compact space due to flexible use of ALPHA assembly kits



Overview, see page 15/16

ALPHA distribution boards (DIN technology)

- Comprehensive portfolio with wall-mounted and floor-mounted distribution boards for currents between 160 A to 1250 A



Overview, see page 15/150

© Siemens 2022

SIVACON S4 power distribution boards (NF technology)

- Modular system for reliable, integrated and cost-efficient power distribution from 800 A up to 4000 A/6300 A (with license)
- Compact, space-saving design perfectly adapted to suit SENTRON components
- Increased planning reliability due to the provision of 3D data



Overview, see page 15/18

ALPHA UNIVERSAL distribution boards (NF technology)

- Comprehensive portfolio with wall-mounted and floor-mounted distribution boards for currents between 125 A to 800 A
- Simple planning thanks to the modular platform structure



Overview, see page 15/120


© Siemens 2022

Control cabinets/System cubicles

For plant engineering, process control, network technology, secondary systems/energy automation

SIVACON 8MF1 system cubicles

- Modular system
- Fully assembled, adapted according to your specifications, or entirely customized

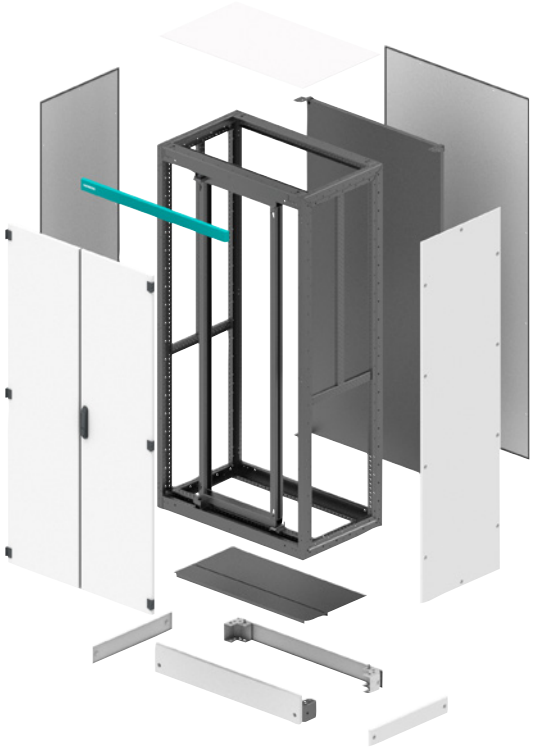

Overview, see page 17/6

SIVACON 8MF/8MR system lighting – LED lights

The LED lights offer optimum lighting conditions for installation and maintenance. The LED technology is energy-efficient and maintenance-free.



Overview, see page 17/32

SIVACON 8MF/8MR system lighting – Slimline lights

The Slimline lights are an alternative with an energy-saving lamp and are also available as a version with an integrated socket.



Overview, see page 17/33

SIVACON 8MR system air-conditioning

Ensures fault-free operation of the electrical and electronic built-in units installed in the cubicle, even under the harshest ambient conditions.



Overview, see page 17/36

© Siemens 2022

© Siemens 2022



Made for makers. Simply reliable.

All power distribution systems rely on a secure infeed of electrical energy.
The 3WA air circuit breaker combines all of the functions which are required of power distribution equipment in the digital companies of today: from reliably protecting people and equipment from electrical accidents and damage, to flexible application and retrofit options, a long service life and low maintenance, to innovative features for integrated e-engineering, reliable energy data recording and seamless integration into digital environments. As the central component of the electrical power distribution, the 3WA air circuit breaker provides the basis for a holistic energy system in the digital age.

Reliable, versatile and perfectly integrated

The 3WL air circuit breakers reliably protect electrical equipment from damage or fire resulting from short circuit, ground fault or overload failures.

© Siemens 2022

Air Circuit Breakers



All the information you need 1/2

Quick selection guide 3WA 1/4

- Circuit breakers and non-automatic circuit breakers for AC and DC 1/4
- Circuit breakers and non-automatic circuit breakers for AC 1/8
- Non-automatic circuit breakers for DC 1/14
- Electronic trip unit ETU600 1/17
- Connection 1/22
- Communication 1/23

3WA11 – 3WA13 1/24

- System overview 1/24
- Online configurator highlights 1/26
- Structure of the article numbers 1/28
- Accessory options 1/38
- Guide frames for AC 1/41
- Guide frames for DC 1/43
- Accessories and spare parts 1/44

Quick selection guide 3WL 1/56

- Circuit breakers and non-automatic circuit breakers for AC and DC 1/56
- Circuit breakers and non-automatic circuit breakers for AC 1/58
- Non-automatic circuit breakers for DC 1/62
- Electronic trip unit ETU 1/64
- Connection 1/68
- Operating mechanism, auxiliary release, auxiliary switch 1/69

3WL11 – 3WL13 1/70

- System overview 1/70
- Online configurator highlights 1/72
- Structure of the article numbers 1/74
- Accessory options 1/78
- Guide fram es for AC 1/89
- Guide frames for DC 1/90
- Accessories and spare parts 1/91

3WL10 1/106

- System overview 1/106
- Online configurator highlights 1/108
- Structure of the article numbers 1/110
- Accessory options 1/112
- Guide frames 1/114
- Electronic trip units ETU and accessories 1/115
- Accessories and spare parts 1/118

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about air circuit breakers, please visit our websites
www.siemens.com/3WA
www.siemens.com/3WL

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Quick selection guide
  - 3WA air circuit breakers (109781967)
  - 3WL air circuit breakers (109751638)
- Brochure
  - 3WA air circuit breakers (109800077)
- Technical basic information
  - 3WL air circuit breakers (109767789)

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- 3WA air circuit breaker – Teaserfilm
  bit.ly/3p14AOZ
- 3WA air circuit breaker – Highlightfilm
  bit.ly/2Y0iWD2
- 3WL air circuit breakers (general)
  bit.ly/2ZH1rXH

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Air circuit breakers sie.ag/2lXiZjB

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number www.siemens.com/product?Article No.

Order supports are available in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/product-support

- Order support – 3WA air circuit breakers – Made for makers. Simply reliable. (109800074)

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your air circuit breaker at
www.siemens.com/lowvoltage/3wa-configurator
www.siemens.com/lowvoltage/3wl-configurator
www.siemens.com/lowvoltage/3wl10-configurator

The following are additionally available for your configured air circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

SENTRON powerconfig

The combined commissioning and service tool SENTRON powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download SENTRON powerconfig via
www.siemens.com/powerconfig

Free download SENTRON powerconfig mobile via
App Store and **Play Store**

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)
- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Equipment manual
  – 3WA air circuit breakers **(109763061)**
  – 3VA27 molded case circuit breakers & 3WL10 air circuit breakers **(109753821)**
- System manual
  – 3WA air circuit breaker communication **(109792368)**
  – 3WL/3VL circuit breakers with communication capability – Modbus **(39850157)**
  – 3WL/3VL circuit breakers with communication capability – PROFIBUS **(12560390)**
- Configuration manual
  – 3WL1 air circuit breakers **(35681108)**
  – Low-voltage protection devices selectivity tables **(109748621)**
- Communications manual
  – 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP **(109757987)**
  – 3WL10 air circuit breakers & 3VA27 molded case circuit breakers **(109760220)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 3WA air circuit breakers (WT-LV3WA)
- 3WL10 air circuit breaker, size 0 (WT-LVA3WL0)
- 3WL air circuit breakers, sizes 1-3 (WT-LVA3WL)
- Protection systems in low-voltage power distribution (WT-LVAPS)
- LV-3WA Basic (LV-3WA_BA)
- LV-3WA Advanced (LV-3WA_AD)
- Maintenance and operation of 3WL circuit breakers (LV-CBMAIN) with subsequent certification option (LV-CBCERT)
- Communication with SENTRON components (LV-COM)
- Project planning and selection of SENTRON circuit breakers (LV-CBPROJ)

Video tutorial on the 3WL air circuit breaker
www.lowvoltage.siemens.com/wcms/3wl-tutorial

Technical overview – Air circuit breakers

3WA

3WL

The fast way to get you to our online services

This page provides you with comprehensive information and links on air circuit breakers

3WA: **www.siemens.com/lowvoltage/product-support (109781188)**
3WL: **www.siemens.com/lowvoltage/product-support (109766020)**

© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

AC





		3WA11		3WA12	
Basic data					
Rated operational voltage U_e	V	≤1000		≤1150	
Rated current I_n	A	630 ... 2500		2000 ... 4000	
Size		1		2	
Type of mounting		Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
Number of poles		3/4-pole	3/4-pole	3/4-pole	3/4-pole
Dimensions					
Width (3-pole | 4-pole)	mm	320|410	320|410	460|590	460|590
Height (for breaking capacity N, S, M, H and D | C and E)	mm	468|518	437|462	468|518	437|462
Depth	mm	471	357	471	357
Approvals					
General product approvals		VDE, EAC, CCC, CE, C-Tick		VDE, EAC, CCC, CE, C-Tick	
Marine/shipbuilding		ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS		ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS	

Breaking capacity		N	S	M	E	S	M	H	C	E
Rated short-circuit breaking capacity										
I_{cu} | I_{cs} at U_e up to 415/440 V AC	kA	55|55	66|66	85|85	–|–	66|66	85|85	100|100	130|130	–|–
I_{cu} | I_{cs} at U_e up to 500 V AC	kA	55|55	66|66	85|85	–|–	66|66	85|85	100|100	130|130	–|–
I_{cu} | I_{cs} at U_e up to 690 V AC	kA	42|42	50|50	66|66	85|85	50|50	66|66	85|85	100|100	85|85
I_{cu} | I_{cs} at U_e up to 1000 V AC	kA	–|–	–|–	–|–	50|50	–|–	–|–	–|–	–|–	85|85
I_{cu} | I_{cs} at U_e up to 1150 V AC	kA	–|–	–|–	–|–	–|–	–|–	–|–	–|–	–|–	50|50
Rated short-circuit making capacity I_{cm}										
I_{cm} at U_e up to 415 V AC	kA	121	145	187	–	145	187	220	286	–
I_{cm} at U_e up to 500 V AC	kA	121	145	187	–	145	187	220	286	–
I_{cm} at U_e up to 690 V AC	kA	88	105	145	187	105	145	187	220	187
I_{cm} at U_e up to 1000 V AC	kA	–	–	–	105	–	–	–	–	187
I_{cm} at U_e up to 1150 V AC	kA	–	–	–	–	–	–	–	–	105

System overview, page 1/24

© Siemens 2022

AC		DC	
			
3WA13		**3WA12**	
≤1150		≤600/1000	
4000 ... 6300		1000 ... 4000	
3		2	
Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
3/4-pole	3/4-pole	3/4-pole	3/4-pole
704 | 914	704 | 914	460 | 590	460 | 590
468 | 518	437 | 462	468 | 518	437 | 462
471	357	471	357
VDE, EAC, CCC, CE, C-Tick ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS		VDE, EAC, CCC, CE, C-Tick ABS, DNV, GL, LRS, BV, PRS, CCS, RMRS	

H	C	E	D	E
–|–	–|–	–|–	–|–	–|–
100|100	150|150 (3-pole); 130|130 (4-pole)	–|–	–|–	–|–
85|85	150|150 (3-pole); 130|130 (4-pole)	150|150 (3-pole); 130|130 (4-pole)	–|–	–|–
–|–	–|–	125|125	–|–	–|–
–|–	–|–	70|70	–|–	–|–
220	330 (3-pole); 286 (4-pole)	–	–	–
220	330 (3-pole); 286 (4-pole)	–	–	–
187	330 (3-pole); 286 (4-pole)	330 (3-pole); 286 (4-pole)	–	–
–	–	275	–	–
–	–	154	–	–

System overview, page 1/24

© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2 (continued)

AC





			3WA11				3WA12				
Breaking capacity			**N**	**S**	**M**	**E**	**S**	**M**	**H**	**C**	**E**
Rated short-time withstand current I_{cw} [1]											
I_{cw} at U_e up to 500 V AC	0.5 s	kA	55	66	85	–	66	85	100	100	–
	1 s	kA	50	66	85	–	66	85	85	100	–
	2 s	kA	35 [2]/45 [3]	45	70	–	66	66 [4]/85 [5]	66 [4]/85 [5]	85	–
	3 s	kA	30 [2]/35 [3]	35	60	–	55 [4]/66 [5]	55 [4]/75 [5]	55 [4]/75 [5]	75	–
I_{cw} at U_e up to 690 V AC	0.5 s	kA	42	50	66	85	50	66	85	100	85
	1 s	kA	42	50	66	85	50	66	85	100	85
	2 s	kA	35 [2]/42 [3]	45	66	70	50	66	66 [4]/85 [5]	85	66 [4]/85 [5]
	3 s	kA	30 [2]/35 [3]	35	60	60	50	55 [4]/66 [5]	55 [4]/75 [5]	75	55 [4]/75 [5]
I_{cw} at U_e up to 1000 V AC	0.5 s	kA	–	–	–	50	–	–	–	–	85
	1 s	kA	–	–	–	50	–	–	–	–	85
	2 s	kA	–	–	–	50	–	–	–	–	66 [4]/85 [5]
	3 s	kA	–	–	–	50	–	–	–	–	55 [4]/75 [5]
I_{cw} at U_e up to 1150 V AC	0.5 s	kA	–	–	–	–	–	–	–	–	50
	1 s	kA	–	–	–	–	–	–	–	–	50
	2 s	kA	–	–	–	–	–	–	–	–	50
	3 s	kA	–	–	–	–	–	–	–	–	50
I_{cw} at U_e up to 220 V DC	1 s	kA	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 300 V DC	1 s	kA	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 600 V DC	1 s	kA	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 1000 V DC	1 s	kA	–	–	–	–	–	–	–	–	–
I_{cw} at U_e up to 1500 V DC	1 s	kA	–	–	–	–	–	–	–	–	–
Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers											
Up to 500 V AC		kA	55	66	85	–	66	85	100	100	–
Up to 690 V AC		kA	42	50	66	85	50	66	85	100	85
Up to 1000 V AC		kA	–	–	–	50	–	–	–	–	85
Up to 1150 V AC		kA	–	–	–	–	–	–	–	–	50
Up to 220 V DC		kA	–	–	–	–	–	–	–	–	–
Up to 300 V DC		kA	–	–	–	–	–	–	–	–	–
Up to 600 V DC		kA	–	–	–	–	–	–	–	–	–
Up to 1000 V DC		kA	–	–	–	–	–	–	–	–	–
Up to 1500 V DC		kA	–	–	–	–	–	–	–	–	–
IT network capability											
1-pole short-circuit breaking capacity I_{IT} acc to. IEC 60947-2 Annex H	≤500 V	kA	50	50	50	–	50	50	50	50	–
	≤690 V	kA	–	–	–	50	–	–	–	–	50
	1000 V	kA	–	–	–	–	–	–	–	–	–

[1] At rated operational voltage U_e ≥690 V, the I_{cw} value of the circuit breaker corresponds to the I_{cu} or I_{cs}value

[2] Size 1 with $I_{n\,max}$ ≤1250 A

[3] Size 1 with $I_{n\,max}$ ≥1600 A

[4] $I_{n\,max}$ ≤2500 A

[5] $I_{n\,max}$ ≥3200 A

System overview, page 1/24

© Siemens 2022

AC



DC



3WA13			3WA12	
H	C	E	D	E
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
100	130 (3-pole); 120 (4-pole)	–	–	–
85	130 (3-pole); 120 (4-pole)	130 (3-pole); 120 (4-pole)	–	–
–	–	125 (3-pole); 120 (4-pole)	–	–
–	–	70	–	–
–	–	–	35	–
–	–	–	30	–
–	–	–	25	–
–	–	–	–	20
–	–	–	–	– (3-pole); 20 (4-pole)
50	50	–	–	–
–	–	50	–	–
–	–	–	–	–

System overview, page 1/24


© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2



3WA11

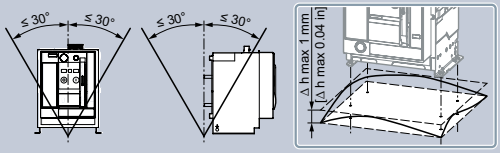

Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
General data									
Isolating function acc. to EN 60947-2			Yes						
Utilization category			B						
Permissible ambient temperature	Operation	°C	–40 ... +70						
	Storage	°C	–40 ... +80						
Mounting position									
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover						
Voltage									
Rated operational voltage U_e at 50/60 Hz	1000 V version	V AC	≤1000						
Rated insulation voltage U_i		V AC	1000						
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12						
	Auxiliary circuits	kV	4						
	Control circuits	kV	2.5						
Permissible load									
Permissible load for withdrawable versions									
For all connection types (except rear vertical main connections)	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	1930	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1210	1490	1780	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2370
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1545	1855	2060
Permissible load for fixed-mounted versions									
For all connection types (except rear vertical main connections)	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	–
With rear vertical connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
	Up to 70 °C (Cu bare)	A	630	800	1000	1250	1600	2000	2500
Power loss at I_n									
With 3-phase symmetrical load with maximum rated current, complete device (3/4p)	Fixed-mounted	W	30	45	70	105	135	240	360
	Withdrawable versions	W	55	85	130	205	310	440	600

System overview, page 1/24

© Siemens 2022

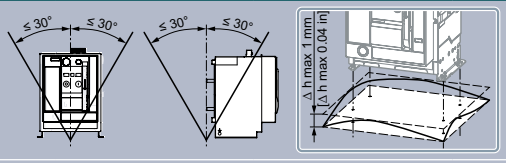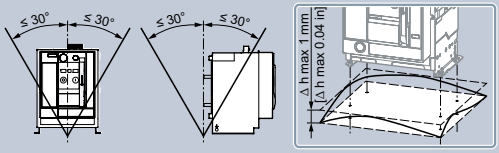	3WA12			3WA13		
						
2000 A	**2500 A**	**3200 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
Yes				Yes		
B				B		
–40 ... +70				–40 ... +70		
–40 ... +80				–40 ... +80		
						
IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover				IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		
≤1150				≤1150		
≤1150				≤1150		
12				12		
4				4		
2.5				2.5		
2000	2500	3200	–	4000	5000	–
2000	2500	3020	–	4000	5000	–
2000	2280	2870	–	4000	5000	–
2000	2500	3200	4000	4000	5000	5920
2000	2500	3200	3910	4000	5000	5810
2000	2390	2945	3645	4000	5000	5500
2000	2500	3200	–	4000	5000	–
2000	2500	3200	–	4000	5000	–
2000	2500	3200	–	4000	5000	–
2000	2500	3200	4000	4000	5000	6300
2000	2500	3200	4000	4000	5000	6300
2000	2500	3200	4000	4000	5000	5920
180	270	410	750	520	630	900
320	520	710	1040	810	1050	1600

System overview, page 1/24

© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Switching times									
Make time		ms				35			
Opening time		ms				38			
Electrical make time (through closing coil) [1]		ms				80			
Electrical opening time (through shunt trip)		ms				73			
Electrical opening time (instantaneous undervoltage release)		ms				≤80			
Opening time due to ETU, instantaneous short-circuit release		ms				50			
Service life/endurance									
Breaking capacity N, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance [2]	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			10000			7500	5000
	With maintenance [2]	Operating cycles				30000			
Breaking capacity S, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				15000			
	With maintenance [2]	Operating cycles				30000			
Electrical	Without maintenance 690 V	Operating cycles			15000			7500	5000
	With maintenance [2]	Operating cycles				30000			
Breaking capacity M, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance [2]	Operating cycles				15000			
Electrical	Without maintenance 690 V	Operating cycles				7500			5000
	With maintenance [2]	Operating cycles				15000			
Breaking capacity E, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				10000			
	With maintenance [2]	Operating cycles				15000			
Electrical	Without maintenance 690 V	Operating cycles				7500			5000
	Without maintenance 1000 V	Operating cycles				1000			
	Without maintenance 1150 V	Operating cycles				–			
	With maintenance [2]	Operating cycles				15000			
Breaking capacity H, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance [2]	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance [2]	Operating cycles				–			
Breaking capacity C, 3/4-pole									
Mechanical	Without maintenance	Operating cycles				–			
	With maintenance [2]	Operating cycles				–			
Electrical	Without maintenance 690 V	Operating cycles				–			
	With maintenance 690 V [2]	Operating cycles				–			
Operating frequency									
Breaking capacity N and S									
Electrical	3-pole	1/h				45			
	4-pole	1/h				45			
Breaking capacity M, H and C									
Electrical	3/4-pole	1/h				60/60 ≤ 690 V			
Breaking capacity E									
Electrical	3/4-pole	1/h				20/20 at 1000 V, 60/60 ≤ 690 V			

[1] Make time through closing coil for momentary duty for synchronization purposes 5% OP = 50 ms
[2] Maintenance means: Replacing main contact elements and arc chutes
(see operating instructions: www.siemens.com/lowvoltage/manuals).

System overview, page 1/24

© Siemens 2022

3WA12				3WA13		
						
2000 A	**2500 A**	**3200 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
35				35		
34				34		
100				100		
73				73		
≤80				≤80		
50				50		
–				–		
–				–		
–				–		
–				–		
10000				–		
20000				–		
7500	7500	4000	2000	–		
20000				–		
10000				–		
20000				–		
7500	7500	4000	2000	–		
20000				–		
10000				5000		
20000				10000		
7500	7500	4000	2000	2000		
1000				1000		
500				500		
20000				10000		
10000				10000		
20000				15000		
7500	7500	4000	2000	2000		
20000	20000	20000	20000	15000		
5000			–	5000		
10000			–	10000		
5000	5000	4000	–	1000		
10000	10000	10000	–	10000		
45				–		
60				–		
60/60 ≤ 690 V				60/60 ≤ 690 V		
20/20 at 1000/1150 V, 60/60 ≤ 690 V				20/20 at 1000/1150 V, 60/60 ≤ 690 V		

System overview, page 1/24

© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)

3WA11



Rated current I_n			630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A
Connection									
Main conductor minimum cross-sections									
Copper bars, bare		Unit, mm^2	1× 40 × 10	1× 50 × 10	1× 60 × 10	2× 40 × 10	2× 50 × 10	3× 50 × 10	4× 50 × 10
Copper bars, painted black		Unit, mm^2	1× 40 × 10	1× 50 × 10	1× 60 × 10	2× 40 × 10	2× 50 × 10	3× 50 × 10	4× 50 × 10
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)									
Standard connection = push-in	Without end sleeve		2× 0.5 ... 2.5 mm^2 (AWG 20 ... 14)						
	With end sleeve acc. to DIN 46228 Part 2		2× 0.5 ... 2.5 mm^2 (AWG 20 ... 14)						
	With twin end sleeve		2× 0.5 ... 1.5 mm^2 (AWG 20 ... 16)						
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)						
Optional connection with screw connection	Without end sleeve		2× 0.5 ... 2.5 mm^2 (AWG 20 ... 14)						
	With end sleeve acc. to DIN 46228 Part 2		1× 0.5 ... 1.5 mm^2 (AWG 20 ... 16)						
	With twin end sleeve		1× 0.5 ... 1.5 mm^2 (AWG 20 ... 16)						
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)						
Position signaling switch									
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0.08 ... 2.5 mm^2 (AWG 20 ... 12)						
	With end sleeve acc. to DIN 46228 Part 2		0.25 ... 1.5 mm^2						
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)						
Push-in connection for communication signaling contacts	Without end sleeve		0.14 ... 1.5 mm^2 (AWG 20 ... 16)						
	With end sleeve acc. to DIN 46228 Part 2		0.25 ... 1.5 mm^2 (AWG 20 ... 16)						
	Stripped length		9 mm (0.35 inch)						
Weights									
3-pole	Fixed-mounted circuit breaker	kg	32	32	32	33	33	33	33
	Withdrawable circuit breaker without guide frame	kg	35	35	35	36	36	36	36
	Guide frames	kg	26	26	26	27	27	27	28
4-pole	Fixed-mounted circuit breaker	kg	39	39	39	39	39	40	40
	Withdrawable circuit breaker without guide frame	kg	42	42	42	42	42	43	43
	Guide frames	kg	31	31	31	31	31	31	33

System overview, page 1/24

© Siemens 2022

	3WA12			3WA13		
						
2000 A	**2500 A**	**3200 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
3× 50 × 10	2× 100 × 10	3× 100 × 10	4× 120 × 10	4× 100 × 10	6× 100 × 10	6× 120 × 10
3× 50 × 10	2× 100 × 10	3× 100 × 10	4× 120 × 10	4× 100 × 10	6× 100 × 10	6× 120 × 10
2× 0.5 ... 2.5 mm² (AWG 20 ... 14)				2× 0.5 ... 2.5 mm² (AWG 20 ... 14)		
2× 0.5 ... 2.5 mm² (AWG 20 ... 14)				2× 0.5 ... 2.5 mm² (AWG 20 ... 14)		
2× 0.5 ... 1.5 mm² (AWG 20 ... 16)				2× 0.5 ... 1.5 mm² (AWG 20 ... 16)		
10 ... 12 mm (0.39 ... 0.47 inch)				10 ... 12 mm (0.39 ... 0.47 inch)		
2× 0.5 ... 2.5 mm² (AWG 20 ... 14)				2× 0.5 ... 2.5 mm² (AWG 20 ... 14)		
1× 0.5 ... 1.5 mm² (AWG 20 ... 16)				1× 0.5 ... 1.5 mm² (AWG 20 ... 16)		
1× 0.5 ... 1.5 mm² (AWG 20 ... 16)				1× 0.5 ... 1.5 mm² (AWG 20 ... 16)		
7 ... 8 mm (0.28 ... 0.31 inch)				7 ... 8 mm (0.28 ... 0.31 inch)		
0.08 ... 2.5 mm² (AWG 20 ... 12)				0.08 ... 2.5 mm² (AWG 20 ... 12)		
0.25 ... 1.5 mm²				0.25 ... 1.5 mm²		
5 ... 6 mm (0.2 ... 0.24 inch)				5 ... 6 mm (0.2 ... 0.24 inch)		
0.14 ... 1.5 mm² (AWG 20 ... 16)				0.14 ... 1.5 mm² (AWG 20 ... 16)		
0.25 ... 1.5 mm² (AWG 20 ... 16)				0.25 ... 1.5 mm² (AWG 20 ... 16)		
9 mm (0.35 inch)				9 mm (0.35 inch)		
43	45	50	52	79	80	111
47	48	54	53	84	86	86
33	34	41	40	70	87	86
54	56	63	64	100	102	144
57	60	67	88	107	108	108
40	42	50	71	71	89	110

System overview, page 1/24


© Siemens 2022

Non-automatic circuit breakers for DC

IEC 60947-2

3WA12

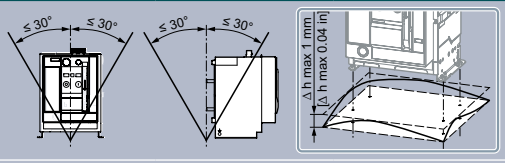

Rated current I_n			1000 A	2000 A	4000 A
General data					
Isolating function acc. to EN 60947-2			Yes		
Utilization category			B		
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C)	°C	–40 ... +70		
	Storage	°C	–40 ... +80		
Mounting position					
Degree of protection			IP20 without control cabinet door, IP41 with door sealing frame, IP55 with cover		
Voltage					
Rated operational voltage U_e	Breaking capacity D | E	V DC	600 | 1000 (3-pole); 1500 (4-pole)		
Rated insulation voltage U_i	Breaking capacity D | E	V DC	600 | 1000 (3-pole); 1500 (4-pole)		
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12		
	Auxiliary circuits	kV	4		
	Control circuits	kV	2.5		
Permissible load					
Permissible load for withdrawable versions					
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	3640
	Up to 60 °C (Cu bare)	A	1000	2000	3500
	Up to 70 °C (Cu bare)	A	1000	1950	3250
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	3640
	Up to 70 °C (Cu bare)	A	1000	2000	3400
Permissible load for fixed-mounted versions					
For all connection types (except rear vertical main connections)	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	3900
With rear vertical connections	Up to 40 °C (Cu bare)	A	1000	2000	4000
	Up to 55 °C (Cu bare)	A	1000	2000	4000
	Up to 60 °C (Cu bare)	A	1000	2000	4000
	Up to 70 °C (Cu bare)	A	1000	2000	4000
Power loss at I_n					
With 3-phase symmetrical load, complete device (3/4p)	Withdrawable versions	W	280	770	1640
	Fixed-mounted	W	140	390	820
Switching times					
Make time		ms	35	35	35
Opening time		ms	34	34	34
Electrical make time (through closing coil)		ms	100	100	100
Electrical opening time (through shunt trip)		ms	73	73	73
Electrical opening time (instantaneous undervoltage release)		ms	≤80	≤80	≤80

System overview, page 1/24

© Siemens 2022

3WA12



Rated current I_n			1000 A	2000 A	4000 A
Service life/endurance					
Breaking capacity D, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance [1]	Operating cycles	20000	20000	20000
Electrical	Without maintenance 600 V	Operating cycles	6000	6000	4000
	With maintenance [1]	Operating cycles	20000	20000	20000
Breaking capacity E, 3/4-pole					
Mechanical	Without maintenance	Operating cycles	10000	10000	10000
	With maintenance [1]	Operating cycles	20000	20000	20000
Electrical	Without maintenance 1000 V	Operating cycles	1000	1000	1000
	With maintenance [1]	Operating cycles	20000	20000	20000
Operating frequency					
Breaking capacity D					
Electrical	3/4-pole	1/h	60/60	60/60	60/60
Breaking capacity E					
Electrical	3/4-pole	1/h	20/20	20/20	20/20
Connection					
Main conductor minimum cross-sections					
Copper bars, bare		Unit, mm²	1× 50 x 10	2× 50 x 10	3 x 100 x 10 on the infeed and outgoing side; 6 x 250 x 500 x 5 for jumpers
Copper bars, painted black		Unit, mm²	1× 50 x 10	2× 50 x 10	3 x 100 x 10 on the infeed and outgoing side; 6 x 250 x 500 x 5 for jumpers
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)					
Standard connection = push-in	Without end sleeve		2× 0.5 ... 2.5 mm² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 2		2× 0.5 ... 2.5 mm² (AWG 20 ... 14)		
	With twin end sleeve		2× 0.5 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		10 ... 12 mm (0.39 ... 0.47 inch)		
Optional connection with screw connection	Without end sleeve		2× 0.5 ... 2.5 mm² (AWG 20 ... 14)		
	With end sleeve acc. to DIN 46228 Part 2		1× 0.5 ... 1.5 mm² (AWG 20 ... 16)		
	With twin end sleeve		1× 0.5 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		7 ... 8 mm (0.28 ... 0.31 inch)		
Position signaling switch					
Spring-loaded terminals for standard signaling contacts	Without end sleeve		0.08 ... 2.5 mm² (AWG 20 ... 12)		
	With end sleeve acc. to DIN 46228 Part 2		0.25 ... 1.5 mm²		
	Stripped length		5 ... 6 mm (0.2 ... 0.24 inch)		
Push-in connection for communication signaling contacts	Without end sleeve		0.14 ... 1.5 mm² (AWG 20 ... 16)		
	With end sleeve acc. to DIN 46228 Part 2		0.25 ... 1.5 mm² (AWG 20 ... 16)		
	Stripped length		9 mm (0.35 inch)		
Weights					
3-pole	Fixed-mounted circuit breaker	kg	56	56	64
	Withdrawable circuit breaker without guide frame	kg	60	60	68
	Guide frames	kg	31	31	45
4-pole	Fixed-mounted circuit breaker	kg	67	67	77
	Withdrawable circuit breaker without guide frame	kg	72	72	82
	Guide frames	kg	37	37	54

[1] Maintenance means: Replacing main contact elements and arc chutes (see operating instructions: www.siemens.com/lowvoltage/manuals).















System overview, page 1/24

© Siemens 2022

Non-automatic circuit breakers for DC

Application examples

The connection to the circuit breakers is not dependent on direction and polarity; the circuit diagrams can be adapted accordingly. If the parallel or series connections are made directly to the connecting bars, for thermal reasons the continuous load on the circuit breakers must only be 80% of the permissible operational current. If the parallel or series connection is made at a distance of 1 m from the connecting bars, the circuit breaker can be used at full operational current load.

Minimum required contact gaps at rated voltage	DC 1-pole disconnection Grounded system	DC 2-pole (all-pole) disconnection Grounded system	Non-grounded system
Rated operational voltage up to 300 V			
			
Rated operational voltage up to 600 V			
			
Rated operational voltage up to 1000 V			
			
Rated operational voltage up to 1500 V			
			

Note:
DC 2-pole (all-pole) disconnection; grounded system
The grounded conductor must always be assigned to the individual switching pole of the non-automatic air circuit breaker, so that in the event of a ground fault there are always 2 conducting paths in series in a circuit with 3-pole circuit breakers, and 3 conducting paths in series in a circuit with 4-pole circuit breakers.
The jumpers between the switching poles must be short-circuit and ground-fault proof.

System overview, page 1/24

© Siemens 2022

Electronic trip unit ETU600

Protective functions

ETU600 LSI, ETU600 LSIG, ETU600 LSIG Hi-Z			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**	**Setting values with rotary switch**					
L: Overload protection LT							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_r	0.4 ... 1.0 × I_n	0.5/0.6/0.7/0.75/0.8/0.85/0.9/ 0.95/1.0 x I_n	■	■	■	■	■
Tripping time t_r at 6 × I_r	For I^2t: 0.5 ... 30 s and at I^4t: 0.5 ... 5 s	1/2/5/8/10/14/17/21/25 s	■	■	■	■	■
Characteristic LT curve	I^2t and I^4t		■	■	■	■	■
Thermal memory	Can be switched on/off		■	■	■	■	■
Cooling time constant	10 and 18 x t_r		■	■	■	■	■
Phase failure detection	Can be switched on/off		■	■	■	■	■
Overload pre-alarm PAL	Can be switched on/off		■	■	■	■	■
Current setting $I_{r\,PAL}$	0.7 ... 1.0 x I_r		■	■	■	■	■
Delay time $t_{r\,PAL}$	0.5 ... 1.0 x t_r		■	■	■	■	■
L: Overload protection LT, neutral conductor							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_N	0.2 ... 2.0 × I_n for 4-pole circuit breakers max. $I_{n\,max}$		■	■	■	■	■
Current setting $I_{N\,PAL}$	0.7 ... 1.0 × I_N		■	■	■	■	■
S: Short-time-delayed short-circuit protection ST							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_{sd}	0.6 x I_n ... 0.8 x I_{cw}	1.5/2/2.5/3/4/5/6/8/10 x I_r	■	■	■	■	■
Tripping time t_{sd}	0.02 ... 0.4 s	For Fix: 0.08/0.15/0.22/0.3/0.4 s For I^2t: 0.1/0.2/0.3/0.4 s	■	■	■	■	■
Characteristic ST curve	I^0t and I^2t		■	■	■	■	■
Reference point $I_{ST\,ref}$	6-12 x I_r		■	■	■	■	■
Intermittent acquisition	Can be switched on/off		■	■	■	■	■
S: Directional short-time-delayed short-circuit protection dST							
Tripping	Can be switched on/off		□	□	□	■	■
Current setting I_{sd} FW	0.6 x I_n ... 0.8 x I_{cw}		□	□	□	■	■
Current setting I_{sd} REV	0.6 x I_n ... 0.8 x I_{cw}		□	□	□	■	■
Tripping time t_{sd} FW	0.05 ... 0.4 s		□	□	□	■	■
Tripping time t_{sd} REV	0.05 ... 0.4 s		□	□	□	■	■
I: instantaneous short-circuit protection INST							
Tripping	Can be switched on/off		■	■	■	■	■
Current setting I_i	1.5 x I_n ... 0.8 x I_{cs}	1.5/2/3/4/6/8/10/12/15 x I_n	■	■	■	■	■
Reverse power protection RP							
Tripping	Can be switched on/off		□	□	□	■	■
Setting value P_{RP}	0.05 ... 0.5 × P_n		□	□	□	■	■
Tripping time t_{RP}	0.01 ... 25 s		□	□	□	■	■
Enhanced Protective functions EPF							
Phase unbalance current and phase unbalance voltage			□	□	□	■	■
Undervoltage and overvoltage			□	□	□	■	■
Active power import and active power export			□	□	□	■	■
Underfrequency and overfrequency			□	□	□	■	■
Total harmonic distortion for current and voltage			□	□	□	■	■
Phase sequence detection			□	□	□	■	■
DAS+ dynamic arc sentry							
Current setting $I_{i\,DAS+}$	1.5 ... 10 x I_n		■	■	■	■	■
Current setting $I_{g\,DAS+}$	With LSIG GFx option plug Residual: - Sizes 1 and 2: 100 ... 2000 A and - Size 3: 400 ... 2000 A Direct: 15 ... 2000 A		■	■	■	■	■
Tripping time $t_{g\,DAS+}$	0 ... 5 s		■	■	■	■	■
Second parameter set							
Parameter set changeover	Switchable between parameter set A and B		□	□	□	■	■

■ Available, feature of the application package
□ Can be retrofitted

System overview, page 1/24

© Siemens 2022

Electronic trip unit ETU600

Protective functions

ETU600 LSI			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**						
G: ground fault GF alarm							
Alarm	Can be switched on/off		□	□	□	■	■
Current setting $I_{g\ alarm}$ with LSIG GFx option plug	Detection method Residual	Sizes 1 and 2: 100 ... 5000 A Size 3: 400 ... 5000 A	□	□	□	■	■
	Detection method Direct	15 ... 5000 A	□	□	□	■	■
Alarm time $t_{g\ alarm}$		0 ... 0.5 s	□	□	□	■	■

■ Available, feature of the application package
□ Can be retrofitted

ETU600 LSIG			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**						
G: Ground fault GF							
Tripping	Can be switched on/off		■	■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N-conductor	■	■	■	■	■
	Direct	Direct metering of the ground-fault current with a current transformer	■	■	■	■	■
	Dual	Protection zone UREF: Detection of the ground-fault current by means of summation current formation, Protection zone REF: Measurement of the ground-fault current with an external current transformer	■	■	■	■	■
Characteristic GF curve	With LSIG GFx option plug	For Fix (I^0t)/I^2t/I^4t/I^6t	■	■	■	■	■
Current setting I_g with LSIG GFx option plug	Detection method Residual	Sizes 1 and 2: 100 ... 2000 A Size 3: 400 ... 2000 A	■	■	■	■	■
	Detection method Direct	15 ... 2000 A	■	■	■	■	■
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	■	■	■	■	■
	For I^xt at 3 x I_g	0 ... 30 s	■	■	■	■	■
	$t_{g\ def}$ at I^xt	0,05 ... 0,5 s	■	■	■	■	■
Intermittent acquisition	Can be switched on/off		■	■	■	■	■
G: ground fault GF alarm							
Alarm	Can be switched on/off		■	■	■	■	■
Current setting $I_{g\ alarm}$ with LSIG GFx option plug	Detection method Residual	Sizes 1 and 2: 100 ... 5000 A Size 3: 400 ... 5000 A	■	■	■	■	■
	Detection method Direct	15 ... 5000 A	■	■	■	■	■
Alarm time $t_{g\ alarm}$		0 ... 0.5 s	■	■	■	■	■

■ Available, feature of the application package

System overview, page 1/24

© Siemens 2022

ETU600 LSIG Hi-Z			Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Protective function	**Variable setting range**						
G: Ground fault GF Hi-Z							
Tripping	Can be switched on/off		■	■	■	■	■
Method of ground fault detection	Residual	Detection of ground-fault current via summation current formation in all phases and the N-conductor	■	■	■	■	■
	Dual Hi-Z, for high-impedance connection of the external current transformers	Protection zone UREF: Detection of the ground-fault current by means of summation current formation Protection zone REF: Measurement of the ground-fault current with an external current transformer combination	■	■	■	■	■
Characteristic GF curve	With LSIG GFx option plug	For Fix (I^0t)/I^2t/I^4t/I^6t	■	■	■	■	■
Current setting I_g with LSIG GFx option plug	Protection zone UREF	Size 2: 100 ... 2000 A and Size 3: 400 ... 2000 A	■	■	■	■	■
	Protection zone REF	15 ... 2000 A	■	■	■	■	■
Tripping time t_g	For Fix (I^0t)	0 ... 5 s	■	■	■	■	■
	For I^xt 3 x I_g in protection zone UREF	0 ... 30 s	■	■	■	■	■
	$t_{g\ def}$ at I^xt	0,05 ... 0,5 s	■	■	■	■	■
Intermittent acquisition	Can be switched on/off		■	■	■	■	■
G: ground fault GF alarm							
Alarm	Can be switched on/off		■	■	■	■	■
Current setting $I_{g\ alarm}$ with LSIG GFx option plug	Protection zone UREF	Size 2: 100 ... 5000 A and Size 3: 400 ... 5000 A	■	■	■	■	■
Alarm time $t_{g\ alarm}$		0 ... 0.5 s	■	■	■	■	■

■ Available, feature of the application package

System overview, page 1/24

© Siemens 2022

Electronic trip unit ETU600

Operation, interfaces and measurement function

ETU600		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring	Non-automatic circuit breakers
Operation and interfaces							
Rotary switch		■	■	■	■	■	–
Display and operating keys		■	■	■	■	■	–
SENTRON powerconfig configuration software		■	■	■	■	■	–
Fieldbus communication		■	■	■	■	■	–
Color display		■	■	■	■	■	–
Bluetooth [1] and USB interface		■	■	■	■	■	–
Communication							
Prepared for connection of a communication module (ready4COM feature)	Status messages of the circuit breaker	□	□	■	■	■	□
	Status messages of the electronic trip unit ETU600	□	□	■	■	■	–
	Remote operation, requires a communication module, closing coil, shunt trip	□	□	■	■	■	□
Communication module COM190 PROFINET IO/Modbus TCP		□	□	□	□	□	□
Digital input and output on the electronic trip unit ETU600							
Parameterizable input	For activating DAS+ dynamic arc sentry or can be used for parameter set changeover	■	■	■	■	■	–
Parameterizable output	Can be used as a "life contact" and for display of "Parameter set B active" or "DAS+ dynamic arc sentry active".	■	■	■	■	■	–
IOM230 digital input and output module							
Two parameterizable inputs	For controlling the circuit breaker and transmitting information from the switchboard via communication.	□	□	□	□	□	□
Three parameterizable outputs	For signaling events, states, tripping operations or alarms of the circuit breaker	□	□	□	□	□	□

[1] A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

– Not available
■ Available, feature of the application package
□ Can be retrofitted

System overview, page 1/24

© Siemens 2022

ETU600		Current metering	ready4COM	PMF-I Energy efficiency	PMF-II Basic Power Monitoring	PMF-III Advanced Power Monitoring
Measurement function						
Integrated voltage tap at top/bottom		–	–	■	■	■
Voltage tap module VTM		–	–	■	■	■
Type acc. to IEC 61557-12	PMF-I	–	–	■	■	■
	PMF-II	–	–	–	■	■
	PMF-III	–	–	–	–	■
Metering values						
Temperature		–	■	■	■	■
Accuracy according to IEC 61557-12						
Phase current I_{L1}, I_{L2}, I_{L3}	Class 1	■	■	■	■	■
Neutral conductor current I_N	Class 1	■	■	■	■	■
Voltage U_{LN}	Class 0.5	–	–	■	■	■
Voltage U_{LL}	Class 0.5	–	–	■	■	■
Active energy E_a	Class 2	–	–	■	■	■
Active power P	Class 2	–	–	–	■	■
Accuracy according to manufacturer's specifications						
Ground-fault current I_g with ETU600 LSI	2%	–	–	–	■	■
Ground-fault current I_g with ETU600 LSIG, ETU600 LSIG Hi-Z	2%	■	■	■	■	■
Reactive energy E_r	2%	–	–	–	■	■
Apparent energy E_{ap}	2%	–	–	–	■	■
Reactive power Q	2%	–	–	–	■	■
Apparent power S	2%	–	–	–	■	■
Power factor PF	6%	–	–	–	■	■
cos φ	6%	–	–	–	■	■
Frequency f	0.5%	–	–	–	■	■
Current unbalance	2.5%	–	–	–	■	■
Voltage unbalance	1.5%	–	–	–	■	■
Total harmonic distortion $THD\text{-}I$ [1]	2%	–	–	–	–	■
Total harmonic distortion $THD\text{-}U$ [1]	2%	–	–	–	–	■
Harmonic I, U [1]	2%	–	–	–	–	■

[1] For 2nd to 15th harmonic ±2% and for 16th to 31st harmonic ±5%

■ Available, feature of the application package
– Not available













System overview, page 1/24

© Siemens 2022

Connection

Main circuit connection


3WA11 – 3WA13


Fixed-mounted		Withdrawable	
 Rear horizontal		 Rear horizontal	
 Rear vertical		 Rear vertical	
 Horizontal on top, vertical at the bottom	 Vertical on top, horizontal at the bottom	 Horizontal on top, vertical at the bottom	 Vertical on top, horizontal at the bottom
 Front connection with double hole		 Front connection with double hole	
		 Flange	
		 Flange on top and horizontal at bottom	 Flange on bottom and horizontal at top

Secondary disconnect terminal

The auxiliary and control cables are connected at the manual connectors using the push-in technology of the auxiliary conductor connections of the circuit breaker.

Coding pins on the manual connectors prevent them being inserted in the wrong slots.



Screwless connection (push in)


Screw connection (optional)

System overview, page 1/24

© Siemens 2022

Communication

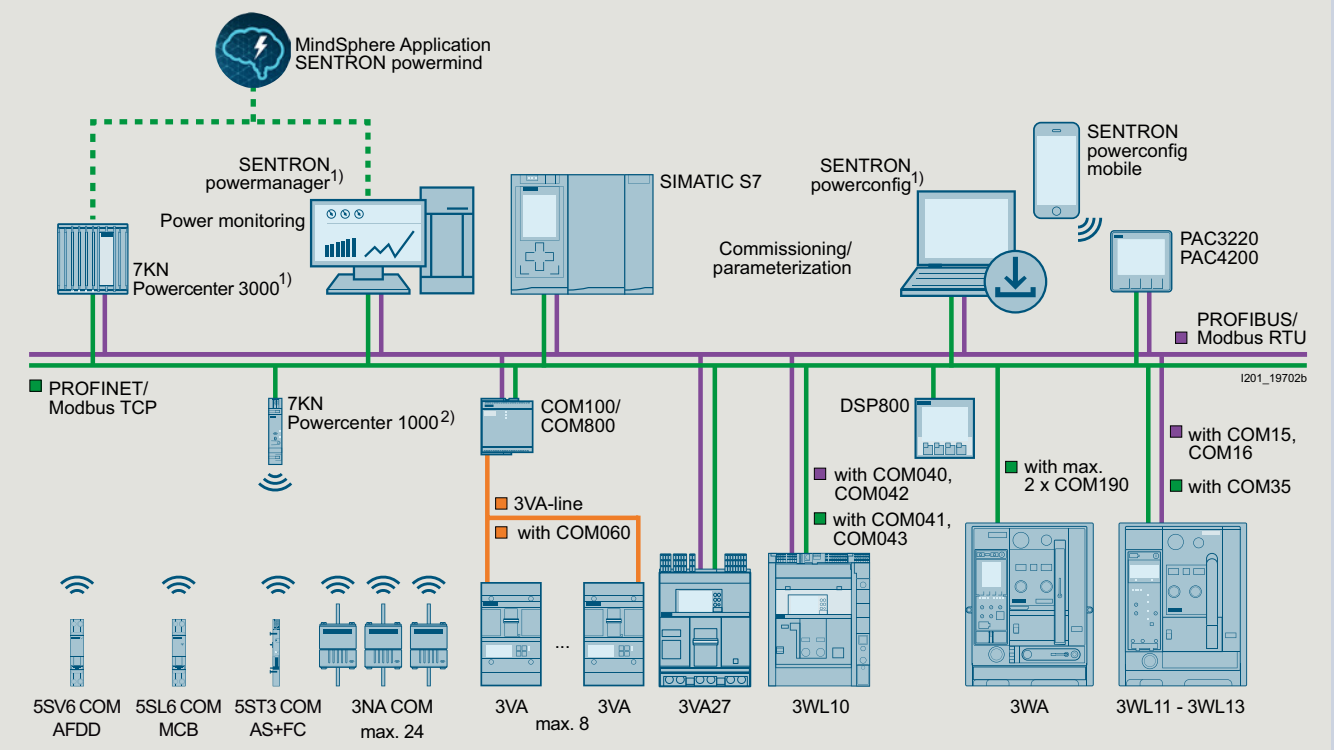

1) Direct connection to Modbus TCP; Modbus RTU via gateway; PROFINET and PROFIBUS are not supported.
2) Direct connection to Modbus TCP; PROFINET is not supported.

The 3WA can be equipped with up to two PROFINET IO/Modbus TCP COM190 communication modules and up to five IOM230 digital input/output modules.

For the optional communications interface with the COM190 communication module, a circuit breaker with the "ready4COM" feature must be selected as the circuit breaker/non-automatic air circuit breaker. The first COM190 communication module must be selected via a Z option. If you want to use a further COM190 communication module, this must be ordered separately as an accessory.
Both COM190 communication modules can be run in parallel.

The first IOM230 digital input/output module can be selected via a Z option.
The up to four further digital input/output modules must be ordered separately as accessories.

You will find further information on the COM190 in the Equipment Manual – 3WA Air Circuit Breakers
www.siemens.com/lowvoltage/manuals (109763061)

Technical specifications	COM190
Primary operating range	
U_s	24 V DC ±20%
Rated power dissipation	1 W
Switched Ethernet Ports	2
Protocol	PROFINET IO (CC-C) and Modbus TCP
Security functions	Yes
Quantity	Up to 2

Technical specifications	IOM230
Primary operating range	
U_s	24 V DC ±20%
Rated power dissipation	1 W
Inputs	2
Outputs	3
Maximum switching current	24 V DC, 4 A
	250 V AC, 5 A
Maximum continuous current	24 V DC, 0.2 A
	250 V AC, 0.2 A
Quantity	Up to 5

System overview, page 1/24

© Siemens 2022

System overview 3WA11 – 3WA13

Circuit breakers and non-automatic circuit breakers for AC and DC

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

Circuit breakers and non-automatic circuit breakers



Sizes 1 to 3

Main circuit connection



Front double hole



Flange





Main connection vertical, horizontal

Electronic trip unit and measurement function




ETU600

Operating mechanisms and auxiliary switches



Spring charging motor

Closing coil and remote trip alarm reset coil



Closing coil (CC)





Remote trip alarm reset coil

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022

Auxiliary releases


Closing coil (CC)


Shunt trip (ST)


Undervoltage release (UVR)

Accessories for electronics


Communication module


Digital input/output module


Sealable and lockable cover


Current sensors

Accessories for auxiliary circuit


Trip alarm switch


Motor disconnect switch


Local electric close


Emergency OPEN button

Interlocks and locking provisions


Locking provision for charging handle



Locking provision against unauthorized closing


Mechanical interlock


Locking mechanisms

Other accessories


Door sealing frame


Arc chute cover


Automatic reset of the reclosing lockout

Note:
You will find a detailed range of accessories in the Accessories section.


© Siemens 2022

Online configurator highlights


www.siemens.com/lowvoltage/3wa-configurator

Graphical display

- Integration of the legend as a color system
  - Orange: still to be selected
  - Petrol: already selected
  - Gray: preselected (default)
- Graphical highlighting of the individual configuration steps: "What you see is what you get"

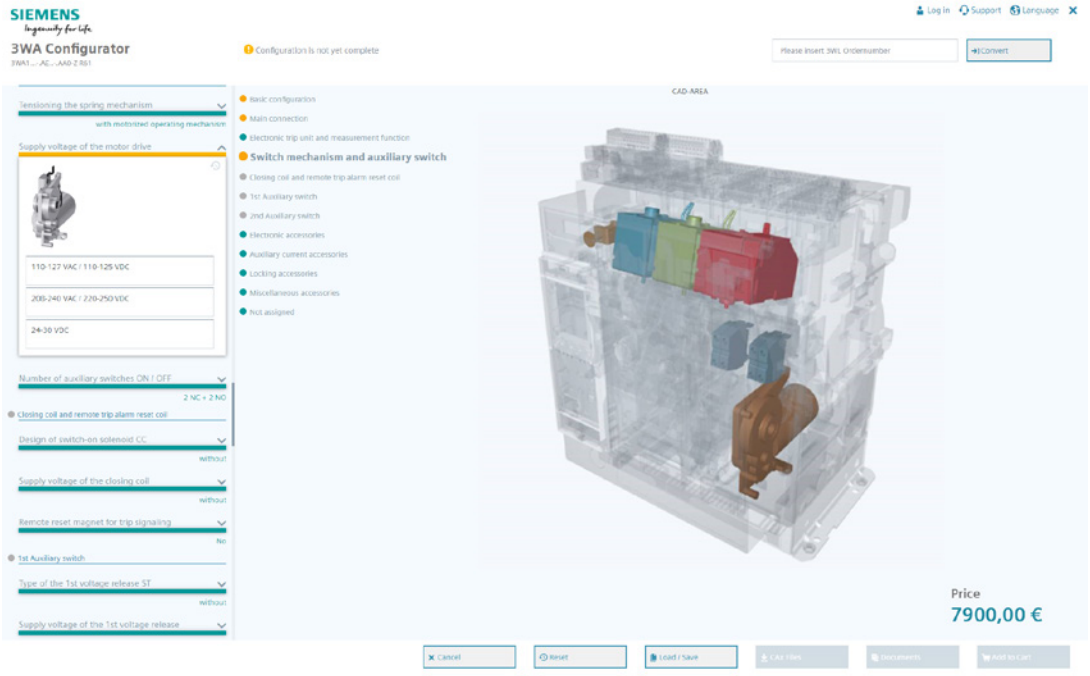


Splitting function (Frame and circuit breaker can be ordered separately)

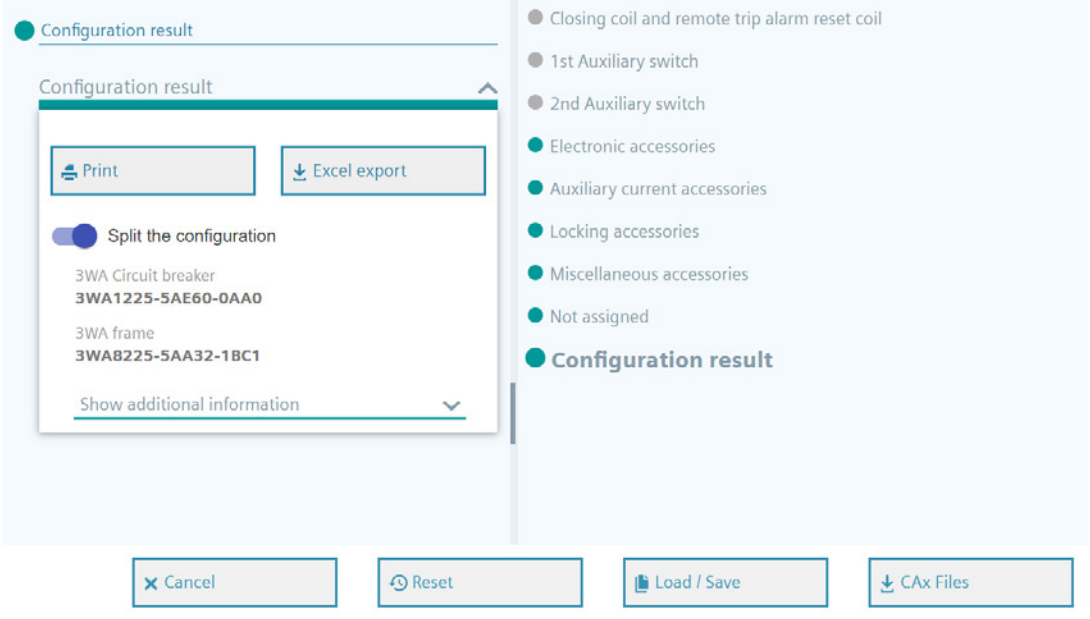

© Siemens 2022


Direct conversion of a 3WL article number to a 3WA article number in the configurator

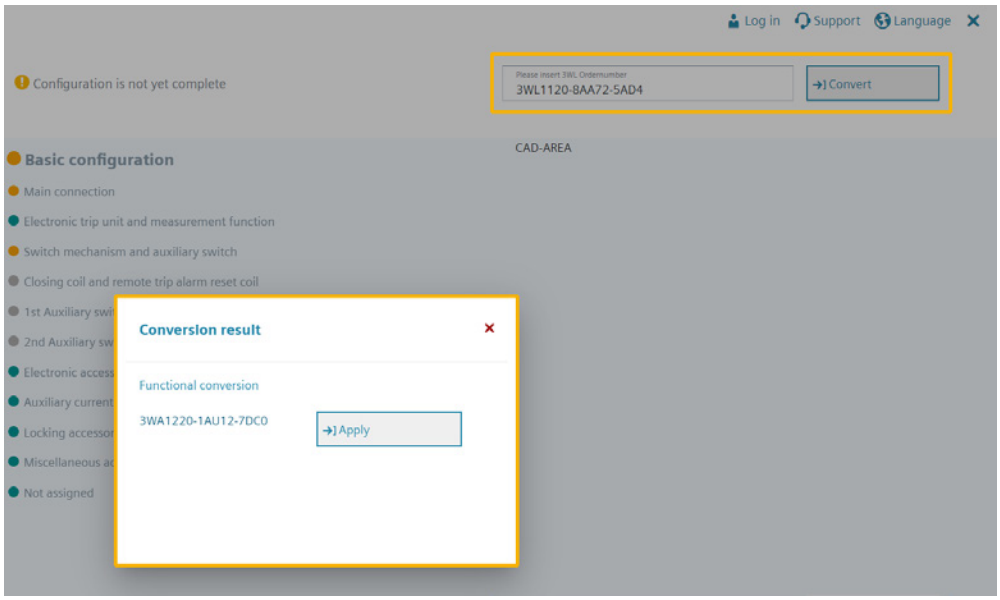

Responsive design (adapted to the differing requirements of the displaying devices)



Dynamic customer price during configuration

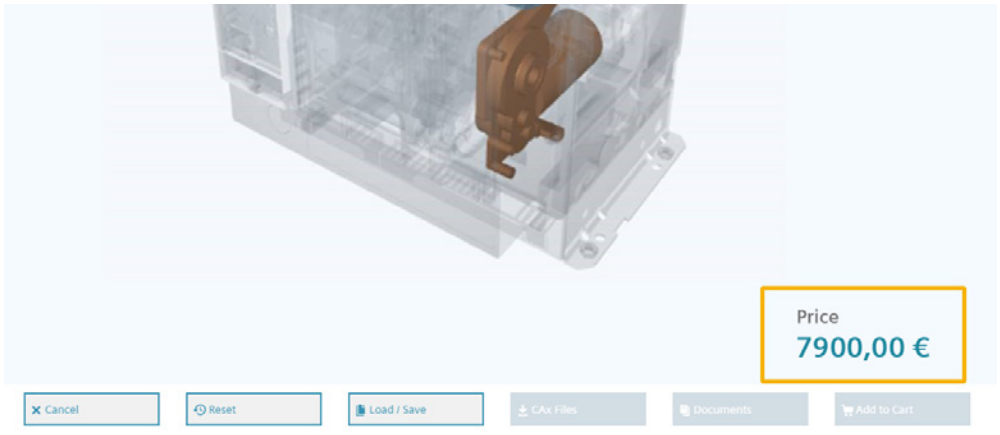

© Siemens 2022

Structure of the article numbers

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

	5	6	7	8	9	10	11	12	13	14	15	16
3WA1				–					–			

Circuit breaker and non-automatic circuit breaker

Size (SZ)	1						**1**
	2						**2**
	3						**3**

		SZ 1	SZ 2	SZ 3			
Max. rated current $I_{n\,max}$	630 A	■	–	–		**0**	**6**
	800 A	■	–	–		**0**	**8**
	1000 A	■	–	–		**1**	**0**
	1250 A	■	–	–		**1**	**2**
	1600 A	■	–	–		**1**	**6**
	2000 A	■	■	–		**2**	**0**
	2500 A	■	■	–		**2**	**5**
	3200 A	–	■	–		**3**	**2**
	4000 A	–	■[1]	■		**4**	**0**
	5000 A	–	–	■		**5**	**0**
	6300 A	–	–	■		**6**	**3**

Short-circuit breaking capacity I_{cu} at 500/690 V	N	■	–	–	55/42 kA	**2**
	S	■	■	–	66/50 kA	**3**
	M	■	■	–	85/66 kA	**4**
	H	–	■	■	100/85 kA	**5**
	C	–	■	–	130/100 kA	**6**
		–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA	**6**

Non-automatic circuit breakers	**A**	**A**

Non-automatic circuit breakers, ready4COM feature	**C**	**A**

Application packages with protective and measurement functions for circuit breakers	Electronic trip unit ETU600	Current metering				**A**	
		Current metering, ready4COM feature				**C**	
	Electronic trip unit ETU600 with measurement function, internal voltage tap in the circuit breaker, VTM680 voltage tap module and ready4COM	PMF-I Energy Efficiency	Voltage tap on top			**L**	
			Voltage tap on bottom			**E**	
		PMF-II Basic Power Monitoring	Voltage tap on top			**M**	
			Voltage tap on bottom			**F**	
		PMF-III Advanced Power Monitoring	Voltage tap on top			**N**	
			Voltage tap on bottom			**G**	
	Protective functions	■	■	■	LSI		**E**
		■	■	■	LSIG		**F**
		–	■	■	LSIG Hi-Z		**G**

Number of poles	Fixed-mounted		3-pole	**0**
			4-pole, Neutral left	**1**
	Withdrawable	Without position signaling switch	3-pole	**3**
			4-pole, Neutral left	**4**
		With position signaling switch[2]	3-pole	**6**
			4-pole, Neutral left	**7**

[1] Not available for breaking capacity C

[2] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:
3× connected position, 2× test position, 1× disconnected position;
Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:
1× connected position, 1× test position, 1× disconnected position + message through communication interface for disconnected position and for "not available"

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

3WA1 5 6 7 – 8 9 10 11 12 – 13 14 15 16

Connection

		SZ 1	SZ 2	SZ 3		
Type of mounting	Fixed-mounted	■	■ [1]	■	Vertical	1
		■	■ [3]	■ [4]	Horizontal	2
		■ [2]	■ [5]	■ [6]	Front	3
		■	■ [3]	■ [4]	Vertical on top/horizontal at the bottom	5
		■	■ [3]	■ [4]	Horizontal on top/vertical at the bottom	6
	Withdrawable	■	■	■	Without guide frame	0
		■	■ [1]	■	Vertical	1
		■ [2]	■ [3]	■ [4]	Horizontal	2
		■ [2]	■ [5]	■ [6]	Front	3
		■ [2]	■ [5]	■ [6]	Flange	4
		■ [2]	■ [3]	■ [4]	Vertical on top/horizontal at the bottom	5
		■ [2]	■ [3]	■ [4]	Horizontal on top/vertical at the bottom	6
		■ [2]	■ [5]	■ [6]	Flange at the bottom/horizontal on top	7
		■ [2]	■ [5]	■ [6]	Horizontal on top/flange at the bottom	8

[1] The 4000 A vertical connections for the 3WA1 have different dimensions from the 3WL1. Dimensionally compatible connections can be ordered with the additional Z option D01.
[2] Not available for 2500 A
[3] Not available for 4000 A
[4] Not available for 6300 A
[5] Not available for 4000 A and for breaking capacity C
[6] Not available for 5000 A and 6300 A and for breaking capacity C

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

Structure of the article numbers

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers up to 690 V

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

3WA1	5	6	7	8	–	9	10	11	12	–	13	14	15	16

Operating mechanism, auxiliary switch and auxiliary release

				13
Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3
			4 NO, 4 NC	7
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4
			4 NO, 4 NC	8

				14
Closing coil and remote trip alarm reset coil [1)2)]	Without closing coil	Without remote trip alarm reset coil		A
	With closing coil (CC/CC-COM) [3)] for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC	B
			48 ... 60 V DC	C
			110 ... 127 V AC/110 ... 125 V DC	D
			208 ... 240 V AC/220 ... 250 V DC	E
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	F
			48 ... 60 V DC	G
			110 ... 127 V AC/110 ... 125 V DC	H
			208 ... 240 V AC/220 ... 250 V DC	J
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC	K
			48 ... 60 V DC	L
			110 ... 127 V AC/110 ... 125 V DC	M
			208 ... 240 V AC/220 ... 250 V DC	N
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC	P
			48 ... 60 V DC	Q
			110 ... 127 V AC/110 ... 125 V DC	R
			208 ... 240 V AC/220 ... 250 V DC	S

			15
2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F
		48 ... 60 V DC	G
		110 ... 127 V AC/110 ... 125 V DC	H
		208 ... 240 V AC/220 ... 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤0.08 s) and short-time delayed (≤0.2 s)	24 V DC	L
		48 V DC	N
		110 ... 127 V AC/110 ... 125 V DC	P
		208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R
	With undervoltage release (UVR-t), adjustable delay 0.2 ... 3.2 s	48 V DC	S
		60 V DC	T
		110 ... 127 V AC/110 ... 125 V DC	U
		208 ... 240 V AC/220 ... 250 V DC	V
		380 ... 415 V AC	W

1) Remote trip alarm reset coil is not available for non-automatic circuit breakers
2) When using the remote trip alarm reset coil, the reclosing lockout is generally deactivated. The circuit breaker can be closed again immediately if the conditions for closing are fulfilled.
3) If the ready4COM feature is provided, the communication-capable closing coils (CC-COM) and/or shunt trips (ST-COM) are installed at the factory.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

	5	6	7	8		9	10	11	12		13	14	15	16
3WA1					–					–				

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		**0**
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP	24 ... 30 V DC	**1**
		48 ... 60 V DC	**2**
		110 ... 127 V AC/110 ... 125 V DC	**3**
		208 ... 240 V AC/220 ... 250 V DC	**4**
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	**5**
		48 ... 60 V DC	**6**
		110 ... 127 V AC/110 ... 125 V DC	**7**
		208 ... 240 V AC/220 ... 250 V DC	**8**

[1] If the ready4COM feature is provided, the communication-capable closing coils (CC-COM) and/or shunt trips (ST-COM) are installed at the factory.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

Structure of the article numbers

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for higher voltages

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

	5	6	7	8	9	10	11	12	13	14	15	16
3WA1				–				–				

Circuit breaker and non-automatic circuit breaker

Size (SZ)	1						**1**	
	2						**2**	
	3						**3**	
		SZ 1	SZ 2	SZ 3				
Max. rated current $I_{n\,max}$	630 A	■	–	–		**0**	**6**	
	800 A	■	–	–		**0**	**8**	
	1000 A	■	–	–		**1**	**0**	
	1250 A	■	–	–		**1**	**2**	
	1600 A	■	–	–		**1**	**6**	
	2000 A	■	■	–		**2**	**0**	
	2500 A	■	■	–		**2**	**5**	
	3200 A	–	■	–		**3**	**2**	
	4000 A	–	■	■		**4**	**0**	
	5000 A	–	–	■		**5**	**0**	
	6300 A	–	–	■		**6**	**3**	
Short-circuit breaking capacity I_{cu} at 690 V/1000 V/ 1150 V	Breaking capacity E	■	–	–	85/50 kA/–			**8**
		–	■	–	85/85/50 kA			**8**
		–	–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA			**8**
Non-automatic circuit breakers							**A**	**A**
Non-automatic circuit breaker, ready4COM feature							**C**	**A**
Application packages with protective and measurement functions for circuit breakers	Electronic trip unit ETU600				Current metering		**A**	
					Current metering, ready4COM feature		**C**	
	Electronic trip unit ETU600 with measurement function, internal voltage tap in the circuit breaker, VTM640 voltage tap module and ready4COM				PMF-I Energy Efficiency	Voltage tap on top	**U**	
						Voltage tap on bottom	**Q**	
					PMF-II Basic Power Monitoring	Voltage tap on top	**V**	
						Voltage tap on bottom	**R**	
					PMF-III Advanced Power Monitoring	Voltage tap on top	**W**	
						Voltage tap on bottom	**S**	
	Protective functions	■	■	■	LSI			**E**
		■	■	■	LSIG			**F**
		–	■	■	LSIG Hi-Z			**G**

Number of poles	Fixed-mounted		3-pole	**0**
			4-pole, Neutral left	**1**
	Withdrawable	Without position signaling switch	3-pole	**3**
			4-pole, Neutral left	**4**
		With position signaling switch [1]	3-pole	**6**
			4-pole, Neutral left	**7**

[1] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:
3× connected position, 2× test position, 1× disconnected position;
Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:
1× connected position, 1× test position, 1× disconnected position + message through communication interface for disconnected position and for "not available".

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

3WA1 5 6 7 – 8 9 10 11 12 – 13 14 15 16

Connection

		SZ 1	SZ 2	SZ 3		
Type of mounting	Fixed-mounted	■	■ 3)	■	Vertical	1
		■	■ 2)	■ 4)	Horizontal	2
		■ 1)	■ 2)	■ 5)	Front double hole	3
		■ 1)	■ 2)	■ 4)	Vertical on top/horizontal at the bottom	5
		■ 1)	■ 2)	■ 4)	Horizontal on top/vertical at the bottom	6
	Withdrawable	■	■	■	Without guide frame	0
		■	■ 3)	■	Vertical	1
		■ 1)	■ 2)	■ 4)	Horizontal	2
		■ 1)	■ 2)	■ 5)	Front double hole	3
		■ 1)	■ 2)	■ 5)	Flange	4
		■ 1)	■ 2)	■ 4)	Vertical on top/horizontal at the bottom	5
		■ 1)	■ 2)	■ 4)	Horizontal on top/vertical at the bottom	6
		■ 1)	■ 2)	■ 5)	Flange on top/horizontal at the bottom	7
		■ 1)	■ 2)	■ 5)	Horizontal on top/flange at the bottom	8

1) Only ≤2000 A is available for size 1
2) Only ≤3200 A is available for size 2
3) Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL.
With Z option D01, vertical connection can be changed to the connection compatible with 3WL.
4) Only ≤5000 A is available for size 3
5) Only for 4000 A is available for size 3

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

Structure of the article numbers

Basic configuration for AC circuit breakers and AC non-automatic circuit breakers in a 690 V IT system and for higher voltages

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

3WA1	5	6	7	8	–	9	10	11	12	–	13	14	15	16

Operating mechanism, auxiliary switch and auxiliary release

				13	14	15
Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0		
			4 NO, 4 NC	1		
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2		
			4 NO, 4 NC	5		
		48 ... 60 V DC	4 NO, 4 NC	6		
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3		
			4 NO, 4 NC	7		
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4		
			4 NO, 4 NC	8		
Closing coil and remote trip alarm reset coil [1]	Without closing coil	Without remote trip alarm reset coil			A	
	With closing coil (CC/CC-COM) [2] for uninterrupted duty, 100% OP	Without remote trip alarm reset coil	24 ... 30 V DC		B	
			48 ... 60 V DC		C	
			110 ... 127 V AC/110 ... 125 V DC		D	
			208 ... 240 V AC/220 ... 250 V DC		E	
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC		F	
			48 ... 60 V DC		G	
			110 ... 127 V AC/110 ... 125 V DC		H	
			208 ... 240 V AC/220 ... 250 V DC		J	
	With closing coil (CC) for momentary duty, 5% OP	Without remote trip alarm reset coil	24 ... 30 V DC		K	
			48 ... 60 V DC		L	
			110 ... 127 V AC/110 ... 125 V DC		M	
			208 ... 240 V AC/220 ... 250 V DC		N	
		With remote trip alarm reset coil (RR) for momentary duty 1% OP	24 ... 30 V DC		P	
			48 ... 60 V DC		Q	
			110 ... 127 V AC/110 ... 125 V DC		R	
			208 ... 240 V AC/220 ... 250 V DC		S	

			15
2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F
		48 ... 60 V DC	G
		110 ... 127 V AC/110 ... 125 V DC	H
		208 ... 240 V AC/220 ... 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤0.08 s) and short-time delayed (≤0.2 s)	24 V DC	L
		48 V DC	N
		110 ... 127 V AC/110 ... 125 V DC	P
		208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R
	With undervoltage release (UVR-t), adjustable delay 0.2 ... 3.2 s	48 V DC	S
		60 V DC	T
		110 ... 127 V AC/110 ... 125 V DC	U
		208 ... 240 V AC/220 ... 250 V DC	V
		380 ... 415 V AC	W

[1] Remote trip alarm reset coil is not available for non-automatic circuit breakers
[2] If the ready4COM feature is provided, the communication-capable closing coils (CC-COM) and/or shunt trips (ST-COM) are installed at the factory.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

3WA1	5	6	7	8	–	9	10	11	12	–	13	14	15	16

Auxiliary releases

1st auxiliary release	Without 1st auxiliary release		**0**
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP	24 ... 30 V DC	**1**
		48 ... 60 V DC	**2**
		110 ... 127 V AC/110 ... 125 V DC	**3**
		208 ... 240 V AC/220 ... 250 V DC	**4**
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	**5**
		48 ... 60 V DC	**6**
		110 ... 127 V AC/110 ... 125 V DC	**7**
		208 ... 240 V AC/220 ... 250 V DC	**8**

[1] If the ready4COM feature is provided, the communication-capable closing coils (CC-COM) and/or shunt trips (ST-COM) are installed at the factory.

Quick selection guide, pages 1/4 and 1/8

© Siemens 2022

Structure of the article numbers

Basic configuration for DC non-automatic circuit breakers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

1

	5	6	7	8	9	10	11	12	13	14	15	16
3WA1				–					–			

Non-automatic circuit breaker

Size (SZ)	2			2	

		SZ 2			
Max. rated current $I_{n\,max}$	1000 A	■		1	0
	2000 A	■		2	0
	4000 A	■		4	0
Short-circuit breaking capacity I_{cc}	D	■	25 kA, 600 V DC	1	
	E	■	20 kA, 1000 V DC	8	

Non-automatic circuit breakers	A	U
Non-automatic circuit breaker, ready4COM feature	C	U

Number of poles [1]	Fixed-mounted		3-pole	0
			4-pole	1
	Withdrawable	Without position signaling switch	3-pole	3
			4-pole	4
		With position signaling switch [1]	3-pole	6
			4-pole	7

Connection

		SZ 2		
Type of mounting	Fixed-mounted	■	Vertical	1
		■	Horizontal	2
		■	Front double hole	3
		■	Vertical on top/horizontal at the bottom	5
		■	Horizontal on top/vertical at the bottom	6
	Withdrawable	■	Without guide frame	0
		■	Vertical	1
		■	Horizontal	2
		■	Front double hole	3
		■	Flange	4
		■	Vertical on top/horizontal at the bottom	5
		■	Horizontal on top/vertical at the bottom	6
		■	Flange on top/horizontal at the bottom	7
		■	Horizontal on top/flange at the bottom	8

[1] Position signaling switch for circuit breakers/non-automatic circuit breakers without ready4COM:
3× connected position, 2× test position, 1× disconnected position;
Position signaling switch for circuit breakers/non-automatic circuit breakers with ready4COM:
1× connected position, 1× test position, 1× disconnected position + message through communication interface for disconnected position and for "not available".

Quick selection guide, pages 1/4 and 1/14

© Siemens 2022

3WA1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

Operating mechanism, auxiliary switch and auxiliary release

Operating mechanism and auxiliary switch	Manual recharging of the stored energy mechanism	Without spring charging motor	2 NO, 2 NC	0
			4 NO, 4 NC	1
	Recharging of the stored energy mechanism by spring charging motor (M)	24 ... 30 V DC	2 NO, 2 NC	2
			4 NO, 4 NC	5
		48 ... 60 V DC	4 NO, 4 NC	6
		110 ... 127 V AC/ 110 ... 125 V DC	2 NO, 2 NC	3
			4 NO, 4 NC	7
		208 ... 240 V AC/ 220 ... 250 V DC	2 NO, 2 NC	4
			4 NO, 4 NC	8

Closing coil	Without closing coil		A
	With closing coil (CC/CC-COM) [1] for uninterrupted duty, 100% OP	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With closing coil (CC) for momentary duty, 5% OP	24 ... 30 V DC	K
		48 ... 60 V DC	L
		110 ... 127 V AC/110 ... 125 V DC	M
		208 ... 240 V AC/220 ... 250 V DC	N

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip (ST), uninterrupted duty 100% OP [1]	24 ... 30 V DC	B
		48 ... 60 V DC	C
		110 ... 127 V AC/110 ... 125 V DC	D
		208 ... 240 V AC/220 ... 250 V DC	E
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	F
		48 ... 60 V DC	G
		110 ... 127 V AC/110 ... 125 V DC	H
		208 ... 240 V AC/220 ... 250 V DC	J
	With undervoltage release (UVR), instantaneous (≤0.08 s) and short-time delayed (≤0.2 s)	24 V DC	L
		48 V DC	N
		110 ... 127 V AC/110 ... 125 V DC	P
		208 ... 240 V AC/220 ... 250 V DC	Q
		380 ... 415 V AC	R
	With undervoltage release (UVR-t), adjustable delay 0.2 ... 3.2 s	48 V DC	S
		60 V DC	T
		110 ... 127 V AC/110 ... 125 V DC	U
		208 ... 240 V AC/220 ... 250 V DC	V
		380 ... 415 V AC	W

1st auxiliary release	Without 1st auxiliary release		0
	With shunt trip (ST/ST-COM) [1], uninterrupted duty 100% OP	24 ... 30 V DC	1
		48 ... 60 V DC	2
		110 ... 127 V AC/110 ... 125 V DC	3
		208 ... 240 V AC/220 ... 250 V DC	4
	With shunt trip (ST), momentary duty 5% OP	24 ... 30 V DC	5
		48 ... 60 V DC	6
		110 ... 127 V AC/110 ... 125 V DC	7
		208 ... 240 V AC/220 ... 250 V DC	8

[1] If the ready4COM feature is provided, the communication-capable closing coils (CC-COM) and/or shunt trips (ST-COM) are installed at the factory.

Quick selection guide, pages 1/4 and 1/14

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

Order code

Option plug for electronic trip unit

- To reduce the rated current of the circuit breaker
- Only one module is possible per circuit breaker. As standard, the electronic trip unit is equipped with an option plug which is equal to the maximum rated breaker current ($I_{n\,max}$). The rated current of the selected option plug must be less than $I_{n\,max}$.

	Rated current I_n	SZ1	SZ2	SZ3		Order code
Option plug	250 A	■	■	–		**B02**
	315 A	■	■	–		**B03**
	400 A	■	■	–		**B04**
	500 A	■	■	–		**B05**
	630 A	■	■	–		**B06**
	800 A	■	■	–		**B08**
	1000 A	■	■	–		**B10**
	1250 A	■	■	■		**B12**
	1600 A	■	■	■		**B16**
	2000 A	■	■	■		**B20**
	2500 A	–	■	■		**B25**
	3200 A	–	■	■		**B32**
	4000 A	–	–	■		**B40**
	5000 A	–	–	■		**B50**

IOM230 digital input/output module [1)]

		Order code
Module with 2 inputs and 3 outputs	A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **Cubicle**BUS[2] terminating resistor; five modules can be operated at the same time. Further modules must be ordered separately as 3WA9111-0EC11, which includes the adapter for mounting on the secondary disconnect terminal system of the circuit breaker and the adapter for external mounting on a DIN rail.	**F23**

COM190 communication module [1) 2)]

- The precondition for connection is a circuit breaker or non-automatic circuit breaker with the "ready4COM" feature

		Order code
PROFINET IO/Modbus TCP [2)]	A module including 2 Switched Ethernet ports, circuit breaker internal. A module including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, connecting cables and **Cubicle**BUS[2] terminating resistor; two communication modules can be run at the same time. The second communication module must be ordered separately as 3WA9111-0EC13.	**F19**

Automatic reset

- Only possible for circuit breakers with an electronic trip unit

		Order code
Automatic reset	Automatic reset of the reclosing lockout after ETU tripping; this option is not required when ordering a circuit breaker with a remote trip alarm reset coil RR.	**K01**

Tinned version of the main connections on the guide frame

- Only for circuit breakers in withdrawable version with horizontal connection or flange connection
- Cannot be ordered for circuit breakers without a guide frame
- The normal delivery time increases to 15 work days

		Order code
Tinned connections	Sizes 1, 2, 3	**D08**

[1)] When ordering this option for a circuit breaker or a non-automatic air circuit breaker of the installation type "withdrawable version without guide frame", this must be used as the order option for the guide frame.
[2)] For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

System overview, page 1/24

© Siemens 2022

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

			Order code
Broadened vertical main connection			
• Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately			
Main circuit connection	For 3WA1, 4000 A, size 2	Compatible with 3WL1240 for retrofit	D01
Secondary disconnect terminal system			
• Cannot be ordered for circuit breakers without a guide frame			
Secondary disconnect terminal system	With screw connection instead of push-in connection (standard)		N03
Mechanical operating cycles counter			
Mechanical operating cycles counter, 5-digit	Can be used with all circuit breakers and non-automatic circuit breakers including those without a spring charging motor		C01
Signaling switch			
Tripped signaling switch	2nd tripped signaling switch (S25) 1st tripped signaling switch included as standard for circuit breakers. Can only be used with circuit breakers with an electronic trip unit without ready4COM.	1 NO	K06
Pushbuttons/shutdown switches/closing lockouts/special packaging/arc chute cover			
Emergency OPEN button	Mushroom pushbutton instead of the mechanical OFF pushbutton		C25
Local electric close on operator panel (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Only possible in combination with a closing coil (CC)	With sealing cap	C11
		With CES lock	C12
Motor disconnect switch on operator panel (S12)	This prevents automatic charging of the stored energy mechanism by the spring charging motor		C24
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)			P61
Arc chute cover mounted on the guide frame	Not available for: – Fixed-mounted – Breaking capacity C, E and D – 4000 A size 2		R10
Sealable and lockable cover	For electronic trip unit		F40
Internal current sensors (without energy core) for applications with frequency converters			
• Used in converter applications with high harmonic components; can only be used for circuit breakers with an electronic trip unit – External 24 V DC supply required – Undervoltage release required – Additionally contains a relay for monitoring the 24 V DC and warning labels – If option Z=K60 is provided, an optional measurement function PMF-I to PMF-III according to IEC 61557-12 is not technically feasible.			
Internal current sensors	Sizes 2, 3		K60
Mechanical interlock			
• Interlocking module with Bowden cable 2 m			
Mechanical interlock	For fixed-mounted breakers		S55
	For withdrawable circuit breakers with guide frame		R55
	For guide frames (ordered separately)		R56
	For withdrawable circuit breakers (ordered separately)		R57

System overview, page 1/24

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wa-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WA....-.....-.... -Z

			Order code
Locking provisions (for fixed-mounted and withdrawable circuit breakers)			
Locking provision	Against unauthorized closing from the operator panel of the circuit breaker. The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1	Made by CES	S01
		Made by IKON	S03
		Assembly kit FORTRESS or CASTELL [1]	S05
		Assembly kit for padlocks [2]	S07
		Made by RONIS	S08
		Made by PROFALUX	S09
Locking provision	For charging handle with padlock [2]		S33
Locking provisions (for withdrawable circuit breakers)			
Locking provision to prevent movement of the withdrawable circuit breaker	Safety lock for mounting onto the circuit breaker	Made by CES	S71
		Made by PROFALUX	S75
		Made by RONIS	S76
Locking provisions against unauthorized closing, for withdrawable circuit breakers • The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced. • Not available in combination with order code "R81", "R85" or "R86". • Only possible on complete order for a withdrawable circuit breaker or when ordering the guide frame separately			
Made by CES			R61
Made by RONIS			R68
Made by PROFALUX			R60
Locking mechanisms • R30 and R50 not possible in combination with order code "R81", "R85" or "R86". • R30 and R50 only possible on complete order for a circuit breaker with a guide frame or when ordering the guide frame separately • R40 can only be ordered with the circuit breaker			
For fixed-mounted circuit breakers	To prevent opening of the control cabinet door in ON position		S30
For withdrawable circuit breakers	To prevent opening of the control cabinet door in connected position		R30
	To prevent activation when the control cabinet door is open [3]		R40
	To prevent movement when the control cabinet door is open [4]		R50
Locking provisions to prevent movement of the withdrawable circuit breaker in disconnected position • Consisting of Bowden cable and lock in the control cabinet door • Not available in combination with order code "R30", "R50", "R61", "R68" or "R60" • Only possible for a complete order for a circuit breaker with a guide frame or when ordering the guide frame separately			
Made by CES			R81
Made by PROFALUX			R85
Made by RONIS			R86
Increased degree of protection for installation in a control cabinet			
Door sealing frame for degree of protection IP41			T40

[1] Locks must be ordered from the manufacturer.
[2] Padlock not included in the scope of supply
[3] Not available in combination with R50
[4] Not available in combination with R40

System overview, page 1/24

© Siemens 2022

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frames, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator

	5	6	7		8	9	10	11	12		13	14	15	16
3WA8				–		A	A			–				

Guide frames

			SZ 1	SZ 2	SZ 3				
Size	1					1			
	2					2			
	3					3			
Max. rated current $I_{n\,max}$ (Generate the selection of positions 6, 7 and 8 according to the list below)	630 ... 1000 A		■	–	–		1	0	
	1250 ... 1600 A		■	–	–		1	6	
	630 ... 2000 A		■	■	–		2	0	
	2500 A		■	■	–		2	5	
	2000 ... 3200 A		–	■	–		3	2	
	4000 A		–	■	■		4	0	
	4000 ... 5000 A		–	–	■		5	0	
	6300 A		–	–	■		6	3	
Short-circuit breaking capacity I_{cu} (Generate the selection of positions 6, 7 and 8 according to the list below)	At 500/690 V	N	■	–	–	55/42 kA			2
		S	■	■	–	66/50 kA			3
		M	■	■	–	85/66 kA			4
		H	–	■	■	100/85 kA			5
		C	–	■	–	130/100 kA			6
			–	–	■	3-pole: 150/150 kA 4-pole: 130/130 kA			6
	At 690/1000/1150 V	E	■	–	–	80/50 kA/–			8
			–	■	–	85/85/50 kA			8
			–	–	■	3-pole: 150/125/70 kA 4-pole: 130/125/70 kA			8
Number of poles	3-pole							3	
	4-pole, Neutral left							4	
Main connection			■	■ [5]	■	Vertical			1
			■ [1]	■ [2]	■ [3]	Horizontal			2
			■ [1]	■ [2]	■ [4]	Front double hole			3
			■ [1]	■ [2]	■ [4]	Flange			4
			■ [1]	■ [2]	■ [3]	Vertical on top/horizontal at the bottom			5
			■ [1]	■ [2]	■ [3]	Horizontal on top/vertical at the bottom			6
			■ [1]	■ [2]	■ [4]	Flange on top/horizontal at the bottom			7
			■ [1]	■ [2]	■ [4]	Horizontal on top/flange at the bottom			8

[1] Only ≤2000 A is available for size 1
[2] Only ≤3200 A is available for size 2
[3] Only ≤5000 A is available for size 3
[4] Only for 4000 A is available for size 3
[5] Vertical connection for 3WA size 2 for 4000 A has different dimensions than for the 3WL. With Z option D01, vertical connection can be changed to the connection compatible with 3WL.

The following combinations of positions 6, 7 and 8 of the article number are technically feasible

Size	Breaking capacity at $I_{n\,max}$	630 A	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A	4000 A	5000 A	6300 A
		Representation 6, 7, 8										
1	N	10-2	10-2	10-2	16-2	16-2	20-3	25-3	–	–	–	–
	S	10-3	10-3	10-3	16-3	16-3	20-3	25-3	–	–	–	–
	M	20-4	20-4	20-4	20-4	20-4	20-4	25-4	–	–	–	–
	E	20-8	20-8	20-8	20-8	20-8	20-8	25-8	–	–	–	–
2	S	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	M	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	H	–	–	–	–	–	20-5	25-5	32-5	40-5	–	–
	E	–	–	–	–	–	20-8	25-8	32-8	40-8	–	–
	C	–	–	–	–	–	32-6	32-6	32-6	–	–	–
3	H	–	–	–	–	–	–	–	–	40-5	50-5	63-5
	E	–	–	–	–	–	–	–	–	50-8	50-8	63-8
	C	–	–	–	–	–	–	–	–	50-8	50-8	63-8

System overview, page 1/24

© Siemens 2022

Guide frames for AC

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frames, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator**

	3WA8	5	6 7	8	–	9 10	11	12	–	13	14	15	16
										1			1

Push-in connection [1]	SZ 1, SZ 2, SZ 3	X7, X6, X5	Non-automatic circuit breakers without ready4COM feature	A
		X8, X7, X6, X5	Circuit breakers/non-automatic circuit breakers with ready4COM feature	B
	SZ 2, SZ 3	X9, X8, X7, X6, X5	Including external trip controller ETC600 for circuit breakers with ETU600 LSIG Hi-Z	K

Position signaling switch	Without position signaling switch	A
	Position signaling switch PSS (3x connected position, 2x test position, 1x disconnected position)	C
	Position signaling switch PSS-COM (1x connected position, 1x test position, 1x disconnected position) plus connection to a communication module	G

[1] Conversion to screw-type connection is possible with Z option N03.

System overview, page 1/24

© Siemens 2022

Guide frames for DC

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frames, please use our online configurator at
www.siemens.com/lowvoltage/3wa-configurator**

	5	6	7	8	9	10	11	12	13	14	15	16
3WA8				–	A	U			–	1		1

Guide frames

Size (SZ)	2			2
Max. rated current $I_{n\,max}$	2000 A			2 0
	4000 A			4 0
Short-circuit breaking capacity	D	≤ 600 V DC	25 kA at 600 V DC	1
	E	≤ 1000 V DC	20 kA at 1000 V DC	8
Number of poles	3-pole			3
	4-pole			4
Connection	Withdrawable	Vertical		1
		Horizontal		2
		Front double hole		3
		Flange		4
		Vertical on top/horizontal at the bottom		5
		Horizontal on top/vertical at the bottom		6
		Flange on top/horizontal at the bottom		7
		Horizontal on top/flange at the bottom		8
Secondary disconnect terminal	Push-in connection	X7, X6, X5	Non-automatic circuit breakers	A
		X8, X7, X6, X5	Non-automatic circuit breakers with ready4COM	B
Position signaling switch	Without position signaling switch			A
	Position signaling switch PSS (3x connected position, 2x test position, 1x disconnected position)			C
	Position signaling switch PSS-COM (1x connected position, 1x test position, 1x disconnected position) plus connection to a communication module			G

System overview, page 1/24

© Siemens 2022

Accessories and spare parts

Accessories for electronic trip unit

Electronic trip unit ETU600



Basic Protective functions	Article No.
LSI/LSIG	3WA9111-0EE62
LSIG Hi-Z	3WA9111-0EE63

Spare part battery for ETU600



	Article No.
	3WA9111-0EE81

Option plug



Basic configuration	Rated current I_n	SZ 1	SZ 2	SZ 3	Article No.	
Protective function LSI: LT, ST, INST					3WA9111-0EB	..
Protective function LSIG: LT, ST, INST, GF (ground-fault protection with extended setting range)					3WA9111-0EX	..
	250 A	■	■	–		02
	315 A	■	■	–		03
	400 A	■	■	–		04
	500 A	■	■	–		05
	630 A	■	■	–		06
	800 A	■	■	–		08
	1000 A	■	■	–		10
	1250 A	■	■	■		12
	1600 A	■	■	■		16
	2000 A	■	■	■		20
	2500 A	■	■	■		25
	3200 A	–	■	■		32
	4000 A	–	■	■		40
	5000 A	–	–	■		50
	6300 A	–	–	■		63

Function packages for ETU600



Protective and alarm functions	Article No.
Ground fault alarm (GF alarm)	3WA9111-0ES01
Directional short-time-delayed short-circuit protection (dST) and reverse power protection (RP) (requires an optional voltage tap module)	3WA9111-0ES05
Enhanced Protective functions (EPF)	**Article No.**
Full package with unbalance, voltage, active power, frequency, THD and phase sequence detection	3WA9111-0ES11
Phase unbalance current and phase unbalance voltage	3WA9111-0ES12
Undervoltage and overvoltage	3WA9111-0ES13
Active power import and active power export	3WA9111-0ES14
Underfrequency and overfrequency	3WA9111-0ES15
Total harmonic distortion for current and voltage	3WA9111-0ES16
Phase sequence detection	3WA9111-0ES17
Functional expansions	**Article No.**
Second protection parameter set	3WA9111-0ES21
Extended measurement function	**Article No.**
Upgrade to measurement function PMF-II Basic Power Monitoring (metering values, see catalog page 1/21)	3WA9111-0ES52
Upgrade to measurement function PMF-III Advanced Power Monitoring (metering values, see catalog page 1/21)	3WA9111-0ES53

External current sensors for the N-conductor



Version	Size	Article No.
For mounting on busbar	1	3WA9111-0AA21
	2	3WA9111-0AA22
	3	3WA9111-0AA23
For busbar connection	1	3WA9111-0AA31
	2	3WA9111-0AA32
	3	3WA9111-0AA33


System overview, page 1/24

© Siemens 2022

Accessories for electronic trip unit

Sealable and lockable covers





Accessory for	Article No.
ETU600	3WA9111-0EM22

Automatic reset of the reclosing lockout



Version	Article No.
Spare part for option K01 or for retrofitting	3WA9111-0EM31

Remote trip alarm reset coil



- For mechanical tripped indicator
- Including automatic reset of the reclosing lockout 3WA9111-0EM31


Voltage	Article No.
24 ... 30 V DC	3WA9111-0EM42
48 ... 60 V DC	3WA9111-0EM44
110 ... 127 V AC/110 ... 125 V DC	3WA9111-0EM45
208 ... 240 V AC/220 ... 250 V DC	3WA9111-0EM46

Second tripping solenoid (F6) with reclosing lockout



Version	Article No.
For external control via the external trip controller ETC600, including the necessary parts for the secondary disconnect terminal	3WA9111-0EM61

External trip controller ETC600



Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail	3WA9111-0EM62

System overview, page 1/24

© Siemens 2022

Accessories and spare parts

Locking provisions and interlocks

Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

Version	Article No.
Without safety lock	3WA9111-0BA21
Made by CES	3WA9111-0BA22
Made by IKON	3WA9111-0BA23

Locking provision against unauthorized closing from the operator panel



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09

Type	Scope of supply	Article No.
Assembly kit FORTRESS or CASTELL [1]	Without locks, cylinders or keys	3WA9111-0BA31
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA32
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WA9111-0BA33
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA34
Made by CES	Locks, cylinders and keys included	3WA9111-0BA35
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA36
Assembly kit for padlocks	Without padlock	3WA9111-0BA37

Locking provision against unauthorized closing of the withdrawable circuit breaker



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA51
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA53
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WA9111-0BA57
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA58
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA50

Locking provision for charging handle with padlock



Version	Scope of supply	Article No.
Spare part for S33	Without padlock	3WA9111-0BA71

Locking provision to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76

Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WA9111-0BA73
Made by IKON	Locks, cylinders and keys included	3WA9111-0BA75
Made by PROFALUX	Locks, cylinders and keys included	3WA9111-0BA76
Made by RONIS	Locks, cylinders and keys included	3WA9111-0BA77
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WA9111-0BA80

[1] Locks, cylinders and keys must be ordered from the manufacturer.
Suitable cylinder lock KIRK Key C 900-301.
Suitable lock FORTRESS CLIS X005.
Suitable lock CASTELL FS2.

System overview, page 1/24

© Siemens 2022

Locking provisions and interlocks


Interlock systems



- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WA9111-0BA43

Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position



- Consisting of Bowden cable and the breaker mechanism in the control cabinet door
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the control cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the control cabinet door open" (order code "R50")

Type	Article No.
Made by CES	3WA9111-0BA81
Made by IKON	3WA9111-0BA82
Made by PROFALUX	3WA9111-0BA83
Made by RONIS	3WA9111-0BA84


Locking mechanisms to prevent opening of the control cabinet door when the circuit breaker is closed



- Defeatable
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version		Article No.
Spare part for option S30	Fixed-mounted circuit breaker	3WA9111-0BB12
Spare part for option R30	Guide frames	3WA9111-0BB13

Locking mechanisms to prevent movement when the control cabinet door is open



- Mounted on guide frame
- **Note:** Not possible in combination with "Locking mechanisms to prevent movement of the withdrawable circuit breakers in the disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R50	3WA9111-0BB15

Mechanical interlock



- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	Circuit breaker and guide frame when ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WA9111-0BB21
Module for withdrawable circuit breakers with guide frame	–	Option R55	3WA9111-0BB22
Module for guide frame	✓	Option R56	3WA9111-0BB23
Module for withdrawable circuit breaker	✓	Option R57	3WA9111-0BB24
Adapter for size 3 withdrawable circuit breaker	✓	–	3WA9111-0BB25


Coupling on the circuit breaker for mutual interlocking with Bowden cable



- Can be used in all circuit breakers

Article No.
3WA9111-0BB31

Bowden cable for mechanical interlock



Length	Article No.
2000 mm	3WA9111-0BB41
3000 mm	3WA9111-0BB42
4500 mm	3WA9111-0BB43

[1] Locks, cylinders and keys must be ordered from the manufacturer.


System overview, page 1/24

© Siemens 2022

Accessories and spare parts

Indicators and control elements

Ready-to-close signaling switch (S20)



Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH01

1st trip alarm switch (S24)



Version	Article No.
Spare part for signaling switch installed as standard	3WA9111-0AH02


2nd trip alarm switch (S25)



- Can only be used with a circuit breaker with an electronic trip unit without ready4COM
- The 1st trip alarm switch (1 changeover contact) is installed in every circuit breaker with a trip unit as standard

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WA9111-0AH03

Mechanical operating cycles counter (5-digit)



Version	For circuit breakers/non-automatic circuit breakers	Article No.
Spare part for option C01	With manual operating mechanism	3WA9111-0AH04
	With spring charging motor	3WA9111-0AH05


Spring charge signaling switch (S21)



- Standard when a spring charging motor is installed to charge the stored energy mechanism
- When a spring charging motor is retrofitted, the spring charge signaling switch can also be retrofitted

Contacts	Article No.
1 NO	3WA9111-0AH06

Position signaling switch for withdrawable circuit breakers



Contacts	Article No.
PSS: 6 changeover contacts; 3× connected position, 2× test position, 1× disconnected position	3WA9111-0AH11
PSS-COM: 3 changeover contacts; 1× connected position, 1× test position, 1× disconnected position and option for connection to a communication module	3WA9111-0AH12

Local electric close (S10) for operator panel





- Scope of supply: Button + wiring
- Not available with motor disconnect switch
- **Note:** Possible only for circuit breakers with closing coil

Version	Article No.
With sealing cap, spare part for option C11	3WA9111-0AH21
With CES assembly kit, Spare part for option C12	3WA9111-0AH22
With IKON assembly kit	3WA9111-0AH23

Motor disconnect switch (S12)



- Mounting onto operator panel
- Only in combination with the spring charging motor for charging the stored energy mechanism
- Not available in combination with local electric close

Version	Article No.
Spare part for option S25	3WA9111-0AH24

Emergency OPEN button





- Mushroom pushbutton instead of local mechanical open

Version	Article No.
Spare part for option S24	3WA9111-0AH25







System overview, page 1/24

© Siemens 2022

Secondary disconnect terminals for circuit breakers and guide frames

- For size 1, up to 4 secondary disconnect terminal blocks are possible; for sizes 2 and 3, up to 5 secondary disconnect terminal blocks are possible
- Circuit breakers and non-automatic circuit breakers with secondary disconnect terminal blocks are supplied from the factory:
  - Non-automatic circuit breakers with 3 blocks
  - Non-automatic circuit breakers with ready4COM feature with 4 blocks
  - Non-automatic circuit breakers with ETU600 LSI or LSIG with 4 blocks
  - Non-automatic circuit breaker with ETU600 LSIG-HiZ with 5 blocks

Secondary disconnect terminal

	Version	Type	Article No.
	Base part (1)		3WA9111-0AB01
	1000 V extension [1]		3WA9111-0AB02
	Manual connector (2)	Screw connection	3WA9111-0AB03
		Push-in connection	3WA9111-0AB04
		Ring lug connection	3WA9111-0AB05 new
	Coding kit (3)	For fixed-mounted X5 to X8	3WA9111-0AB07
	Sliding contact module (4)	For guide frames	3WA9111-0AB08
	Blanking block		3WA9111-0AB12

For a complete secondary disconnect terminal block, you must order:
Fixed-mounted version: (1) + (2) + (3)
Withdrawable version: (1) + (4) + (2)

[1] Secondary disconnect terminal for circuit breakers with breaking capacity C and E must be ordered separately

Auxiliary releases

Closing coil (CC)/shunt trip (ST)



- Suitable for uninterrupted duty

Version	Voltage	Article No.
100% OP Switching time ≦80 ms	24 ... 30 V DC	3WA9111-0AD02
	48 ... 60 V DC	3WA9111-0AD04
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD06

Closing coil (CC-COM)/shunt trip (ST-COM) new



- Suitable for uninterrupted duty

Version	Voltage	Article No.
For circuit breakers and non-automatic circuit breakers with the "ready4com" feature 100% OP Switching time ≦80 ms Switching time via COM ≦120 ms	24 ... 30 V DC	3WA9111-0AD32
	48 ... 60 V DC	3WA9111-0AD34
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD35
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD36


System overview, page 1/24

© Siemens 2022

Accessories and spare parts

Auxiliary releases


Closing coil (CC)



- For momentary duty, with cut-off switch S15

Version	Voltage	Article No.
5% OP Switching time 50 ms	24 ... 30 V DC	3WA9111-0AD12
	48 ... 60 V DC	3WA9111-0AD14
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD16

Shunt trip (ST)



- For momentary duty, with cut-off switch S14

Version	Voltage	Article No.
5% OP Switching time 50 ms	24 ... 30 V DC	3WA9111-0AD22
	48 ... 60 V DC	3WA9111-0AD24
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD25
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD26

Capacitor trip device



- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA, 3WL and 3WN circuit breakers
- **Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trip

Rated control supply voltage/rated operational voltage		Article No.
AC 50/60 Hz	DC	
220 ... 240 V	220 ... 250 V	3WA9111-0AD81

Undervoltage release (UVR)



Version	Voltage	Article No.
Instantaneous ≤0.08 s (UVR) and short-time delayed ≤0.2 s	24 V DC	3WA9111-0AE02
	30 V DC	3WL9111-0AE02-0AA0
	48 V DC	3WA9111-0AE04
	60 V DC	3WL9111-0AE07-0AA0
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE06
	380 ... 415 V AC	3WA9111-0AE07
Delayed (UVR-t), adjustable delay 0.2 ... 3.2 s	48 V DC	3WA9111-0AE13
	60 V DC	3WA9111-0AE14
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE16
	380 ... 415 V AC	3WA9111-0AE17

Operating mechanism


Spring charging motor to charge the stored energy mechanism



Voltage	Article No.
24 ... 30 V DC	3WA9111-0AF02
48 ... 60 V DC	3WA9111-0AF04
110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AF05
220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AF06

Auxiliary contacts

Auxiliary switches (AUX)



Contacts	Article No.
2 NO + 2 NC	3WA9111-0AG01
2 NO	3WA9111-0AG02
1 NO + 1 NC	3WA9111-0AG03

System overview, page 1/24

© Siemens 2022

Door sealing frame, protective cover

Door sealing frame



Version	Article No.
Spare part for option T40	3WA9111-0AP01

Protective cover IP55



- Cannot be used in conjunction with door sealing frames
- Hood removable and can be opened on both sides

Article No.
3WA9111-0AP03


Arc chute, arc chute cover

Arc chute



Voltage	Size	Breaking capacity		Article No.
690 V AC	1	N, S		3WA9111-0AS01
		M		3WA9111-0AS02
	2	S, M, H		3WA9111-0AS10
		C		3WA9111-0AS11
	3	H		3WA9111-0AS17
		C		3WA9111-0AS18
1000 V AC	1	E	For fixed-mounted breakers	3WA9111-0AS04
			For withdrawable circuit breakers	3WA9111-0AS05
	2	E		3WA9111-0AS12
	3	E		3WA9111-0AS18
600 V DC	2	D		3WA9111-0AS13
1000 V DC	1	E		3WA9111-0AS06
	2	E		3WA9111-0AS14

Arc chute cover



- Parts kit for guide frame
- Spare part for option R10
- Not available for:
  - Breaking capacity C, D and E
  - 4000 A size 2

Number of poles	Size	Article No.
3-pole	1	3WA9111-0AS31
	2	3WA9111-0AS32
	3	3WA9111-0AS33
4-pole	1	3WA9111-0AS41
	2	3WA9111-0AS42
	3	3WA9111-0AS43

Coding for withdrawable version

Coding for withdrawable version



- Variant coding by the customer with 36 coding options

Size	Article No.
1, 2	3WA9111-0AR11
3	3WA9111-0AR12

System overview, page 1/24

© Siemens 2022

Accessories and spare parts

Grounding connections

Grounding connection between the guide frame and the withdrawable circuit breaker



- For 30 kA and 60 kA ground short-circuit current
- For 60 kA ground short-circuit current, order 2x contact modules for guide frame

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 [1]		3WA9111-0BG01
	3		3WA9111-0BG02
For withdrawable circuit breakers	1	3-pole	3WA9111-0BG11
		4-pole	3WA9111-0BG21
	2	3-pole [1]	3WA9111-0BG12
		4-pole [1]	3WA9111-0BG22
	3	3-pole [2]	3WA9111-0BG13
		4-pole [2]	3WA9111-0BG23

[1] Cannot be used for size 2 with breaking capacity C and size 2, 4000 A.
[2] Not for breaking capacity E

Support brackets

Support brackets



- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WA9111-0BB50


Modules of the **Cubicle**BUS²

COM190 PROFINET IO/Modbus TCP communication module [1]




Version	Article No.
Circuit breaker internal or on DIN rail, including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and **Cubicle**BUS² terminating resistor	3WA9111-0EC13

IOM230 digital input/output module (2 inputs and 3 outputs)




Version	Article No.
Including adapter for mounting on the secondary disconnect terminal system of the circuit breaker, adapter for mounting on DIN rail, connecting cables and terminating resistor for **Cubicle**BUS²	3WA9111-0EC11

Terminating resistor for CubicleBUS²



Version	Article No.
For **Cubicle**BUS² on the last module	3WA9111-0EC50

Adapters



Version	Article No.
For mounting the modules of the **Cubicle**BUS² on the secondary disconnect terminal system of the circuit breaker	3WA9111-0EC60
For mounting the modules of the **Cubicle**BUS² on DIN rail	3WA9111-0EC61

[1] For connecting the Ethernet cable, connectors angled 90° to the right are recommended, e.g. PROFINET connector 6GK1901-1BB20-2AA0.

System overview, page 1/24

© Siemens 2022

Internal voltage tap

Set of components for conversion of an existing internal voltage tap on the main conducting paths



Conversion	Circuit breaker	Size	Article No.
From bottom to top	3-pole	1	3WA9111-0EK11
		2	3WA9111-0EK12
		3	3WA9111-0EK13
	4-pole	1	3WA9111-0EK21
		2	3WA9111-0EK22
		3	3WA9111-0EK23
From top to bottom	3-pole	1	3WA9111-0EK31
		2	3WA9111-0EK32
		3	3WA9111-0EK33
	4-pole	1	3WA9111-0EK41
		2	3WA9111-0EK42
		3	3WA9111-0EK43

Retrofit of the internal voltage tap on the lower main conducting paths



For breaking capacity	Set for circuit breaker	Size	Article No.
N, S, M, H, C with VTM680 voltage tap module	3-pole	1	3WA9111-0EK51
		2	3WA9111-0EK52
		3	3WA9111-0EK53
	4-pole	1	3WA9111-0EK61
		2	3WA9111-0EK62
		3	3WA9111-0EK63
E with VTM640 voltage tap module	3-pole	1	3WA9111-0EK55
		2	3WA9111-0EK56
		3	3WA9111-0EK57
	4-pole	1	3WA9111-0EK65
		2	3WA9111-0EK66
		3	3WA9111-0EK67

Retrofit kit to connect an external voltage transformer



Size	Article No.
2, 3 including VTM640 voltage tap module and the necessary connection components	3WA9111-0EK81

Main conductor connections, fixed-mounted versions

Front-accessible main connections according to DIN 43673, double hole for main connection at top



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AL11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AL12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC	3WA9111-0AL21
	S, M, H, E | 2500 A AC	3WA9111-0AL22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AL23
3	H | 4000 A AC	3WA9111-0AL31

Front-accessible main connections according to DIN 43673, double hole for main connection at bottom



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AL13
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AL14
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC	3WA9111-0AL24
	S, M, H, E | 2500 A AC	3WA9111-0AL25
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AL26
3	H | 4000 A AC	3WA9111-0AL32


System overview, page 1/24

© Siemens 2022

Accessories and spare parts

Main conductor connections, fixed-mounted versions

Rear vertical main connections



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S, M, E | ≤ 2000 A AC [1]	3WA9111-0AM11
	N, S, M, E | 2500 A AC	3WA9111-0AM12
2	S, M, H, C, E | ≤ 3200 A AC [2]	3WA9111-0AM21
3	H, C, E | ≤ 6300 A AC	3WA9111-0AM33

[1] In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WA9111-0AM11 vertical connection is required for each connection, from 1250 A to 2000 A or with breaking capacity M or E two 3WA9111-0AM11 vertical connections are required for each connection.
[2] In the case of vertical connection size 2, up to 2500 A one 3WA9111–0AM21 vertical connection is required for each connection for breaking capacity S, M, H, E, D, for 3200 A and always for breaking capacity C, two 3WA9111-0AM21 vertical connections are required for each connection


Main conductor connections for withdrawable units

Front-accessible main connections, according to DIN 43673, double hole at top or at bottom [1]



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AN11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AN12
2	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AN21
	S, M, H, E | 2500 A AC	3WA9111-0AN22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AN23
3	H | 4000 A AC	3WA9111-0AN31

Supports for front-accessible main connections according to DIN 43673




Number of poles	Size	Article No.
3-pole, set for 3 bars, top or bottom	1	3WA9111-0AN81
	2	3WA9111-0AN82
	3	3WA9111-0AN83
4-pole, set for 4 bars, top or bottom	1	3WA9111-0AN84
	2	3WA9111-0AN85
	3	3WA9111-0AN86

Rear vertical main connections



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AV11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AV12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC [2]	3WA9111-0AV21
	S, M, H, E | 2500 A AC [2]	3WA9111-0AV22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC [2]	3WA9111-0AV23
	C | 2000 ... 3200 A AC	3WA9111-0AV24
3	H, C, E | ≤ 5000 A AC	3WA9111-0AV31

Rear horizontal main connections



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AX11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AX12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC [2]	3WA9111-0AX21
	S, M, H, E | 2500 A AC [2]	3WA9111-0AX22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC [2]	3WA9111-0AX23
	C | 2000 ... 3200 A AC	3WA9111-0AX24
3	H, C, E | ≤ 5000 A AC	3WA9111-0AX31

[1] When using front-accessible main connections (withdrawable circuit breakers) supports are required.
[2] Not for circuit breakers with very high breaking capacity C.

Connecting flange



Size	Breaking capacity | Rated current I_n	Article No.
1	N, S | ≤ 1000 A AC	3WA9111-0AW11
	N, S | 1250 ... 2000 A AC; M, E | ≤ 2000 A AC	3WA9111-0AW12
2	S, M, H, E | 2000 A AC; D, E | ≤ 2000 A DC	3WA9111-0AW21
	S, M, H, E | 2500 A AC	3WA9111-0AW22
	S, M, H, E | 3200 A AC; D, E | 4000 A DC	3WA9111-0AW23
3	H | 4000 A AC	3WA9111-0AW31

System overview, page 1/24

© Siemens 2022

Conversion kit

Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers




- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WA circuit breakers with breaking capacity C and breaking capacity E

Number of poles	Size	Article No.
3-pole	1	3WA9111-0BC11
	2	3WA9111-0BC12
	3	3WA9111-0BC13
4-pole	1	3WA9111-0BC14
	2	3WA9111-0BC15
	3	3WA9111-0BC16

Main contact elements


Main contact elements for AC circuit breakers



- **Notes:**
  - To be ordered only once for each circuit breaker
  - On the following circuit breakers, the main contact elements can only be replaced in the factory:
    3WA1 size 1 breaking capacity M and E
    3WA1 size 2 breaking capacity C
    3WA1 size 3 breaking capacity C and E

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	1	N	≤1000 A	3WA9111-0AQ01
			1250 A	3WA9111-0AQ02
			1600 A	3WA9111-0AQ04
		S	≤ 1000 A	3WA9111-0AQ03
			1250 ... 1600 A	3WA9111-0AQ04
		N, S	2000 ... 2500 A	3WA9111-0AQ05
	2	S, M, H, E	2000 A	3WA9111-0AQ08
			2500 A	3WA9111-0AQ11
			3200 A	3WA9111-0AQ13
		S, M, H, E	4000 A	3WA9111-0AQ15
	3	H	4000 A	3WA9111-0AQ20
			5000 ... 6300 A	3WA9111-0AQ22
4	1	N	≤ 1000 A	3WA9111-0AQ51
			1250 A	3WA9111-0AQ52
			1600 A	3WA9111-0AQ54
		S	≤1000 A	3WA9111-0AQ53
			1250 ... 1600 A	3WA9111-0AQ54
		N, S	2000 ... 2500 A	3WA9111-0AQ55
	2	S, M, H, E	2000 A	3WA9111-0AQ58
			2500 A	3WA9111-0AQ61
			3200 A	3WA9111-0AQ63
		S, M, H, E	4000 A	3WA9111-0AQ65
	3	H	4000 A	3WA9111-0AQ70
			5000 ... 6300 A	3WA9111-0AQ72

Main contact elements for DC non-automatic circuit breakers



- **Note:** To be ordered only once for each circuit breaker

Number of poles	Size	Breaking capacity	Rated current I_n	Article No.
3	2	D, E	1000/2000 A	3WA9111-0AQ17
			4000 A	3WA9111-0AQ18
4	2	D, E	1000/2000 A	3WA9111-0AQ67
			4000 A	3WA9111-0AQ68

System overview, page 1/24

© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC and DC

IEC 60947-2

AC





			3WL10		3WL11	
Basic data						
Rated operational voltage U_e		V	≤690		≤1000	
Rated current I_n		A	630 ... 1250		630 ... 2000	
Size			0		1	
Type of mounting			Withdrawable	Fixed-mounted	Withdrawable	Fixed-mounted
Number of poles			3/4-pole	3/4-pole	3/4-pole	3/4-pole
Dimensions						
Width (3-pole | 4-pole)		mm	278|348	210|280	320|410	320|410
Height (standard) | A05, A15, A16, DC greater than 600 V)		mm	363.5	296	468|518	462
Depth		mm	271	183	471	357
Approvals						
General product approvals			VDE, EAC, CCC, CE, C-Tick		VDE, EAC, CCC, CE, C-Tick	
Marine/shipbuilding			RMRS		ABS, DNV, LR, BV, GL, PRS, RMRS	
Breaking capacity			B	N	S	N	S	H
Rated short-circuit breaking capacity								
Rated operational voltage U_e up to 415 V AC I_{cu} | I_{cs}		kA	42|42	55|50	66|50	55|55	66|66	85|85
Rated operational voltage U_e up to 500 V AC I_{cu} | I_{cs}		kA	42|42	50|50	50|50	55|55	66|66	85|85
Rated operational voltage U_e up to 690 V AC I_{cu} | I_{cs}		kA	–|–	42|42	50|50	42|42	50|50	66|66
Rated operational voltage U_e up to 690 V AC +20% [6], with Z option: A16 I_{cu} | I_{cs}		kA	–|–	–|–	–|–	–|–	–|–	50|50
Rated operational voltage U_e up to 1000 V AC, with Z option: A05 I_{cu} | I_{cs}		kA	–|–	–|–	–|–	–|–	–|–	50|50
Rated operational voltage U_e up to 1150 V AC, with Z option: A15 I_{cu} | I_{cs}		kA	–|–	–|–	–|–	–|–	–|–	–|–
Rated short-time withstand current I_{cw} [5]								
Rated short-time withstand current I_{cw} at U_e up to 500 V AC	0.5 s	kA	–	–	–	55	66	85
	1 s	kA	42	42	50	50	66	85
	2 s	kA	–	–	–	35 [1]/45 [2]	45	70
	3 s	kA	24	24	36	35 [1]/45 [2]	35	60
Rated short-time withstand current I_{cw} at U_e up to 690 V AC	0.5 s	kA	–	–	–	42	50	66
	1 s	kA	42	42	50	42	50	66
	2 s	kA	–	–	–	35 [1]/42 [2]	45	66
	3 s	kA	24	24	36	30 [1]/45 [2]	35	60
Rated short-time withstand current I_{cw} at DC	1 s	kA	–	–	–	–	–	–
Rated conditional short-circuit current I_{cc} of the non-automatic air circuit breakers								
Up to 500 V AC		kA	–	42	50	55	66	85
Up to 690 V AC		kA	–	42	50	42	50	66
Up to 1000 V/1150 V AC, with Z option: A05		kA	–	–	–	–	–	50/–
Up to 1000 V/1150 V AC, with Z option: A15		kA	–	–	–	–	–	–
Up to 220 V DC		kA	–	–	–	–	–	–
Up to 300 V DC		kA	–	–	–	–	–	–
Up to 600 V DC		kA	–	–	–	–	–	–
Up to 1000 V DC		kA	–	–	–	–	–	–
Rated short-circuit making capacity I_{cm}								
I_{cm} at 415 V AC		kA	88	121	145	121	145	187
I_{cm} at 500 V AC		kA	88	105	105	121	145	187
I_{cm} at 690 V AC		kA	–	88	105	88	105	145
I_{cm} at 1000 V AC		kA	–	–	–	–	–	105
I_{cm} at 1150 V AC		kA	–	–	–	–	–	–

[1] Size 1 with $I_{n\ max.}$ ≤1250 A
[2] Size 1 with $I_{n\ max.}$ ≥1600 A
[3] Size 2 with $I_{n\ max.}$ ≤2500 A
[4] Size 2 with $I_{n\ max.}$ ≤3200 A
[5] At a rated voltage ≥690 V the I_{cw} value of the circuit breaker corresponds with the I_{cu} or I_{cs} value

System overview, pages 1/106 and 1/70

© Siemens 2022

AC



3WL12

≤1150	
800 ... 4000	
2	
Withdrawable	Fixed-mounted
3/4-pole	3/4-pole
460|590	460|590
468|518	462
471	357
VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LR, BV, GL, PRS, RMRS	
N	**S**	**H**	**C** [7]
66|66	85|85	100|100	130|130
66|66	85|85	100|100	130|130
50|50	75|75	85|85	100|100
–|–	–|–	–|–	–|–
–|–	–|–	85|85	–|–
–|–	–|–	50|50	–|–
66	85	100	100
66	85	85	100
66	66 [3]/85 [4]	66 [3]/85 [4]	85
55 [3]/66 [4]	55 [3]/75 [4]	55 [3]/75 [4]	75
50	75	85	100
50	75	85	100
50	66 [3]/75 [4]	66 [3]/85 [4]	85
50	55 [3]/75 [4]	55 [3]/75 [4]	75
–	–	–	–
66	85	100	130
50	75	85	100
–	–	85/85	–
–	–	–/50	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
145	187	220	286
145	187	220	286
105	165	187	220
–	–	105	–
–	–	105	–

3WL13



≤1150		
4000 ... 6300		
3		
Withdrawable	Fixed-mounted	
3/4-pole	3/4-pole	
704|914	704|914	
468|518	462	
471	357	
VDE, EAC, CCC, VDE, CE, C-Tick		
ABS, DNV, LR, BV, GL, PRS, RMRS		
H	**C 3p**	**C 4p**
100|100	150|150	130|130
100|100	150|150	130|130
85|85	150|150	130|130
–|–	–|–	–|–
85|85	125|125	125|125
70|70	–|–	–|–
100	130	120
100	130	120
100	130	120
100	130	120
85	130	120
85	130	120
85	130	120
85	130	120
–	–	–
100	130	120
85	130	120
85/85	–	–
70/70	–	–
–	–	–
–	–	–
–	–	–
–	–	–
220	330	286
220	330	286
187	330	286
187	267	267
147	–	–

DC



3WL11

1000 DC
2000
1
Fixed-mounted
4-pole
410
462
357
VDE, EAC, CCC, CE, C-Tick
ABS, DNV, LR, BV, GL, PRS, RMRS
DC
–
–
–
–
–
–
–
–
–
–
–
–
–
–
20
–
–
–
–
20
20
20
20
–
–
–
–
–

3WL12



≤600/1000 DC	
1000 ... 4000	
2	
Withdrawable	Fixed-mounted
3/4-pole	3/4-pole
460|590	460|590
468|518	462
471	357
VDE, EAC, CCC, CE, C-Tick	
ABS, DNV, LR, BV, GL, PRS, RMRS	
DC	
–	
–	
–	
–	
–	
–	
–	
–	
–	
–	
–	
–	
–	
–	
35 [8]/30 [9]/25 [10]/20 [11]	
–	
–	
–	
–	
35	
30	
25	
20	
–	
–	
–	
–	
–	

[6] At 690 V AC +5% the $I_{cu} = I_{cs}$ = 85 kA
[7] Up to 3200 A
[8] At U_e = 220 V DC
[9] At U_e = 300 V DC
[10] At U_e = 600 V DC
[11] At U_e = 1000 V DC

System overview, pages 1/106 and 1/70



© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2







				3WL10				3WL11	
Rated current I_n			**630 A**	**800 A**	**1000 A**	**1250 A**	**1000 A**	**1250 A**
General data								
Isolating function acc. to EN 60947-2			Yes					
Utilization category			B					
Permissible ambient temperature	During operation (in operation with LCD max. 55 °C) [1]	°C	–25 ... +70				–40 ... +70	
	Storage	°C	–40 ... +70				–40 ... +80	
Mounting position								
Degree of protection			IP20 without cabinet door, IP30 with door sealing frame, IP54 with cover				IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover	
Voltage								
Rated operational voltage U_e at 50/60 Hz	1000 V version	V AC	≤690				690/1000	
Rated insulation voltage U_i		V AC	1000				1000	
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12				12	
	Auxiliary circuits	kV	4				4	
	Control circuits [9]	kV	2.5				2.5	
Rated rotor operational voltage U_{er}		V					2000	
Permissible load for withdrawable versions [2] [4] [10]								
At rear horizontal main connections	Up to 55 °C (Cu bare)	A	630	800	1000	1250	1000	1250
	Up to 60 °C (Cu bare)	A	630	800	1000	1250	1000	1250
	Up to 70 °C	A	630	800	1000	1250	1000 [8]	1210 [8]
Power loss at I_n								
With 3-phase symmetrical load, complete device (3/4p)	Fixed-mounted circuit breaker	W	31	50	78	122	100	105
	Withdrawable circuit breaker	W	62	100	156	244	195	205
Switching times								
Make time		ms	<20	<20	<20	<20	35	
Opening time		ms	<20	<20	<20	<20	38	
Electrical make time (through closing coil) [5]		ms	<50	<50	<50	<50	80	
Electrical opening time (through shunt trip)		ms	<35	<35	<35	<35	73	
Electrical opening time (instantaneous undervoltage release)		ms	<50	<50	<50	<50	≤80	
Opening time due to ETU, instantaneous short-circuit release		ms	25	25	25	25	50	
Service life/endurance								
Breaking capacity N and S, 3/4-pole								
Mechanical	Without maintenance	Operating cycles	20000	20000	20000	20000	15000	15000
	With maintenance [6]	Operating cycles	–	–	–	–	25000	25000
Electrical	Without maintenance 440 V	Operating cycles	8000 [7]	8000 [7]	8000 [7]	8000 [7]	–	–
	Without maintenance 690 V	Operating cycles	8000 [7]	8000 [7]	8000 [7]	6500 [7]	10000	10000
	With maintenance [6]	Operating cycles	– [7]	– [7]	– [7]	– [7]	25000	25000
Breaking capacity H, 3-pole								
Mechanical	Without maintenance	Operating cycles	–	–	–	–	10000	10000
	With maintenance [6]	Operating cycles	–	–	–	–	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	7500	7500
	Without maintenance 1000 V, with Z option: A05	Operating cycles	–	–	–	–	1000	1000
	Without maintenance 1150 V, with Z option: A15	Operating cycles	–	–	–	–	–	–
	With maintenance [6]	Operating cycles	–	–	–	–	15000	15000

[1] The LCD on the 3WL10 is always active.
[2] 4000 A, size 2 in fixed-mounted version, 3-pole
[4] ETU76B with graphics display can be used up to max. 55 °C.
[5] Make time through closing coil for synchronization purposes (short-time excited) 50 ms.
[6] Maintenance means: Replacing main contact elements and arc chutes (see Operating Manual). Greasing the breaker mechanism on the 3WL10, no spare part of components.

System overview, pages 1/106 and 1/70

© Siemens 2022

3WL11		3WL12								3WL13		
												
1600 A	**2000 A**	**800 A**	**1000 A**	**1250 A**	**1600 A**	**2000 A**	**2500 A**	**3200 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
Yes												
B												
–40 ... +70		–40 ... +70								–40 ... +70		
–40 ... +80		–40 ... +80								–40 ... +80		
												
IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover		IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover								IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover		
690/1000		690/1000/1150								690/1000/1150		
1000		≤1150								≤1150		
12		12								12		
4		4								4		
2.5		2.5								2.5		
2000		2000								2000		
1600	2000	800	1000	1250	1600	2000	2500	3200	3950	4000	5000	5920
1600	1930	800	1000	1250	1600	2000	2500	3020	3810	4000	5000	5810
1490 [8]	1780 [8]	800 [8]	1000 [8]	1250 [8]	1600 [8]	2000 [8]	2280 [8]	2870 [8]	3600 [8]	4000 [8]	5000 [8]	5500 [8]
150	240	40	45	80	85	180	270	410	750	520	630	900
350	440	85	95	165	175	320	520	710	925	810	1050	1600
35		35								35		
38		34								34		
80		100								100		
73		73								73		
≤80		≤80								≤80		
50		50								50		
15000	15000	10000	10000	10000	10000	10000	10000	10000	10000	–	–	–
25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–
10000	7500	7500	7500	7500	7500	7500	7500	4000	2000	–	–	–
25000	25000	17500	17500	17500	17500	17500	17500	17500	17500	–	–	–
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
–	–	500	500	500	500	500	500	500	500	500	500	500
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000

[7] Periodic greasing of breaker mechanism on the 3WL10 (see Manual), no spare part of components

[8] Cu painted black

[9] Motorized operating mechanism U_{imp}=1.2 kV

[10] For 3WL size 2 4000 A and size 3 6300 A with rear vertical main connections.

System overview, pages 1/106 and 1/70

© Siemens 2022

Circuit breakers and non-automatic circuit breakers for AC

IEC 60947-2 (continued)





			3WL10				3WL11	
Rated current I_n			**630 A**	**800 A**	**1000 A**	**1250 A**	**1000 A**	**1250 A**
Service life/endurance								
Breaking capacity H, 4-pole								
Mechanical	Without maintenance	Operating cycles	–	–	–	–	10000	10000
	With maintenance [6]	Operating cycles	–	–	–	–	15000	15000
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	7500	7500
	Without maintenance 1000 V	Operating cycles	–	–	–	–	1000	1000
	Without maintenance 1150 V [7]	Operating cycles	–	–	–	–	–	–
	With maintenance [6]	Operating cycles	–	–	–	–	10000	10000
Breaking capacity C								
Mechanical	Without maintenance	Operating cycles	–	–	–	–	–	–
	With maintenance [6]	Operating cycles	–	–	–	–	–	–
Electrical	Without maintenance 690 V	Operating cycles	–	–	–	–	–	–
	With maintenance 690 V [6]	Operating cycles	–	–	–	–	–	–
Switching frequency [8]								
Mechanical/electrical	690 V version	1/h	60/30	60/30	60/30	60/30	–	–
	1000 V /1150 V version	1/h	–	–	–	–	–	–
Connection								
Minimum phase size								
Copper bars, bare		Unit, mm²	2× 40×5	2× 50×5	2× 50×10 [12] 2× 50×8 [13]	2× 50×10 [12] 2× 50×8 [12]	1× 60×10	2× 40×10
Copper bars, painted black		Unit, mm²	–	–	–	–	1× 60×10	2× 40×10
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)								
Standard connection = screw	Without end sleeve				–		2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16); 1× 2.5 mm² (AWG 14)	
	With end sleeve acc. to DIN 46228 Part 2				–		1× 0.5 ... 1× 1.5 mm² (AWG 20 ... 16)	
	With twin end sleeve				–		2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)	
Screwless connection technology	Without end sleeve				0.5 ... 2.5 mm² (AWG 20 ... 14)		2× 0.5 ... 2× 2.5 mm² (AWG 20 ... 14)	
	With end sleeve acc. to DIN 46228 Part 2				0.5 ... 1.5 mm² (AWG 20 ... 16)		2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)	
Position signaling switches								
Screwless connection technology					1× 0.5 ... 1× 2.5 mm² (AWG 20 ... 14)		1× 0.5 ... 1× 2.5 mm² (AWG 20 ... 14)	
Weights								
3-pole	Fixed-mounted circuit breaker	kg			14		43	43
	Withdrawable circuit breaker	kg			17.3		45	45
	Guide frames	kg			21		25	25
4-pole	Fixed-mounted circuit breaker	kg			16		50	50
	Withdrawable circuit breaker	kg			19.3		54	54
	Guide frames	kg			25		30	30

[6] Maintenance means: Replacing main contact elements and arc chutes (see Operating Manual).

[7] Size 2 with order code "A15" and size 3. Data for very high breaking capacity.

[8] Minimum interval time between 2 tripping operations

[9] 3-pole switching with breaking capacity N and S: 45/h.

System overview, pages 1/106 and 1/70

© Siemens 2022

3WL11					3WL12					3WL13		
												
1600 A	**2000 A**	**800 A**	**1000 A**	**1250 A**	**1600 A**	**2000 A**	**2500 A**	**3200 A**	**4000 A**	**4000 A**	**5000 A**	**6300 A**
10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	5000	5000	5000
15000	15000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
7500	7500	7500	7500	7500	7500	7500	7500	4000	2000	2000	2000	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
–	–	500	500	500	500	500	500	500	500	500	500	500
10000	10000	15000	15000	15000	15000	15000	15000	15000	15000	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	5000	–	5000	5000	5000
–	–	10000	10000	10000	10000	10000	10000	10000	–	10000	10000	10000
–	–	5000	5000	5000	5000	5000	5000	4000	–	1000	1000	1000
–	–	10000	10000	10000	10000	10000	10000	8000	–	–	–	–
–	20/20	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]	60/60 [9]
–	–	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20	20/20
2× 50×10	3× 50×10	1× 50×10	1× 60×10	2× 40×10	2× 50×10	3× 50×10	2× 100×10	3× 100×10	4× 120×10	4× 100×10	6× 100×10	6× 120×10
2× 50×10	3× 50×10	1× 50×10	1× 60×10	2× 40×10	2× 50×10	3× 50×10	2× 100×10	3× 100×10	4× 100×10	4× 100×10	6× 100×10	6× 120×10
2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16); 1× 2.5 mm² (AWG 14)					2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16); 1× 2.5 mm² (AWG 14)					2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16); 1× 2.5 mm² (AWG 14)		
1× 0.5 ... 1× 1.5 mm² (AWG 20 ... 16)					1× 0.5 ... 1× 1.5 mm² (AWG 20 ... 16)					1× 0.5 ... 1× 1.5 mm² (AWG 20 ... 16)		
2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)		
2× 0.5 ... 2× 2.5 mm² (AWG 20 ... 14)					2× 0.5 ... 2× 2.5 mm² (AWG 20 ... 14)					2× 0.5 ... 2× 2.5 mm² (AWG 20 ... 14)		
2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)					2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)		
1× 0.5 ... 1× 2.5 mm² (AWG 20 ... 14)					1× 0.5 ... 1× 2.5 mm² (AWG 20 ... 14)					1× 0.5 ... 1× 2.5 mm² (AWG 20 ... 14)		
43	43	56	56	56	56	56	59	64	85	82	82	90
45	45	60	60	60	60	60	63	68	121	88	88	96
25	25	31	31	31	31	31	39	45	52	60	60	70
50	50	67	67	67	67	67	71	77	103	99	99	108
54	54	72	72	72	72	72	76	82	146	106	106	108
30	30	37	37	37	37	37	47	54	62	84	84	119


[12] Horizontal
[13] Vertical


System overview, pages 1/106 and 1/70

© Siemens 2022

Non-automatic circuit breakers for DC

IEC 60947-2



			3WL11		3WL12	
Rated current I_n			**2000 A**	**1000 A**	**2000 A**	**4000 A**
General data						
Size			1		2	
Isolating function acc. to EN 60947-2			Yes			
Utilization category			B			
Permissible ambient temperature	Operation	°C	–40 ... +70			
	Storage	°C	–40 ... +80			
Mounting position						
Degree of protection			IP20 without cabinet door, IP41 with door sealing frame, IP55 with cover			
Voltage						
Rated operational voltage U_e at 50/60 Hz	1000 V version	V DC	1000		600/1000	
Rated insulation voltage U_i		V DC	1000		1000	
Rated impulse withstand voltage U_{imp}	Main conducting paths	kV	12		12	
	Auxiliary circuits	kV	4		4	
	Control circuits	kV	2.5		2.5	
Permissible load						
At rear horizontal main connections	Up to 40 °C (Cu black painted)	A	2000	1000	2000	4000
	Up to 55 °C (Cu black painted)	A	1910	1000	2000	3640
	Up to 60 °C (Cu black painted)	A	1850	1000	2000	3500
	Up to 70 °C (Cu black painted)	A	1710	1000	1950	3250
Power loss at I_n						
With symmetrical load	Withdrawable circuit breaker	W	150	280	770	1640
Switching times						
Make time		ms	35		35	
Opening time		ms	38		34	
Electrical make time (through activation solenoid) [1]		ms	100		100	
Electrical opening time (through shunt trip)		ms	73		73	
Electrical opening time (instantaneous undervoltage release)		ms	≤80		≤80	
Service life/endurance [3]						
Mechanical	Without maintenance	Operating cycles	10000	10000	10000	10000
	With maintenance [2]	Operating cycles	15000	17500	17500	17500
Electrical	Without maintenance	Operating cycles	1000	6000	6000	4000
	Without maintenance 1000 V	Operating cycles	1000	1000	1000	1000
	With maintenance [2]	Operating cycles	2000	17500	17500	17500

[1] Make time through activation solenoid for synchronization purposes (short-time excited) 50 ms.

[2] Maintenance means: Replace main contact elements and arc chutes (see Operating Manual).

[3] Further technical specifications on request.

[4] At U_e = 220 V DC

System overview, pages 1/106 and 1/70

© Siemens 2022

			3WL11		3WL12	
						
Rated current I_n			**2000 A**	**1000 A**	**2000 A**	**4000 A**
Short-circuit breaking capacity I_{cc}						
Up to 220 V DC		kA	20		35	
Up to 300 V DC		kA	20		30	
Up to 600 V DC		kA	20		25	
Up to 1000 V DC		kA	20		20	
Rated short-time withstand current I_{cw}						
0.5 s		kA	–		–	
1 s		kA	20		35 [4]/30 [5]/25 [6]/20 [7]	
2 s		kA	–		–	
3 s		kA	–		–	
Switching frequency						
690 V version		1/h	–	60	60	60
1000 V version		1/h	20	20	20	20
Connection						
Auxiliary conductor (Cu) max. number of auxiliary conductors × cross-section (solid/stranded)						
Standard connection = strain-relief clamp	Without end sleeve		2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16); 1× 2.5 mm² (AWG 14)			
	With end sleeve acc. to DIN 46228 Part 2		1× 0.5 ... 1× 1.5 mm² (AWG 20 ... 16)			
	With twin end sleeve		2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)			
Optional connection = tension spring	Without end sleeve		2× 0.5 ... 2× 2.5 mm² (AWG 20 ... 14)			
	With end sleeve acc. to DIN 46228 Part 2		2× 0.5 ... 2× 1.5 mm² (AWG 20 ... 16)			
Weights						
3-pole	Fixed-mounted circuit breaker	kg	43	56	56	64
	Withdrawable circuit breaker	kg	–	60	60	68
	Guide frames	kg	–	31	31	45
4-pole	Fixed-mounted circuit breaker	kg	50	67	67	77
	Withdrawable circuit breaker	kg	–	72	72	82
	Guide frames	kg	–	37	37	54

[5] At U_e = 300 V DC
[6] At U_e = 600 V DC
[7] At U_e = 1000 V DC.


System overview, pages 1/106 and 1/70

© Siemens 2022

Electronic trip unit ETU

With watchdog monitoring

3WL10



			ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Basic protective functions					
L	Overload protection (L tripping operation)	Setting range of operating value $I_r = I_n \times$ ...	0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 0.95 | 1 | Default 0.4	0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 0.95 | 1 | Default 0.4	0.4 | 0.5 | 0.6 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 0.95 | 1 | Default 0.4
		Switchable overload protection (from I^2t- to I^4t-dependent function)	–	–	–
		Setting range of delay t_r at I^2t (Reference point 6× I_n)	0.75 | 1 | 2 | 5 | 8 | 10 | 14 | 17 | 21 | 25 s | Default 0.75 s	0.75 | 1 | 2 | 5 | 8 | 10 | 14 | 17 | 21 | 25 s | Default 0.75 s	0.75 | 1 | 2 | 5 | 8 | 10 | 14 | 17 | 21 | 25 s | Default 0.75 s
		Setting range of delay t_r at I^4t (Reference point 6× I_n)	–	–	–
		Thermal memory can be switched on/off	Permanently switched on	Permanently switched on	Permanently switched on
		Phase failure sensitivity/asymmetry	–	–	–
S	Short-time delay short-circuit protection (ST tripping)	Setting range of operating value $I_{sd} = I_n \times$ ...	–	1 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | Default OFF	1 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | Default OFF
		Setting range of delay time t_{sd} at I^2t	–	0.1 | 0.2 | 0.3 | 0.4 | 0.5 | (Ref. 10× I_n)	0.1 | 0.2 | 0.3 | 0.4 | 0.5 | (Ref. 10× I_n)
		Setting range of delay time t_{sd} (t = const.)	–	0.08 | 0.15 | 0.22 | 0.3 | 0.4 s	0.08 | 0.15 | 0.22 | 0.3 | 0.4 s
		ZSI function	–	–	–
I	Instantaneous short-circuit protection (INST tripping operation)	Setting range 2 = $I_n \times$ ...	OFF | 1.5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 15	OFF | 1.5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 15	OFF | 1.5 | 2 | 3 | 4 | 6 | 8 | 10 | 12 | 15
N	Neutral conductor protection	Neutral conductor setting range $I_N = I_n \times$ ...	OFF | 50% | 100% | 200%	OFF | 50% | 100% | 200%	OFF | 50% | 100% | 200%
G	Ground-fault tripping (GF tripping) Detection of ground-fault current through summation current formation with internal or external N conductor transformer	Tripping function can be switched on/off	–	–	■
		Alarm function can be switched on/off	–	–	Permanently switched on
		Detection of ground-fault current through external current transformer	–	–	–
		Setting range of the operating current $I_g = I_n \times$ ...	–	–	0.1 | 0.2 | 0.3 | 0.4 | 0.5 | 0.6 | 0.7 | 0.8 | 1
		Setting range of the operating current I_g for alarm	–	–	–
		Setting range of the delay time t_g	–	–	0.1 | 0.2 | 0.4 | 0.6 | 0.8 s | (fixed delay)
		Switchable ground-fault protection characteristic (I^2t-dependent function)	–	–	t = const./I^2t | Default I^2t
		Setting range of delay time t_g at I^2t	–	–	0.1 | 0.2 | 0.4 | 0.6 | 0.8 s (Ref. 2× I_n) (I^2t dependent) | Default 0.1 (I^2t)
		ZSI-G function	–	–	–

[1] Sizes 1 and 2/size 3

■ Available – Not available/not present

System overview, pages 1/106 and 1/70

© Siemens 2022

3WL10		3WL11 – 3WL13				
						
ETU650 (LSI)	**ETU660 (LSIG)**	**ETU15B (LI)**	**ETU25B (LSI)**	**ETU27B (LSIG)**	**ETU45B (LSIG)**	**ETU76B (LSIG)**
0.4 ... 1 | Default 1 (in steps of 0.001)	0.4 ... 1 | Default 1 (in steps of 0.001)	0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.75 | 0.8 | 0.85 | 0.9 | 1	0.4 | 0.45 | 0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.8 | 0.9 | 1	0.4 | 0.45 | 0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.8 | 0.9 | 1	0.4 | 0.45 | 0.5 | 0.55 | 0.6 | 0.65 | 0.7 | 0.8 | 0.9 | 1	0.4 ... 1
■	■	–	–	–	■	■
0.75 ... 36 s | (in steps of 0.25 s) | Default 36 s	0.75 ... 36 s | (in steps of 0.25 s) | Default 36 s	10 s fixed	10 s fixed	10 s fixed	2 | 3.5 | 5.5 | 8 | 10 | 14 | 17 | 21 | 25 | 30 s	2 ... 30 s
0.75 ... 5 s | (in steps of 0.25 s) | Default 5 s	0.75 ... 5 s | (in steps of 0.25 s) | Default 5 s	–	–	–	1 | 2 | 3 | 4 | 5 s	1 ... 5 s
■	■	–	–	–	■	■
2% ... 90% (default 50%)	2% ... 90% (default 50%)	–	At t_{sd} = 20 ms (M)	At t_{sd} = 20 ms (M)	At t_{sd} = 20 ms (M)	■ (on/off)
0.6 ... 10 | OFF | (in steps of 0.1)	0.6 ... 10 | OFF | (in steps of 0.1)	–	1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | 12	1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | 12	1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 6 | 8 | 10 | 12 | OFF	1.25 × I_n ... 0.8 × I_{cw} OFF
0.05 ... 0.5 s (Ref. 10× I_n)	0.05 ... 0.5 s (Ref. 10× I_n)	–	–	–	100 | 200 | 300 | 400 ms	100 ... 400 ms
0.05 ... 0.4 s	0.05 ... 0.4 s	–	M (0.02 ms) | 100 | 200 | 300 | 400 ms	M (0.02 ms) | 100 | 200 | 300 | 400 ms	M (0.02 ms) | 100 | 200 | 300 | 400 ms	M (0.02 ms) | 80 ... 4000 ms
–	–	–	–	–	Via module of the **Cubicle**BUS	Via module of the **Cubicle**BUS
OFF | 1.5 ... 15 | (in steps of 0.1)	OFF | 1.5 ... 15 | (in steps of 0.1)	2 | 3 | 4 | 5 | 6 | 7 | 8	Fixed at 2 ≥20 × I_n, max. 50 kA	Fixed at 2 ≥20 × I_n, max. 50 kA	OFF | 1.5 | 2.2 | 3 | 4 | 6 | 8 | 10 | 12 | 0.8 × I_{cs}	OFF | 1.5 × I_n ... 0.8 × I_{cs}
OFF | 50% | 100% | 150% | 200%	OFF | 50% | 100% | 200%	–	–	100%	OFF | 50% | 100%	OFF | 20% ... 200%
–	■	–	–	■	■	■
–	■	–	–	–	–	■
–	Alternative Rc or G-ret ground-fault monitoring	–	–	–	■	■
–	0.1 ... 1 | (in steps of 0.001) $I_g = I_n \times$ ...	–	–	A [1] (100/400 A) | B [1] (300/600 A); C [1] (600/800 A) | D [1] (900/1000 A); E [1] (1200/1200 A)	A [1] (100/400 A) | B [1] (300/600 A); C [1] (600/800 A) | D [1] (900/1000 A); E [1] (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	50% ... 90% × I_r | (in steps of 1%) PreAlarm	–	–	–	A [1] (100/400 A); B [1] (300/600 A); C [1] (600/800 A); D [1] (900/1000 A); E [1] (1200/1200 A)	SZ 1, 2: 100 ... 1200 A SZ 3: 400 ... 1200 A
–	0.1 ... 1 s | Default 0.1 s | (in steps of 0.05 s)	–	–	100 | 200 | 300 | 400 | 500 ms	100 | 200 | 300 | 400 | 500 ms	100 ... 500 ms
–	t = const./I^2t | Default const.	–	–	–	■	■
–	0.1 ... 1 s | (in steps of 0.05 s) (Ref. 2× I_n)	–	–	–	100 | 200 | 300 | 400 | 500 ms	100 ... 500 ms
–	–	–	–	–	Via module of the **Cubicle**BUS	Via module of the **Cubicle**BUS


System overview, pages 1/106 and 1/70

© Siemens 2022

Electronic trip unit ETU

With watchdog monitoring (continued)

3WL10



		ETU320 (LI)	ETU350 (LSI)	ETU360 (LSIG)
Parameter set changeover	Switchable between parameter set A and B	–	–	–
LCD		–	–	–
Voltage tap on top/bottom		–	–	–
Measurement function		–	–	–
Tripping operation as a result of extended protective function: (including: phase asymmetry current/voltage, harmonic distortion current/voltage, under/ overvoltage, phase rotation direction, active power in/opposite to normal direction, under/ overfrequency, protective functions dependent on direction of power flow)		–	–	–
Mode of communication				
Communication PROFIBUS | PROFINET | Modbus RTU | Modbus TCP		–	–	–
Output modules				
Signals via relay: Overload warning, load shedding/load carrying, leading signal, overload tripping 200 ms, temperature alarm, phase asymmetry, instantaneous short-circuit release, short time-delayed short-circuit release, overload trip, neutral conductor trip, auxiliary relay, ETU faults, ground-fault protection tripping and ground-fault alarm (only with ground-fault protection module)		IOM300	IOM300	IOM300

Increment size when settings are made for the ETU76B using the menu

From ... to	Increment size
0 ... 1	0.1
1 ... 100	1
100 ... 500	5
500 ... 1000	10
1000 ... 1600	50
1600 ... 10000	100
10000 ... max.	1000

■ Available – Not available/not present

System overview, pages 1/106 and 1/70

© Siemens 2022





















3WL10		3WL11 – 3WL13				
						
ETU650 (LSI)	**ETU660 (LSIG)**	**ETU15B (LI)**	**ETU25B (LSI)**	**ETU27B (LSIG)**	**ETU45B (LSIG)**	**ETU76B (LSIG)**
■	■	–	–	–	–	■
Integrated	Integrated	–	–	–	Optional	Integrated
Optional	Optional	–	–	–	Optional	Optional
Basic/Advanced	Basic/Advanced	–	–	–	Measurement function Plus	Measurement function Plus
■	■	–	–	–	■	■
■	■	–	–	–	■	■
IOM040/IOM300	IOM040/IOM300	–	–	–	■	■

System overview, pages 1/106 and 1/70

© Siemens 2022

Connection

Main circuit connection

	3WL10		3WL11 – 3WL13			
Connection	**Fixed-mounted**	**Withdrawable**	**Fixed-mounted**		**Withdrawable**	
Front	 Direct	 Extended	 1-hole	 2-hole	 1-hole	 2-hole
	 Extended					
	 Broadened					
Rear	 Vertical	 Vertical	 Vertical		 Vertical	 Flanges
	 Horizontal	 Horizontal	 Horizontal		 Horizontal	
		 Broadened				
Cable	 Cable terminals	 Cable lug				

Auxiliary circuit connections

3WL10: Withdrawable/fixed-mounted version

- Direct engagement of the auxiliary conductor vertically onto the circuit breaker or horizontally in the guide frame



Screwless connection technology (push in)


3WL11 – 3WL13: Withdrawable version

- Connection of the internal auxiliary switches to the male connector on the switch side
- When fully inserted, connection with the sliding contact module in the guide frame


3WL11 – 3WL13: Fixed-mounted version

- Engagement of the auxiliary supply connectors directly onto the circuit breaker

Coding pins on the connectors prevent them being inserted in the wrong slots



Screw connection (standard)



Screwless connection (tension spring) (optional)

System overview, pages 1/106 and 1/70

© Siemens 2022

Operating mechanism, auxiliary release, auxiliary switch

Operating mechanism

The circuit breakers are available with various optional operating mechanisms:

- Manual operating mechanism with mechanical closing (standard design)
- Manual operating mechanism with mechanical and electrical closing
- Motorized operating mechanism with mechanical and electrical closing

The operating mechanisms with electrical closing are suitable for synchronization tasks.

	Available for air circuit breakers	
	3WL10	3WL11 – 3WL13
Closing coils (CC)	■	■
Undervoltage releases (UVR)/ shunt trips (ST)	■	■
Shunt trips (ST)	■	■
Remote reset magnets (RR)	■	■
Motorized operating mechanism (MO)	■	■
Mechanical operating cycles counters	■	■

System overview, pages 1/106 and 1/70

© Siemens 2022

System overview 3WL11 – 3WL13

IEC AC 630 – 6300 A, IEC DC ..

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

Circuit breakers and non-automatic circuit breakers



Sizes 1 to 3

ETU



LI



LSI



LSING



LSIN, LSING



LSIN, LSING

Accessories



Communi-cation modules



Rating plugs



Remote reset magnets




Breaker status sensors (BSS)



Ground-fault modules

Connection



Fixed-mounted, withdrawable versions



Main connection vertical, horizontal, front, flange

Accessories




Auxiliary conductor plug-in system

Operating mechanisms and auxiliary releases




Motorized operating mechanisms



Auxiliary releases

Accessories



Closing coils


Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022


Auxiliary switches



Auxiliary switches



Position signaling switches



Signaling switches

Accessories




Position signaling switches

Other accessories



Door sealing frames



Shutters




EMERGENCY-OFF pushbuttons



Operating cycle counters



Support brackets



Grounding connections


Interlocking



Interlocking sets



Key operation



Locking mechanisms


Note:
You will find a detailed range of accessories in the Accessories section.

© Siemens 2022

Online configurator highlights

www.siemens.com/lowvoltage/3wl-configurator


Ungroup into individual components: Divides the finished complete article number into single article numbers

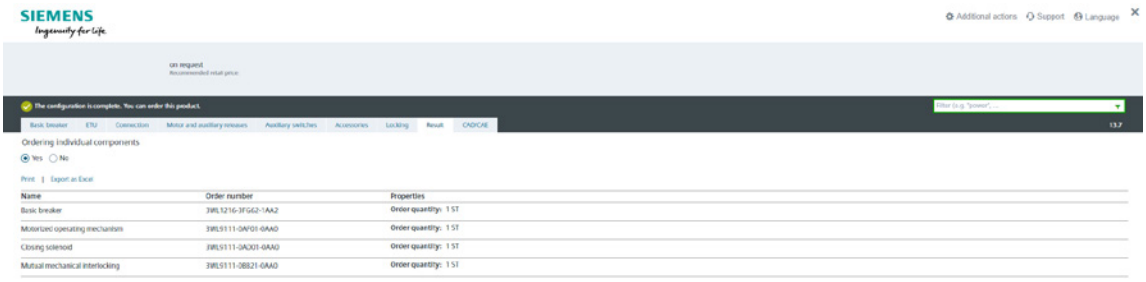

Automatic generation of the 3D model, 2D dimension drawing and the internal circuit diagram according to IEC



Direct entry of an already known article number or parts of an article number

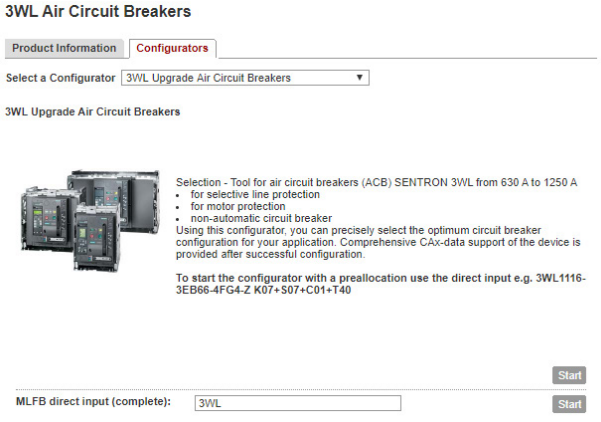

© Siemens 2022

© Siemens 2022

Structure of the article numbers

Basic configuration for AC circuit breakers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

1

3WL1	5	6	7	–	8	9	10	11	12	–	13	14	15	16

Air circuit breakers and non-automatic air circuit breakers and ETU

Size (SZ)	1								1	
	2								2	
	3								3	
		SZ 1	SZ 2	SZ 3						
Max. rated current $I_{n\,max.}$	630 A	■	–	–				0	6	
	800 A	■	■[6]	–				0	8	
	1000 A	■	■[6]	–				1	0	
	1250 A	■	■[6]	–				1	2	
	1600 A	■	■	–				1	6	
	2000 A	■	■	–				2	0	
	2500 A	–	■	–				2	5	
	3200 A	–	■	–				3	2	
	4000 A	–	■[6]	■				4	0	
	5000 A	–	–	■				5	0	
	6300 A	–	–	■				6	3	
Short-circuit breaking capacity I_{cu} at 500 V	N ECO	■	–	–	55 kA					2
		–	■	–	66 kA					2
	S Standard	■	–	–	66 kA					3
		–	■	–	85 kA					3
	H High	■	–	–	85 kA					4
		–	■	■	100 kA					4
	C Very high	–	■	■[8]	130 kA					5
		–	–	■[9]	150 kA					5
Trip units	Without trip unit							A	A	
	With trip unit, without ground-fault tripping	ETU15B[7]			LI			B	B	
		ETU25B			LSI			C	B	
		ETU45B (without display)			LSIN			E	B	
		ETU45B (with display)			LSIN			F	B	
		ETU76B			LSIN			N	B	
	With trip unit, with ground-fault tripping	ETU27B (without display)			LSING			D	G	
		ETU45B (without display)			LSING			E	G	
		ETU45B (with display)			LSING			F	G	
		ETU76B			LSING			N	G	
Number of poles	3-pole (3WL upgrade)									6
	4-pole (3WL upgrade)									7

Connection

		SZ 1	SZ 2	SZ 3		
Type of mounting	Fixed-mounted	■	■	■	Vertical	1
		■	■[2]	■[3]	Horizontal	2
		■[4]	■[1]	■[5]	Front single hole	3
		■	■[1]	■[5]	Front double hole	4
	Withdrawable	■	■	■	Without guide frame	5
		■	■[2]	■[3]	Horizontal	6
		■	■	■	Vertical	7
		■	■[1]	■[5]	Flanges	8

[1] Not available for 4000 A and breaking capacity C
[2] Not available for 4000 A
[3] Not available for 6300 A
[4] Not available for 2000 A and breaking capacity H
[5] Not available for 5000 A, 6300 A and breaking capacity C
[6] Not available for breaking capacity C
[7] Not available for size 3
[8] Not available for 3-pole
[9] Not available for 4-pole

Quick selection guide, pages 1/56 and 1/58

© Siemens 2022

3WL1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

Operating mechanisms and auxiliary releases

Stored energy mechanism	Manual recharging of the stored energy mechanismc	With mechanical operation		1
		With mechanical and electrical operation, closing coil suitable for uninterrupted duty, 100% OP	110 V AC 50/60 Hz/110 V DC	2
			230 V AC 50/60 Hz/220 V DC	3
	Motorized recharging	With mechanical and electrical operation, closing coil suitable for uninterrupted duty, 100% OP	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	4
			110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	5
			24 V DC	6

1st auxiliary release	Without 1st auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G
	With undervoltage release, instantaneous	24 V DC	J
		30 V DC	K
		48 V DC	L
		60 V DC	U
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	N
		380 ... 415 V AC 50/60 Hz	P
	With undervoltage release, delay 0.2 ... 3.2 s	48 V DC	Q
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	R
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	S
		380 ... 415 V AC 50/60 Hz	T

Auxiliary switches

1st auxiliary switch block	2 NO + 2 NC	2
1st + 2nd auxiliary switch block	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

Quick selection guide, pages 1/56 and 1/58

© Siemens 2022

Structure of the article numbers

Basic configuration for DC non-automatic air circuit breakers

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator**

				5	6	7		8	9	10	11	12		13	14	15	16
3WL1							–						–				
Non-automatic air circuit breakers and ETU																	
Size (SZ)	1			1													
	2			2													
			SZ 1	SZ 2													
Max. rated current I_n	1000 A		–	■		1	0										
	2000 A		■	■		2	0										
	4000 A		–	■		4	0										
Short-circuit breaking capacity I_{cu}	1000 V DC	20 kA	■	–				8									
	600 V DC	25 kA	–	■				8									
Non-automatic air circuit breakers	Without trip unit								A	A							
Number of poles	3-pole (3WL upgrade)		–	■							6						
	4-pole (3WL upgrade)		■	■							7						
Connection			SZ 1	SZ 2													
Type of mounting	Fixed-mounted		■	■	Vertical							1					
			■	■	Horizontal							2					
			–	■[1]	Front single hole							3					
			–	■[1]	Front double hole							4					
	Withdrawable		–	■	Without guide frame							5					
			–	■	Horizontal							6					
			–	■	Vertical							7					
			–	■	Flanges							8					

[1] Not available for 4000 A

Quick selection guide, pages 1/56 and 1/62

© Siemens 2022

3WL1 5 6 7 8 – 9 10 11 12 – 13 14 15 16

Operating mechanisms and auxiliary releases

Stored energy mechanism	Manual recharging of the stored energy mechanism	With mechanical operation		1
		With mechanical and electrical operation, closing coil suitable for uninterrupted duty, 100% OP	110 V AC 50/60 Hz/110 V DC	2
			230 V AC 50/60 Hz/220 V DC	3
	Motorized recharging	With mechanical and electrical operation, closing coil suitable for uninterrupted duty, 100% OP	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	4
			110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	5
			24 V DC	6

1st auxiliary release	Without 1st auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G

2nd auxiliary release	Without 2nd auxiliary release		A
	With shunt trip 100% OP	24 V DC	B
		30 V DC	C
		48 V DC	D
		60 V DC	E
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	F
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	G
	With undervoltage release, instantaneous	24 V DC	J
		30 V DC	K
		48 V DC	L
		60 V DC	U
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	M
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	N
		380 ... 415 V AC 50/60 Hz	P
	With undervoltage release, delay 0.2 ... 3.2 s	48 V DC	Q
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	R
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	S
		380 ... 415 V AC 50/60 Hz	T

Auxiliary switches

1st auxiliary switch block	2 NO + 2 NC	2
1st + 2nd auxiliary switch block	4 NO + 4 NC	4
	6 NO + 2 NC	7
	5 NO + 3 NC	8

Quick selection guide, pages 1/56 and 1/62

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Accessories for basic configuration

Rated operational voltage 1000 V AC and 690 V IT networks

- Only for circuit breakers of size 1 - 3 with high breaking capacity H and of size 3 C class.
- Cannot be combined with rated operational voltage 1150 V AC, order code "A15".

			Order code
Rated operational voltage	Size 1 [1]	≤2000 A	**A05**
	Size 2 [1] [2]	≤4000 A	**A05**
	Size 3 [1]	≤6300 A	**A05**

Rated operational voltage 1150 V AC

- Only for circuit breakers with high breaking capacity H (8th digit of the article number is a "4").
- Cannot be combined with rated voltage 1000 V AC, order code "A05".

			Order code
Rated operational voltage	Size 2 [1] [2]	≤4000 A	**A15**
	Size 3 [1] [3]	≤6300 A	**A15**

Rated operational voltage 690 V AC (+ 20%)

- Only for 3WL11 circuit breakers, size 1, with high breaking capacity H (8th digit of the article number is a "4").

			Order code
Rated operational voltage	Size 1	≤ 2000 A	**A16**

[1] When ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

[2] Not possible for circuit breakers with very high breaking capacity C.

[3] Front connections are tinned as standard.

System overview, page 1/70

© Siemens 2022

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Order code

Accessories for electronic trip units ETU

Rating plugs

- Only one module is possible per circuit breaker (not in conjunction with electronic trip unit ETU15B).
- As standard, the electronic trip units are equipped with a rating plug which is equal to the maximum rated circuit breaker current ($I_{n\ max.}$). The rated current of the selected rating plug must be less than $I_{n\ max.}$.

Module	Sizes 1, 2	250 A	**B02**
		315 A	**B03**
		400 A	**B04**
		500 A	**B05**
		630 A	**B06**
		800 A	**B08**
		1000 A	**B10**
	Sizes 1, 2, 3	1250 A	**B12**
		1600 A	**B16**
		2000 A	**B20**
	Sizes 2, 3	2500 A	**B25**
		3200 A	**B32**
		4000 A	**B40**
	Size 3	5000 A	**B50**
		6300 A	**B63**

Communication [1]

Breaker status sensor (BSS)	For determining the statuses ON/OFF/Tripped	**F01**
PROFIBUS DP communication port [2]	Including COM15 and breaker status sensor (BSS)	**F02**
Modbus RTU communication port [2]	Including COM16 and breaker status sensor (BSS)	**F12**
PROFINET IO/Modbus TCP communication port [2]	Including COM35 and breaker status sensor (BSS)	**F35**

Measurement function (communication modules not included) [1]

Measurement function Plus	With internal voltage tap on the lower main conducting paths [2]	**F36**
	With internal voltage tap on the upper main conducting paths [2]	**F37**
	For combination with external voltage transformer	**F38**

EMC filter

- Common-mode interference suppressor filters (e.g. in converter applications)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz >40 dB.

EMC filter		**F31**

Overload and short-circuit protection for neutral conductors

- Only possible with 4-pole circuit breaker with ETU27B to ETU76B

Internal current transformer for N conductor	Size 1	**F23**
	Size 2	**F23**
	Size 3	**F23**

[1] The precondition is an ETU45b or ETU76b

[2] When ordering withdrawable circuit breaker and guide frame separately, specify order code "F02", "F12" or "F35" only for withdrawable circuit breaker.

[3] Can only be used for rated operational voltages up to 690 V AC.

System overview, page 1/70

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code
Accessories for electronic trip units ETU			
Remote resetting			
Automatic reset of the reclosing lockout			**K01**
• Remote reset for displays and reset buttons including automatic reset of the reclosing lockout			
Remote reset magnets	24 V DC		**K10**
	48 V DC		**K11**
	110 ... 127 V AC 50/60 Hz/110 ... 125 V DC		**K12**
	208 ... 240 V AC 50/60 Hz/220 ... 250 V DC		**K13**
Connection			
Tinned version of the customer's connections on the guide frame			
• Only for circuit breakers in withdrawable version with horizontal connection or flange connection.			
• The normal delivery time increases to 15 work days.			
Customer's connections [1) 2)]	Size 1		**A08**
	Size 2		**A08**
	Size 3		**A08**
Connection technology for main connections (fixed-mounted versions)			
Top: [3)] **horizontal** **Bottom: accessible from front, single hole**	Size 1	≤1600 A	**N11**
	Size 2	≤3200 A	**N11**
	Size 3 [4)]	≤4000 A	**N11**
Top: vertical **Bottom: horizontal**	Size 1	≤2000 A	**N20**
	Size 2	≤3200 A	**N20**
	Size 3	≤5000 A	**N20**
Top: horizontal **Bottom: vertical**	Size 1	≤2000 A	**N24**
	Size 2	≤3200 A	**N24**
	Size 3	≤5000 A	**N24**
Connection technology for main connections (withdrawable versions)			
Top and bottom: [5) 6)] **accessible from front, single hole**	Size 1	≤1600 A	**P00**
	Size 2	≤3200 A	**P00**
	Size 3	≤4000 A	**P00**
Top and bottom: [5)] **accessible from front, double hole**	Size 1	≤1600 A	**P01**
	Size 2	≤3200 A	**P01**
	Size 3	≤4000 A	**P01**
Top: [5) 6)] **horizontal** **Bottom: accessible from front, single hole**	Size 1	≤1600 A	**P07**
	Size 2	≤3200 A	**P07**
	Size 3	≤4000 A	**P07**

1) Front connections are tinned as standard.
2) The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.
3) Not for 3WL1 size 1 with high breaking capacity H and circuit breakers with very high breaking capacity C.
4) Not for size 3 with very high breaking capacity C.
5) Not for size 2, 3 circuit breakers with very high breaking capacity C.
6) Not for 3WL1 size 1 with high breaking capacity H

System overview, page 1/70

© Siemens 2022

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code

Connection

Connection technology for main connections (withdrawable versions)

Top: vertical **Bottom: horizontal**	Size 1	≤2000 A	**P18**
	Size 2	≤3200 A	**P18**
	Size 3	≤5000 A	**P18**
Top: [1] connecting flange **Bottom: horizontal**	Size 1	≤2000 A	**P19**
	Size 2	≤3200 A	**P19**
	Size 3	≤4000 A	**P19**
Top: horizontal **Bottom: vertical**	Size 1	≤2000 A	**P23**
	Size 2	≤3200 A	**P23**
	Size 3	≤5000 A	**P23**
Top: [1] horizontal **Bottom: connecting flange**	Size 1	≤2000 A	**P28**
	Size 2	≤3200 A	**P28**
	Size 3	≤4000 A	**P28**

Connection technology for auxiliary conductors (for fixed-mounted and withdrawable versions)

Connection technology for screwless terminals (tension spring)	Fixed-mounted		**N61**
	Withdrawable		**P61**

Operating mechanisms and auxiliary releases

Motorized operating mechanisms	Only possible if the 13th digit of the article number = "1"	24 ... 30 V DC	**M01**
		48 ... 60 V DC	**M03**
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	**M05**
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	**M06**
Mechanical operating cycles counter, 5-digit [2]			**C01**
Closing coils	• Suitable for uninterrupted duty, 100% OP • Only possible if the 13th digit of the article number = "1"	24 V DC	**M21**
		30 V DC	**M22**
		48 V DC	**M23**
		60 V DC	**M24**
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	**M25**
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	**M26**
	• Not suitable for uninterrupted duty, 5% OP, synchronizable [3] • Only possible if the 13th digit of the article number = "1"	24 V DC	**M31**
		48 V DC	**M33**
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	**M35**
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	**M36**
Opening coils (shunt trips) [3][4]	Not suitable for uninterrupted duty, 5% OP, synchronizable	24 V DC	**M41**
		48 V DC	**M43**
		110 ... 127 V AC 50/60 Hz/110 ... 125 V DC	**M45**
		208 ... 240 V AC 50/60 Hz/220 ... 250 V DC	**M46**

[1] Not for size 2, 3 circuit breakers with very high breaking capacity C.

[2] Only possible with motorized operating mechanism.

[3] Overexcited, i.e. switching time 50 ms (standard >80 ms).

[4] Only possible if the 14th digit of the article number for the circuit breaker is "A", i.e. "without 1st auxiliary release".

System overview, page 1/70

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Auxiliary switches and signaling switches

			Order code
Position signaling switches for guide frames	1 CO | 1 CO | 1 CO (connected | test | disconnected position)		R15
	3 CO | 2 CO | 1 CO (connected | test | disconnected position)		R16
Signaling switches	Ready-to-close signaling switch (S20)	1 NO	C22
	Spring charge signaling switch [1] (S21)	1 NO	C20
	For the first auxiliary release [1] (S22)	1 CO	C26
	For the second auxiliary release [1] (S23)	1 CO	C27
	1st tripped signaling switch [1] [2] (S24)	1 CO	K07
	2nd tripped signaling switch [1] [2] [3] (S25)	1 NO	K06

Other accessories

Pushbuttons/shutdown switches/closing lockouts

			Order code
EMERGENCY-OFF pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton		S24
Electrical ON button on the operator panel [1] (S10)	This prevents unauthorized electrical closing from the operator panel. Mechanical closing and remote closing remain possible. Possible only for circuit breakers with closing coil (CC)	With sealing cap	C11
		With CES lock	C12
Motor shutdown switch on control panel [4] (S12)	This prevents automatic charging of the stored energy mechanism by the motorized operating mechanism		S25

Special packaging for increased transport requirements (moisture protection)

		Order code
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)		A61

Arc chute covers

- Not available for
  - 1000 V version (order code "A05"),
  - DC version
  - 4000 A size 2
  - 1150 V version (order code "A15")
  - 130 kA version, size 2
  - 150 kA version, size 3

		Order code
Arc chute covers	3-pole, 4-pole	R10

Shutters

		Order code
Shutter: 2-part, lockable, with padlocks [5]	3-pole, 4-pole	R21

[1] Not possible with "communications interface" option, order code "F02", "F12" or "F35".
[2] Not available for non-automatic air circuit breakers.
[3] Only possible with option "K07".
[4] Only for breakers with motorized operating mechanism, not possible with order codes "C11", "C12".
[5] Padlock not included in the scope of supply.

System overview, page 1/70

© Siemens 2022

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code

Other accessories

Measuring transformers (without energy transformers), for powering the ETU

- Used in converter applications with high harmonic components; can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
  - Undervoltage release required
- Comprises:
  - 3 (3-pole) or 4 (4-pole) transformers
  - 24 V DC relay
  - Warning signs
  - Manual

Transformer	3-pole/4-pole	Size 2, 3	**K60**

Operating manual, printed version

French/Italian			**A11**
Spanish/Portuguese			**A12**

Interlocking

Mechanical interlocking mechanism

- Interlocking module with Bowden cable 2 m

Mechanical interlock		For fixed-mounted breakers	**S55**
		For withdrawable circuit breakers with guide frame	**R55**
		For guide frames (ordered separately)	**R56**
		For withdrawable circuit breakers (ordered separately)	**R57**

Locking provisions (for fixed-mounted and withdrawable versions)

- The disconnector unit fulfills the requirements for main circuit breakers according to EN 60204-1

Locking provisions	Against unauthorized closing from the operator panel	Made by CES	**S01**
		Made by IKON	**S03**
		Assembly kit FORTRESS or CASTELL [1]	**S05**
		Assembly kit for padlocks [2]	**S07**
		Made by RONIS	**S08**
		Made by PROFALUX	**S09**

Locking provisions (for fixed-mounted and withdrawable versions)

Locking provisions	For charging handle with padlock [2]		**S33**

[1] Locks must be ordered from the manufacturer.

[2] Padlock not included in the scope of supply.

System overview, page 1/70

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

			Order code

Interlocking

Locking provisions (for withdrawable version)

- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the guide frame, active in the connected position, function is retained when circuit breaker is replaced
- Not possible in combination with order code "R81", "R85" or "R86"

Locking provisions	Against unauthorized closing from the operator panel	Made by CES	**R61**
		Made by RONIS	**R68**
		Made by PROFALUX	**R60**

Locking provisions (for withdrawable version)

- Safety lock for mounting onto the circuit breaker

Locking provisions	To prevent movement of withdrawable circuit breaker	Made by CES	**S71**
		Made by PROFALUX	**S75**
		Made by RONIS	**S76**

Locking mechanisms

- Not possible in combination with order code "R81", "R85" or "R86"

For fixed-mounted circuit breakers	To prevent opening of the cabinet door in ON position	**S30**
For withdrawable circuit breakers	To prevent opening of the cabinet door in connected position	**R30**
	To prevent activation when the cabinet door is open [1) 3)]	**R40**
	To prevent movement when the cabinet door is open [2)]	**R50**

Locking mechanisms to prevent movement of the withdrawable circuit breaker in disconnected position

- Consisting of Bowden cable and lock in the cabinet door
- Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60"

Made by CES	**R81**
Made by PROFALUX	**R85**
Made by RONIS	**R86**

Seals

Door sealing frame for degree of protection IP41	**T40**

Accessories from current catalog

Use of the withdrawable circuit breaker in combination with an older guide frame

- Reduction of the technical specifications for withdrawable circuit breakers 3WL1 for use in combination with older guide frames supplied
  - as complete circuit breaker with 3WL1...-...3.-.... or 3WL1...-...4.-.... or
  - as 3WL92..-.A..-.... or
  - as 3WL92..-.B..-.... or
  - as 3WL92..-.D..-.... or
  - as 3WL92..-.E..-.... or
- for sizes 1, 2, 3.

Use of the circuit breaker in older guide frames, including the appropriate guide frame coding	**A41**

[1)] Not available in combination with R50

[2)] Not available in combination with R40

[3)] Combination with R81, R85 and R86 on request

System overview, page 1/70

© Siemens 2022

Further technical specifications

Manual operating mechanism

		3WL11 – 3WL13
Switching on/charging energy store		
Maximum force required to operate the hand lever		≤230 N
Required number of strokes on the hand lever		9

Closing coils

		3WL11 – 3WL13	
Primary operating range			
Version		For continuous command (100% OP)	5 % OP
Primary operating range		0.85 ... 1.1 × U_s	0.85 ... 1.1 × U_s
Extended operating range for battery operation	At 24 ... 30 V DC, 48 ... 60 V DC 110 ... 125 V DC 220 ... 250 V DC	0.85 ... 1.26 × U_s	0.85 ... 1.26 × U_s
Rated operational voltage			
Rated control supply voltage U_s	50/60 Hz AC	110 ... 127 V, 208 ... 240 V	
	DC	24 ... 30 V, 48 ... 60 V, 110 ... 125 V, 220 ... 250 V	
Operation			
Closing power	DC/AC	40 W/40 VA	≤60 V: 200 W ≥110 V: 250 W
Continuous power	DC/AC	8 W/8 VA	-
Minimum command duration at 100% U_s		60 ms	60 ms
Maximum command duration at 100% U_s		–	2000 ms
Make time of the circuit breaker at 100% U_s		100 ms	50 ms
Fuse protection of the control circuit at U_s for closing coil			
Smallest permissible DIAZED fuse, gL, slow-response	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 125 V DC/110 ... 127 V AC	1 A	4 A
	220 ... 250 V DC/208 ... 240 V AC	1 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A
	48 ... 60 V DC	2 A	10 A
	110 ... 125 V DC/110 ... 127 V AC	1 A	4 A
	220 ... 250 V DC/208 ... 240 V AC	1 A	2 A
Fuse protection of the control circuit at U_s for spring charging motor + closing coil			
Smallest permissible DIAZED fuse, gL, slow-response	24 ... 30 V DC	6 A	10 A
	48 ... 60 V DC	6 A	10 A
	110 ... 125 V DC/110 ... 127 V AC	2 A	4 A
	220 ... 250 V DC/208 ... 240 V AC	2 A	2 A
Automatic circuit breaker with C characteristic	24 ... 30 V DC	6 A	10 A
	48 ... 60 V DC	6 A	10 A
	110 ... 125 V DC/110 ... 127 V AC	2 A	4 A
	220 ... 250 V DC/208 ... 240 V AC	2 A	2 A

Motor

		3WL11 – 3WL13
Primary operating range		
Primary operating range		0.85 ... 1.1 × U_s
Extended operating range for battery operation	At 24 V DC, 48 V DC 60 V DC, 110 V DC 220 V DC	0.85 ... 1.26 × U_s
Operation		
Power consumption of motor	AC/DC	135 VA/135 W
Time required to charge the stored energy mechanism at 1 × U_s		≤10 s
Short-circuit protection		
Smallest permissible DIAZED fuse (operational class gL)/automatic circuit breaker with C characteristic (for different rated control supply voltages)	At U_s = 24 ... 30 V	6 A
	At U_s = 48 ... 60 V	6 A
	At U_s = 110 ... 125 V DC/ 110 ... 127 V AC	2 A
	At U_s = 220 ... 250 V DC/ 208 ... 240 V AC	2 A

System overview, page 1/70

© Siemens 2022

Accessory options

Further technical specifications

Signals of the electronic trip unit

Signals of the electronic trip unit	3WL11 – 3WL13
Measuring accuracy of the electronic trip unit	Protective functions acc. to EN 60947; current indication ≤10%; measurement function for base quantities ≤1%; measurement function for derived quantities ≤4%

Undervoltage releases UVR (F3) and UVR-t_d (F4)

		3WL11 – 3WL13
Primary operating range		
Response values	Pickup	≥0.85 × U_s (circuit breaker can be closed)
	Dropout	0.35 ... 0.7 × U_s (circuit breaker is tripped)
Primary operating range		0.85 ... 1.1 × U_s
Extended operating range for battery operation	At 24 V DC, 30 V DC, 48 V DC, 110 V DC, 220 V DC	0.85 ... 1.26 × U_s
Rated voltage		
Rated control supply voltage U_s	Instantaneous 50/60 Hz AC	110 ... 127 V, 208 ... 240 V, 380 ... 415 V
	Instantaneous DC	24 V, 30 V, 48 V, 60 V, 110 ... 125 V, 220 ... 250 V [1]
	Delayed 50/60 Hz AC	110 ... 127 V, 208 ... 240 V, 380 ... 415 V
	Delayed DC	48 V, 110 ... 125 V, 220 ... 250 V
Operation		
Power consumption (pickup/uninterrupted duty)	AC	20/5 VA
	DC	20/5 W
Opening time of the circuit breaker		
Version UVR (F3)	Instantaneous	≤80 ms
	With delay	200 ms
Version UVR-t_d (F8)	With delay, t_d = 0.2 to 3.2 s	0.2 ... 3.2 s
	Reset through additional NC contact – direct tripping	≤100 ms
Short-circuit protection		
Smallest permissible DIAZED fuse (operational class gL)/ miniature circuit breaker with C characteristic		1 A TDz (slow) / 1 A

Shunt trip (ST) (F1, F2)

		3WL11 – 3WL13		
Primary operating range				
Version		For continuous command (100% OP), locks out on momentary-contact commands	5% OP	With spring energy store consisting of shunt trip and capacitor trip device
Primary operating range		0.85 ... 1.1 × U_s	0.85 ... 1.1 × U_s	0.85 ... 1.1 × U_s
Extended operating range for battery operation		0.85 ... 1.26 × U_s	0.85 ... 1.26 × U_s	–
Response values	Pickup	>0.7 × U_s (circuit breaker is tripped)	>0.7 × U_s (circuit breaker is tripped)	–
Rated operational voltage				
Rated control supply voltage U_s	50/60 Hz AC	110 ... 127 V, 208 ... 240 V		230 V
	DC	24 ... 30 V, 48 ... 60 V, 110 ... 125 V, 220 ... 250 V		220 V
Operation				
Closing power DC	DC/AC	40 W/40 VA	≤60 V: 200 W ≥110 V: 250 W	1 VA/1 W
Continuous power	DC/AC	8 W/8 VA	–	–
Minimum command duration at 100% U_s		60 ms	60 ms	–
Maximum command duration at 100% U_s		–	2000 ms	–
Opening time of the circuit breaker at U_s = 100%		80 ms	50 ms	80 ms
Storage time at U_s/I_s/Recharging time at U_s		–	–	max. 5 min/min. 5 s
Fuse protection of the control circuit at U_s for shunt trip				
Smallest permissible DIAZED fuse, gL, slow-response	24 ... 30 V DC	2 A	10 A	–
	48 ... 60 V DC	2 A	10 A	–
	110 ... 125 V DC/110 ... 127 V AC	1 A	4 A	–
	220 ... 250 V DC/208 ... 240 V AC	1 A	2 A	–
Automatic circuit breaker with C characteristic	24 ... 30 V DC	2 A	10 A	–
	48 ... 60 V DC	2 A	10 A	–
	110 ... 125 V DC/110 ... 127 V AC	1 A	4 A	–
	220 ... 250 V DC/208 ... 240 V AC	1 A	2 A	–

[1] 24 V and 30 V only with undervoltage release UVR (F3)

System overview, page 1/70

© Siemens 2022

Remote reset magnet for mechanical tripped indicator (F7)

		3WL11 – 3WL13
Primary operating range		
Primary operating range		0.85 ... 1.1 × U_s
Extended operating range for battery operation	At 24 ... 30 V DC, 48 ... 60 V DC, 110 ... 125 V DC, 220 ... 250 V DC	0.7 ... 1.26 × U_s
Operation		
Power consumption	AC/DC	60 VA/60 W
Min. command duration at U_s for the remote reset magnet		60 ms
Short-circuit protection		
Smallest permissible DIAZED fuse (operational class gL)/ automatic circuit breaker with C characteristic		2 A TDz (slow)/1 A at U_s = 24 ... 60 V DC 1 A TDz (slow)/1 A at >110 V DC and 100 V AC

Contact position-driven auxiliary switches (S1, S2, S3, S4, S7, S8)

		3WL11 – 3WL13			
Rated operational voltage					
Rated insulation voltage U_i	AC/DC	500 V			
Rated operational voltage U_e	AC/DC	500 V			
Rated impulse withstand voltage U_{imp}		4 kV			
Contact reliability		From 1 mA at 5 V DC			
Breaking capacity					
Alternating current 50/60 Hz	Rated operational voltage U_e	24 ... 230 V		380 V, 400 V	
	Rated operational current I_e/AC-12	10 A		10 A	
	Rated operational current I_e/AC-15	4 A		3 A	
Direct current	Rated operational voltage U_e	24 V	48 V	110 V	220 V
	Rated operational current I_e/DC-12	10 A	8 A	3.5 A	1 A
	Rated operational current I_e/DC-13	8 A	4 A	1.2 A	0.4 A
Short-circuit protection					
Largest permissible DIAZED fuse (operational class gL)		10 A TDz, 10 A Dz			
Largest permissible miniature circuit breaker with C characteristic		10 A			

Ready-to-close signaling switches (S20) (acc. to DIN VDE 0630)

		3WL11 – 3WL13	
Breaking capacity			
Alternating current 50/60 Hz	Rated operational voltage U_e	250 V	
	Rated operational current I_e	8 A	
Direct current	Rated operational voltage U_e	125 V	250 V
	Rated operational current I_e	0.4 A	0.2 A
	Contact reliability	From 1 mA at 5 V DC	
Short-circuit protection			
Largest permissible DIAZED fuse (operational class gL)		2 A Dz (quick)	

System overview, page 1/70

© Siemens 2022

Accessory options

Further technical specifications

Tripped signaling switches (S24) and signaling switches for auxiliary releases (S22, S23) (acc. to DIN VDE 0630)

		3WL11 – 3WL13		
Breaking capacity				
Alternating current 50/60 Hz	Rated operational voltage U_e	250 V		
	Rated operational current I_e/AC-12	8 A		
Direct current	Rated operational voltage U_e	24 V	125 V	250 V
	Rated operational current I_e/DC-12	6 A	0.4 A	0.2 A
	Contact reliability	From 1 mA at 5 V DC		
Short-circuit protection				
Largest permissible DIAZED fuse (operational class gL)		6 A Dz (quick)		
Tripped signaling switches				
Signal duration after tripping		Until manual or electrical remote reset (option)		

Position signaling switches on guide frame

		3WL11 – 3WL13		
Type of contacts				
Message	"Circuit breaker in connected position"	3 CO	or	1 CO
	"Circuit breaker in test position"	2 CO	or	1 CO
	"Circuit breaker in disconnected position"	1 CO	or	1 CO
Contact reliability		From 1 mA at 5 V DC		
Rated operational voltage				
Rated insulation voltage U_i	50/60 Hz AC	440 V		
	DC	250 V		
Rated operational voltage U_e		250 V		
Rated impulse withstand voltage U_{imp}		4 kV		
Breaking capacity				
Rated operational current I_e	I_e/AC-12	24 V 10 A, 110/127 V 10 A, 220/240 V 10 A, 320/440 V 10 A		
	I_e/AC-15	220/240 V 4 A, 320/440 V 3 A		
	I_e/DC-12	24 V 10 A, 48 V 2.5 A, 220/240 V 0.2 A		
	I_e/DC-13	24 V 3.0 A, 220/240 V 0.1 A		
	A 300 (AC)	120 V 6 A, 240 V 3 A		
	R 300 (DC)	125 V 0.22 A, 250 V 0.11 A		
Short-circuit protection				
Largest permissible DIAZED fuse (operational class gL)		8 A TDz (slow)		
Largest permissible automatic circuit breaker with C characteristic		8 A TDz (slow)		

System overview, page 1/70

© Siemens 2022

Guide frames for AC

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frames, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator

	5	6	7	8	9	10	11	12	13	14	15	16
3WL9	2	1										1

		SZ 1	SZ 2	SZ 3	
Size (SZ)	1				1
	2				2
	3				3
Max. rated current $I_{n\,max}$ (guide frames)	1000 A [5) 6)]	■	–	–	1
	1600 A [5) 6)]	■	–	–	2
	2000 A [6)]	■	■	–	3
	2500 A [6)]	–	■	–	4
	3200 A [7)]	–	■	–	5
	4000 A [6)]	–	■	■	6
	5000 A	–	–	■	7
	6300 A	–	–	■	8
Number of poles	3-pole				F
	4-pole				G
Main connection	Front, single hole	■ [1)]	■ [2) 6)]	■ [3)]	A
	Front, double hole	■	■ [2) 6)]	■ [3)]	B
	Horizontal	■	■ [2)]	■ [4)]	C
	Vertical	■	■	■	D
	Connecting flange	■	■ [2) 6)]	■ [3)]	E

Breaking capacity I_{cu} at 500 V	N,	55 kA	■	–	–	N
	S,	66 kA	■	–	–	S
	H,	85 kA	■ [5)]	–	–	H
	N, S and H	≤100 kA	–	■	■	H
	C	130 kA	–	■	–	C
	C	150 kA	–	–	■	C

1) Not available for rated circuit breaker current 2000 A and breaking capacity H
2) Not available for rated circuit breaker current 4000 A
3) Not available for rated circuit breaker current 5000 A + 6300 A + breaking capacity C
4) Not available for rated circuit breaker current 6300 A
5) For size 1 with breaking capacity H, please select the max. rated current I_n 2000 A of the guide frame
6) Not available for breaking capacity C
7) For all rated circuit breaker currents up to 3200 A with breaking capacity C

Options

	5	6	7	8	9	10	11	12	13	14	15	16
3WL9	2	1										1

Number of auxiliary supply connector	Without [2)]				0	
	1 connector				1	
	2 connectors				2	
	3 connectors				3	
	4 connectors				4	
Type of auxiliary circuit connections	Without [2)]			0		
	With screw terminals (SIGUT, standard)			1		
	With screwless terminals (tension spring)			2		
Position signaling switches	Without		0			
	1 CO | 1 CO | 1 CO (connected | test | disconnected position)		1			
	3 CO | 2 CO | 1 CO (connected | test | disconnected position)		2			
Shutters	Without	A				
	With shutter, 2-part, lockable	B				

8) Can only be selected if the number of the auxiliary supply connector is zero.

System overview, page 1/70

© Siemens 2022

Guide frames for DC

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your guide frames, please use our online configurator at
www.siemens.com/lowvoltage/3wl-configurator**

	5	6	7		8	9	10	11	12		13	14	15	16
3WL9	2	1	2	–						–			0	1

Max. rated current $I_{n\,max}$	2000 A	3
	4000 A	6
Number of poles	3-pole	H
	4-pole	J
Main connection	Front, single hole [1]	A
	Front, double hole [1]	B
	Horizontal	C
	Vertical	D
	Connecting flange	E

[1] Not available for rated circuit breaker current 4000 A

Options

	5	6	7		8	9	10	11	12		13	14	15	16
3WL9	2	1	2	–						–			0	1

Number of auxiliary supply connectors	Without	0
	1 connector	1
	2 connectors	2
	3 connectors	3
	4 connectors	4
Type of auxiliary circuit connections	Without [2]	0
	With screw terminals (SIGUT, standard)	1
	With screwless terminals (tension spring)	2
Position signaling switches	Without	0
	1 CO | 1 CO | 1 CO (connected | test | disconnected position)	1
	3 CO | 2 CO | 1 CO (connected | test | disconnected position)	2
Shutters	Without	A
	With shutter, 2-part, lockable	B

[2] Can only be selected if the number of the auxiliary supply connector is zero.

System overview, page 1/70

© Siemens 2022

Accessories and spare parts

Accessories for electronic trip units ETU


Protective devices with device holder and optional measurement function



- For spare part in existing circuit breakers, please specify the circuit breaker ID No. when ordering.

Type	With protective function	Measurement function	Article No.
ETU15B	LI	Without	3WL9311-5AA00-0AA2
ETU25B	LSI	Without	3WL9312-5AA00-0AA2
ETU27B	LSING	Without	3WL9312-7AA00-0AA2
ETU45B (without display)	LSIN(G)	Without	3WL9314-5AA00-0AA2
		With measurement function Plus	3WL9314-5AA30-0AA2
ETU76B	LSIN(G)	Without	3WL9317-6AA00-0AA2
		With measurement function Plus	3WL9317-6AA30-0AA2

Rating plugs


NSE0_00992b

- With the rating plug selected, the maximum rated current $I_{n\,max}$ of the circuit breaker must not be exceeded. The following applies: $I_n \leq I_{n\,max}$

Size	Rated current I_n	Article No.
1, 2	250 A	3WL9111-0AA51-0AA0
	315 A	3WL9111-0AA52-0AA0
	400 A	3WL9111-0AA53-0AA0
	500 A	3WL9111-0AA54-0AA0
	630 A	3WL9111-0AA55-0AA0
	800 A	3WL9111-0AA56-0AA0
	1000 A	3WL9111-0AA57-0AA0
1, 2, 3	1250 A	3WL9111-0AA58-0AA0
	1600 A	3WL9111-0AA61-0AA0
	2000 A	3WL9111-0AA62-0AA0
2, 3	2500 A	3WL9111-0AA63-0AA0
	3200 A	3WL9111-0AA64-0AA0
	4000 A	3WL9111-0AA65-0AA0
3	5000 A	3WL9111-0AA66-0AA0
	6300 A	3WL9111-0AA67-0AA0

Ground-fault modules


NSE0_01027a

- Alarm and tripping
- For direct metering of the ground-fault current, e.g. in the star point of the transformer, a 1200 A/1 A current transformer, class 1, is required. The internal load of the 3WL circuit breaker is 0.11 Ω. If the ground-fault current is to be determined using the vectorial sum of the phases, a transformer must be installed in the neutral conductor.

Type	Accessory for	Article No.
GFM AT 45B	ETU45B	3WL9111-0AT53-0AA0
GFM AT 55B – 76B	ETU76B	3WL9111-0AT56-0AA0

Display


NSE0_01609

Accessory for	Version	Article No.
ETU45B	4-line	3WL9111-0AT81-0AA0

Internal current transformers, for N conductor including wiring kit

ETU Release 2	Size	Article No.
–	1	3WL9111-0AA11-0AA0
	2	3WL9111-0AA12-0AA0
	3	3WL9111-0AA13-0AA0
✓	1	3WL9111-0AA14-0AA0
	2	3WL9111-0AA15-0AA0
	3	3WL9111-0AA16-0AA0

External current transformers for N conductor


NSE0_00990a


NSE0_00991a

Copper connection pieces	Size	Article No.
–	1	3WL9111-0AA21-0AA0
	2	3WL9111-0AA22-0AA0
	3	3WL9111-0AA23-0AA0
✓	1	3WL9111-0AA31-0AA0
	2	3WL9111-0AA32-0AA0
	3	3WL9111-0AA33-0AA0

System overview, page 1/70

© Siemens 2022

Accessories and spare parts

Accessories for electronic trip units ETU

EMC filter

- Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters)
- Insertion loss (asymmetric) in the range 40 kHz to 10 MHz >40 dB.

Type	Article No.
Only for ETU Release 2	3WL9111-0AK34-0AA0

Sealable and lockable covers




Accessory for	Article No.
ETU15B to ETU45B	3WL9111-0AT45-0AA0
ETU76	3WL9111-0AT46-0AA0

Automatic reset of the reclosing lockout

Version	Article No.
Spare part for option K01	3WL9111-0AK21-0AA0

Remote reset magnets



- For mechanical tripped indicator
- Spare part for options K10 to K13
- **Note:** Automatic reset of the reclosing lockout 3WL9111-0AK21-0AA0 is also required


Voltage	Article No.
24 ... 30 V DC	3WA9111-0EM42
48 ... 60 V DC	3WA9111-0EM44
120 V AC/125 V DC	3WA9111-0EM45
208 ... 250 V AC/208 ... 250 V DC	3WA9111-0EM46

Retrofittable internal wiring

Use	Male connector	Accessory for	Article No.
Internal **Cubicle**BUS wiring for connection to terminal X8	Without male connector for retrofitting the communication	ETU45B and ETU76B	3WL9111-0AK30-0AA0
For connection of the external N and G transformers to terminal X8	Without male connector	Not for ETU Release 2	3WL9111-0AK31-0AA0
		ETU Release 2	3WL9111-0AK33-0AA0

Locking provisions and interlocks


Interlocking sets for mechanical Open/Close



- Consisting of two transparent covers each for sealing or for attaching padlocks (padlocks not included in scope of supply)
- Cover with 6.35 mm hole (for tool actuation)
- Lock mount for safety lock for key operation

Version	Article No.
Without safety lock	3WL9111-0BA21-0AA0
Made by CES	3WL9111-0BA22-0AA0
Made by IKON	3WL9111-0BA24-0AA0

Locking provisions against unauthorized closing from the operator panel



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Spare part for options S01 to S09


Type	Scope of supply	Article No.
Assembly kit FORTRESS or Castell	Without locks, cylinders or keys	3WL9111-0BA31-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA33-0AA0
Made by KIRK-Key	Without locks, cylinders or keys	3WL9111-0BA34-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA35-0AA0
Made by CES	Locks, cylinders and keys included	3WL9111-0BA36-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA38-0AA0
Assembly kit for padlocks	Without padlock	3WL9111-0BA41-0AA0

System overview, page 1/70

© Siemens 2022

Locking provisions and interlocks


Locking provisions against unauthorized closing, for withdrawable circuit breakers



- The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1
- Consisting of lock in the guide frame, active in connected position, function is retained when circuit breaker is replaced
- Spare part for option R60, R61, R68


Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA51-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA53-0AA0
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WL9111-0BA57-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA58-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA50-0AA0

Locking provisions for charging handle with padlock



Version	Scope of supply	Article No.
Spare part for S33	Without padlock	3WL9111-0BA71-0AA0

Locking provisions to prevent movement of the withdrawable circuit breaker



- Safety lock for mounting onto the circuit breaker
- Spare part for option S71, S75, S76


Type	Scope of supply	Article No.
Made by CES	Locks, cylinders and keys included	3WL9111-0BA73-0AA0
Made by IKON	Locks, cylinders and keys included	3WL9111-0BA75-0AA0
Made by PROFALUX	Locks, cylinders and keys included	3WL9111-0BA76-0AA0
Made by RONIS	Locks, cylinders and keys included	3WL9111-0BA77-0AA0
Made by KIRK-Key [1]	Without locks, cylinders or keys	3WL9111-0BA80-0AA0

Interlocking systems

- 2 of the same keys for 3 circuit breakers
- Locking provision in OFF position
- Lock in the operator panel
- A maximum of 2 circuit breakers can be switched on

Type	Article No.
Made by CES	3WL9111-0BA43-0AA0

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position



- Consisting of Bowden cable and lock in the cabinet door on the circuit breaker
- Spare part for option R81, R85, R86
- **Note:** Not possible in combination with "Locking mechanism to prevent opening of the cabinet door" (order code "R30") or "Locking mechanism to prevent movement with the cabinet door open" (order code "R50")

Type	Article No.
Made by CES	3WL9111-0BA81-0AA0
Made by IKON	3WL9111-0BA83-0AA0
Made by PROFALUX	3WL9111-0BA85-0AA0
Made by RONIS	3WL9111-0BA86-0AA0

Locking mechanisms to prevent opening of the cabinet door in ON position



- Fixed-mounted
- Defeatable
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option S30	3WL9111-0BB12-0AA0

[1] Locks, cylinders and keys must be ordered from the manufacturer.

System overview, page 1/70

© Siemens 2022

Accessories and spare parts

Locking provisions and interlocks

Locking mechanisms to prevent opening of the cabinet door

- Guide frames
- Defeatable
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").


Version	Article No.
Spare part for option R30	3WL9111-0BB13-0AA0

Locking mechanisms to prevent movement with the cabinet door open

- Guide frames
- **Note:** Not possible in combination with "Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").

Version	Article No.
Spare part for option R50	3WL9111-0BB15-0AA0

Mechanical interlock



- With Bowden cable 2000 mm (one required for each circuit breaker)

Type	When ordered separately	Spare part for	Article No.
Fixed-mounted circuit breaker	–	Option S55	3WL9111-0BB21-0AA0
Module for withdrawable circuit breakers with guide frame	–	Option R55	3WL9111-0BB24-0AA0
Module for guide frame	✓	Option R56	3WL9111-0BB22-0AA0
Module for withdrawable circuit breaker	✓	Option R57	3WL9111-0BB23-0AA0
Adapter for size 3 withdrawable circuit breaker	✓	–	3WL9111-0BB30-0AA0

Couplings on the circuit breaker (with ring) for mutual interlocking



- Can be used in all circuit breakers

Article No.
3WL9112-8AH47-0AA0

Bowden cables

Length	Article No.
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0
4500 mm	3WL9111-0BB47-0AA0

Test devices

Manual tester, Release 2 for electronic trip units ETU15B to ETU76B



- For testing the electronic trip unit functions of all 3WL ETUs (Release 1 and Release 2)

Article No.
3WL9111-0AT32-0AA0

Function test unit

- For testing the tripping characteristics for electronic trip units ETU15B to ETU76B (Release 1 and Release 2)

Article No.
3WL9111-0AT44-0AA0

TD400 Kit IEC [1)]

- Commissioning/Service Tool for IEC 3WL (ETU Release 2) and 3VA
- With adapter, cable and case
- Not suitable for 3WL10 and 3VA27

Article No.
3VW9011-0AT40

TD400 adapter (spare part)

Version	Article No.
For 3VA	3VW9011-0AT43
For 3WL ETU Release 1	3VW9011-0AT44
For 3WL ETU Release 2	3VW9011-0AT45


[1)] A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

System overview, page 1/70

© Siemens 2022


Indicators and control elements

Ready-to-close signaling switch (S20)



Version	Contacts	Article No.
Spare part for option C22	1 NO	3WL9111-0AH01-0AA0

Signaling switch (S22 or S23)



- Not possible with communication port, order code "F02", "F12" or "F35"
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally

Version	Contacts	Article No.
Spare part for options C26 to C27	1st or 2nd auxiliary release	3WL9111-0AH02-0AA0

1st tripped signaling switch (S24)

- Not possible with communication port, order code "F02", "F12" or "F35"
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally


Version	Contacts	Article No.
Spare part for option K07	1 CO	3WL9111-0AH14-0AA0

2nd tripped signaling switch (S25)

- Not possible with communication port, order code "F02", "F12" or "F35"
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally
- Can only be used in combination with 1st tripped signaling switch

Version	Contacts	Article No.
Spare part for option K06	1 NO	3WL9111-0AH17-0AA0

Operating cycle counters



- Only in conjunction with motorized operating mechanism.


Variant	Version	Article No.
Spare part for option C01	Mechanical	3WL9111-0AH07-0AA0

Spring charge signaling switch

- Not possible with communication port, order code "F02", "F12" or "F35".
- Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally


Version	Contacts	Article No.
Spare part for option C20	1 NO	3WL9111-0AH08-0AA0

Position signaling switches for guide frames



Version	Contacts	Article No.
Spare part for options R15 to R16	1st block (3 CO)	3WL9111-0AH11-0AA0
	2nd block (6 CO)	3WL9111-0AH12-0AA0

Local electric close (S10) for operator panel



- Not possible with communication port, order code "F02", "F12" or "F35"
- Not possible with motor shutdown switch
- Button + wiring (Auxiliary supply connector X7 required for circuit breakers or guide frames. If this is not already available, please order additionally)
- **Note:** Possible only for circuit breakers with closing coil.

Version	Type	Article No.
Spare part for options C11 and C12	With sealing cap C11	3WL9111-0AJ02-0AA0
	With CES assembly kit C12	3WL9111-0AJ03-0AA0
	With IKON assembly kit	3WL9111-0AJ05-0AA0

System overview, page 1/70

© Siemens 2022

Accessories and spare parts


Indicators and control elements

Motor cutout switch (S12)

- Mounting onto operator panel
- Not possible with local electric close

Version	Article No.
Spare part for option S25	3WL9111-0AJ06-0AA0

EMERGENCY-OFF pushbuttons




- Mushroom pushbutton instead of the mechanical OFF pushbutton

Type	Article No.
Spare part for option S24	3WL9111-0BA72-0AA0

Auxiliary conductor connections

Male connectors for circuit breakers 1



Article No.
3WL9111-0AB01


Extension for male connector


- Male connector must be ordered separately

Version	Article No.
1000 V	3WL9111-0AB02

Auxiliary supply connection for circuit breakers or guide frames 2

Version	Article No.
Screw connection (SIGUT)	3WL9111-0AB03
Screwless connection (tension spring)	3WL9111-0AB04-0AA0






Coding kits 3




Version	Article No.
For fixed-mounted X5 to X8	3WL9111-0AB07

Sliding contact modules for guide frames 4



Article No.
3WL9111-0AB08

One-part sliding contact modules for guide frames 5



Version	Article No.
Screw terminals (SIGUT)	3WL9111-0AB18-0AA0

Blanking blocks for circuit breakers

Article No.
3WL9111-0AB12


For a complete auxiliary current connection you must order:
Fixed-mounted version: 1 + 2 + 3
Withdrawable version: 1 + 4 + 2 or 1 + 5

System overview, page 1/70

© Siemens 2022


Auxiliary releases

Closing coils/shunt trips



Version	Voltage	Article No.
100% OP	24 ... 30 V DC	3WA9111-0AD02
	48 ... 60 V DC	3WA9111-0AD04
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD06


Closing coils (CC)



- For momentary duty, with cut-off switch S15

Version	Voltage	Article No.
5 % OP Switching time 50 ms	24 ... 30 V DC	3WA9111-0AD12
	48 ... 60 V DC	3WA9111-0AD14
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD16

Shunt trips (ST)



- For momentary duty, with cut-off switch S14

Version	Voltage	Article No.
5 % OP Switching time 50 ms	24 ... 30 V DC	3WA9111-0AD22
	48 ... 60 V DC	3WA9111-0AD24
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AD25
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AD26

Undervoltage release






Version	Voltage	Article No.
Instantaneous	24 V DC	3WA9111-0AE02
	30 V DC	3WL9111-0AE02-0AA0
	48 V DC	3WA9111-0AE04
	60 V DC	3WL9111-0AE07-0AA0
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE05
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE06
	380 ... 415 V AC	3WA9111-0AE07
Delayed	48 V DC	3WA9111-0AE13
	110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AE15
	220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AE16
	380 ... 415 V AC	3WA9111-0AE17

Operating mechanism

Motorized operating mechanisms




- Auxiliary supply connector X5 required for circuit breakers or guide frames.
  If this is not already available, please order additionally

Voltage	Article No.
24 ... 30 V DC	3WA9111-0AF02
48 ... 60 V DC	3WA9111-0AF04
110 ... 125 V DC/110 ... 127 V AC	3WA9111-0AF05
220 ... 250 V DC/208 ... 240 V AC	3WA9111-0AF06

Auxiliary contacts

Auxiliary switch blocks



Contacts	Article No.
2 NO + 2 NC	3WL9111-0AG01-0AA0
2 NO	3WL9111-0AG02-0AA0
1 NO + 1 NC	3WL9111-0AG03-0AA0

System overview, page 1/70

© Siemens 2022

Accessories and spare parts

Door sealing frames, hoods, shutters

Door sealing frames



Version	Article No.
Spare part for option T40	3WL9111-0AP01-0AA0

Protective cover IP55



- Cannot be used in conjunction with door sealing frames
- Cover removable and can be opened on both sides


Article No.
3WL9111-0AP02-0AA0

Shutters

Version	Number of poles	Size	Breaking capacity	Article No.
Spare part for option R21	3-pole	1	N, S, H	3WL9111-0AP04-0AA0
		2	N, S, H	3WL9111-0AP06-0AA0
			C	3WL9111-0AP43-0AA0
		3	H, C	3WL9111-0AP07-0AA0
	4-pole	1	N, S, H	3WL9111-0AP08-0AA0
		2	N, S, H	3WL9111-0AP11-0AA0
			C	3WL9111-0AP44-0AA0
		3	H, C	3WL9111-0AP12-0AA0

Arc chute


Arc chute



Voltage	Size	Breaking capacity	Article No.
690 V	1	N, S, H	3WL9111-0AS01-0AA0
	2	N, S, H	3WL9111-0AS02-0AA0
		C	3WL9111-0AS10-0AA0
	3	H, C	3WL9111-0AS03-0AA0
1000 V/1150 V	2	H, C	3WL9111-0AS05-0AA0
	3	H, C	3WL9111-0AS06-0AA0

Arc chute covers

- Parts kit for guide frame
- Spare part for option R10
- Not available for
  - 1000 V version (order code "A05"),
  - 1150 V version (order code "A15")
  - DC version,
  - 4000 A size 2,
  - Circuit breakers with very high breaking capacity C.




Number of poles	Size	Article No.
3-pole	1	3WL9111-0AS32-0AA0
	2	3WL9111-0AS36-0AA0
	3	3WL9111-0AS38-0AA0
4-pole	1	3WL9111-0AS42-0AA0
	2	3WL9111-0AS44-0AA0
	3	3WL9111-0AS46-0AA0

System overview, page 1/70

© Siemens 2022

Coding for withdrawable version

Coding for withdrawable version



- By customer, for 36 coding variants

Size	Article No.
1, 2	3WL9111-0AR12-0AA0
3	3WL9111-0AR13-0AA0

Grounding connections

Grounding connection between the guide frame and the withdrawable circuit breaker



- For 30 kA and 60 kA ground short-circuit current
- For 60 kA ground short-circuit current, order 2x contact modules for guide frame

Contact module	Size	Number of poles	Article No.
For guide frames	1, 2 [1]		3WL9111-0BA01-0AA0
	3		3WL9111-0BA02-0AA0
For withdrawable circuit breakers	1	3-pole	3WL9111-0BA05-0AA0
		4-pole	3WL9111-0BA08-0AA0
	2	3-pole [1]	3WL9111-0BA06-0AA0
		4-pole [1]	3WL9111-0BA04-0AA0
	3	3-pole	3WL9111-0BA07-0AA0
		4-pole	3WL9111-0BA10-0AA0

[1] Cannot be used for size 2 with very high breaking capacity C and size 2, 4000 A.

Support brackets

Support brackets




- For mounting fixed-mounted circuit breakers on vertical plane
- Only for sizes 1 and 2 (1 set = 2 units)

Article No.
3WL9111-0BB50-0AA0

Modules of the CubicleBUS

- Each modules of the **Cubicle**BUS is supplied with a 0.2 m pre-assembled cable to connect the modules with each other. A longer pre-assembled cable is required for connection to the circuit breaker.
- All communication components, modules of the **Cubicle**BUS and measurement functions are available for the electronic trip units ETU45B and ETU76B.

CubicleBUS modules



Type	Article No.
Digital output module with rotary coding switch, relay outputs	3WL9111-0AT26-0AA0
Digital output module, configurable, relay outputs	3WL9111-0AT20-0AA0
Digital input module	3WL9111-0AT27-0AA0
Analog output module	3WL9111-0AT23-0AA0
ZSI module	3WL9111-0AT21-0AA0

Preassembled cables for modules of the CubicleBUS

For connection to 3WL	Length	Article No.
With COM15/COM16/COM35	0.5 m	3WL9111-0BC04-0AA0
	1 m	3WL9111-0BC02-0AA0
	2 m	3WL9111-0BC03-0AA0
Without COM15/COM16/COM35	2 m	3WL9111-0BC05-0AA0

Voltage transformers

- Required for 3WL circuit breakers with measurement function Plus, if no direct voltage tap is available.
- 380 ... 690 V/100 V, class 0.5

Number of poles	Measurement function	Article No.
3-pole	With measurement function Plus	3WL9111-0BB68-0AA0

System overview, page 1/70

© Siemens 2022

Accessories and spare parts

Retrofitting and spare parts

- For retrofitting the COM15, COM16 or COM35 communication modules in withdrawable 3WL circuit breakers with Z options A05 (1000 V AC), A15 (1150 V AC) or A16 (690 V + 20%), the following additional assembly kits are required: 3WL9111-0AT62-0AA0 for circuit breakers size 1 or 3WL9111-0AT63-0AA0 for circuit breakers size 2/3

COM35 PROFINET IO/Modbus TCP modules



Version	Article No.
For electronic trip units ETU45B and ETU76B	3WL9111-0AT65-0AA0

PROFINET IO/Modbus TCP retrofit kits

- Retrofit kit for the PROFINET IO/Modbus TCP communication including COM35, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

Article No.
3WL9111-0AT66-0AA0

PROFIBUS retrofit kits

- Retrofit kit for the PROFIBUS communication including COM15, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B electronic trip units

Article No.
3WL9111-0AT12-0AA0

COM15 PROFIBUS modules



Version	Article No.
For electronic trip units ETU45B and ETU76B	3WL9111-0AT15-0AA0

COM16 Modbus RTU modules

Version	Article No.
For electronic trip units ETU45B and ETU76B	3WL9111-0AT17-0AA0

Modbus RTU retrofit kits IEC

- Retrofit kit for the Modbus communication including COM16, BSS and set of cables for all 3WL air circuit breakers with electronic trip units ETU45B and ETU76B

Article No.
3WL9111-0AT18-0AA0

Additional parts for retrofitting the COM15/COM16/COM35 communication modules

- In withdrawable 3WL circuit breakers with Z options:
  - A05 (1000 V AC) or
  - A15 (1150 V AC) or
  - A16 (690 V + 20%)

Size	Article No.
1	3WL9111-0AT62-0AA0
2, 3	3WL9111-0AT63-0AA0

Breaker status sensors (BSS)



Version	Article No.
• For acquisition via communication of the circuit breaker states ON/OFF/tripped • For electronic trip units ETU45B and ETU76B	3WL9111-0AT16-0AA0

System overview, page 1/70

© Siemens 2022

Interfaces

Interface to the IEC 61850

- The SICAM A8000 as an intelligent data concentrator ensures the connection of the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and the forwarding of the data via communication protocols (such as IEC61850,IEC60870-5-104,IEC60870-5-101, Modbus and DNP) to higher-level systems.






Type	Operating voltage	Article No.
SICAM CP-8021 [1]	–	6MF2802-1AA00
SICAM CP-8050 [2]	–	6MF2805-0AA00
SICAM PS-8620	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	110 ... 220 V DC (12 W)	6MF2862-2AA00

[1] Dimensioned for device quantities of max. 1× 3WL and 1× 3VA

[2] Dimensioned for device quantities of 3× 3WL and 8× 3VA

You will find further information at:
www.siemens.com/sicam-a8000
For the SICAM CP-8021 and SICAM CP-8050, predefined modules were created to reduce commissioning work to a minimum.
The modules can be downloaded from SIOS free of charge www.siemens.com/lowvoltage/product-support (109779191)

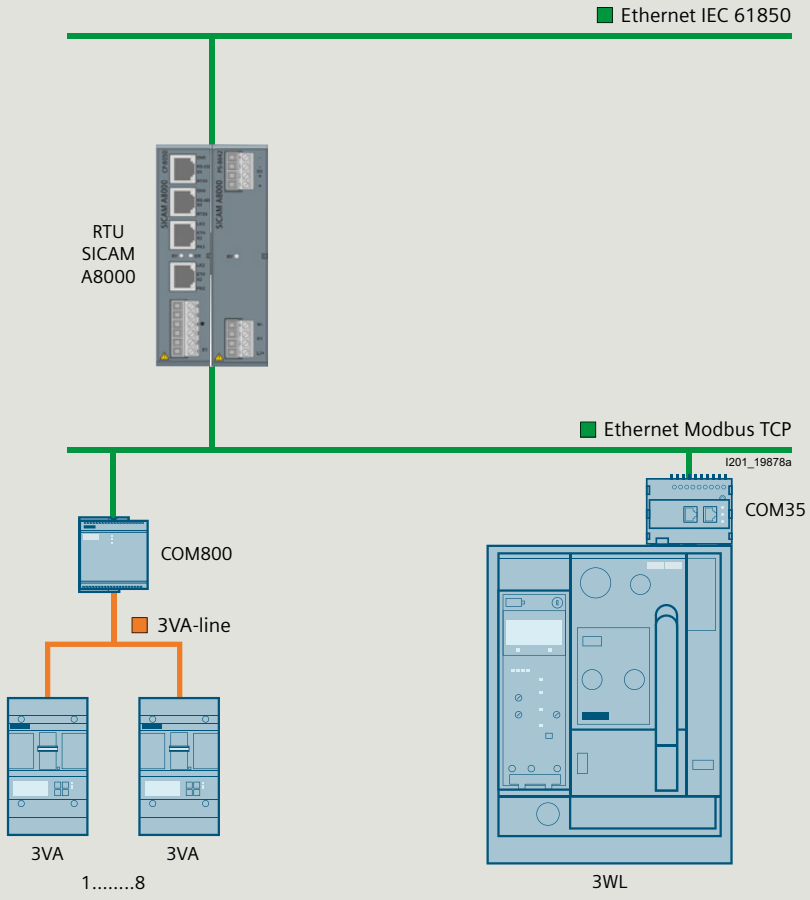

System overview, page 1/70

© Siemens 2022

Accessories and spare parts

Storage devices

Capacitor trip device

- For shunt trips
- Storage time 5 min
- Also suitable for 3VL, 3VA and 3WN circuit breakers
- **Note:** Rated control supply voltage must match the rated control supply voltage of the shunt trip.

Rated control supply voltage/rated operational voltage		Article No.
50/60 Hz AC	DC	
220 ... 240 V	220 ... 250 V	3WL9111-0BA14-0AA0

Spare parts

Measurement function Plus for retrofitting

- As spare part or for retrofitting the measurement function Plus with an external voltage transformer
  - For ETU45B or ETU76B Release 2
  - Voltage transformer required
  - Voltage converter required
  - A measuring accuracy of 3% is achieved if retrofitted.

	Article No.
	3WL9111-0AT05-0AA0

Voltage converter

Version	Article No.
As spare part or for retrofitting the measurement function Plus	3WL9111-0AT06-0AA0

Components for conversion of an existing internal voltage tap [2)]

- Conversion requires 3 components for 3-pole 3WL
- Conversion requires 4 components for 4-pole 3WL
- Conversion of a measurement function (Z option A05) is not possible.

Conversion of internal voltage tap to main contact	Size	Article No.
From bottom to top	1	3WL9111-0AT71-0AA0
	2	3WL9111-0AT72-0AA0
	3	3WL9111-0AT73-0AA0
From top to bottom	1	3WL9111-0AT74-0AA0
	2	3WL9111-0AT75-0AA0
	3	3WL9111-0AT76-0AA0

Transformers (without iron core), Rogowski coil only (instrument transformer for the protective function)

- Used in converter applications with high harmonic components;
  can only be used with ETU45B or ETU76B
  - External 24 V DC supply required
  - Undervoltage release required (e.g. 3WL9111-0AE01-0AA0)
- As retrofit kit or as spare part. With new circuit breakers, please use the Z option K60
- **Scope of supply:**
  - Transformer
  - Warning signs
  - Manual


Number of poles	Size	Article No.
3-pole	1	3WL9111-0AA42-0AA0
	2	3WL9111-0AA43-0AA0
	3	3WL9111-0AA44-0AA0
4-pole	1	3WL9111-0AA45-0AA0
	2	3WL9111-0AA46-0AA0
	3	3WL9111-0AA47-0AA0

System overview, page 1/70

© Siemens 2022

Main conductor connections, fixed-mounted versions (essential accessory)


Front-accessible main connections, single hole at top



- Not for 3WL1 size 1 with high breaking capacity H

Size	Rated current I_n	Article No.
1	≤1000 A	3WL9111-0AL01-0AA0
	1250 ... 1600 A	3WL9111-0AL02-0AA0
2 [4]	≤2000 A	3WL9111-0AL03-0AA0
	≤2500 A	3WL9111-0AL04-0AA0
	≤3200 A	3WL9111-0AL05-0AA0
3	≤4000 A	3WL9111-0AL06-0AA0


Front-accessible main connections, single hole at bottom



- Not for 3WL1 size 1 with high breaking capacity H


Size	Rated current I_n	Article No.
1	≤1000 A	3WL9111-0AL51-0AA0
	1250 ... 1600 A	3WL9111-0AL52-0AA0
2 [4]	≤2000 A	3WL9111-0AL53-0AA0
	≤2500 A	3WL9111-0AL54-0AA0
	≤3200 A	3WL9111-0AL55-0AA0
3	≤4000 A	3WL9111-0AL56-0AA0

Front-accessible main connections according to DIN 43673, double hole at top




Size	Rated current I_n	Article No.
1	≤1000 A [1]	3WL9111-0AL07-0AA0
	1250 ... 2000 A [5]	3WL9111-0AL08-0AA0
2 [4]	≤2000 A	3WL9111-0AL11-0AA0
	≤2500 A	3WL9111-0AL12-0AA0
	≤3200 A	3WL9111-0AL13-0AA0
3	≤4000 A	3WL9111-0AL14-0AA0

Front-accessible main connections according to DIN 43673, double hole at bottom



Size	Rated current I_n	Article No.
1	≤1000 A [1]	3WL9111-0AL57-0AA0
	1250 ... 2000 A [5]	3WL9111-0AL58-0AA0
2 [4]	≤2000 A	3WL9111-0AL61-0AA0
	≤2500 A	3WL9111-0AL62-0AA0
	≤3200 A	3WL9111-0AL63-0AA0
3	≤4000 A	3WL9111-0AL64-0AA0

Rear vertical main connections



Size	Rated current I_n	Article No.
1 [2]	≤2000 A	3WL9111-0AM01-0AA0
2 [3]	≤3200 A	3WL9111-0AM02-0AA0
3	≤6300 A	3WL9111-0AM03-0AA0

[1] Nor for 3WL1 size 1 with high breaking capacity H
[2] In the case of vertical connection size 1 with breaking capacity N and S, up to 1000 A one 3WL9111-0AM01-0AA0 vertical connection is required, up to 2000 A or with breaking capacity H two 3WL9111-0AM01-0AA0 vertical connections are required.
[3] In the case of vertical connection size 2, up to 2500 A one 3WL9111-0AM02-0AA0 vertical connection is required, up to 3200 A two 3WL9111-0AM02-0AA0 vertical connections are required.
[4] Not for circuit breakers with very high breaking capacity C.
[5] Can be used for size 1 with H breaking capacity of 630 A ... 2000 A.


System overview, page 1/70

© Siemens 2022

Accessories and spare parts


Main conductor connections, withdrawable versions (essential accessory)

Front-accessible main connections, single hole at top or at bottom [1) 2)]




Size	Rated current I_n	Article No.
1	≤1000 A	3WL9111-0AN01-0AA0
	1250 ... 1600 A	3WL9111-0AN02-0AA0
2 [3)]	≤2000 A	3WL9111-0AN03-0AA0
	≤2500 A	3WL9111-0AN04-0AA0
	≤3200 A	3WL9111-0AN05-0AA0
3	≤4000 A	3WL9111-0AN06-0AA0

Front-accessible main circuit connections, according to DIN 43673, double hole at top or at bottom [1)]



Size	Rated current I_n	Article No.
1	≤1000 A [2)]	3WL9111-0AN07-0AA0
	1250 ... 2000 A [5)]	3WL9111-0AN08-0AA0
2 [3)]	≤2000 A	3WL9111-0AN11-0AA0
	≤2500 A	3WL9111-0AN12-0AA0
	≤3200 A	3WL9111-0AN13-0AA0
3	≤4000 A	3WL9111-0AN14-0AA0

Supports for front and DIN connecting bars



Number of poles	Size	Article No.
3-pole for 3 bars	1	3WL9111-0AN41-0AA0
	2	3WL9111-0AN42-0AA0
	3	3WL9111-0AN43-0AA0
4-pole for 4 bars	1	3WL9111-0AN44-0AA0
	2	3WL9111-0AN45-0AA0
	3	3WL9111-0AN46-0AA0

Rear vertical main connections




Size	Rated current I_n	Connection pieces	Article No.
1	≤1000 A [2)]		3WL9111-0AN15-0AA0
	1250 ... 2000 A [5)]		3WL9111-0AN16-0AA0
2	≤2000 A [3)]		3WL9111-0AN17-0AA0
	≤2500 A [3)]		3WL9111-0AN18-0AA0
	≤3200 A [3)]		3WL9111-0AN21-0AA0
	1600 ... 3200 A [4)]		3WL9111-0AN38-0AA0
3	≤5000 A		3WL9111-0AN22-0AA0
	≤6300 A	3 pieces for 3-pole switches	3WL9111-0AN23-0AA0
	≤6300 A, top	4 pieces for 4-pole switches	3WL9111-0AN20-0AA0
	≤6300 A, bottom	4 pieces for 4-pole switches	3WL9111-0AN10-0AA0

Rear horizontal main connections

Size	Rated current I_n	Article No.
1	≤1000 A [2)]	3WL9111-0AN32-0AA0
	1250 ... 2000 A [5)]	3WL9111-0AN33-0AA0
2	≤2000 A [3)]	3WL9111-0AN34-0AA0
	≤2500 A [3)]	3WL9111-0AN35-0AA0
	≤3200 A and 4000 A DC [3)]	3WL9111-0AN36-0AA0
	1600 ... 3200 A [4)]	3WL9111-0AN47-0AA0
3	≤5000 A	3WL9111-0AN37-0AA0

Connecting flange



Size	Rated current I_n	Article No.
1	≤1000 A [2)]	3WL9111-0AN24-0AA0
	1250 ... 2000 A [5)]	3WL9111-0AN25-0AA0
2 [3)]	≤2000 A	3WL9111-0AN26-0AA0
	≤2500 A	3WL9111-0AN27-0AA0
	≤3200 A	3WL9111-0AN28-0AA0
3	≤4000 A	3WL9111-0AN31-0AA0

1) When using front-accessible main connections (withdrawable circuit breakers) supports are required.
2) Not for 3WL1 size 1 with high breaking capacity H
3) Not for circuit breakers with very high breaking capacity C.
4) Only for circuit breakers with very high breaking capacity C.
5) Can be used for size 1 with H breaking capacity of 630 A ... 2000 A.

System overview, page 1/70

© Siemens 2022

Conversion kit


Conversion kit for converting fixed-mounted circuit breakers into withdrawable circuit breakers

- Guide frames and sliding contact modules must be ordered separately
- Conversion from fixed-mounted to withdrawable circuit breakers is not possible for 3WL1 circuit breakers with very high breaking capacity C and for circuit breakers with Z options A05, A15 or A16

Number of poles	Size	Article No.
3-pole	1	3WL9111-0BC11-0AA0
	2	3WL9111-0BC12-0AA0
	3	3WL9111-0BC13-0AA0
4-pole	1	3WL9111-0BC14-0AA0
	2	3WL9111-0BC15-0AA0
	3	3WL9111-0BC16-0AA0

Main contact elements

Main contact elements [2) 4)]



- **Notes:**
  - The circuit breaker ID number must be specified when ordering [3)]
  - Specified for each connection (depending on the number of poles on the circuit breaker, order 3 or 4 units)
  - Article number is automatically adapted to the circuit breaker ID No.

Size	Rated current I_n	Article No.
1	≤1600 A [1)]	3WL9111-0AM90 L1Y
2	≤2500 A	3WL9111-0AM91 L1Y
	≤4000 A	3WL9111-0AM92 L1Y
3	≤6300 A	3WL9111-0AM93 L1Y

1) Not for circuit breakers with very high breaking capacity C.
2) Spare part of the main contact elements for 3WL1 circuit breakers with very high breaking capacity C is only possible at the factory.
3) Please specify the circuit breaker ID No. in plain text when ordering.
1) Not for size 1 circuit breakers with breaking capacity H and circuit breakers with I_n=2000A.

System overview, page 1/70

© Siemens 2022

System overview 3WL10

IEC AC ..

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator


1

Circuit breakers and non-automatic circuit breakers



Size 0

Trip units



Electronic trip units ETU (LI, LSI, LSIG)



Electronic trip units ETU (LSI, LSIG)

Accessories



Communi-cation and I/O modules



Rating plugs



Breaker Connect modules



Measurement function (Basic/ Advanced)



External ground fault transformers

Main conductor connections



Fixed-mounted, withdrawable versions



Rear vertical/horizontal connections



Front connections



Front connections, extended



Terminals for Cu/Al cable connection

Motors



Spring charging motor

Accessories



Remote reset magnets



Mechanical operating cycles counters

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022

Auxiliary releases/closing coils



Shunt trips, undervoltage releases



Closing coils

Auxiliary switches and signaling switches



Auxiliary, alarm, and signaling switches



Position signaling switches

Interlocking



Interlocking sets



Locking provisions



Locking mechanisms



Door sealing frames



Protective covers

Note:
You will find a detailed range of accessories in the Accessories section.


© Siemens 2022

Online configurator highlights

www.siemens.com/lowvoltage/configurators

Search function with global direct input


Searches for specific terms and jumps to MLFB based on input to the correct configurator

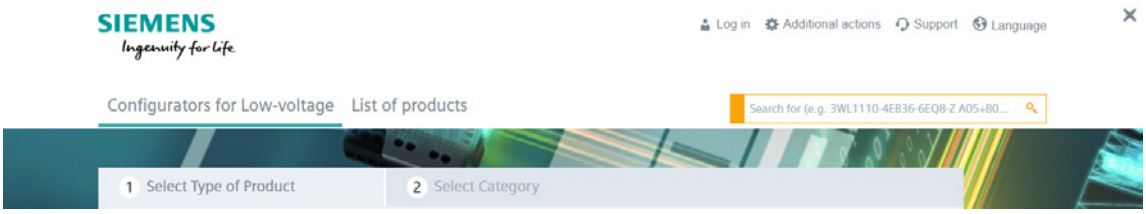


Product list stores multiple configurations and can transfer them collectively to the shopping cart



Recall of completed configurations for modification or additional configuration

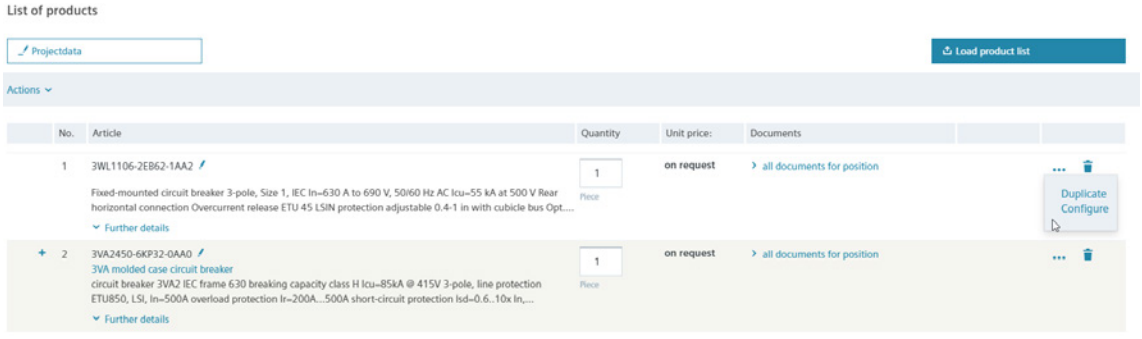


Responsive Design

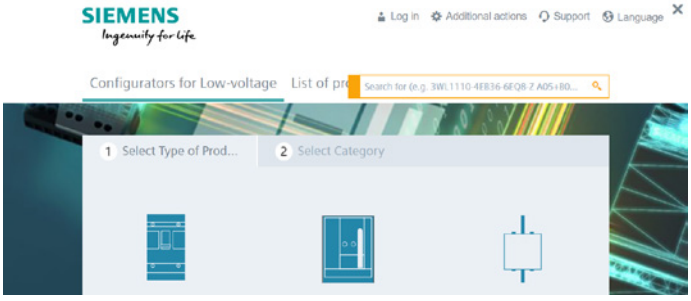


© Siemens 2022

www.siemens.com/lowvoltage/3wl10-configurator


Download an ePlan selector for 3WL10

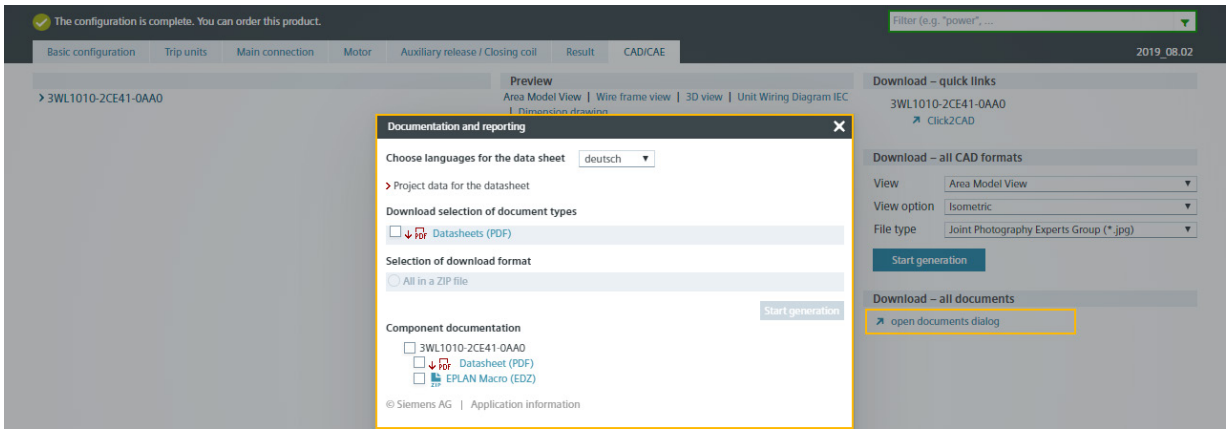

Mouseover display of characteristic curves to show the protective function

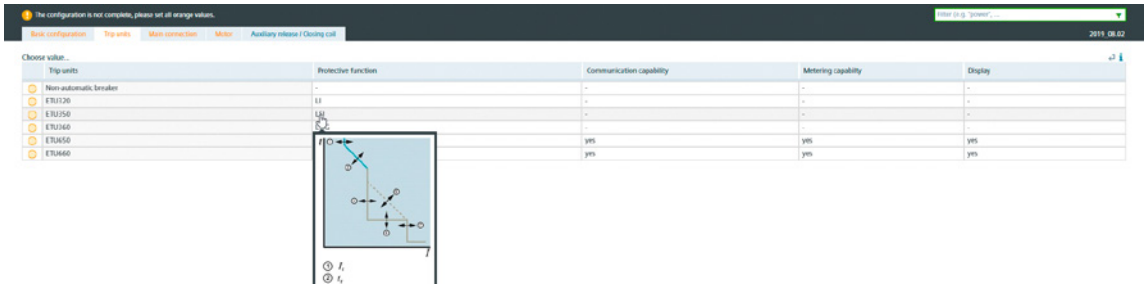

Direct entry of an already known article number or parts of an article number

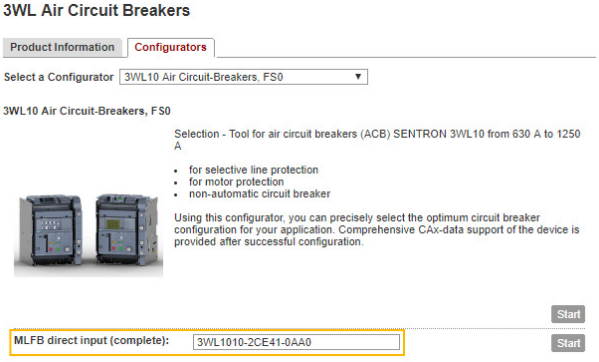

© Siemens 2022

Structure of the article numbers

Basic configuration

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your air circuit breaker, please use our online configurator at
www.siemens.com/lowvoltage/3wl10-configurator**

1

3WL10	6	7	–	8	9	10	11	12	–	13	14	15	16

Circuit breaker, non-automatic circuit breaker and ETU

Max. rated current $I_{n\,max}$	630 A							0	6				
	800 A							0	8				
	1000 A							1	0				
	1250 A							1	2				
Short-circuit breaking capacity I_{cu} at 415 V	B	Basic (42 kA)								1			
	N	ECO (55 kA)								2			
	S	Standard (66 kA)								3			
Non-automatic air circuit breakers [1]	Without measurement function, without a communication interface	Without trip unit					A	A					
Circuit breakers, ETU 3-series	Without measurement function, without a communication interface	With trip unit	ETU320 LI	(N) [2]			A	B					
			ETU350 LSI	(N) [2]			A	C					
			ETU360 LSIG	(N) [2]			A	D					
Circuit breakers, ETU 6-series		With trip unit	ETU650 LSI	(N) [2]				E					
			ETU660 LSIG	(N) [2]				F					
	Without a communication interface	Without measurement function					A						
	With a communication interface	Without measurement function					B						
		Measurement function Basic	Voltage tap on bottom				C						
			Voltage tap on top				D						
		Measurement function Advanced	Voltage tap on bottom				E						
			Voltage tap on top				F						

[1] Only possible with N = ECO (55 kA) and S = Standard (66 kA)
[2] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or 4-pole breakers

Number of poles	Fixed-mounted versions	3-pole		0	
		4-pole	Neutral left	1	
			Neutral right	2	
	Withdrawable	3-pole		3	
		4-pole	Neutral left	4	
			Neutral right	5	

Connection [3]

Type of mounting	Withdrawable	Without frame		0
		Rear vertical connection		1
		Rear horizontal connection		2
		Adapter for cable lug connection (rear)		4
		Front-accessible, extended terminal for main circuit connection		5
	Fixed-mounted versions	Rear vertical connection		1
		Rear horizontal connection		2
		Front terminal for main circuit connection		3
		Circular conductor terminals (front)		4
		Front-accessible, extended terminal for main circuit connection		5

[3] Broadened connections available as accessories.

Quick selection guide, pages 1/56 and 1/58

© Siemens 2022

3WL10 6 7 – 8 9 10 11 12 – 13 14 15 16

Motor

Operating mechanisms	Manual operating mechanism		0
	Spring charging motor	24 ... 30 V AC/DC	1
		48 ... 60 V AC/DC	2
		110 V AC/DC	3
		230 V AC/DC	4

Auxiliary releases, closing coils

Closing coil (CC), remote reset magnet (RR)	Without closing coil, without remote reset magnet		A
	Closing coils (CC)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
	Closing coil (CC) and additionally a remote reset magnet (RR)	24 V AC/DC	K
		110 V AC/DC	L
		220 V AC/DC	M
2nd auxiliary release	Without 2nd auxiliary release		A
	With undervoltage release (UVR)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
		380 ... 400 V AC/DC	K
		415 ... 440 V AC/DC	L
	With undervoltage release (UVR), delayable with external time-delay device; Scope of supply: UVR + time-delay device	24 ... 30 V AC/DC	M
		110 ... 127 V AC/DC	N
		220 ... 250 V AC/DC	P
	With 2nd shunt trip (ST2)	24 V AC/DC	Q
		30 V AC/DC	R
		48 V AC/DC	S
		60 V AC/DC	T
		110 ... 120 V AC/DC	U
		120 ... 127 V AC/DC	V
		220 ... 240 V AC/DC	W
		240 ... 250 V AC/DC	X
1st auxiliary release	Without 1st auxiliary release		0
	Shunt trip (ST)	24 V AC/DC	1
		30 V AC/DC	2
		48 V AC/DC	3
		60 V AC/DC	4
		110 ... 120 V AC/DC	5
		120 ... 127 V AC/DC	6
		220 ... 240 V AC/DC	7
		240 ... 250 V AC/DC	8

Quick selection guide, pages 1/56 and 1/58

© Siemens 2022

Accessory options

For a complete and valid configuration of your air circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3wl10-configurator

1

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

Accessories for basic configuration

Mounting options for fixed-mounted versions

- In the basic configuration, the fixed-mounted circuit breaker is mounted onto the rear panel; floor mounting is an option; in addition, the device must be modified if it is to be extended with functionalities such as external auxiliary switches or mechanical interlocking mechanisms.[1)]

			Order code
Mounting options for fixed-mounted versions [1)]	Floor mounting	Mounting support standard	**A07**
		Mounting support extended [2)]	**S56**
	Rear panel mounting onto mounting plate	Side wall extended [2)]	**S57**

Accessories for electronic trip units ETU

Rating plugs

- As standard, the electronic trip units are equipped with a rating plug for setting the rated current I_n, which is equal to the maximum rated circuit breaker current ($<I_{n\,max}$). The rated current of the selected rating plug must be less than or equal to $I_{n\,max}$.
- To downrate the circuit breaker, the rated current of less than $I_{n\,max}$ is selected for the rating plug by means of a Z option.
- Other functions can also be activated using rating plugs (L = OFF or Rc protection).

				Order code
Rating plug	For setting the rated current I_n	For all ETUs	400 A	**B04**
			630 A	**B06**
			800 A	**B08**
			1000 A	**B10**
	For setting the rated current I_n, with overload protection L = OFF	For 6-series ETUs	400 A	**L04**
			630 A	**L06**
			800 A	**L08**
			1000 A	**L10**
			1250 A	**L12**
	For setting the rated current I_n, for enabling of the residual current protective function. The residual current function is only possible with the MF advanced measurement function.	For ETU660 only	400 A	**G04**
			630 A	**G06**
			800 A	**G08**
			1250 A	**G12**

Communication modules

- No more than two different communication modules can be used at the same time.
- When using an IOM040 digital I/O module (Z option K56), only one communication module can be used.

			Order code
Communication modules	COM040	PROFIBUS	**F02**
	COM041	PROFINET	**F03**
	COM043	Modbus TCP	**F11**
	COM042	Modbus RTU	**F12**

Breaker Connect modules

- When a circuit breaker with a communication interface is ordered, a Breaker Connect module for external 24 V DC power supply of the electronic components is also supplied ready installed.
- By means of this Z option, the Breaker Connect module for 24 V DC is replaced by a Breaker Connect module for 110 ... 240 V AC/DC.

		Order code
Breaker Connect modules	110 ... 240 V AC/DC	**F26**

I/O modules internal

			Order code
I/O modules internal	Digital I/O module IOM040	2 inputs, 2 outputs	**K56**

[1)] These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.
[2)] Not possible in connection with or as an alternative to the mounting support, standard (A07)

System overview, page 1/106

© Siemens 2022

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3WL....-.....-.... -Z

				Order code
Accessories for the motor				
Mechanical operating cycles counter, 5-digit				C01
Auxiliary switches and signaling switches				
• Auxiliary and signaling switches for currents >100 mA and up to 400 V AC are installed as standard. • For currents <100 mA for PLC connections, these auxiliary and signaling switches can be replaced. • The auxiliary/signaling switches for 24 V DC digital signals are designed for – a minimal load from 1 mA at 5 V DC and – a maximum breaking capacity of 100 mA at 24 V DC.				
Position signaling switches for guide frames [1]		2 CO | 2 CO | 2 CO (connected | test | disconnected position)		K55
Signaling switches	Ready-to-close signaling switches		1 CO digital, 24 V DC	K50
	Tripped signaling switches (S24)		1 CO digital, 24 V DC	K53
	Spring charge signaling switch (S21)		1 CO digital, 24 V DC	K54
Auxiliary switches	ON/OFF AUX	4 CO digital, 24 V DC		K51
		2 CO 400 V AC + 2 CO digital, 24 V DC		K52
Locking, blocking and interlocking				
Locking provisions [1]	To prevent movement of withdrawable circuit breaker	Cylinder lock	Made by RONIS	R78
		For no more than 3 padlocks, 8 mm		R65
Locking mechanisms	To prevent movement to disconnected position			R79
Locking provision	Against unauthorized closing from the operator panel (safe OFF)	Cylinder lock, made by RONIS		S08
		For no more than 3 padlocks, plastic 4 mm		S22
		For no more than 1 padlock, metal 7 mm		S23
		For no more than 2 padlocks, metal 8 mm		S07
Interlocking sets	For mechanical ON and/or OFF on the operator panel	For no more than 3 padlocks, plastic 4 mm		S42
		For no more than 1 padlock, metal 7 mm		S43
		For no more than 2 padlocks, metal 8 mm		S44
Protective covers	For mechanical ON/OFF, not lockable			S41
Door sealing frame IP30	IP3x			T30


[1] Can be used not only when guide frame is ordered separately, but also with complete order (breaker + guide frame).

System overview, page 1/106

© Siemens 2022

Guide frames

Guide frames for ordering separately without circuit breakers



- Guide frames without breakers up to 1250 A
- **Note:** All CB bus modules for communication COM04x/IOM300/Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the circuit breaker. The PSS standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

Number of poles	Connection type	Article No.
3-pole	Rear vertical	3VW8112-0AA01
	Rear horizontal	3VW8112-0AB01
	4× 240 mm² Cu/Al cable connection, for cable lug connections	3VW8112-0AD01
	Front connection bars, extended	3VW8112-0AE01
4-pole	Rear vertical	3VW8112-0BA01
	Rear horizontal	3VW8112-0BB01
	4× 240 mm² Cu/Al cable connection, for cable lug connections	3VW8112-0BD01
	Front connection bars, extended	3VW8112-0BE01

To specify the options, add "-Z" to the complete article number and indicate the appropriate order code(s).

3VW8....-.....-.... -Z

Order code

Locking, blocking and interlocking

Locking provisions	To prevent movement of withdrawable circuit breaker	Cylinder lock, made by RONIS	**R78**
		For no more than 3 padlocks, 8 mm	**R65**
Locking mechanisms	To prevent movement to disconnected position (only in combination with R78 or R65)		**R79**

Auxiliary/signaling switches

Position signaling switch PSS for guide frame	For 24 V DC digital signals, for minimum currents	2 CO | 2 CO | 2 CO (connected | test | disconnected position)	**K55**

Auxiliary and signaling switches for currents >100 mA and up to 400 V AC are installed as standard.
For currents <100 mA for PLC connections, these auxiliary and signaling switches can be modified.
The auxiliary/signaling switches for 24 V DC digital signals are designed for


- a minimal load from 1 mA at 5 V DC and
- a maximum breaking capacity of 100 mA at 24 V DC.

System overview, page 1/106

© Siemens 2022

Electronic trip units ETU and accessories

Electronic trip units (ETU)





Version	With communications/measurement function/ enhanced protective functions	Type	Protective function	Article No.
With rotary coding switches	No	ETU320	LIN	3VW9011-5AA00
		ETU350	LSIN	3VW9012-5AA00
		ETU360	LSING	3VW9012-7AA00
With display	Yes	ETU650	LSIN	3VW9017-5AA00
		ETU660	LSING	3VW9017-7AA00

Metering functions for ETU650 or ETU660




Description	Protective function/version	Arrangement	Article No.
Measurement function	MF Basic	–	3VW9011-0AT01
	MF Advanced	–	3VW9011-0AT04
Set of cables for voltage tap for MF	For 4-pole circuit breakers with neutral right	Top or bottom	3VW9011-0AT08
	For 4-pole circuit breakers with neutral left	Top	3VW9011-0AT75
		Bottom	3VW9011-0AT76
	For 3-pole circuit breakers	Top	3VW9011-0AT72
		Bottom	3VW9011-0AT73

External current transformers for N conductor




Accessory for	Use	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	For 3-pole circuit breakers only	3VW9011-0AA30

External current transformers for grounded transformer star point



Accessory for	G_{ret} (ground return)	Article No.
ETU660	100 A	3VW9011-0GF30
	250 A	3VW9011-0GF31

Summation current transformers external Rc-CT for residual current measurement



- Only with MF Advanced measurement function and Rc rating plug

Accessory for	Use	Article No.
ETU660	For external residual current measurement	3VW9011-0RC30

Remote reset magnets RR for the circuit breakers including tripped signaling



- Remote reset magnet (RR) for resetting the circuit breaker after tripping as a result of overcurrent conditions

Accessory for	Voltage	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	24 V DC	3VW9011-0AK03
	110 V AC/DC	3VW9011-0AK05
	250 V AC/DC	3VW9011-0AK06

Spare part batteries for electronic trip units ETU



Accessory for	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	3VW9011-0AT38

System overview, page 1/106

© Siemens 2022

Electronic trip units ETU and accessories

Rating plug



- Only one module is possible per circuit breaker

Accessory for	Version	Rated current I_n	Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Rating plugs for setting (< $I_{n\,max}$) the rated current I_n	400 A	3VW9011-0AA53
		630 A	3VW9011-0AA55
		800 A	3VW9011-0AA56
		1000 A	3VW9011-0AA57
		1250 A	3VW9011-0AA58
ETU 6-series	Rating plugs without overload protection (L = OFF) and for setting (< $I_{n\,max}$) the rated current I_n	400 A	3VW9011-0LF53
		630 A	3VW9011-0LF55
		800 A	3VW9011-0LF56
		1000 A	3VW9011-0LF57
		1250 A	3VW9011-0LF58
ETU660	Rating plug Rc for ETU660, for enabling the residual current protective function and setting (< $I_{n\,max}$) of the rated current I_n. The residual current function is only possible with the MF Advanced measurement function.	400 A	3VW9011-0RC53
		630 A	3VW9011-0RC55
		800 A	3VW9011-0RC56
		1250 A	3VW9011-0RC58


CB bus modules - communication modules



- Contains the communication module
- No more than two different communication modules can be used at the same time
- When using a digital I/O module IOM040 (Z option K56) only one communication module can be used
- Can only be used with ETUs of the 6-series and a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communication interface to the ETU 6-series is selected

Communication modules	Protocol	Article No.
COM040	PROFIBUS	3VW9011-0AT15
COM041	PROFINET	3VW9011-0AT14
COM043	Modbus TCP	3VW9011-0AT16
COM042	Modbus RTU	3VW9011-0AT17

CB bus modules - I/O modules external IOM300



- For snapping onto DIN rail

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	• 2 A at ≤ DC 30 V • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	11	10	3VW9011-0AT20

CB bus modules - I/O modules internal IOM040



- When using a digital I/O module IOM040, only one communication module can be used

Accessory for	Maximum switching current per contact	Inputs	Outputs	Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	2	2	3VW9011-0AT30

Actuator module COM ACT



- For switching the circuit breaker on/off remotely via communication
- Actuation of the closing coil (CC) and the 1st shunt trip (ST)
- Can only be used in combination with a communication module, spring charging motor, closing coil and 1st shunt trip
- Automatically included if the communication interface of the ETU 6-series is selected in the basic circuit breaker configuration

Accessory for	Article No.
ETU 6-series	3VW9011-0AT10

Breaker Connect modules



- For the external power supply for the electronics components

Voltage	Article No.
110 ... 240 V AC/DC	3VW9011-0AT06
24 ... 48 V DC	3VW9011-0AT07

System overview, page 1/106

© Siemens 2022

Auxiliary contact signaling switch for communication interface



- Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions.
- Can only be used in combination with communication module.
- Can be combined with standard position signaling switches or ready-to-close signaling contacts.
- **Note:** Both signaling switches are automatically included in the basic circuit breaker if the communication interface of the ETU 6-series is selected (COM PSS only with withdrawable versions).

Function	Article No.
Ready-to-close signaling switch for communication COM RTC	3VW9011-0AT11
Position signaling switch COM PSS (for withdrawable breakers only)	3VW9011-0AT12

Test devices and Breaker Data Adapters



- Can be used for all ETU 3-series and 6-series

Function	Type	Article No.
Test device • For the trip test via ETU and tripping solenoid including release • The ETU and the tripping solenoids are activated by means of a battery built into the test device. • On activation in the ETU 6-series, the parameters can be configured on the display	TD310	3VW9011-0AT32
Breaker Data Adapter • As gateway for parameterization of the ETU with SENTRON powerconfig • For generation of a report of the set parameters with powerservice	TD410	3VW9011-0AT34
Test devices and Breaker Data Adapters • As gateway for parameterization of the ETU with SENTRON powerconfig – Testing a tripping operation using SENTRON powerconfig • For use with the powerservice software – Testing of the basic protective functions LSING – Testing of the enhanced protective functions – Test data storage – Readout of ETU buffer – Generation of a report of the set parameters	TD420	3VW9011-0AT33

System overview, page 1/106

© Siemens 2022


Accessories and spare parts

Accessories for connection

Front terminals for main circuit connections acc. to IEC 60947-2

- To be ordered separately for top and bottom







Mounting	Version	Mounted onto	Number of poles/ quantity	Article No.
Fixed-mounted	Front terminals for main circuit connection		3-pole/3 units	3VW9011-0AL01
			4-pole/4 units	3VW9011-0AL02
	Extended main terminals, including insulating plate and phase barriers, standard	Front terminals for main circuit connection	3-pole/3 units	3VW9011-0AL77
			4-pole/4 units	3VW9011-0AL78
	Broadened main terminals, including insulating plate and extended phase barriers	Front terminals for main circuit connection, top	3-pole/3 units	3VW9011-0AL73
		Front terminals for main circuit connection, bottom	3-pole/3 units	3VW9011-0AL75
		Front terminals for main circuit connection, top, bottom	4-pole/4 units	3VW9011-0AL74






Withdrawable	Front-accessible terminals for main circuit connection	Flange of the guide frame	3-pole/3 units	3VW9011-0AN01
			4-pole/4 units	3VW9011-0AN02
	Broadened main circuit connections	Front-accessible terminals for main circuit connection	3-pole/3 units	3VW9011-0AN73
			4-pole/4 units	3VW9011-0AN74

Rear terminals for main circuit connections acc. to IEC 60947-2

- To be ordered separately for top and bottom








Mounting	Version	Mounted onto	Number of poles/ quantity	Article No.
Fixed-mounted	Rear terminals for main circuit connection; rotatable for horizontal/ vertical connection, including terminal cover		3-pole/3 units	3VW9011-0AL32
			4-pole/4 units	3VW9011-0AL33
Withdrawable	Rear terminals for main circuit connection; rotatable for horizontal/ vertical connection, including terminal cover		3-pole/3 units	3VW9011-0AN32
			4-pole/4 units	3VW9011-0AN33
	Broadened main circuit connections	Rear horizontal main connections	3-pole/3 units	3VW9011-0AN75
			4-pole/4 units	3VW9011-0AN76

Cu/Al cable connections

- To be ordered separately for top and bottom





Mounting	Version	Mounted onto	Number of poles/ quantity	Article No.
Fixed-mounted	Circular conductor terminals 4 × 240 mm² for front cable connection [1], including insulating plate and high, extended terminal cover	Front terminals for main circuit connection	3-pole/3 units	3VW9011-0AL71
			4-pole/4 units	3VW9011-0AL72
Withdrawable	Set of circular conductor connection pieces 4 × 240 mm² for cable lug connections, rear cable connection	Rear vertical main connections	3-pole/3 units	3VW9011-0AN71
			4-pole/4 units	3VW9011-0AN72

Auxiliary supply connectors in push-in version



- Control wire tap in push-in version for upgrading fixed-mounted breakers and guide frames.
- The device is always fitted at the factory with the exact number of control wire taps required.

Version	Article No.
Push-in	3VW9011-0AB11


[1] For connecting Al cables up to 1000 A

System overview, page 1/106

© Siemens 2022

Accessories for connection

Terminal covers for fixed-mounted



- Finger-proof for front main circuit connection for fixed-mounted
- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.

Version	Number of poles/quantity	Article No.
Standard	3-pole/2 units	3VW9723-0WD30
	4-pole/2 units	3VW9724-0WD40
Extended	3-pole/2 units	3VW9723-0WF30
	4-pole/2 units	3VW9724-0WF40

Phase barriers for fixed-mounted



- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.
- For operating voltages >440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional.

Height	Number of poles/quantity	Article No.
100 mm (standard)	3-pole/4 units	3VW9723-0WA00
	4-pole/6 units	3VW9724-0WA10
200 mm (extended)	3-pole/4 units	3VW9723-0WA01
	4-pole/6 units	3VW9724-0WA11

Support for mounting the fixed-mounted breaker on the floor

- For fixed-mounted versions

Version	Use	Article No.
Mounting support standard (circuit breaker feet) (= Z option A07)		3VW9011-0BB51
Mounting support extended (circuit breaker feet), including mechanical transmission of switch position on circuit breaker side panel (= Z option S56)	• Fixation for external auxiliary switches AUX 15 W (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16) • Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB52

Extension kit for modification of the side wall of the fixed-mounted breaker



- For fixed-mounted versions
- Rear wall fixing on mounting plate
- For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57)

Version	Use	Article No.
Extension kit for side wall	• Fixation for external auxiliary switches AUX 15 W (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16) • Mechanical interlock for 3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB53

System overview, page 1/106

© Siemens 2022

Accessories and spare parts

Motor

Spring charging motor (MO)



Description	Voltage	Article No.
For automatic charging of the stored-energy operating mechanism	24 ... 30 V AC/DC	3VW9011-0AF01
	48 ... 60 V AC/DC	3VW9011-0AF02
	100 ... 130 V AC/DC	3VW9011-0AF03
	220 ... 250 V AC/DC	3VW9011-0AF04

Mechanical operating cycles counters



Description	Version	Article No.
In combination with a spring charging motor	5 digits	3VW9011-0AH07

Auxiliary releases, closing coils

Closing coils CC/shunt trips ST



Voltage	Article No.
24 V AC/DC	3VW9011-0AD01
30 V AC/DC	3VW9011-0AD02
48 V AC/DC	3VW9011-0AD03
60 V AC/DC	3VW9011-0AD04
110 ... 120 V AC/DC	3VW9011-0AD05
120 ... 127 V AC/DC	3VW9011-0AD06
220 ... 240 V AC/DC	3VW9011-0AD07
240 ... 250 V AC/DC	3VW9011-0AD08
380 ... 400 V AC	3VW9011-0AD17
415 ... 440 V AC	3VW9011-0AD18

TD320 function test unit for closing coil/shunt trip



- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested
- The operational availability test is performed cyclically at intervals of 30 seconds
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
  - LED POWER ON LIT: Correct function of the YO/YC test unit
  - LED DEACTIVATION LIT: Power supply failure, wire break
  - LED SHORT-CIRCUIT LIT: Winding short-circuit
  - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
  - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil/shunt trip OK

Version	Article No.
For all closing coils/shunt trips	3VW9011-0AT31

System overview, page 1/106

© Siemens 2022

Auxiliary releases, closing coils

Auxiliary/signaling switches



- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load from 1 mA at 5 V DC and a
  - a maximum breaking capacity of 100 mA at 24 V DC
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted breakers a 3VW9011-0BB5x side wall modification

Type	Contacts	Article No.
Ready-to-close signal RTC	1 CO standard	3VW9011-0AH01
	1 CO digital	3VW9011-0AH02
Auxiliary switch ON/OFF AUX	4 CO standard	3VW9011-0AG01
	4 CO digital	3VW9011-0AG02
	2 CO standard + 2 CO digital	3VW9011-0AG03
External auxiliary switch ON/OFF AUX	15 CO standard	3VW9011-0AG05
	15 CO digital	3VW9011-0AG06
Tripped signaling switch S24	1 CO standard	3VW9011-0AH14
	1 CO digital	3VW9011-0AH15
Spring charge signaling switch S21	1 CO standard	3VW9011-0AH10
	1 CO digital	3VW9011-0AH08
Position signaling switch PSS (for withdrawable devices)	2 CO | 2 CO | 2 CO (connected | test | disconnected position) standard	3VW9011-0AH11
	2 CO | 2 CO | 2 CO (connected | test | disconnected position) digital	3VW9011-0AH12

Fixing for external auxiliary switches AUX 15 CO



- External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

Version	Article No.
For fixed-mounted circuit breakers with rear panel or floor mounting (in combination with Z option S56 or S57)	3VW9011-0AG15
For guide frames	3VW9011-0AG17

Undervoltage releases UVR



Voltage	Article No.
24 V AC/DC	3VW9011-0AE01
30 V AC/DC	3VW9011-0AE02
48 V AC/DC	3VW9011-0AE03
60 V AC/DC	3VW9011-0AE04
110 ... 120 V AC/DC	3VW9011-0AE05
120 ... 127 V AC/DC	3VW9011-0AE06
220 ... 240 V AC/DC	3VW9011-0AE07
240 ... 250 V AC/DC	3VW9011-0AE08
380 ... 400 V AC	3VW9011-0AE17
415 ... 440 V AC	3VW9011-0AE18

External time-delay device for undervoltage release



- With adjustable delay time from 0.5 to 3 s.
- Suitable for mounting onto DIN rail.

Voltage	Article No.
24 ... 30 V AC/DC	3VW9011-0AE10
48 V AC/DC	3VW9011-0AE11
60 V AC/DC	3VW9011-0AE15
110 ... 127 V AC/DC	3VW9011-0AE12
220 ... 250 V AC/DC	3VW9011-0AE13

System overview, page 1/106

© Siemens 2022

Accessories and spare parts

Interlocking

Locking provisions to prevent movement of the withdrawable circuit breaker



Version	Article No.
RONIS cylinder lock (spare part for R78)	3VW9011-0BA80
Padlock 8 mm (spare part for R65), for no more than 3 padlocks	3VW9011-0BA87

Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position



- Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87)

Description	Article No.
Locking mechanism (spare part for R79)	3VW9011-0BA84


Locking provisions in OFF position



- For fixed-mounted versions and withdrawable versions
- Against unauthorized closing from the operator panel (safe OFF)
- The disconnector unit fulfills the conditions for a supply disconnecting (isolating) device acc. to EN 60204-1

Description	Article No.
Cylinder lock, made by RONIS (spare part for S08)	3VW9011-0BA33


Locking provisions in OFF position



- For fixed-mounted versions and withdrawable versions
- Against unauthorized closing from the operator panel (safe OFF)
- The disconnector unit fulfills the conditions for a supply disconnecting (isolating) device acc. to EN 60204-1

Description	Version	Article No.
Padlock 4 mm (spare part for S22)	Plastic for no more than 3 padlocks	3VW9011-0BA41
Padlock 7 mm (spare part for S23)	Metal for no more than 1 padlock	3VW9011-0BA42
Padlock 8 mm (spare part for S07)	Metal for no more than 2 padlocks	3VW9011-0BA44

Interlocking sets for mechanical Open and/or Close on the operator panel



Description	Version	Article No.
Padlock 4 mm (spare part for S42)	Plastic for no more than 3 locks	3VW9011-0BA22
Padlock 7 mm (spare part for S43)	Metal for no more than 1 lock	3VW9011-0BA23
Padlock 8 mm (spare part for S44)	Metal for no more than 2 locks	3VW9011-0BA24

Protective cover for mechanical ON/OFF



- Mechanical ON/OFF to protect against unintentional actuation on the operator panel
- Not lockable

Description	Article No.
Not lockable (spare part for S41)	3VW9011-0BA21

Mechanical interlock



- Mechanical interlock for 3WL/3VA with Bowden cable 2 m
- For fixed-mounted versions, an additional support 3VW9011-0BB52 (option S56) or extension kit 3VW9011-0BB53 (option S57) must be ordered

Mounting	Mounting	Article No.
Fixed-mounted	Rear panel or floor mounting	3VW9011-0BB21
Withdrawable	Mounting onto guide frame	3VW9011-0BB22

Bowden cable, separate

- One required for each circuit breaker

Type	Article No.
1000 mm	3VW9011-0BB23
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0

System overview, page 1/106

© Siemens 2022

Interlocking

Locking mechanisms for control cabinet door



- To prevent opening of the cabinet door in ON position
- It additionally prevents the circuit breaker from being closed when the control cabinet door is open

Mounting	Version	Article No.
Fixed-mounted onto side panel or floor	Direct fixed interlocking	3VW9011-0BB10
	Locking with Bowden cable	3VW9011-0BB16
Withdrawable	Direct fixed interlocking	3VW9011-0BB14
	Locking with Bowden cable	3VW9011-0BB18

Door sealing frame IP30



- Can be used up to IP3x degree of protection

Version	Mounting	Version	Article No.
Spare part for Z option T30.	Fixed-mounted	IP3x	3VW9011-0AP01
	Withdrawable	IP3x	3VW9011-0AP02

Protective cover IP54



- Protective cover/hood IP54 lockable for fixed-mounted breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door
- Cannot be combined with IP30 door sealing frame and door mounted rotary operator

Version	Version	Article No.
Lock with unique key	IP54	3VW9011-0AP03
Lock with standard key	IP54	3VW9011-0AP13

System overview, page 1/106

© Siemens 2022



One system. For all applications.

Requirements for cost- and energy-efficient operation of electrical power distribution are on the increase. Whether in industrial plants, in infrastructure or in buildings: As a modular, highly adaptable system, the 3VA series of molded case circuit breakers ensures fully reliable protection of personnel and plant, and supports every process phase – from planning to operation of electrical power distribution.

Comprehensively certified. Deployable worldwide.

3VA molded case circuit breakers are available in various ranges with IEC approval; other ranges are available that comply with standard IEC 60947 and standard UL 489. The system is therefore ideally suited for mechanical engineering companies and switchgear manufacturers. The full range of functionalities of molded case circuit breakers can be used for plant and equipment operating in Europe and North America, with absolute standards compliance assured.

© Siemens 2022

Molded Case Circuit Breakers



All the information you need 2/2

Molded case circuit breakers and switch disconnectors for all applications 2/4

Quick selection guide 2/6

- Molded case circuit breakers, switch disconnectors and accessories 2/6
- 3VA1 molded case circuit breakers, switch disconnectors up to 1000 A 2/8
- 3VA2 molded case circuit breakers up to 1600 A 2/12
- Trip units 2/16
- Online configurator highlights 2/18

3VA10 – 3VA26 2/20

- System overview 2/20
- Structure of the article numbers 2/22
- Internal accessories 2/26
- Manual operators 2/28
- Motor operators 2/34
- Connection technology 2/36
- Plug-in and withdrawable technology 2/50
- Residual current devices RCD 2/54
- Communication 2/56
- Locking, blocking and interlocking 2/62
- Cover frame and mounting 2/64

3VA27 2/66

- System overview 2/66
- Structure of the article numbers 2/68
- Accessory options 2/72
- Guide frame 2/74
- Electronic trip unit ETU and accessories 2/75
- Accessories for connection and insulation 2/78
- Motor operators and manual operators 2/80
- Auxiliary release, closing coil 2/81
- Locking provisions and interlocks 2/83

3VL 2/85

- 3VL up to 1600 A, IEC 2/85

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about molded case circuit breakers, please visit our website **www.siemens.com/3VA**

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technical basic information
  - 3VA molded case circuit breakers **(109766672)**

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- 3VA molded case circuit breakers (general)
  bit.ly/2xNxlFA

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Molded case circuit breakers **sie.ag/2mmLcAk**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your 3VA molded case circuit breaker at
www.siemens.com/lowvoltage/3va-configurator
www.siemens.com/lowvoltage/3va27-configurator

The following are additionally available for your 3VA molded case circuit breaker:

- 3D views
- CAD data
- Unit wiring diagrams
- Dimension drawings

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

SENTRON powerconfig

The combined commissioning and service tool SENTRON powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download SENTRON powerconfig via
www.siemens.com/powerconfig

Free download SENTRON powerconfig mobile via
App Store and **Play Store**

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the
App Store and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  - 3VA selectivity **(109743975)**
- Communication manual
  - 3VA molded case circuit breakers with IEC and UL certification **(98746267)**
  - 3WL10 air circuit breakers & 3VA27 molded case circuit breakers **(109760220)**
- Equipment manual
  - 3VA molded case circuit breakers with IEC certificate **(90318775)**
  - 3VA27 molded case circuit breakers & 3WL10 air circuit breakers **(109753821)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 3VA molded case circuit breaker (WT-LVA3VA)
- Protection systems in low-voltage power distribution (WT-LVAPS)
- Communication with SENTRON components (LV-COM)
- Project planning and selection of SENTRON circuit breakers (LV-CBPROJ)

Technical overview – Molded case circuit breakers

The fast way to get you to our online services

This page provides you with comprehensive information and links on molded case circuit breakers
www.siemens.com/lowvoltage/product-support (109767421)

© Siemens 2022

Molded case circuit breakers and switch disconnectors for all applications



3VA10 ... 3VA15 molded case circuit breakers

Setting standards for standard applications

The 3VA1 molded case circuit breaker is ideally suited for your standard applications in infrastructure and industrial facilities. It is equipped with a thermal-magnetic trip unit, and offers reliable protection for plants and generators.

With its compact dimensions and depth of just 70 mm, the 3VA1 molded case circuit breaker can even fit into locations where space is limited. Thanks to its cover size of 45 mm, it is also ideally suited for use in distribution boards up to 250 A.

Special features

- Compact design
- AC/DC applications
- No derating up to +50 °C
- Optimized for distribution boards (45 mm cover size)
- Universal platform of accessories
- 1, 2, 3 or 4-pole versions
- Rated current range of 1 to 1000 A

© Siemens 2022



3VA20 ... 3VA26 molded case circuit breakers

The power to deliver in demanding applications

If you are looking for a solution that lets you handle your most technically demanding projects in industrial and infrastructure applications with ease, the 3VA2 molded case circuit breaker has the special capabilities you need. It combines high breaking capacity, a range of electronic trip units (ETUs), very good selectivity properties, and various additional functionalities.

Special features

- Very good selective protection response
- AC applications
- No derating up to +50 °C
- Integrated measurement function
- Connection to a communication system
- Rated current range of 25 to 1250 A



3VA27 molded case circuit breaker

Depending on the application, the 3VA27 molded case circuit breaker handles line/motor and starter protection for low-voltage electrical power distribution, and supplements the existing IEC portfolio with a rated current of 1600 A.

Special features

- Choice between two ranges of electronic trip units with a number of equipment versions
- Variable and versatile connections
- Connection to a communication system
- Can be used as a platform circuit breaker with the 3WL10 ACB, with an extensive range of common accessories
- Rated current range of 800 to 1600 A

© Siemens 2022

Molded case circuit breakers, switch disconnectors and accessories



Protective functions	3VA10	3VA11	3VA12	3VA13	3VA14	3VA15
Size	100 A	160 A	250 A	400 A	630 A	1000 A
Switch disconnectors						
No protection	–	■	■	■	■	–
Thermal-magnetic						
Line protection	■	■	■	■	■	■
Starter protection	–	■	■	■	■	■
Electronic						
Line protection	–	–	–	–	–	–
Line and generator protection	–	–	–	–	–	–
Line and generator protection, with display	–	–	–	–	–	–
Line and generator protection, with display, with measurement function	–	–	–	–	–	–
Motor protection	–	–	–	–	–	–
Motor protection, with display	–	–	–	–	–	–
Motor protection, with display, with measurement function	–	–	–	–	–	–
Starter protection	–	–	–	–	–	–

Accessories

Size	100 A	160 A	250 A	400 A	630 A	1000 A
Accessories						
Auxiliary switches and signaling switches	■	■	■	■	■	■
Auxiliary releases	■	■	■	■	■	■
Connection technology	■	■	■	■	■	■
Plug-in version	–	■	■	■	■	■
Withdrawable version	–	–	■	■	■	–
Front mounted rotary operator	■	■	■	■	■	■
Door mounted rotary operator	■	■	■	■	■	■
Side wall mounted rotary operator	■	■	■	■	■	–
MO310 motor operator (mounted onto the side)	–	■		–	–	–
MO320 motor operator (mounted onto the front)	–	■	■	■	■	–
Motor operator with SEO520 stored energy operator	–	–	–	–	–	–
Motor operator (MO), integrable	–	–	–	–	–	–
Locking, blocking and interlocking	■	■	■	■	■	■
Residual current device (mounted onto the side)	–	■	■	–	–	–
Residual current device (mounted underneath)	–	■	■	–	–	–
Communication link	–	–	–	–	–	–
EFB300	–	–	–	–	–	–
Testing and commissioning devices	–	–	–	–	–	–
Cover frame	■	■	■	■	■	■
DIN-rail adapter	■	■	–	–	–	–
Busbar adapter	■	■	■	■	■	–

■ Available – Not available/not present

© Siemens 2022



3VA20	3VA21	3VA22	3VA23	3VA24	3VA25	3VA26	3VA27
100 A	160 A	250 A	400 A	630 A	1000 A	1250 A	1600 A
–	–	–	–	–	–	–	■
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
–	■	■	■	■	■	–	■
–	■	■	■	■	■	–	■
–	■	■	■	■	■	–	■
–	■	■	■	■	■	–	■

100 A	160 A	250 A	400 A	630 A	1000 A	1250 A	1600 A
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	–
■	■	■	■	■	–	–	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	–	–	–
–	–	–	–	–	–	–	–
■	■	■	■	■	–	–	–
■	■	■	–	–	–	–	–
–	–	–	–	–	–	–	■
■	■	■	■	■	■	■	■
–	–	–	–	–	–	–	–
■	■	■	■	■	–	–	–
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■
–	–	–	–	–	–	–	–
■	■	■	■	■	–	–	–


© Siemens 2022

3VA1 molded case circuit breakers, switch disconnectors up to 1000 A

Technical specifications





			3VA10			3VA11			3VA11		
Electrical characteristics according to IEC 60947-2											
Number of poles			3/4-pole			1-pole			2-pole		
Size		A	100			160			160		
Rated current I_n at 50 °C ambient temperature		A	16 ... 100			16 ... 160			16 ... 160		
Rated operational voltage U_e 50/60 Hz AC		V	690			415			415		
Rated insulation voltage U_i		V	800			500			500		
Rated impulse withstand voltage U_{pulse}		kV	8			8			8		
Use in IT networks (breaking capacity acc. to IEC 60947-2, Annex H)		V	■			■			■		
Frequency		Hz	0 ... 400			0 ... 400			0 ... 400		
Breaking capacity (line protection)			**B**	**N**	**S**	**N**	**S**	**M**	**N**	**S**	**M**
Rated ultimate short-circuit breaking capacity I_{cu}											
50/60 Hz AC	220 ... 240 V	kA	25	36	55	25	36	55	36	55	85
	380 ... 415 V	kA	16	25	36	5	6	6	25	36	55
	440 V	kA	8	16	25	–	–	–	–	–	–
	500 V	kA	5	5	7	–	–	–	–	–	–
	690 V	kA	5	5	7	–	–	–	–	–	–
DC [1]	125 V	kA	16	25	30	16	25	30	16	25	30
	250 V	kA	25	36	55	–	–	–	36	55	85
	500 V	kA	25	36	55	–	–	–	–	–	–
	600 V	kA	8	16	25	–	–	–	–	–	–
	750 V	kA	–	–	–	–	–	–	–	–	–
	1000 V [2]	kA	–	–	–	–	–	–	–	–	–
Rated service short-circuit breaking capacity I_{cs}											
50/60 Hz AC	220 ... 240 V	kA	25	36	55	25	35	55	36	55	85
	380 ... 415 V	kA	16	25	36	5	6	6	25	36	55
	440 V	kA	8	16	25	–	–	–	–	–	–
	500 V	kA	5	5	5	–	–	–	–	–	–
	690 V	kA	5	5	5	–	–	–	–	–	–
DC	125 V	kA	16	25	30	16	25	30	16	25	30
	250 V	kA	25	36	55	–	–	–	36	55	85
	500 V	kA	25	36	55	–	–	–	–	–	–
	600 V	kA	8	16	25	–	–	–	–	–	–
	750 V	kA	–	–	–	–	–	–	–	–	–
	1000 V [2]	kA	–	–	–	–	–	–	–	–	–
Dimensions											
	A	mm	76.2 (3P) | 101.6 (4P)			25.4			50.8		
	B	mm	130			130			130		
	C	mm	70			70			70		
	D	mm	88			88			88		

[1] For detailed data on DC breaking capacity, number of interrupter poles and circuit diagrams, see FAQ www.siemens.com/lowvoltage/product-support (109779932)
[2] For I_n = 630 A/800 A
[3] I_n 125 A, 160 A: I_{cu}/I_{cs} = 36 kA/36 kA

■ Available – Not available/not present

System overview, page 2/20

© Siemens 2022











3VA11				3VA12			3VA13				3VA14				3VA15		
3/4-pole				3/4-pole			3/4-pole				3/4-pole				3/4-pole		
160				250			400				630				1000		
16 ... 160				160 ... 250			320 ... 400				500 ... 630				630 ... 1000		
690				690			690				690				690		
800				800			800				800				800		
8				8			8				8				8		
■				■			■				■				≤500		
0 ... 400				0 ... 400			0 ... 400				0 ... 400				0 ... 400		
N	**S**	**M**	**H**	**S**	**M**	**H**	**S**	**M**	**H**	**C**	**S**	**M**	**H**	**C**	**M**	**H**	**C**
36	55	85	100	55	85	100	55	85	100	200	55	85	100	200	85	110	200
25	36	55	70	36	55	70	36	55	70	110	36	55	70	110	55	70	110
16	25	36	55 [3)]	25	36	36	36	55	70	110	36	55	70	110	55	70	110
7	7	10	10	10	15	15	25	36	55	70	25	36	55	70	36	55	70
7	7	10	10	7	10	10	7	7	10	10	7	7	10	10	25	35	35
16	25	30	30	55	85	100	8	16	25	25	8	16	25	25	–	–	–
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
16	25	36	55	25	36	55	8	16	25	25	8	16	25	25	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	35	50	100
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	25	35	50
36	55	85	100	55	85	100	55	85	100	200	55	85	100	200	85	110	150
25	36	55	70	36	55	70	36	55	70	110	36	55	70	110	55	70	110
16	25	36	40 [3)]	25	36	36	36	55	70	110	36	55	70	110	55	70	70
5	5	5	5	10	10	10	25	36	55	70	25	36	55	70	36	55	65
5	5	5	5	5	5	5	5	5	6	6	5	5	6	6	19	19	19
16	25	30	30	55	85	100	8	16	25	25	8	16	25	25	–	–	–
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
36	55	85	100	55	85	100	8	16	25	25	8	16	25	25	35	50	100
16	25	36	55	25	36	55	8	16	25	25	8	16	25	25	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	35	50	100
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	25	35	50
76.2 (3P) | 101.6 (4P)				105 (3P) | 140 (4P)			138 (3P) | 184 (4P)				138 (3P) | 184 (4P)				210 (3P) | 280 (4P)		
130				158			248				248				320		
70				70			110				110				120		
88				88			137				137				253		

System overview, page 2/20

© Siemens 2022

3VA1 molded case circuit breakers, switch disconnectors up to 1000 A

Application





			3VA10	3VA11	3VA11
Electrical characteristics according to IEC 60947-2					
Number of poles			3/4-pole	1-pole	2-pole
Size		A	100	160	160
Rated current I_n at 50 °C ambient temperature		A	16 ... 100	16 ... 160	16 ... 160
3VA1 molded case circuit breakers for line protection, standard applications (IEC 60947-2)					
Service life/endurance (operating cycles)					
Mechanical (CLOSE-OPEN cycles)			20000	20000	20000
Electrical	380 ... 415 V	I_n	9000	9000	9000
		$I_n/2$	15000	15000	15000
	690 V		6300	6300	6300
Trip Units					
TM210	FTFM		■	■	■
TM220	ATFM		–	–	–
TM240	ATAM		–	–	–
3VA1 molded case circuit breakers for starter protection (IEC 60947-4-1 standards and specifications acc. to AC-1)					
Rated current I_n at 50 °C ambient temperature		A	–	–	–
Service life/endurance (operating cycles)					
Mechanical (CLOSE-OPEN cycles)			–	–	–
Electrical	380 ... 415 V		–	–	–
Trip Units					
TM120M	AM		–	–	–
Switch disconnectors (IEC 60947-3)					
Electrical characteristics according to IEC 60947-3					
Rated uninterrupted current I_u at 50 °C ambient temperature		A	–	–	–
Rated operational voltage U_e 50/60 Hz AC		V	–	–	–
Rated operational voltage U_e DC		V	–	–	–
Rated conditional short-circuit current I_q with upstream 3VA1 circuit breaker		kA	–	–	–
Permissible rated short-time current I_{cw} (1 s)		kA	–	–	–

■ Available – Not available/not present

System overview, page 2/20

© Siemens 2022











3VA11	3VA12	3VA13	3VA14	3VA15
3/4-pole	3/4-pole	3/4-pole	3/4-pole	3/4-pole
160	250	400	630	1000
16 ... 160	160 ... 250	320 ... 400	500 ... 630	630 ... 1000
20000	20000	20000	20000	10000
9000	8000	6000	4000	4600
15000	14000	12000	8000	7000
6300	5400	4200	3000	3200
■	–	–	–	–
■	–	–	–	–
■	■	■	■	■
1 ... 125	160, 200	250	400 ... 500	630 ... 800
20000	20000	20000	20000	10000
9000	8000	6000	4000	4600
■	■	■	■	■
63 ... 160	250	400	630 (3P), 500 (4P)	–
690	690	690	690	–
500 (3P), 600 (4P)	500 (3P), 600 (4P)	500 (3P), 600 (4P)	500 (3P), 600 (4P)	–
70 at 415 V	70 at 415 V	110 at 415 V 10 at 690 V	110 at 415 V 10 at 690 V	–
2	3	6	7.6 (3P), 6 (4P)	–

System overview, page 2/20


© Siemens 2022

3VA2 molded case circuit breakers up to 1600 A

Technical specifications





			3VA20				3VA21					3VA22				
Electrical characteristics according to IEC 60947-2																
Number of poles			3/4-pole				3/4-pole					3/4-pole				
Size		A	100				160					250				
Rated current I_n at 50 °C ambient temperature		A	25 ... 100				25 ... 160					160 ... 250				
Rated operational voltage U_e 50/60 Hz AC		V	690				690					690				
Rated insulation voltage U_i		V	800				800					800				
Rated impulse withstand voltage U_{pulse}		kV	8				8					8				
Use in IT networks (breaking capacity acc. to IEC 60947-2, Annex H)		V	■				■					■				
Frequency		Hz	50/60				50/60					50/60				
Breaking capacity (line protection)			**M**	**H**	**C**	**L**	**M**	**H**	**C**	**L**	**E**	**M**	**H**	**C**	**L**	**E**
Rated ultimate short-circuit breaking capacity I_{cu}																
50/60 Hz AC	220 ... 240 V	kA	85	110	150	200	85	110	150	200	–	85	110	150	200	–
	380 ... 415 V	kA	55	85	110	150	55	85	110	150	200	55	85	110	150	200
	440 V	kA	55	85	110	150	55	85	110	150	–	55	85	110	150	–
	500 V	kA	36	55	85	100	36	55	85	100	–	36	55	85	100	–
	690 V	kA	2	2	2	25	2.5	2.5	2.5	25	85	3	3	3	25	85
DC	125 V (1 switching pole)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	250 V (2 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	500 V (3 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	600 V (4 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Rated service short-circuit breaking capacity I_{cs}																
50/60 Hz AC	220 ... 240 V	kA	85	110	150	200	85	110	150	200	–	85	110	150	200	–
	380 ... 415 V	kA	55	85	110	150	55	85	110	150	200	55	85	110	150	200
	440 V	kA	55	85	110	150	55	85	110	150	–	55	85	110	150	–
	500 V	kA	36	55	85	100	36	55	85	100	–	36	55	85	100	–
	690 V	kA	2	2	2	18	2.5	2.5	2.5	18	65	3	3	3	18	65
DC	125 V (1 switching pole)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	250 V (2 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	500 V (3 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
	600 V (4 switching poles)	kA	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Dimensions																
	A	mm	105 (3P) | 140 (4P)				105 (3P) | 140 (4P)					105 (3P) | 140 (4P)				
	B	mm	181				181					181				
	C	mm	86				86					86				
	D	mm	107				107					107				

■ Available – Not available/not present

System overview, page 2/20 and 2/66

© Siemens 2022











3VA23					3VA24					3VA25			3VA26			3VA27		
3/4-pole					3/4-pole					3/4-pole			3/4-pole			3/4-pole		
400					630					1000			1250			1600		
250 ... 400					400 ... 630					630 ... 1000			1250			800 ... 1600		
690					690					690			690			690		
800					800					800			800			1000		
8					8					8			8			8		
■					■					≤500			≤500			■		
50/60					50/60					50/60			50/60			50/60		
M	H	C	L	E	M	H	C	L	E	M	H	C	M	H	C	M	H	C
85	110	150	200	–	85	110	150	200	–	85	110	200	85	110	200	100	150	200
55	85	110	150	200	55	85	110	150	200	55	85	110	55	85	110	55	85	110
55	85	110	–	–	55	85	110	–	–	55	85	110	55	85	110	55	85	100
36	55	85	–	–	36	55	85	–	–	36	55	85	36	55	85	36	55	85
5	5	5	25	85	6	6	6	25	85	25	35	35	25	35	35	25	36	50
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
85	110	150	200	–	85	110	150	200	–	85	110	150	85	110	150	100	150	200
55	85	110	150	200	55	85	110	150	200	55	85	85	55	85	85	55	85	110
55	85	110	–	–	55	85	110	–	–	55	70	70	55	70	70	55	85	100
36	55	65	–	–	36	55	85	–	–	36	55	65	36	55	65	36	55	63
5	5	5	18	65	6	6	6	18	65	19	19	19	19	19	19	25	36	36
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
138 (3P) | 184 (4P)					138 (3P) | 184 (4P)					210 (3P) | 280 (4P)			210 (3P) | 280 (4P)			210 (3P) | 280 (4P)		
248					248					320			320			291		
110					110					120			120			171 (handle operating mechanism) | 183 (stored energy operating mechanism)		
137					137					253			253			225		

System overview, page 2/20 and 2/66

© Siemens 2022

3VA2 molded case circuit breakers up to 1600 A

Application





			3VA20	3VA21	3VA22
Electrical characteristics according to IEC 60947-2					
Number of poles			3/4-pole	3/4-pole	3/4-pole
Size		A	100	160	250
Rated current I_n at 50 °C ambient temperature		A	25 ... 100	25 ... 160	160 ... 250
Service life/endurance (operating cycles)					
Mechanical (OPEN-CLOSE cycles)			25000	25000	25000
Electrical	380 ... 415 V	I_n	15000	14000	12000
		$I_n/2$	20000	20000	17000
	690 V		10500	9800	8400
Trip units					
ETU320	LI		■	■	■
ETU330	LIG		■	■	■
ETU340	ELISA LI		–	■	■
ETU350	LSI		■	■	■
ETU550/ETU850	LSI		■	■	■
ETU560/ETU860	LSIG		■	■	■
ETU650	LSI		–	–	–
ETU360	LSIG		–	–	–
ETU660	LSIG		–	–	–
3VA2 molded case circuit breakers for motor/starter protection (IEC 60947-4-1 standards and specifications acc. to AC-1)					
Rated current I_n at 50 °C ambient temperature		A	–	25 ... 100	160 ... 200
Service life/endurance (operating cycles)					
Mechanical (CLOSE-OPEN cycles)			–	25000	25000
Electrical	380 ... 415 V		–	14000	12000
Trip units					
ETU310M	I		–	■	■
ETU350M	LSI		–	■	■
ETU550M	LSI		–	■	■
ETU860M	LSIG		–	■	■
ETU320	LI		–	–	–
ETU350	LSI		–	–	–
ETU360	LSIG		–	–	–
ETU650	LSIG		–	–	–
ETU660	LSIG		–	–	–

■ Available – Not available/not present

System overview, page 2/20 and 2/66

© Siemens 2022







3VA23	3VA24	3VA25	3VA26	3VA27
3/4-pole	3/4-pole	3/4-pole	3/4-pole	3/4-pole
400	630	1000	1250	1600
250 ... 400	400 ... 630	630 ... 1000	1250	800 ... 1600
20000	20000	10000	10000	10000
6000	5000	4600	4600	2000
12000	10000	7000	7000	–
4200	3500	3200	3200	–
■	■	■	■	■
■	■	■	■	–
■	■	■	■	–
■	■	■	■	■
■	■	■	■	–
■	■	■	■	–
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
250	400 ... 500	630 ... 800	–	800 ... 1600
20000	20000	10000	–	10000
6000	5000 (400 A) 3000 (500 A)	4600	–	2000
■	■	–	–	–
■	■	■	–	–
■	■	■	–	–
■	■	■	–	–
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■
–	–	–	–	■

System overview, page 2/20 and 2/66

© Siemens 2022

Trip units

Protection system for 3VA molded case circuit breakers up to 1000 A

Trip units	Thermal-magnetic	Electronic	Electronic with display	Electronic with display and measurement function
				
	TM 2-series	**ETU 3-series**	**ETU 5-series**	**ETU 8-series**
Protective function				
Line protection	TM210, TM220, TM240	ETU320, ETU330, ETU340, ETU350	ETU550, ETU560	ETU850, ETU860
Starter protection	TM120M	ETU310M	–	–
Motor protection	–	ETU350M	ETU550M	ETU860M
Integrated functions				
Parameterizing	Setting and reading the parameters • Current values	Setting and reading the parameters • Current values • Delay times	Setting and reading the parameters • Via display and communication • Fine setting of the parameters • Reading the measured values	Setting and reading the parameters • Via display and communication • Fine setting of the parameters • Reading the measured values
Status display	–	Indicating the ETU status via LEDs	Indicating the ETU status via LEDs	Indicating the ETU status via LEDs
Interface	–	Interface for test devices	Interface for test devices	Interface for test devices
Measurement function	–	–	–	Measurement function integrated
Optional expansions				
24 V module	–	–	 24 V module for continuous power supply (also without primary current through the molded case circuit breaker)	 24 V module for continuous power supply (also without primary current through the molded case circuit breaker)
External function box	–	 EFB300 external function box for connection to the ETU	 EFB300 external function box for connection to the ETU	 EFB300 external function box for connection to the ETU
Communication module	–	–	 COM060 communication module	 COM060 communication module
Data concentrator	–	–	 COM800/COM100 data concentrator with interface to • PROFIBUS • PROFINET • Modbus RTU • Ethernet (Modbus TCP)	 COM800/COM100 data concentrator with interface to • PROFIBUS • PROFINET • Modbus RTU • Ethernet (Modbus TCP)
External display	–	–	 DSP800 external display for installing in the cubicle door	 DSP800 external display for installing in the cubicle door
Test device	–	 TD300/TD400/TD500 test device	 TD300/TD400/TD500 test device	 TD300/TD400/TD500 test device

System overview, page 2/20 and 2/66

© Siemens 2022

Protective functions of the 3VA1 with thermal-magnetic trip unit

	TM120M AM	**TM210** FTFM	**TM220** ATFM	**TM240** ATAM
Protections				
Starter protection	■	–	–	–
Line protection	–	■	■	■
Version available with				
1-pole and 2-pole breakers	–	■	–	–
3-pole breaker	■	■	■	■
4-pole breaker	–	■	■	■
Available protection parameters				
I_r adjustable	–	–	■	■
I_i adjustable	■	–	–	■
I_r fixed	–	■	–	–
I_i fixed	–	■	■	–
I_N [1]	–	■	■	■

[1] 3VA10 only without N protection
3VA11, 3VA12, 3VA13, 3VA14 without, 50% or 100% N protection
50% N protection from I_n ≥100 A

Protective functions of the 3VA2 with electronic trip unit

	ETU310M I	**ETU320** LI	**ETU330** LIG	**ETU340** ELISA®	**ETU350** LSI	**ETU350M** LSI	**ETU550** LSI	**ETU550M** LSI	**ETU560** LSIG	**ETU850** LSI	**ETU860** LSIG	**ETU860M** LSIG
Protection												
Starter protection	■	–	–	–	–	–	–	–	–	–	–	–
Motor protection	–	–	–	–	–	■	–	■	–	–	–	■
Line protection	–	■	■	■	■	–	■	–	■	■	■	–
Generator protection	–	■	■	–	■	–	■	–	■	■	■	–
Version available with												
3-pole without external neutral conductor transformer	■	■	■	■	■	■	–	■	–	–	–	■
3-pole with external neutral conductor transformer	–	–	–	–	–	–	■	–	■	■	■	–
4-pole with protected neutral conductor transformer	–	■	■	■	■	–	■	–	■	■	■	–
Available protection parameters												
Characteristic in L range	I^2t	I^2t	I^2t	I^4t	I^2t	I^2t	I^2t	I^2t	I^2t	I^2t	I^2t	I^2t
I_r	–	■	■	■	■	■	■	■	■	■	■	■
t_r at 6 × I_r	–	■	■	–	■	–	■	–	■	■	■	–
t_c	–	–	–	–	–	■	–	■	–	–	–	■
t_p	–	–	–	–	–	–	–	■	–	–	–	■
Thermal image	■	■	■	■	■	■	■	■	■	■	■	■
Thermal image can be switched on/off	–	–	–	–	–	–	■	–	■	■	■	–
I_{sd}	–	–	–	–	■	■	■	■	■	■	■	■
t_{sd} at 8 × I_r	–	–	–	–	■	■	■	■	■	■	■	■
Characteristic in S range: I^2t_{sd}	–	–	–	–	■	–	■	–	■	■	■	–
Characteristic in S range: selectable I^2t_{sd}/t_{sd}	–	–	–	–	–	–	■	–	■	■	■	–
I_i	■	■	■	■	■	■	■	■	■	■	■	■
I_N [1]	–	■	■	■	■	–	■	–	■	■	■	–
I_g	–	–	■	–	–	–	–	–	■	–	■	■
t_g at 2 × I_g	–	–	■	–	–	–	–	–	■	–	■	■
Characteristic in G range: I^2t_g	–	–	–	–	–	–	–	–	■	–	■	■
Characteristic in G range: selectable I^2t_g/t_g	–	–	–	–	–	–	–	–	■	–	■	■
Ground-fault alarm function	–	–	–	–	–	–	–	–	■	–	■	■
Blocking protection	–	–	–	–	–	–	–	–	–	–	–	■
ZSI in combination with an EFB external function box	–	■	■	■	■	■	■	■	■	■	■	■

[1] Available in a version with external current transformer for N conductor or 4-pole breaker

Available for:
- Circuit breakers with ETU (4-pole)
- Circuit breakers with ETU5/ETU8 3-pole with external neutral conductor transformer or 4-pole

System overview, page 2/20 and 2/66


© Siemens 2022

Online configurator highlights

www.siemens.com/lowvoltage/configurators

Search function with global direct input


Searches for specific terms and jumps to the article number based on input to the correct configurator

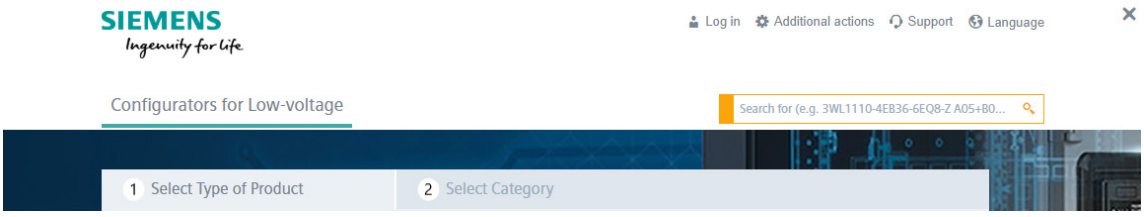


Product list stores multiple configurations and can transfer them collectively to the shopping cart



Recall of completed configurations for modification or additional configuration

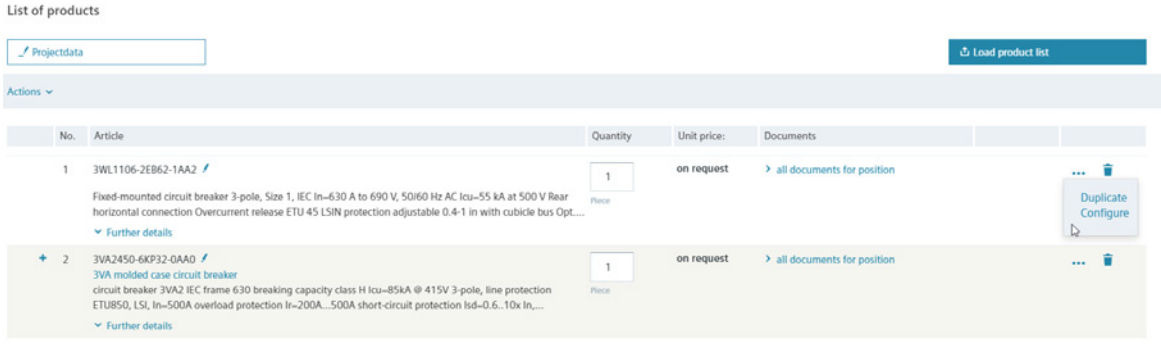


Responsive Design

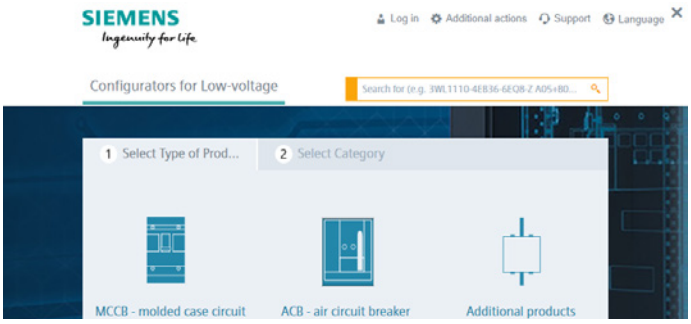


© Siemens 2022

www.siemens.com/lowvoltage/3va-configurator and www.siemens.com/lowvoltage/3va27-configurator


Visualization of the internally mountable accessories (slot assignment)

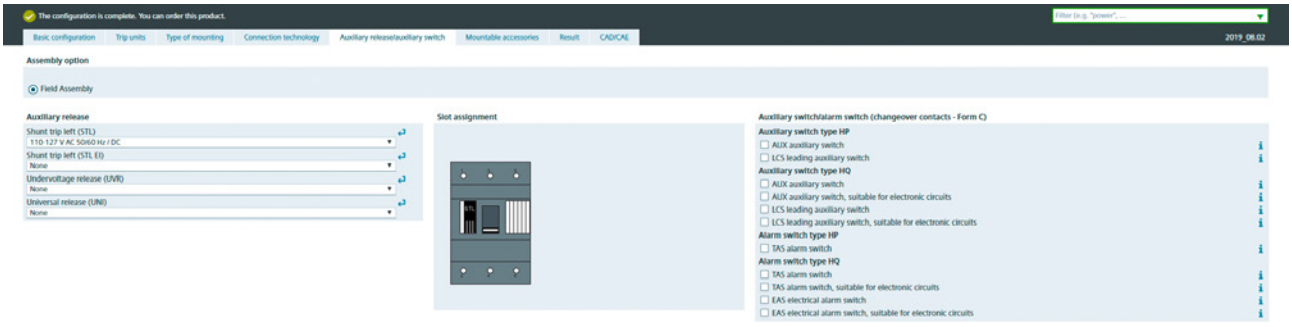

Download of the individual edz files for 3VA

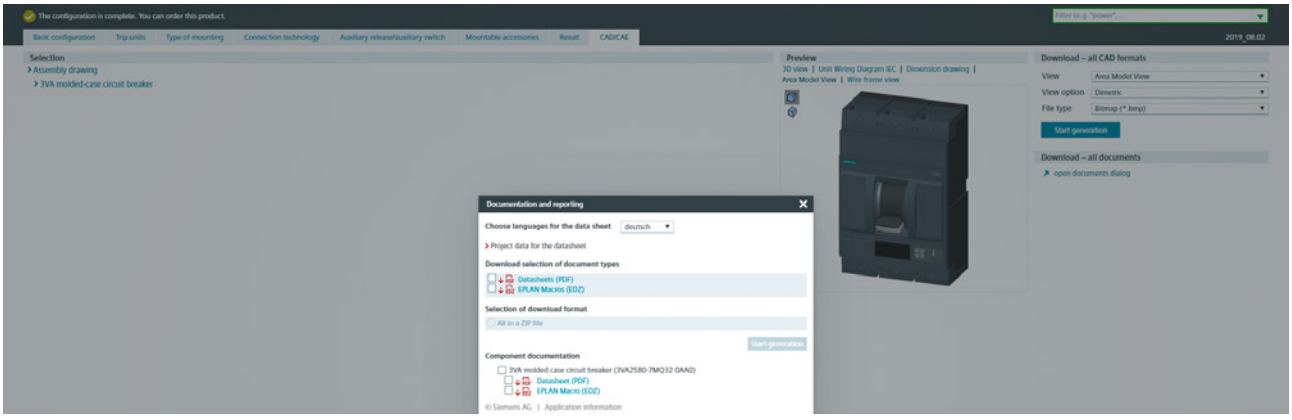

Automatic generation of the 3D model, the 2D dimension drawing and the internal circuit diagram according to IEC

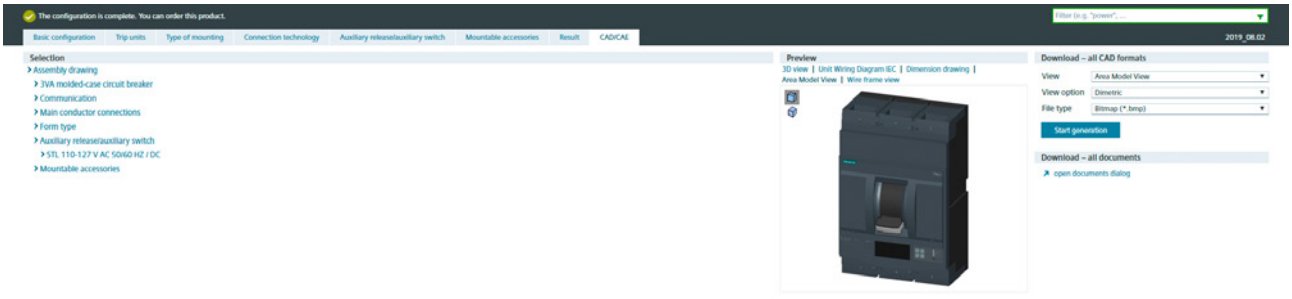

© Siemens 2022

System overview

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Molded case circuit breakers and switch disconnectors



3VA1 for standard applications




3VA2 for selective applications

Trip units



Thermal-magnetic trip unit (TMTU)



Electronic trip unit (ETU)



Electronic trip unit (ETU) with display, and optionally with measurement function

Trip unit accessories



24 V module



Communication module



Data concentrator



External display



Test device

Type of mounting



Fixed-mounted



Withdrawable unit, complete kit



Plug-in unit, complete kit

Supplementary accessories



Auxiliary circuit connector



Door feedthrough



Position signaling switch



Cylinder lock adapter



Crank

Main conductor connection



Bus connectors



Bus connectors broadened



Circular conductor terminal



Box terminal



Nut keeper kits, right-angled

Connection accessories



Insulation accessories

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022

Auxiliary releases/auxiliary switches


Shunt trip


Universal release


Undervoltage release


Auxiliary switch



Tripped signaling switch


Leading changeover switch LCS


Electrical alarm switches EAS


Short circuit alarm switch SAS

Mountable accessories


Manual operator


Motor operator


Residual current device

Additional circuit breaker accessories



Cover frame


DIN-rail adapter


Locking provisions


Cylinder lock

Mechanical interlocking mechanisms


Sliding bar interlock


Interlocking with rod


Handle interlocking module with bowden cable

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022

Structure of the article numbers

Basic configuration for line and generator protection

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

			3VA10	3VA11	3VA12	3VA13	3VA14	3VA15	3VA20	3VA21	3VA22	3VA23	3VA24	3VA25	3VA26	4	5	6	7	8	9	10	11	12
3VA																				–				– 0AA0
Trip units	Thermal-magnetic															1								
	Electronic															2								
Size (SZ)	100 A		■	–	–	–	–	–	■	–	–	–	–	–	–		0							
	160 A		–	■	–	–	–	–	–	■	–	–	–	–	–		1							
	250 A		–	–	■	–	–	–	–	–	■	–	–	–	–		2							
	400 A		–	–	–	■	–	–	–	–	–	■	–	–	–		3							
	630 A		–	–	–	–	■	–	–	–	–	–	■	–	–		4							
	1000 A		–	–	–	–	–	■	–	–	–	–	–	■	–		5							
	1250 A		–	–	–	–	–	–	–	–	–	–	–	–	■		6							
Max. rated current $I_{n\,max}$	Line protection	16 A	■	■	–	–	–	–	–	–	–	–	–	–	–			9	6					
		20 A	■	■	–	–	–	–	–	–	–	–	–	–	–			2	0					
		25 A	■	■	–	–	–	–	■	■	–	–	–	–	–			2	5					
		32 A	■	■	–	–	–	–	–	–	–	–	–	–	–			3	2					
		40 A	■	■	–	–	–	–	■	■	–	–	–	–	–			4	0					
		50 A	■	■	–	–	–	–	–	–	–	–	–	–	–			5	0					
		63 A	■	■	–	–	–	–	■	■	–	–	–	–	–			6	3					
		80 A	■	■	–	–	–	–	–	–	–	–	–	–	–			8	0					
		100 A	■	■	–	–	–	–	■	■	–	–	–	–	–			1	0					
		125 A	–	■	–	–	–	–	–	–	–	–	–	–	–			1	2					
		160 A	–	■	■		–	–	–	■[1]	■	–	–	–	–			1	6					
		200 A	–	–	■	–	–	–	–	–	–	–	–	–	–			2	0					
		250 A	–	–	■	–	–	–	–	–	■[1]	■	–	–	–			2	5					
		320 A	–	–	–	■	–	–	–	–	–	–	–	–	–			3	2					
		400 A	–	–	–	■	–	–	–	–	–	■[1]	■	–	–			4	0					
		500 A	–	–	–	–	■	–	–	–	–	–	■[2]	–	–			5	0					
		630 A	–	–	–	–	■	■	–	–	–	–	■	■	–			6	3					
		800 A	–	–	–	–	–	■	–	–	–	–	–	■	–			8	0					
		1000 A	–	–	–	–	–	■	–	–	–	–	–	■	–			1	0					
		1250 A	–	–	–	–	–	–	–	–	–	–	–	–	■			1	2					
	Generator protection	25 A	–	–	–	–	–	–	■	■	–	–	–	–	–			2	5					
		40 A	–	–	–	–	–	–	■	■	–	–	–	–	–			4	0					
		63 A	–	–	–	–	–	–	■	■	–	–	–	–	–			6	3					
		100 A	–	–	–	–	–	–	■	■	–	–	–	–	–			1	0					
		160 A	–	–	–	–	–	–	–	■	■	–	–	–	–			1	6					
		250 A	–	–	–	–	–	–	–	–	■	■	–	–	–			2	5					
		400 A	–	–	–	–	–	–	–	–	–	■	■	–	–			4	0					
		500 A	–	–	–	–	–	–	–	–	–	–	■[2]	–	–			5	0					
		630 A	–	–	–	–	–	–	–	–	–	–	■	■	–			6	3					
		800 A	–	–	–	–	–	–	–	–	–	–	–	■	–			8	0					
		1000 A	–	–	–	–	–	–	–	–	–	–	–	■	–			1	0					
		1250 A	–	–	–	–	–	–	–	–	–	–	–	–	■			1	2					
	Switch disconnector	63 A	–	■	–	–	–	–	–	–	–	–	–	–	–			6	3					
		100 A	–	■	–	–	–	–	–	–	–	–	–	–	–			1	0					
		125 A	–	■	–	–	–	–	–	–	–	–	–	–	–			1	2					
		160 A	–	■	–	–	–	–	–	–	–	–	–	–	–			1	6					
		250 A	–	–	■	–	–	–	–	–	–	–	–	–	–			2	5					
		400 A	–	–	–	■	–	–	–	–	–	–	–	–	–			4	0					
		500 A	–	–	–	–	■	–	–	–	–	–	–	–	–			5	0					
		630 A	–	–	–	–	■	–	–	–	–	–	–	–	–			6	3					

[1] Rated current not available with ETU340 ELISA LI
[2] With ETU 5-series and 8-series, utilization category B and ETU340 ELISA LI only

Quick selection guide, pages 2/8 and 2/12

© Siemens 2022

3VA [4] [5] [6] [7] – [8] [9] [10] [11] [12] – 0AA0

			3VA10	3VA11	3VA12	3VA13	3VA14	3VA15	3VA20	3VA21	3VA22	3VA23	3VA24	3VA25	3VA26				8	9	10	11	12
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	Without overload protection		–	■	–	■	–	■	–	–	–	–	–	–	–				1				
	Without short-circuit protection		–	■	■	■	■	–	–	–	–	–	–	–	–				1				
	16 kA		■	–	–	–	–	–	–	–	–	–	–	–	–				2				
	25 kA		■	■	–	–	–	–	–	–	–	–	–	–	–				3				
	36 kA		■	■	■	■	■	–	–	–	–	–	–	–	–				4				
	55 kA		–	■	■	■	■	■	■	■	■	■	■	■	■				5				
	70 kA		–	■	■	■	■	■	–	–	–	–	–	–	–				6				
	85 kA		–	–	–	–	–	–	■	■	■	■	■	■	■				6				
	110 kA		–	–	–	■	■	■	■	■	■	■	■	■	■				7				
	150 kA		–	–	–	–	–	–	■	■	■	■	■	–	–				8				
	200 kA [1]		–	–	–	–	–	–	–	■	■	■	■	–	–				0				
Protective function thermal-magnetic	No protection		–	■	■	■	■	–	–	–	–	–	–	–	–	SD100	–				A		
	Line protection		■	■	–	–	–	–	–	–	–	–	–	–	–	TM210	FTFM				D		
			–	■	–	–	–	–	–	–	–	–	–	–	–	TM220	ATFM				E		
			–	■	■	■	■	■	–	–	–	–	–	–	–	TM240	ATAM				F		
Protective function thermal-magnetic, neutral conductor protection	No protection																			A			
	Line protection	Without neutral conductor protection																		E			
		50% neutral conductor protection																		F			
		100% neutral conductor protection																		G			
Protective function electronic	Line protection		–	–	–	–	–	–	■	■	■	■	■	■	■	ETU320	LI	(N) [2]		H	L		
			–	–	–	–	–	–	■	■	■	■	■	■	■	ETU330	LIG	(N) [2]		H	M		
			–	–	–	–	–	–	–	■	■	■	■	■	■	ETU340	ELISA LI	(N) [2]		H	K		
	Line and generator protection		–	–	–	–	–	–	■	■	■	■	■	■	■	ETU350	LSI	(N) [2]		H	N		
	Line and generator protection, with display		–	–	–	–	–	–	■	■	■	■	■	■	■	ETU550	LSI	(N) [3]		J	P		
			–	–	–	–	–	–	■	■	■	■	■	–	–	ETU560	LSIG	(N) [3]		J	Q		
	Line and generator protection, with display, with measurement function		–	–	–	–	–	–	■	■	■	■	■	■	■	ETU850	LSI	(N) [3]		K	P		
			–	–	–	–	–	–	■	■	■	■	■	■	■	ETU860	LSIG	(N) [3]		K	Q		
Number of poles	1-pole	Line protection	–	■ [4]	–	–	–	–	–	–	–	–	–	–	–							1	
	2-pole	Line protection	–	■ [4]	–	–	–	–	–	–	–	–	–	–	–							2	
	3-pole	Line protection	■	■	■	■	■	■	■	■	■	■	■	■	■							3	
		Generator protection	–	–	–	–	–	–	■	■	■	■	■	■	■							3	
	4-pole	Line protection	■	■	■	■	■	■	■	■	■	■	■	■	■							4	
		Generator protection	–	–	–	–	–	–	■	■	■	■	■	■	■							4	
Connection technology	Nut keeper kit	Line protection	■	■	■	■	■	■	■	■	■	■	■	■	■								2
		Generator protection	–	–	–	–	–	–	■	■	■	■	■	■	■								2
	Box terminal	Line protection	■	■	–	–	–	–	■	■	–	–	–	–	–								6
		Generator protection	–	–	–	–	–	–	■	■	–	–	–	–	–								6

[1] Available for 3 and 8-series ETUs

[2] Neutral conductor protection for 4-pole breakers

[3] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or for 4-pole breakers

[4] For TM210 only

Quick selection guide, pages 2/8 and 2/12

© Siemens 2022

Structure of the article numbers

Basic configuration for starter and motor protection

**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator**

			3VA11	3VA12	3VA13	3VA14	3VA15	3VA21	3VA22	3VA23	3VA24	3VA25	4	5	6	7	8
3VA																	–
Trip units	Thermal-magnetic												1				
	Electronic												2				
Size (SZ)	160 A		■	–	–	–	–	■	–	–	–	–		1			
	250 A		–	■	–	–	–	–	■	–	–	–		2			
	400 A		–	–	■	–	–	–	–	■	–	–		3			
	630 A		–	–	–	■	–	–	–	–	■	–		4			
	1000 A		–	–	–	–	■	–	–	–	–	■		5			
Max. rated current $I_{n\,max}$	Starter protection	1 A	■	–	–	–	–	–	–	–	–	–			8	1	
		2 A	■	–	–	–	–	–	–	–	–	–			0	2	
		4 A	■	–	–	–	–	–	–	–	–	–			0	4	
		8 A	■	–	–	–	–	–	–	–	–	–			0	8	
		12.5 A	■	–	–	–	–	–	–	–	–	–			9	2	
		20 A	■	–	–	–	–	–	–	–	–	–			2	0	
		25 A	–	–	–	–	–	■	–	–	–	–			2	5	
		32 A	■	–	–	–	–	–	–	–	–	–			3	2	
		40 A	■	–	–	–	–	■	–	–	–	–			4	0	
		50 A	■	–	–	–	–	–	–	–	–	–			5	0	
		63 A	■	–	–	–	–	■	–	–	–	–			6	3	
		80 A	■	–	–	–	–	–	–	–	–	–			8	0	
		100 A	■	–	–	–	–	■	–	–	–	–			1	0	
		125 A	■	–	–	–	–	–	–	–	–	–			1	2	
		160 A	–	■	–	–	–	–	■	–	–	–			1	6	
		200 A	–	■	–	–	–	–	■	–	–	–			2	0	
		250 A	–	–	■	–	–	–	–	■	–	–			2	5	
		320 A	–	–	■	–	–	–	–	–	–	–			3	2	
		400 A	–	–	–	■	–	–	–	–	■	–			4	0	
		500 A	–	–	–	■	–	–	–	–	■	–			5	0	
		630 A	–	–	–	–	■	–	–	–	–	–			6	3	
		800 A	–	–	–	–	■	–	–	–	–	–			8	0	
	Motor protection	25 A	–	–	–	–	–	■	–	–	–	–			2	5	
		40 A	–	–	–	–	–	■	–	–	–	–			4	0	
		63 A	–	–	–	–	–	■	–	–	–	–			6	3	
		100 A	–	–	–	–	–	■	–	–	–	–			1	0	
		160 A	–	–	–	–	–	–	■	–	–	–			1	6	
		200 A	–	–	–	–	–	–	■	–	–	–			2	0	
		250 A	–	–	–	–	–	–	–	■	–	–			2	5	
		400 A	–	–	–	–	–	–	–	–	■	–			4	0	
		500 A	–	–	–	–	–	–	–	–	■	–			5	0	
		630 A	–	–	–	–	–	–	–	–	–	■			6	3	
		800 A	–	–	–	–	–	–	–	–	–	■			8	0	
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	55 kA		■	■	■	■	■	■	■	■	■	■					5
	70 kA		■	■	■	■	■	–	–	–	–	–					6
	85 kA		–	–	–	–	–	■	■	■	■	■					6
	110 kA		–	–	■	■	■	■	■	■	■	■					7
	200 kA		–	–	–	–	–	■	■	■	■	–					0

Quick selection guide, pages 2/8 and 2/12

© Siemens 2022

3VA 4 5 6 7 – 8 9 10 11 12 – **0AA0**

			3VA11	3VA12	3VA13	3VA14	3VA15	3VA21	3VA22	3VA23	3VA24	3VA25				9	10	11	12
Protective function thermal-magnetic	Starter protection		■	–	–	–	–	–	–	–	–	–		TM110M	FM	M	G		
			■	■	■	■	■	–	–	–	–	–		TM120M	AM	M	H		
Protective function electronic	Motor protection		–	–	–	–	–	■	■	■	■	■		ETU350M	LSI	M	N		
	Motor protection, with display		–	–	–	–	–	■	■	■	■	■		ETU550M	LSI	M	P		
	Motor protection, with display, with measurement function		–	–	–	–	–	■	■	■	■	■		ETU860M	LSIG	M	Q		
	Starter protection		–	–	–	–	–	■	■	■	■	–		ETU310M	I	M	S		
Number of poles	3-pole	Starter protection	■	■	■	■	■	■	■	■	■	–						3	
		Motor protection	–	–	–	–	–	■	■	■	■	■						3	
Connection technology	Nut keeper kit	Starter protection	■	■	■	■	■	■	■	■	■	–							2
		Motor protection	–	–	–	–	–	■	■	■	■	■							2
	Box terminal	Starter protection	■	–	–	–	–	■	–	–	–	–							6
		Motor protection	–	–	–	–	–	■	–	–	–	–							6

Quick selection guide, pages 2/8 and 2/12

© Siemens 2022

Internal accessories

Auxiliary switches and alarm switches

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Auxiliary switches AUX

- Used to signal the position of the main contacts of the molded case circuit breaker
- The contacts of the auxiliary switch and the molded case circuit breaker close in unison



Type	Width	I_e	U_e AC/DC	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard			3VA9988-0AA12		
		<1 A	24 V/24 V	Electronic-compatible			3VA9988-0AA13		
HP	14 mm (2 slots)	10 A	600 V/250 V	Standard	–	3VA9988-0AA11			

Leading changeover switches LCS

- Used for load shedding, for example
- Signal the opening of the main contacts with a lead time of 20 ms in advance of circuit breaker trips



Type	Width	I_e	U_e AC/DC	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard	–	3VA9988-0AA22			
		<1 A	24 V/24 V	Electronic-compatible	–	3VA9988-0AA23			
HP	14 mm (2 slots)	10 A	600 V/250 V	Standard	–	3VA9988-0AA21			

Trip alarm switches TAS

- Signal every circuit breaker tripping operation
- Are actuated whenever the molded case circuit breaker switches to the TRIP position



Type	Width	I_e	U_e AC/DC	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard			3VA9988-0AB12		
		<1 A	24 V/24 V	Electronic-compatible			3VA9988-0AB13		
HP	14 mm (2 slots)	10 A	600 V/250 V	Standard	–	3VA9988-0AB11			

Short circuit alarm switches SAS

- Signal tripping operations only if they have been initiated by a short circuit
- The tripping operation must be reset by deliberate acknowledgement of the fault before the molded case circuit breaker can be switched to ON again



Type	Width	I_e	U_e AC/DC	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard	3VA9988-0AB32	3VA9988-0AB32	3VA9988-0AB34	–	–
		<1 A	24 V/24 V	Electronic-compatible	3VA9988-0AB33	3VA9988-0AB33	3VA9988-0AB35	–	–

Electrical alarm switches EAS

- Are actuated as soon as the main contacts of the molded case circuit breaker open in the event that the breaker is tripped by the ETU



Type	Width	I_e	U_e AC/DC	Version	3VA10	3VA11	3VA12 3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24 3VA25 3VA26
HQ	7 mm (1 slot)	6 A	240 V/250 V	Standard	–	–	–	–	3VA9988-0AB22
		<1 A	24 V/24 V	Electronic-compatible	–	–	–	–	3VA9988-0AB23

System overview, page 2/20

© Siemens 2022

Auxiliary releases

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

			3VA10 3VA11 3VA12 3VA13 3VA14 3VA15	3VA20 3VA21 3VA22 3VA23 3VA24	3VA25 3VA26
Shunt trips left STL					
• Used for remote-controlled tripping of the molded case circuit breaker • Have particularly low power consumption • Especially suitable for electrical interlocking in the EI variant [1]					
	**Version**	**U_e 50/60 Hz AC**	**U_e DC**		
	Standard	–	12 V	3VA9988-0BL10	
		24 V	24 ... 30 V	3VA9988-0BL30	
		48 ... 60 V	48 ... 60 V	3VA9988-0BL31	
		110 ... 127 V	110 ... 127 V	3VA9988-0BL32	
		208 ... 277 V	220 ... 250 V	3VA9988-0BL33	
		380 ... 600 V	–	3VA9988-0BL20	
	Electrical (EI)	–	24 V	3VA9988-0BM10	
Shunt trips flexible STF					
• Used for remote-controlled tripping of the molded case circuit breaker • Flexible installation					
	**U_e 50/60 Hz AC**	**U_e DC**			
	24 V	–	–	3VA9988-0BA20	–
	48 ... 60 V	–	–	3VA9988-0BA21	–
	110 ... 127 V	–	–	3VA9988-0BA22	–
	208 ... 277 V	–	–	3VA9988-0BA23	–
	380 ... 500 V	–	–	3VA9988-0BA24	–
	600 V	–	–	3VA9988-0BA25	–
Universal releases UNI					
• Combination of shunt trip and undervoltage release					
	**U_e 50/60 Hz AC**	**U_e DC**			
	–	12 V		3VA9908-0BD11	
		24 V		3VA9908-0BD12	
		48 V		3VA9908-0BD13	
Undervoltage releases UVR					
	• Trip the molded case circuit breaker in the event that the rated operational voltage of a monitored circuit drops below a minimum permissible limit or fails altogether				
	U_e 50/60 Hz AC	**U_e DC**			
	–	12 V		3VA9908-0BB10	
		24 V		3VA9908-0BB11	
		48 V		3VA9908-0BB12	
		60 V		3VA9908-0BB13	
		125 ... 127 V		3VA9908-0BB14	
		220 ... 230 V		3VA9908-0BB15	
		250 V		3VA9908-0BB16	
	24 V	–		3VA9908-0BB20	
	48 V	–		3VA9908-0BB21	
	60 V	–		3VA9908-0BB22	
	110 V	–		3VA9908-0BB23	
	120 ... 127 V	–		3VA9908-0BB24	
	208 ... 230 V	–		3VA9908-0BB25	
	380 ... 400 V	–		3VA9908-0BB26	
	440 ... 480 V	–		3VA9908-0BB27	
Time-delay devices for undervoltage releases					
	**U_e 50/60 Hz AC**	**U_e DC**			
	110 V	110 V		3VA9988-0BF21	
	230 V	230 V		3VA9988-0BF22	
	–	24 V		3VA9988-0BF23	


[1] In combination with TAS and AUX. For circuit diagrams, see the operating Instructions

System overview, page 2/20

© Siemens 2022


Manual operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

				3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Front mounted rotary operators								
• Handle • For IEC • Degree of protection IP30 • For 3-pole and 4-pole breakers								
	Version	**Illumination kit**	**Door interlock**					
	Standard (gray)	Without	Without	3VA9157-0EK11	3VA9257-0EK11	3VA9267-0EK11	3VA9467-0EK11	3VA9687-0EK11
			With	3VA9157-0EK21	3VA9257-0EK21	3VA9267-0EK21	3VA9467-0EK21	3VA9687-0EK21
		With	Without	3VA9157-0EK13	3VA9257-0EK13	3VA9267-0EK13	3VA9467-0EK13	–
			With	3VA9157-0EK23	3VA9257-0EK23	3VA9267-0EK23	3VA9467-0EK23	–
	EMERGENCY-OFF (red/yellow)	Without	Without	3VA9157-0EK15	3VA9257-0EK15	3VA9267-0EK15	3VA9467-0EK15	3VA9687-0EK15
			With	3VA9157-0EK25	3VA9257-0EK25	3VA9267-0EK25	3VA9467-0EK25	3VA9687-0EK25
		With	Without	3VA9157-0EK17	3VA9257-0EK17	3VA9267-0EK17	3VA9467-0EK17	–
			With	3VA9157-0EK27	3VA9257-0EK27	3VA9267-0EK27	3VA9467-0EK27	–
Door mounted rotary operators with tolerance compensation								
• Shaft 300 mm (325 mm for 3VA15/3VA25/3VA26) • With mounting tolerance compensation • Handle with masking plate 75 × 75 mm (100 × 100 mm for 3VA15/3VA25/3VA26) • Degree of protection IP65 • For 3-pole and 4-pole breakers								
	Version	**Illumination kit**	**Door interlock**					
	Standard (gray)	Without	With	3VA9157-0FK21	3VA9257-0FK21	3VA9267-0FK21	3VA9467-0FK21	3VA9687-0FK21
		With	With	3VA9157-0FK23	3VA9257-0FK23	3VA9267-0FK23	3VA9467-0FK23	3VA9687-0FK23
	EMERGENCY-OFF (red/yellow)	Without	With	3VA9157-0FK25	3VA9257-0FK25	3VA9267-0FK25	3VA9467-0FK25	3VA9687-0FK25
		With	With	3VA9157-0FK27	3VA9257-0FK27	3VA9267-0FK27	3VA9467-0FK27	3VA9687-0FK27
Door mounted rotary operators without tolerance compensation								
	• Shaft 300 mm (325 mm for 3VA15/3VA25/3VA26) • Handle with masking plate 75 × 75 mm (100 × 100 mm for 3VA15/3VA25/3VA26) • Degree of protection IP65 • For 3-pole and 4-pole breakers							
	Version	**Illumination kit**	**Door interlock**					
	Standard (gray)	Without	With	3VA9157-0FK61	3VA9257-0FK61	3VA9267-0FK61	3VA9467-0FK61	3VA9687-0FK61
Door mounted rotary operators without handle								
	• For IEC • Degree of protection IP30 • For 3-pole and 4-pole breakers							
	Version	**Illumination kit**	**Door interlock**					
	With shaft stub (gray)	–	Without	3VA9157-0GK00	3VA9257-0GK00	3VA9267-0GK00	3VA9467-0GK00	3VA9687-0GK00

System overview, page 2/20

© Siemens 2022



			3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Side wall mounted rotary operators							
 • Rotary operator with shaft 300 mm • Handle with masking plate 75 × 75 mm • Degree of protection IP65 • For 3-pole and 4-pole breakers							
Version	**Mounting bracket**	**Illumination kit**					
Standard (gray)	Without	Without	3VA9157-0PK11	3VA9257-0PK11	3VA9267-0PK11	3VA9467-0PK11	–
		With	3VA9157-0PK13	3VA9257-0PK13	3VA9267-0PK13	3VA9467-0PK13	–
EMERGENCY-OFF (red/yellow)	Without	Without	3VA9157-0PK15	3VA9257-0PK15	3VA9267-0PK15	3VA9467-0PK15	–
		With	3VA9157-0PK17	3VA9257-0PK17	3VA9267-0PK17	3VA9467-0PK17	–
Side wall mounted rotary operators with mounting bracket							
 • Rotary operator with short shaft and mounting bracket for mounting directly on the side wall • Handle with masking plate 75 × 75 mm • Degree of protection IP65 • For 3-pole and 4-pole breakers							
Version	**Mounting bracket**	**Illumination kit**					
Standard (gray)	With	Without	3VA9157-0PK51	3VA9257-0PK51	3VA9267-0PK51	–	–
		With	3VA9157-0PK53	3VA9257-0PK53	3VA9267-0PK53	–	–
EMERGENCY-OFF (red/yellow)	With	Without	3VA9157-0PK55	3VA9257-0PK55	3VA9267-0PK55	–	–
		With	3VA9157-0PK57	3VA9257-0PK57	3VA9267-0PK57	–	–
Extended DIN rail for N/PE terminals							
							
Version	**Rated current**						
For mounting bracket	≤250 A		3VA9987-0GL30	3VA9987-0GL30	3VA9987-0GL30	–	–
Auxiliary switch modules for rotary operator							
							
Version							
2× leading to "ON"			3VA9257-0GX10	3VA9257-0GX10	3VA9467-0GX10	3VA9467-0GX10	–
2× leading to "ON" and 1× leading to "OFF"			–	–	3VA9467-0GX20	3VA9467-0GX20	–
Mounting adapters for side wall mounted rotary operators							
							
Version							
Necessary accessories for 3VA side wall mounted rotary operators, if 3VA9...-0GX.0 auxiliary switch modules are used			3VA9257-0GX01	3VA9257-0GX01	3VA9467-0GX01	–	–

System overview, page 2/20

© Siemens 2022



Manual operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Supplementary handles for door mounted rotary operators						
 • For operation when cabinet door is open						
Version						
Standard (gray)		3VA9287-0GC01	3VA9287-0GC01	3VA9487-0GC01	3VA9487-0GC11	3VA9687-0GC01
EMERGENCY-OFF (red/yellow)		3VA9287-0GC05	3VA9287-0GC05	3VA9487-0GC05	3VA9487-0GC15	3VA9687-0GC05
Handles						
 • With masking plate						
Version	**Tolerance compensation**					
Standard (gray)	With		8UD1721-0AB21		8UD1731-0AB21	8UD1741-0AB21
	Without		8UD1721-0AB11		8UD1731-0AB11	8UD1741-0AB11
EMERGENCY-OFF (red/yellow)	With		8UD1721-0AB25		8UD1731-0AB25	8UD1741-0AB25
	Without		8UD1721-0AB15		8UD1731-0AB15	8UD1741-0AB15
Handle lever extensions						
 • **Note:** The handle lever extension is already included in the scope of supply of the breakers.						
		–	–	–	3VA9487-0SC10	3VA9987-0SC10
Shafts						
 **Type**	**Length**					
8 × 8 mm	300 mm		8UD1900-2WA00			–
	600 mm		8UD1900-2WB00			–
12 × 12 mm	300 mm	–	–	–	–	8UD1900-4WA00
	600 mm	–	–	–	–	8UD1900-4WB00
Adapters for shafts						
Type	**Use**					
 8 × 8 mm	With door mounted rotary operator and side wall mounted rotary operator		8UD1900-2DA00			–
 12 × 12 mm	For door mounted rotary operator	–	–	–	–	8UD1900-4DA00
Door couplings						
Type						
 8 × 8 mm			8UD1900-2HA00			–
 12 × 12 mm		–	–	–	–	8UD1900-4HA00

System overview, page 2/20

© Siemens 2022

	3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Mounting tolerance compensations					
Type					
 8 × 8 mm	8UD1900-2GA00				–
 12 × 12 mm	–	–	–	–	8UD1900-4GA00
Fixing brackets for shafts					
	3VA9287-0GA80		3VA9487-0GA80		3VA9687-0GA80
Variable depth adapters					
Type					
 8 × 8 mm	3VA9487-0GB10				–

System overview, page 2/20

© Siemens 2022

Manual operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA10 3VA11 3VA12	3VA13 3VA14	3VA15	3VA20 3VA21 3VA22 3VA23 3VA24	3VA25 3VA26
Labeling plates for manual operators						
				3VA9087-0SX10		
Illumination kits for manual operators						
	• 24 V DC voltage					
Version	**Rated current**					
Front mounted rotary operator	100 ... 250 A	8UD1900-0KA10	–	–	–	–
	100 ... 630 A	–	8UD1900-0KA20	–	8UD1900-0KA20	–
	630 ... 1000 A	–	–	8UD1900-0KA30	–	8UD1900-0KA30
Door mounted rotary operator and side wall mounted rotary operator	100 ... 630 A	8UD1900-0KA20	8UD1900-0KA20	8UD1900-0KA20	8UD1900-0KA20	–
	630 ... 1000 A	–	–	–	–	8UD1900-0KA30
Cylinder locks (type Kaba), standard masking plates						
	**Use**	**Key**				
For door mounted rotary operator and side wall mounted rotary operator (in the masking plate), only for locking, not for interlocking	1	8UD1900-0MB01	8UD1900-0MB01	–	8UD1900-0MB01	–
	2	8UD1900-0NB01	8UD1900-0NB01	–	8UD1900-0NB01	–
	3	8UD1900-0PB01	8UD1900-0PB01	–	8UD1900-0PB01	–
	4	8UD1900-0QB01	8UD1900-0QB01	–	8UD1900-0QB01	–
Cylinder locks (type Kaba), EMERGENCY-OFF masking plates						
	**Use**	**Key**				
For door mounted rotary operator and side wall mounted rotary operator (in the masking plate), only for locking, not for interlocking	1	8UD1900-0MB05	8UD1900-0MB05	–	8UD1900-0MB05	–
	2	8UD1900-0NB05	8UD1900-0NB05	–	8UD1900-0NB05	–
	3	8UD1900-0PB05	8UD1900-0PB05	–	8UD1900-0PB05	–
	4	8UD1900-0QB05	8UD1900-0QB05	–	8UD1900-0QB05	–
Cylinder locks (type RONIS)						
	• Includes a lock with 2 keys • For locking or interlocking • For installation on the circuit breaker side in all rotary operators • For mounting in the adapter kit for the accessories compartment • **Note:** The cylinder lock adapter for rotary operators is also needed for locking or interlocking circuit breakers via rotary operators					
	Key					
	1			3VA9980-0VL10		
	3			3VA9980-0VL30		
	4			3VA9980-0VL40		
Cylinder lock adapters for rotary operators						
	• To mount the cylinder lock in the rotary operator (also possible with door mounted rotary operator and side wall mounted rotary operator), on circuit breaker side, NOT in masking plate					
	Rated current					
	100 ... 630 A	3VA9980-0LF20	3VA9980-0LF20	–	3VA9980-0LF20	–
	1000 A	–	–	3VA9680-0LF20	–	3VA9680-0LF20

System overview, page 2/20

© Siemens 2022

System overview, page 2/20

© Siemens 2022

Motor operators

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Side mounted motor operators without stored energy operators (MO310)



- Cover size 45 mm

Addressable via control signals	Isolating features in accordance with IEC/EN 60947-1	Make time, typically For 3VA1	For 3VA2	Break time, typically For 3VA1	For 3VA2	Rated operational power
■	■	<300 ms	–	<300 ms	–	250 W, max. 500 W (60 ms)

Motor operators without stored energy operators (MO320)



Addressable via control signals	Isolating features in accordance with IEC/EN 60947-1	Make time, typically For 3VA1	For 3VA2	Break time, typically For 3VA1	For 3VA2	Rated operational power
■	■	<800 ms (160 A, 250A)	<1000 ms (250 A), <1700 ms (630 A)	<800 ms (160 A, 250A)	<1000 ms (250 A), <1400 ms (630 A)	250 W, max. 500 W (60 ms)

Spare parts kit for MO320 new

Scope of supply
Mounting plate, plug

Motor operators with stored energy operators (SEO520)

- Synchronizable motor operator with optional communication link
- Has two spring assemblies that are used to switch the 3VA2 molded case circuit breaker on and off quickly. This new principle in the MCCB area ensures fast, reliable and easily controllable switching sequences, especially in load transfer switching applications.
- The connection with the COM060 communication module, via a plug-in connection, integrates the SEO520 into the communication environment of the 3VA molded case circuit breakers and ensures that the molded case circuit breaker can also be switched via the supported communication networks and the SENTRON powerconfig and SENTRON powermanager software packages.
- **Note:** On account of the fast switching times, the SEO520 cannot be used with a leading changeover switch LCS.



Addressable via control signals	Isolating features in accordance with IEC/EN 60947-1	Make time, typically For 3VA1	For 3VA2	Break time, typically For 3VA1	For 3VA2	Rated operational power
■	■	–	<80 ms	–	<80 ms	300 W, max. 500 W (60 ms)

Spare parts kit for SEO520 new

Scope of supply
Mounting plate, plug

Spare parts kit for SEO520 with communication new

Scope of supply
Mounting plate, plug, SLC adapter

Mechanical operating cycles counters (for installation in the SEO520)



Mounting	Article No.
For installation in the SEO520	3VA9987-0HX10

Cylinder lock adapters for SEO520



Mounting	Article No.
For installation of cylinder locks in the SEO520	3VA9980-0LF30

Cylinder locks (type RONIS)



- Includes a lock with 2 keys
- For locking the operating mode (Manual/Auto/Lock) of the SEO520

Key	Article No.
1	3VA9980-0VL10
3	3VA9980-0VL30
4	3VA9980-0VL40

System overview, page 2/20

© Siemens 2022

		3VA10	3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14	3VA23 3VA24
Rated control supply voltage	**With communication**						
42 ... 60 V AC, 24 ... 60 V DC	–	–	3VA9117-0HB10	–	–	–	–
110 ... 230 V AC, 110 ... 250 V DC	–	–	3VA9117-0HB20	–	–	–	–
Rated control supply voltage	**With communication**						
24 ... 60 V DC	–	–	3VA9157-0HA10	3VA9257-0HA10	3VA9267-0HA10	3VA9467-0HA10	3VA9467-0HA10
110 ... 230 V AC, 110 ... 250 V DC	–	–	3VA9157-0HA20	3VA9257-0HA20	3VA9267-0HA20	3VA9467-0HA20	3VA9467-0HA20
		–	3VA9157-0HA00	3VA9257-0HA00	3VA9267-0HA00	3VA9467-0HA00	3VA9467-0HA00
Rated control supply voltage	**With communication**						
24 V DC	–	–	–	–	3VA9267-0HC10	–	3VA9467-0HC10 [1] new
42 ... 60 V AC/DC	–	–	–	–	3VA9267-0HC20	–	3VA9467-0HC20 [1] new
110 ... 230 V AC, 110 ... 250 V DC	–	–	–	–	3VA9267-0HC30	–	3VA9467-0HC30 [1] new
24 V DC	Yes	–	–	–	3VA9267-0HC15	–	3VA9467-0HC15 [1] new
110 ... 230 V AC, 110 ... 250 V DC	Yes	–	–	–	3VA9267-0HC35	–	3VA9467-0HC35 [1] new
		–	–	–	3VA9267-0HC00	–	–
		–	–	–	3VA9267-0HC05	–	–

[1] Circuit breakers should be of product version ≥ *E06*. Product versions < *E06* may be subject to a reduced service life (mechanical operating cycles). We recommend upgrading the circuit breaker to a higher product version, if necessary.

Reset mode

All motor operators have the following reset modes:
Reset mode 1: Automatic reset
Reset mode 2: Reset via OFF-signal

The motor operator with SEO520 stored energy operator additionally has:
Reset mode 3: Reset via OFF-signal with additional acknowledge signal

System overview, page 2/20

© Siemens 2022

Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Box terminals

	Connection options		Scope of supply	Cable cross-section, copper stranded
	❶	❷	3 single terminals	1.5 ... 70 mm²
				6 ... 120 mm²
				25 ... 185 mm²
				50 ... 185 mm²
				35 ... 300 mm²
	❶	❷	4 single terminals	1.5 ... 70 mm²
				6 ... 120 mm²
				25 ... 185 mm²
				50 ... 185 mm²
				35 ... 300 mm²

Nut keeper kits

	Connection options		Scope of supply	Max. tap width	Max. tap thickness
	❶	❷	3 terminals	17 mm	6.5 mm
				25 mm	8 mm
				35 mm	10 mm
			Nut keeper kit for 3-pole breakers, 1 terminal cover	50 mm	25 mm
	❶	❷	4 terminals	17 mm	6.5 mm
				25 mm	8 mm
				35 mm	10 mm
			Nut keeper kit for 4-pole breakers, 1 terminal cover	50 mm	28 mm

Circular conductor terminals, 1 cable

	Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [3]	
					Cu	Al
	❶	❷	3 single terminals	1.5 ... 10 mm²	■	–
				1.5 ... 50 mm²	■	–
				10 ... 95 mm²	■	■
				16 ... 185 mm²	■	■
				35 ... 185 mm²	■	■
				50 ... 300 mm²	■	■
	❶	❷	4 single terminals	1.5 ... 10 mm²	■	–
				1.5 ... 50 mm²	■	–
				10 ... 95 mm²	■	■
				16 ... 185 mm²	■	■
				35 ... 185 mm²	■	■
				50 ... 300 mm²	■	■

[1] Maximum current-carrying capacity of cable connection 400 A
Flexible copper bar: No restrictions
[2] Maximum current-carrying capacity of cable connection 400 A
[3] Al cable only tested according to UL486 A/B

System overview, page 2/20

© Siemens 2022

3VA10 3VA11	3VA12	3VA20 3VA21	3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25
3VA9153-0JA11	–	–	–	–	–
–	3VA9253-0JA11	3VA9163-0JA12	3VA9163-0JA12	–	–
–	–	3VA9263-0JA12	3VA9263-0JA12	–	–
–	3VA9253-0JA12	–	–	–	–
–	–	–	–	3VA9483-0JA13 [1]	–
3VA9154-0JA11	–	–	–	–	–
–	3VA9254-0JA11	3VA9164-0JA12	3VA9164-0JA12	–	–
–	–	3VA9264-0JA12	3VA9264-0JA12	–	–
–	3VA9254-0JA12	–	–	–	–
–	–	–	–	3VA9484-0JA13 [1]	–
3VA9113-0QA00	–	–	–	–	–
–	3VA9213-0QA00	3VA9203-0QA00	3VA9203-0QA00	–	–
–	–	–	–	3VA9403-0QA00	–
–	–	–	–	–	3VA9603-0QA00
3VA9114-0QA00	–	–	–	–	–
–	3VA9214-0QA00	3VA9204-0QA00	3VA9204-0QA00	–	–
–	–	–	–	3VA9404-0QA00	–
–	–	–	–	–	3VA9604-0QA00
3VA9113-0JB10	–	–	–	–	–
–	–	3VA9103-0JB11	3VA9103-0JB11	–	–
3VA9113-0JB11	–	–	–	–	–
–	–	3VA9263-0JB12	3VA9263-0JB12	–	–
–	3VA9253-0JB12	–	–	–	–
–	–	–	–	3VA9383-0JB13 [2]	–
3VA9114-0JB10	–	–	–	–	–
–	–	3VA9104-0JB11	3VA9104-0JB11	–	–
3VA9114-0JB11	–	–	–	–	–
–	–	3VA9264-0JB12	3VA9264-0JB12	–	–
–	3VA9254-0JB12	–	–	–	–
–	–	–	–	3VA9384-0JB13 [2]	–

System overview, page 2/20

© Siemens 2022

Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

2

Circular conductor terminals with control wire taps, 1 cable [2]

	Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [3]	
					Cu	Al
	❶	❷	3 single terminals	1.5 ... 10 mm²	■	–
				1.5 ... 50 mm²	■	–
				10 ... 95 mm²	■	■
				16 ... 185 mm²	■	■
				50 ... 185 mm²	■	■
				50 ... 300 mm²	■	■
	❶	❷	4 single terminals	1.5 ... 10 mm²	■	–
				1.5 ... 50 mm²	■	–
				10 ... 95 mm²	■	■
				16 ... 185 mm²	■	■
				50 ... 185 mm²	■	■
				50 ... 300 mm²	■	■

Circular conductor terminals, 2 cables

	Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [3]		Control wire tap
					Cu	Al	
	❶	❷	3 single terminals, 1 short terminal cover	120 ... 300 mm²	■	■	No
							Yes [2]
	❶	❷	4 single terminals, 1 short terminal cover	120 ... 300 mm²	■	■	No
							Yes [2]

Circular conductor terminals, 3 cables

	Connection options		Scope of supply	Cable cross-section	Copper/aluminum stranded [3]		Control wire tap
					Cu	Al	
	❶	❷	3 single terminals, 1 short terminal cover	120 ... 185 mm²	■	■	No
							Yes [2]
	❶	❷	4 single terminals, 1 short terminal cover	120 ... 185 mm²	■	■	No
							Yes [2]

Control wire taps for box terminals [2]



Connection options
❶
❷

Control wire taps for busbars [2]



Connection options
❶
❷

[1] Maximum current-carrying capacity of copper cables 380 A
Maximum current-carrying capacity of aluminum cables 310 A

[2] Maximum current-carrying capacity 15 A
Maximum cable connection up to 2.5 mm²

3) Al cable only tested according to UL 486 A/B

System overview, page 2/20

© Siemens 2022

3VA10 3VA11	3VA12	3VA20 3VA21	3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25
3VA9113-0JG10	–	–	–	–	–
–	–	3VA9103-0JG11	3VA9103-0JG11	–	–
3VA9113-0JG11	–	–	–	–	–
–	–	3VA9263-0JG12	3VA9263-0JG12	–	–
–	3VA9253-0JG12	–	–	–	–
–	–	–	–	3VA9383-0JG13 [1]	–
3VA9114-0JG10	–	–	–	–	–
–	–	3VA9104-0JG11	3VA9104-0JG11	–	–
3VA9114-0JG11	–	–	–	–	–
–	–	3VA9264-0JG12	3VA9264-0JG12	–	–
–	3VA9254-0JG12	–	–	–	–
–	–	–	–	3VA9384-0JG13 [1]	–
–	–	–	–	–	3VA9503-0JB23
–	–	–	–	–	3VA9503-0JG23
–	–	–	–	–	3VA9504-0JB23
–	–	–	–	–	3VA9504-0JG23
–	–	–	–	–	3VA9503-0JB32
–	–	–	–	–	3VA9503-0JG32
–	–	–	–	–	3VA9504-0JB32
–	–	–	–	–	3VA9504-0JG32
3VA9110-0WB00	3VA9200-0WB00	3VA9200-0WB00	3VA9200-0WB00	3VA9480-0WB00	–
3VA9150-0WB00	3VA9280-0WB00	3VA9280-0WB00	3VA9280-0WB00	3VA9480-0WB00	–
3VA9110-0WC00	3VA9200-0WC00	3VA9200-0WC00	3VA9200-0WC00	3VA9480-0WC00	–
3VA9150-0WC00	3VA9280-0WC00	3VA9280-0WC00	3VA9280-0WC00	3VA9480-0WC00	–

System overview, page 2/20

© Siemens 2022

Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Note:
All bus connectors, bus connectors broadened and rear connections are Cu/Sn 6 r plated according to ISO 2093.

2

Front bus connectors



Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
1P	❶	–	1 terminal	22 mm	8 mm
3P	–	❷	3 terminals	6 × 50 mm	8 mm

Front bus connectors, with phase barriers

- 3-pole and 4-pole bus connectors extended only permitted if used with phase barriers!
- Phase barriers are included in the connection technology scope of supply or can be ordered as a spare part (3VA9...-.WA00).






Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	❶	❷	3 terminals, 2 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm
				50 mm	28 mm
4P	❶	❷	4 terminals, 3 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm
				50 mm	28 mm

Bus connectors edgewise, with phase barriers

- 3-pole and 4-pole bus connectors extended only permitted if used with phase barriers!
- Phase barriers are included in the connection technology scope of supply or can be ordered as a spare part (3VA9...-.WA00).






Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	❶	❷	3 terminals, 2 phase barriers	20 mm	6 mm
				25 mm	7 mm
				40 mm	8 mm
4P	❶	❷	4 terminals, 3 phase barriers	20 mm	6 mm
				25 mm	7 mm
				40 mm	8 mm

Front bus connectors broadened, with phase barriers

- 3-pole and 4-pole bus connectors broadened only permitted if used with phase barriers!
- Phase barriers are included in the connection technology scope of supply or can be ordered as a spare part (3VA9...-.WA00).
- Distance between pole centers:
  - 100/160 A = 35 mm
  - 250 A = 45 mm
  - 400/630 A = 70 mm





Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	❶	❷	3 terminals, 2 phase barriers	30 mm	8 mm
				35 mm	10 mm
				60 mm	12.5 mm
				80 mm	10 mm
	–	❷	3 terminals, 2 Phase barriers	80 mm	15 mm
4P	❶	❷	4 terminals, 3 phase barriers	30 mm	8 mm
				35 mm	10 mm
				60 mm	12.5 mm
				80 mm	10 mm

System overview, page 2/20

© Siemens 2022

3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25	3VA26
3VA9151-0QB00	–	–	–	–	–
–	–	–	–	3VA9603-0QB01	–
3VA9153-0QB00	–	–	–	–	–
–	3VA9253-0QB00	3VA9263-0QB00	–	–	–
–	–	–	3VA9483-0QB00	–	–
–	–	–	–	3VA9603-0QB00	–
3VA9154-0QB00	–	–	–	–	–
–	3VA9254-0QB00	3VA9264-0QB00	–	–	–
–	–	–	3VA9484-0QB00	–	–
–	–	–	–	3VA9604-0QB00	–
3VA9153-0QD00	–	–	–	–	–
–	3VA9253-0QD00	3VA9263-0QD00	–	–	–
–	–	–	3VA9483-0QD00	–	–
3VA9154-0QD00	–	–	–	–	–
–	3VA9254-0QD00	3VA9264-0QD00	–	–	–
–	–	–	3VA9484-0QD00	–	–
3VA9153-0QC00	–	–	–	–	–
–	3VA9253-0QC00	3VA9263-0QC00	–	–	–
–	–	–	3VA9483-0QC00	–	–
–	–	–	–	3VA9603-0QC00	–
–	–	–	–	3VA9603-0QC01	3VA9603-0QC01
3VA9154-0QC00	–	–	–	–	–
–	3VA9254-0QC00	3VA9264-0QC00	–	–	–
–	–	–	3VA9484-0QC00	–	–
–	–	–	–	3VA9604-0QC00	–

System overview, page 2/20

© Siemens 2022

Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Note:
All bus connectors broadened, bus connectors and rear connections are Cu/Sn 6 r plated according to ISO 2093.

2

Nut keeper kits, right-angled [1)]





Number of poles	Connection options		Scope of supply	Max. tap width	Max. tap thickness
3P	❶	❷	3 terminals, 2 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm
4P	❶	❷	4 terminals, 3 phase barriers	22 mm	8 mm
				32 mm	10 mm
				40 mm	12.5 mm

Rear connection studs flat







Number of poles	Connection options		Scope of supply
1P	❶	❷	1 short connection stud flat
			1 long connection stud flat
3P	❶	❷	2 short connection studs flat, 1 long connection stud flat
	–	❷	3 short connection studs flat
4P	❶	❷	2 short connection studs flat, 2 long connection stud flat

Rear connection studs round







Number of poles	Connection options		Scope of supply
1P	❶	❷	1 short connection stud round
			1 long connection stud round
3P	❶	❷	1 long connection stud round, 2 short connection studs round
4P	❶	❷	2 long connection studs round, 2 short connection studs round

[1)] Can only be connected to breaker side N, 1, 3, 5

System overview, page 2/20

© Siemens 2022

3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25
3VA9113-0QG00	–	–	–	–
–	3VA9213-0QG00	3VA9223-0QG00	–	–
–	–	–	3VA9403-0QG00	–
3VA9114-0QG00	–	–	–	–
–	3VA9214-0QG00	3VA9224-0QG00	–	–
–	–	–	3VA9404-0QG00	–
3VA9111-0QE10	3VA9211-0QE10	3VA9201-0QE10	3VA9401-0QE10	–
3VA9111-0QE20	3VA9211-0QE20	3VA9201-0QE20	3VA9401-0QE20	–
3VA9113-0QE00	3VA9213-0QE00	3VA9203-0QE00	3VA9403-0QE00	–
–	–	–	–	3VA9603-0QE01
3VA9114-0QE00	3VA9214-0QE00	3VA9204-0QE00	3VA9404-0QE00	–
3VA9111-0QF10	3VA9211-0QF10	3VA9201-0QF10	3VA9401-0QF10	–
3VA9111-0QF20	3VA9211-0QF20	3VA9201-0QF20	3VA9401-0QF20	–
3VA9113-0QF00	3VA9213-0QF00	3VA9203-0QF00	3VA9403-0QF00	–
3VA9114-0QF00	3VA9214-0QF00	3VA9204-0QF00	3VA9404-0QF00	–

System overview, page 2/20

© Siemens 2022

Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Circular conductor terminals, 2P



Connection options		Scope of supply	Number of cables	Cable cross-section	Cu/Al stranded [2] Cu	Cu/Al stranded [2] Al	Control wire tap
❶	–	2 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■	Yes [1]
							No
			6	1.5 … 35 mm²	■	■	No

Circular conductor terminals, 3P

- **Note on 3VA9603-0JJ25, 3VA9603-0JJ35 and 3VA9603-0JJ45:** 1 set of front bus connectors 3VA9603-0QB01 is required for installing circular conductor terminals on the load side.



Connection options		Scope of supply	Number of cables	Cable cross-section	Cu/Al stranded [2] Cu	Cu/Al stranded [2] Al	Control wire tap
❶	–	3 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■	Yes [1]
							No
				50 … 240 mm²	■	■	Yes [1]
							No
			2	25 … 150 mm²	■	■	Yes [1]
							No
				70 … 300 mm²	■	■	Yes [1]
							No
			4	120 … 240 mm²	■	■	Yes [1]
							No
				120 … 300 mm²	■	■	Yes [1]
							No
			6	1.5 … 35 mm²	■	■	No
–	❷	3 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■	Yes [1]
				50 … 240 mm²	■	■	Yes [1]
			2	25 … 150 mm²	■	■	Yes [1]
				70 … 300 mm²	■	■	Yes [1]
				150 … 300 mm²	■	■	Yes [1]
			3	150 … 300 mm²	■	■	Yes [1]
			4	150 … 300 mm²	■	■	Yes [1]
			6	1.5 … 35 mm²	■	■	No

Circular conductor terminals, 4P



Connection options		Scope of supply	Number of cables	Cable cross-section	Cu/Al stranded [2] Cu	Cu/Al stranded [2] Al	Control wire tap
❶	–	4 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■	Yes [1]
							No
				50 … 240 mm²	■	■	Yes [1]
							No
			2	25 … 150 mm²	■	■	Yes [1]
							No
				70 … 300 mm²	■	■	Yes [1]
							No
			4	120 … 240 mm²	■	■	Yes [1]
							No
				120 … 300 mm²	■	■	Yes [1]
							No
			6	1.5 … 35 mm²	■	■	No
–	❷	4 single terminals, 1 extended terminal cover, 1 insulation plate	1	25 … 150 mm²	■	■	Yes [1]
				50 … 240 mm²	■	■	Yes [1]
			2	25 … 150 mm²	■	■	Yes [1]
				70 … 300 mm²	■	■	Yes [1]
			6	1.5 … 35 mm²	■	■	No

[1] Maximum current-carrying capacity 15 A
Maximum cable connection up to 2.5 mm²

[2] Al cable only tested according to UL 486 A/B

System overview, page 2/20

© Siemens 2022

3VA10 3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25
3VA9112-0JC12	–	–	–	–
3VA9112-0JJ12	–	–	–	–
3VA9112-0JF60	–	–	–	–
3VA9113-0JC12	–	–	–	–
3VA9113-0JJ12	–	–	–	–
–	3VA9213-0JC13	3VA9223-0JC13	–	–
–	3VA9213-0JJ13	3VA9223-0JJ13	–	–
–	3VA9213-0JC22	3VA9223-0JC22	–	–
–	3VA9213-0JJ22	3VA9223-0JJ22	–	–
–	–	–	3VA9403-0JC23	–
–	–	–	3VA9403-0JJ23	–
–	–	–	–	3VA9603-0JC43
–	–	–	–	3VA9603-0JJ43
–	–	–	–	3VA9603-0JC44
–	–	–	–	3VA9603-0JJ44
3VA9113-0JF60	3VA9213-0JF60	3VA9223-0JF60	3VA9303-0JF60	–
3VA9153-0JC12	–	–	–	–
–	3VA9253-0JC13	3VA9263-0JC13	–	–
–	3VA9253-0JC22	3VA9263-0JC22	–	–
–	–	–	3VA9483-0JC23	–
–	–	–	–	3VA9603-0JJ25
–	–	–	–	3VA9603-0JJ35
–	–	–	–	3VA9603-0JJ45
3VA9153-0JF60	3VA9253-0JF60	3VA9263-0JF60	3VA9383-0JF60	–
3VA9114-0JC12	–	–	–	–
3VA9114-0JJ12	–	–	–	–
–	3VA9214-0JC13	3VA9224-0JC13	–	–
–	3VA9214-0JJ13	3VA9224-0JJ13	–	–
–	3VA9214-0JC22	3VA9224-0JC22	–	–
–	3VA9214-0JJ22	3VA9224-0JJ22	–	–
–	–	–	3VA9404-0JC23	–
–	–	–	3VA9404-0JJ23	–
–	–	–	–	3VA9604-0JC43
–	–	–	–	3VA9604-0JJ43
–	–	–	–	3VA9604-0JC44
–	–	–	–	3VA9604-0JJ44
3VA9114-0JF60	3VA9214-0JF60	3VA9224-0JF60	3VA9304-0JF60	–
3VA9154-0JC12	–	–	–	–
–	3VA9254-0JC13	3VA9264-0JC13	–	–
–	3VA9254-0JC22	3VA9264-0JC22	–	–
–	–	–	3VA9484-0JC23	–
3VA9154-0JF60	3VA9254-0JF60	3VA9264-0JF60	3VA9384-0JF60	–

System overview, page 2/20




© Siemens 2022

Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

	Version	Number of poles	Mounting location		3VA10	3VA11
Terminal covers specially for fixed-mounted units						
	Short	1P	❶	–	–	3VA9111-0WD10
		2P	❶	–	–	3VA9111-0WD20
		3P	❶	–	3VA9111-0WD30	3VA9111-0WD30
		4P	❶	–	3VA9111-0WD40	3VA9111-0WD40
	Intermediate	3P	❶	–	–	–
		4P	❶	–	–	–
	Extended [1]	2P	❶	–	–	3VA9111-0WF20
		3P	❶	–	3VA9111-0WF30	3VA9111-0WF30
		4P	❶	–	3VA9111-0WF40	3VA9111-0WF40
	Broadened [1]	3P	❶	–	3VA9111-0WG30	3VA9111-0WG30
		4P	❶	–	3VA9111-0WG40	3VA9111-0WG40
Terminal covers specially for plug-in and withdrawable units (spare part)						
	• To provide circuit breaker touch protection • For mounting to the molded case circuit breaker • Included in scope of supply: Cover for the infeed and outgoing terminal					
	Version	Number of poles	Mounting location			
	Short	3P	❶	–	3VA9113-0KB01	3VA9113-0KB01
		4P	❶	–	3VA9114-0KB01	3VA9114-0KB01
Terminal covers for plug-in or withdrawable sockets						
	• For touch protection in the termination area of the plug-in or withdrawable socket • For mounting onto the plug-in or withdrawable socket					
	Version	Number of poles	Mounting location			
	Short	3P	–	❷	–	3VA9153-0KB03
		4P	–	❷	–	3VA9154-0KB03
	Extended [1]	3P	–	❷	–	3VA9153-0KB04
			–	❷	–	3VA9154-0KB04
	Broadened [1]	3P	–	❷	–	3VA9153-0KB05
		4P	–	❷	–	3VA9154-0KB05

[1] Including insulating plate
[2] Suitable for circular conductor terminals 2/4 cables

System overview, page 2/20

© Siemens 2022

3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25
–	–	–	–
–	–	–	–
3VA9211-0WD30	3VA9221-0WD30	3VA9481-0WD30	3VA9601-0WD30
3VA9211-0WD40	3VA9221-0WD40	3VA9481-0WD40	3VA9601-0WD40
–	–	–	3VA9601-0WE30 [2]
–	–	–	3VA9601-0WE40 [2]
–	–	–	–
3VA9211-0WF30	3VA9221-0WF30	3VA9481-0WF30	3VA9601-0WF30
3VA9211-0WF40	3VA9221-0WF40	3VA9481-0WF40	3VA9601-0WF40
3VA9211-0WG30	3VA9221-0WG30	3VA9401-0WG30	–
3VA9211-0WG40	3VA9221-0WG40	3VA9401-0WG40	–
3VA9213-0KB01	3VA9123-0KB01	3VA9353-0KB01	–
3VA9214-0KB01	3VA9124-0KB01	3VA9354-0KB01	–
3VA9253-0KB03	3VA9163-0KB03	3VA9353-0KB03	3VA9603-0KB03
3VA9254-0KB03	3VA9164-0KB03	3VA9354-0KB03	–
3VA9253-0KB04	3VA9163-0KB04	3VA9353-0KB04	–
3VA9254-0KB04	3VA9164-0KB04	3VA9354-0KB04	–
3VA9253-0KB05	3VA9163-0KB05	3VA9353-0KB05	–
3VA9254-0KB05	3VA9164-0KB05	3VA9354-0KB05	–

System overview, page 2/20

© Siemens 2022


Connection technology



❶ For mounting onto the circuit breaker
❷ For mounting on plug-in and withdrawable units

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

Insulating plates





Version	Number of poles	Mounting location		3VA10	3VA11
Standard	2P	❶	–	–	3VA9111-0WJ20
	3P	❶	–	3VA9111-0WJ30	3VA9111-0WJ30
	4P	❶	–	3VA9111-0WJ40	3VA9111-0WJ40
Broadened	3P	❶	–	3VA9111-0WK30	3VA9111-0WK30
	4P	❶	–	3VA9111-0WK40	3VA9111-0WK40

Phase barrier



Mounting location	Scope of supply	3VA10	3VA11
❶ ❷	2 phase barriers	3VA9152-0WA00	
❷	2 phase barriers	–	

Protective sleeve for insulation of rear connections



Mounting location	Scope of supply	3VA10	3VA11
❷	3 protective sleeves	–	

DC insulation plates for 3VA1 for fixed-mounted molded case circuit breakers



Number of poles	3VA10	3VA11
3P	3VA9113-0SG10	
4P	3VA9114-0SG10	

Side plates for 3VA1 for fixed-mounted molded case circuit breakers



Number of poles	Mounting	3VA10	3VA11
2P	On 2-pole molded case circuit breakers	–	3VA9112-0SG20

System overview, page 2/20

© Siemens 2022

3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25	3VA26
–	–	–	–	–
3VA9211-0WJ30	3VA9221-0WJ30	3VA9481-0WJ30	–	–
3VA9211-0WJ40	3VA9221-0WJ40	3VA9481-0WJ40	–	–
3VA9211-0WK30	3VA9221-0WK30	3VA9481-0WK30	–	–
3VA9211-0WK40	3VA9221-0WK40	3VA9481-0WK40	–	–
3VA9252-0WA00	3VA9262-0WA00	3VA9482-0WA00	3VA9602-0WA00	3VA9602-0WA00
–	–	–	3VA9602-0WA05	3VA9602-0WA05
–	–	–	3VA9603-0WH05	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–

System overview, page 2/20

© Siemens 2022

Plug-in and withdrawable technology

Thanks to plug-in and withdrawable technology:

- Molded case circuit breakers can be replaced quickly and easily for overhauls or servicing
- Electrical isolation and clearly visible isolating distance
- The socket can be interlocked to prevent the 3VA molded case circuit breaker from being plugged in or moved in
- Identical connection technology for all molded case circuit breakers, whether they are plug-in, withdrawable or fixed-mounted units

In addition, withdrawable technology offers:

- Transmission of the position of the molded case circuit breaker via communication (CONNECT, TEST, DISCONNECT)
- The ability to test the auxiliary and control circuit connections in the test position of the withdrawable unit, without contacted main current paths
- Transmission of the state of the molded case circuit breaker (ON, OFF, TRIP) via the COM060 communication module

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Withdrawable units, complete kits						
	• **Scope of supply:** – Withdrawable socket – Withdrawable unit, conversion kit – Mounting screw kit • **Note:** The crank for the withdrawable unit must be ordered separately.					
	Number of poles					
	3P	–	3VA9213-0KD00	3VA9123-0KD00	3VA9323-0KD00	–
	4P	–	3VA9214-0KD00	3VA9124-0KD00	3VA9324-0KD00	–
Withdrawable units, conversion kits						
	• **Scope of supply:** – Screw-fastened terminal covers for molded case circuit breakers – Side panels – Plug-in contacts – Cable cages – Autotrip plunger • **Note:** The crank for the withdrawable unit must be ordered separately.					
	Number of poles					
	3P	–	3VA9213-0KD10	3VA9123-0KD10	3VA9323-0KD10	–
	4P	–	3VA9214-0KD10	3VA9124-0KD10	3VA9324-0KD10	–

System overview, page 2/20

© Siemens 2022


		3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Plug-in units, complete kits						
	• **Scope of supply:** – Plug-in base – Plug-in unit, conversion kit – Mounting screw kit • **Note on 3VA9603-0KP00:** – The circuit breaker must be equipped with additional threaded holes for installing the components of the plug-in unit. When ordering the circuit breaker, specify „with plug-in" accordingly. – An undervoltage release (UVR) (article number 3VA9908-0BB..) is required in the circuit breaker in order to provide the protection trip specified in the standard for unplugging the circuit breaker under load. The required UVR voltage version must be ordered in addition.					
	Number of poles					
	3P	3VA9113-0KP00	3VA9213-0KP00	3VA9123-0KP00	3VA9323-0KP00	3VA9603-0KP00
	4P	3VA9114-0KP00	3VA9214-0KP00	3VA9124-0KP00	3VA9324-0KP00	–
Plug-in units, conversion kits						
	• **Scope of supply:** – Screw-fastened terminal covers for molded case circuit breakers – Plug-in contacts – Cable cages – Autotrip plunger					
	Number of poles					
	3P	3VA9113-0KP10	3VA9213-0KP10	3VA9123-0KP10	3VA9323-0KP10	–
	4P	3VA9114-0KP10	3VA9214-0KP10	3VA9124-0KP10	3VA9324-0KP10	–
Plug-in units, conversion kits with blade contacts						
	• **Scope of supply:** – 6× blade contacts – Guide frame for circuit breaker – 2× cover for blade contacts – Position signaling switch – Connecting cable for auxiliary circuits • **Note:** The circuit breaker must be equipped with additional threaded holes for installing the components of the plug-in unit. When ordering the circuit breaker, specify „with plug-in" accordingly.					
	Number of poles					
	3P	–	–	–	–	3VA9603-0KP10

System overview, page 2/20

© Siemens 2022

Plug-in and withdrawable technology


For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

		3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Cable cages for plug-in/withdrawable units (spare part)						
	• For routing of the required cables from the internal accessories on the back of the circuit breaker					
	Number of poles					
	3P/4P	3VA9157-0KB02	3VA9257-0KB02	3VA9167-0KB02	3VA9367-0KB02	–
Door feedthroughs						
		–	3VA9257-0KT00	3VA9167-0KT00	3VA9367-0KT00	–
Autotrip plungers (spare part)						
	**Version**					
	Plug-in unit	3VA9157-0KP81	3VA9257-0KP81	3VA9267-0KP81	3VA9457-0KP81	–
	Withdrawable unit	–	3VA9257-0KD81	3VA9267-0KD81	3VA9457-0KD81	–

System overview, page 2/20

© Siemens 2022

Accessories

			3VA11	3VA12	3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
Communication links for withdrawable unit							
	**Scope of supply**						
	Set of cables with three special position signaling switches, 3VA9987-0KC10 connecting cables		3VA9987-0KC00	3VA9987-0KC00	3VA9987-0KC00	3VA9987-0KC00	–
Position signaling switches for withdrawable unit and plug-in unit							
	• **Note on 3VA9603-0KB00:** 4 position signaling switches can be installed in the plug-in base.						
							
			3VA9987-0KB00	3VA9987-0KB00	3VA9987-0KB00	3VA9987-0KB00	3VA9603-0KB00
Connecting cables							
	**Use**						
	Connection of position signaling switches for communication with COM060		3VA9987-0KC10	3VA9987-0KC10	3VA9987-0KC10	3VA9987-0KC10	–
	For auxiliary circuits		–	–	–	–	3VA9603-0KP80
Cranks for withdrawable units							
	**Version**	**Scope of supply**					
	Insulated	Including crank holder	3VA9987-0KD81	3VA9987-0KD81	3VA9987-0KD81	3VA9987-0KD81	–
Auxiliary circuit connectors							
	• Each auxiliary circuit connector is designed for 4 cables.						
	Version						
	For all withdrawable units		3VA9987-0KD80	3VA9987-0KD80	3VA9987-0KD80	3VA9987-0KD80	–
	For all plug-in units		3VA9987-0KP80	3VA9987-0KP80	3VA9987-0KP80	3VA9987-0KP80	–
Cylinder locks							
	• **Scope of supply:** – 1 lock with 2 keys • For locking or interlocking • **Note:** Not for 3VA15/3VA25!						
	Key	**Lock number**					
	1	1	3VA9980-0VL10	3VA9980-0VL10	3VA9980-0VL10	3VA9980-0VL10	–
	3	3	3VA9980-0VL30	3VA9980-0VL30	3VA9980-0VL30	3VA9980-0VL30	–
	4	4	3VA9980-0VL40	3VA9980-0VL40	3VA9980-0VL40	3VA9980-0VL40	–
Cylinder lock adapters for withdrawable units							
	• To prevent unauthorized withdrawal or insertion of the circuit breaker into the withdrawable unit • Circuit breaker can be locked in the CONNECT, TEST and DISCONNECT positions						
	Use						
	For fitting a cylinder lock in the right-hand side wall of the withdrawable unit		3VA9980-0LF40	3VA9980-0LF40	3VA9980-0LF40	3VA9980-0LF40	–

System overview, page 2/20

© Siemens 2022

Residual current devices RCD

According to IEC 60947-2 Annex B (Type A, Type B) and according to DIN VDE 0664-400 (Type B+)

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va-configurator

2

Residual current devices (RCD) for switch disconnectors and molded case circuit breakers

- Mounted onto the side (left)





Number of poles	Type	Sensitivity [3]	Rated residual response current $I_{\Delta n}$	Limit value of non-tripping time Δt	Rated operational voltage U_e	Fault current frequency	Pre-alarm			Trip alarm		
									COM	TRIP		COM
3-pole	RCD510	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
4-pole	RCD310	Type A	0.03 ... 5 A	Instantaneous	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD510	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–

Residual current devices (RCD) for molded case circuit breakers

- Mounted below (under trip unit)





Number of poles	Type	Sensitivity [3]	Rated residual response current $I_{\Delta n}$	Limit value of non-tripping time Δt	Rated operational voltage U_e	Fault current frequency	Pre-alarm			Trip alarm		
									COM	TRIP		COM
3-pole	RCD520	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD520B [1][4]	Type B	0.03 ... 5 A	0 ... 10 s	127 ... 690 V AC	0 ... 100 kHz	1	■	–	■	■	–
		Type B+	0.03 ... 0.3 A									
	RCD820 [2]	Type A	0.03 ... 30 A [5]	0 ... 10 s	127 ... 690 V AC	50/60 Hz	2	■	■	■	■	■
4-pole	RCD320	Type A	0.03 ... 5 A	Instantaneous	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD520	Type A	0.03 ... 5 A	0 ... 3 s	127 ... 480 V AC	50/60 Hz	1	–	–	■	■	–
	RCD520B [4]	Type B	0.03 ... 5 A	0 ... 10 s	127 ... 690 V AC	0 ... 100 kHz	1	■	–	■	■	–
		Type B+	0.03 ... 0.3 A									
	RCD820 [2]	Type A	0.03 ... 30 A [5]	0 ... 10 s	127 ... 690 V AC	50/60 Hz	2	■	■	■	■	■

Residual current releases (spare part)



Version	Scope of supply
For RCD310 or RCD510	RCR, RCR-RCD cables

RCD820 - 3VA2 ETU connecting cables (spare part)

- Connecting cable between the RCD820 and the electronic trip unit (ETU) of a 3VA2



Version	Scope of supply
For RCD820	1× RCD-ETU cable

[1] 3-pole version in 4-pole enclosure
[2] With energy infeed from below, the required auxiliary switch (AUX) must be ordered separately
[3] Type A: pulse current sensitive, type B/B+: universal current sensitive
[4] Sensitivity selectable for type B/B+
[5] $I_{\Delta n}$ = 30A: type AC
[6] If the molded case circuit breaker has no box terminals as connections, a set of box terminals must be ordered additionally for the taps below the thermal-magnetic trip units.
[7] 1 set of box terminals is included in scope of supply of the RCD510 (3VA921.-0RS20).

Modular residual current devices type A/B (according to IEC 60947-2 Annex M), see monitoring devices, from page 11/1 onwards

System overview, page 2/20

© Siemens 2022

			3VA11	3VA12	3VA20 3VA21	3VA22	3VA23	3VA24	3VA10 3VA13 3VA14 3VA15 3VA25 3VA26
Monitoring mode (tripping can be disabled as an option)	**Remote test/ remote reset**	**Communication-capable**							
■	–	–	3VA9113-0RS20 [6]	3VA9213-0RS20 [7]	–	–	–	–	–
■	–	–	3VA9114-0RS10 [6]	–	–	–	–	–	–
■	–	–	3VA9114-0RS20 [6]	3VA9214-0RS20 [7]	–	–	–	–	–
Monitoring mode (tripping can be disabled as an option)	**Remote test/ remote reset**	**Communication-capable**							
–	–	–	3VA9113-0RL20	3VA9213-0RL20	–	–	–	–	–
■	–	–	3VA9113-0RL21	–	–	–	–	–	–
■	■	■	–	–	3VA9123-0RL30	3VA9223-0RL30	3VA9323-0RL30	3VA9423-0RL30	–
–	–	–	3VA9114-0RL10	–	–	–	–	–	–
–	–	–	3VA9114-0RL20	3VA9214-0RL20	–	–	–	–	–
■	–	–	3VA9114-0RL21	–	–	–	–	–	–
■	■	■	–	–	3VA9124-0RL30	3VA9224-0RL30	3VA9324-0RL30	3VA9424-0RL30	–
			3VA9988-0BR10	3VA9988-0BR10	–	–	–	–	–
			–	–	3VA9927-0RC00	3VA9927-0RC00	3VA9927-0RC00	3VA9927-0RC00	–

System overview, page 2/20

© Siemens 2022

Communication

Measurement function [1]			ETU 5-series	ETU 8-series	Display in ETU	Display DSP800	Communication COM800/COM100
Current							
Phase and neutral conductor currents	I_1, I_2, I_3, I_N	A	■	■	□	□	■
Residual current to ground	I_g	A	■	■	□	□	■
Phase with highest load		A	■	■	□	□	■
Average value over the three phase currents	$I_{leading\ axis} = (I_1 + I_2 + I_3)/3$	A	–	■	–	□	■
Asymmetry of the phase currents	I_{nba}	%	–	■	–	□	■
THD of the 3 phases	$THDI_1$, $THDI_2$, $THDI_3$	%	–	■	–	□	■
Voltage							
Phase voltages incl. average value	U_{12}, U_{23}, U_{31}, U_{phavg}	V	–	■	□	□	■
Voltages to N conductor incl. average value	U_{1N}, U_{2N}, U_{3N}, U_{Navg}	V	–	■	–	□	■
Voltage unbalance		%	–	■	–	□	■
THD phase/phase and phase/N	$THDI_1$, $THDI_2$, $THDI_3$	%	–	■	–	□	■
Power							
Active power, total and per phase	P_1, P_2, P_3, P_{tot}	kW	–	■	□ (P_{tot})	□	■
Apparent power, total and per phase	S_1, S_2, S_3, S_{tot}	kVA	–	■	–	□	■
Reactive power, total and per phase	Q_1, Q_2, Q_3, Q_{tot}	kVAr	–	■	□	□	■
Power factor of the fundamental	P_{F1}, P_{F2}, P_{F3}, P_{Favg}		–	■	□ (PF_{avg})	□	■
Energy							
Active energy, infeed and feedback	E_p	kWh	–	■	□	□	■
Reactive energy, infeed and feedback	E_q	kVArh	–	■	–	□	■
Apparent energy	E_s	kVAh	–	■	–	□	■
Frequency							
Present frequency	f	Hz	–	■	□	□	■
Maximum pointer function							
Min./max. current, voltage, power	With time stamp	–	–	–	–	–	■
Condition Monitoring [2]							
Operating cycles counter	CLOSE-OPEN cycle		■	■	–	–	■
Operating hours		h	■	■	–	–	■
Trip counter	Differentiated by trip causes		■	■	–	–	■
Health indicator [3]	Incl. contact state	%	■	■	■	–	■
Remaining life time [3]		Time	■	■	–	–	■


■ Available □ Displayable – Not available

[1] Depending on ETU version
[2] Only available with continuous external power supply and COM060 and COM800/100 communication interfaces
[3] Firmware 4.4 or higher of ETU, COM060, COM800/100 required

	3VA20 3VA21 3VA22	3VA23 3VA24 3VA25 3VA26
COM060 communication modules		
 • For mounting in the right-hand accessories compartment of the 3VA2 molded case circuit breaker (including ETU power supply) • Including a T-Connector		
Use		
Communication to the COM800/COM100 data concentrator via 3VA line	3VA9187-0TB10	3VA9387-0TB10
SLC adapters (spare part)		
 **Scope of supply**		
5 units	3VA9187-0TB60	3VA9387-0TB60
24 V modules		
 • 24 V DC • For mounting in the right-hand accessories compartment of the 3VA2		
Use		
Optional energy supply for the ETU, also includes continuous operation of the ETU display and the measurement function of the ETU 8-series	3VA9187-0TB50	3VA9387-0TB50

System overview, page 2/20

© Siemens 2022

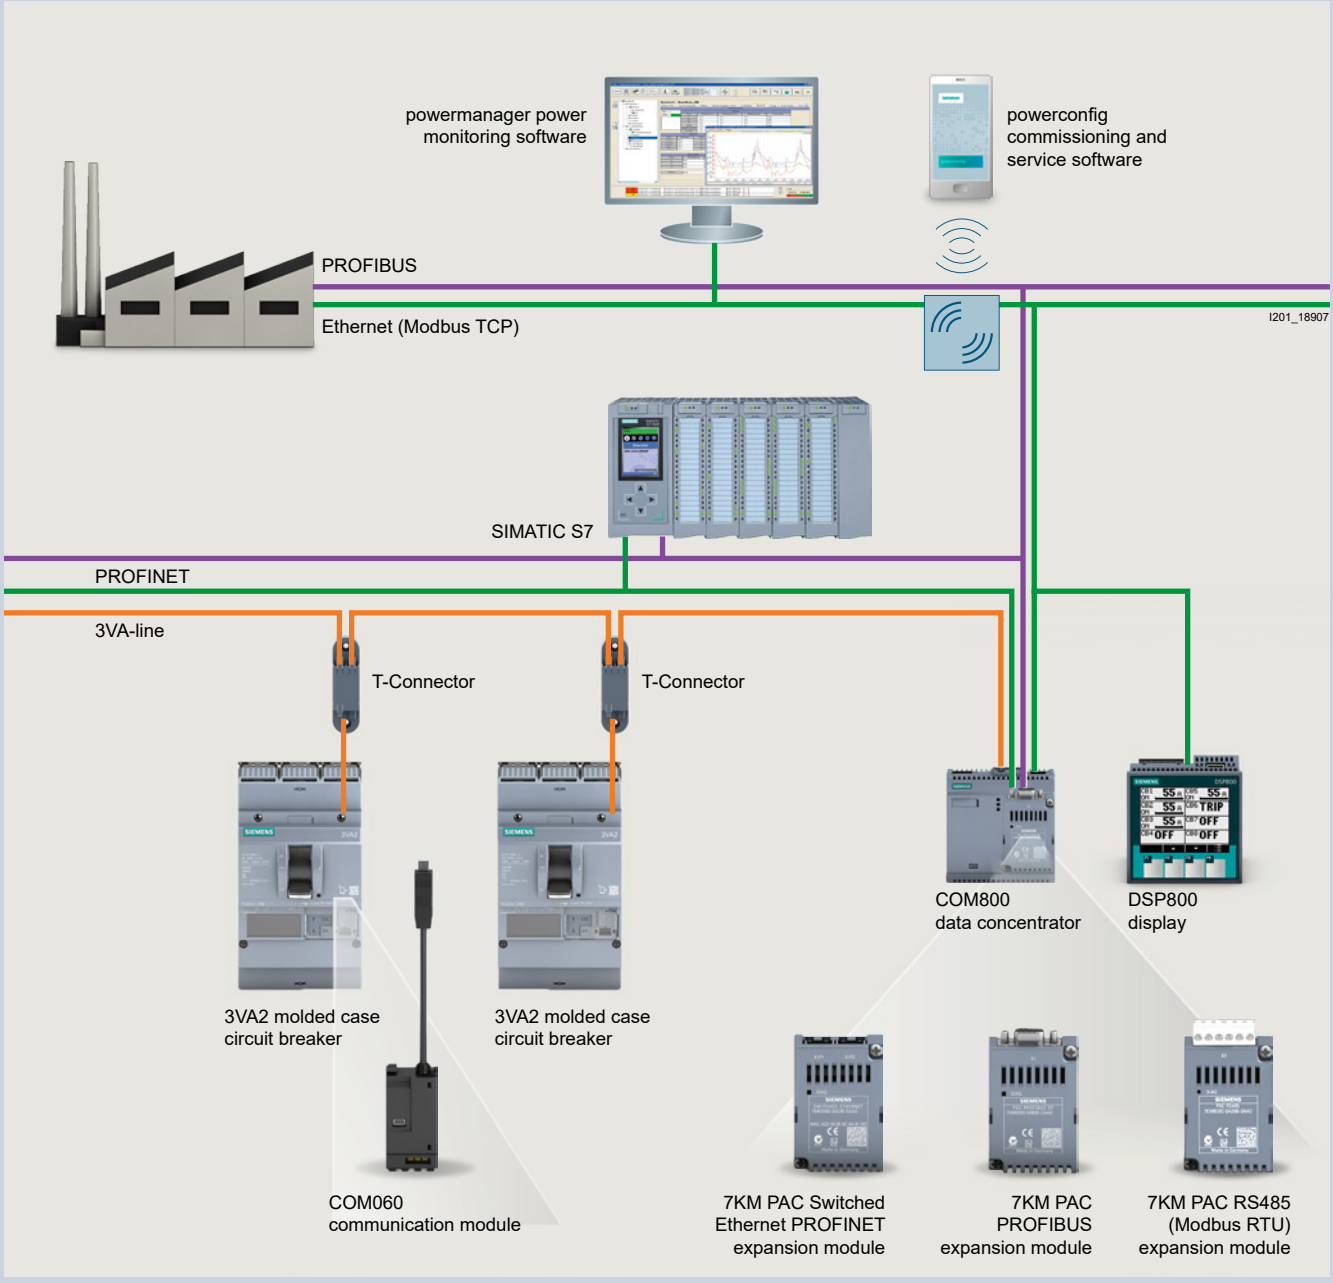

System overview, page 2/20

© Siemens 2022

Communication

Data concentrator

COM800 data concentrators



Version	Article No.
Central communication module for connection of up to eight 3VA2 molded case circuit breakers via the 3VA line, Ethernet 10/100 Mbps interface module socket for inserting an optional PROFIBUS DP or PROFINET module, 2 terminating resistors	3VA9987-0TA10

COM100 data concentrators



Version	Article No.
Central communication module for connection of a 3VA2 molded case circuit breaker via the 3VA line, Ethernet 10/100 Mbps interface module socket for inserting an optional PROFIBUS DP or PROFINET module, 2 terminating resistors	3VA9987-0TA20

7KM PAC PROFIBUS DP expansion modules



Use	Article No.
Used for connecting the COM800/COM100 data concentrator, and the 3VA molded case circuit breakers connected to it, to PROFIBUS DPV1. Supplies the state and measured variables of the 3VA molded case circuit breaker for the PROFIBUS DP master. Receives information (e.g. commands) from the PROFIBUS DP master and transmits them to the 3VA molded case circuit breaker.	7KM9300-0AB01-0AA0

7KM PAC Switched Ethernet PROFINET expansion modules



Use	Article No.
Used for connecting the COM800/COM100 data concentrator, and the connected 3VA molded case circuit breakers, to PROFINET via two Ethernet interfaces. Supplies the state and measured variables of the 3VA molded case circuit breakers to PROFINET via the PROFINET IO, PROFIenergy and Modbus TCP protocols.	7KM9300-0AE02-0AA0

7KM PAC RS485 Modbus RTU expansion modules



Use	Article No.
Used for connecting the COM800/COM100 data concentrator, and the 3VA molded case circuit breakers connected to it, to Modbus RTU. Supplies the state and measured variables of the 3VA molded case circuit breaker for the Modbus RTU master. Receives information (e.g. commands) from the Modbus RTU master and transmits them to the 3VA molded case circuit breaker.	7KM9300-0AM00-0AA0

Interfaces to IEC 61850

Purpose: The SICAM A8000 smart data concentrator connects the circuit breakers from the SENTRON portfolio via the Modbus TCP/IP protocol and transmits data via communication protocols (e.g.: IEC 61850, IEC 60870-5-104, IEC 60870-5-101, Modbus and DNP) to higher-level systems.






Type	Processor assembly	Operating voltage	Article No.
SICAM CP-8021 [1]	4 interfaces		6MF2802-1AA00
SICAM PS-8620	–	24 ... 60 V DC (12 W)	6MF2862-0AA00
SICAM PS-8622	–	110 ... 220 V DC (12 W)	6MF2862-2AA00

[1] Dimensioned for device quantities of 8× 3VA and 1× 3W

You will find further information at:
www.siemens.com/sicam-a8000

System overview, page 2/20

© Siemens 2022

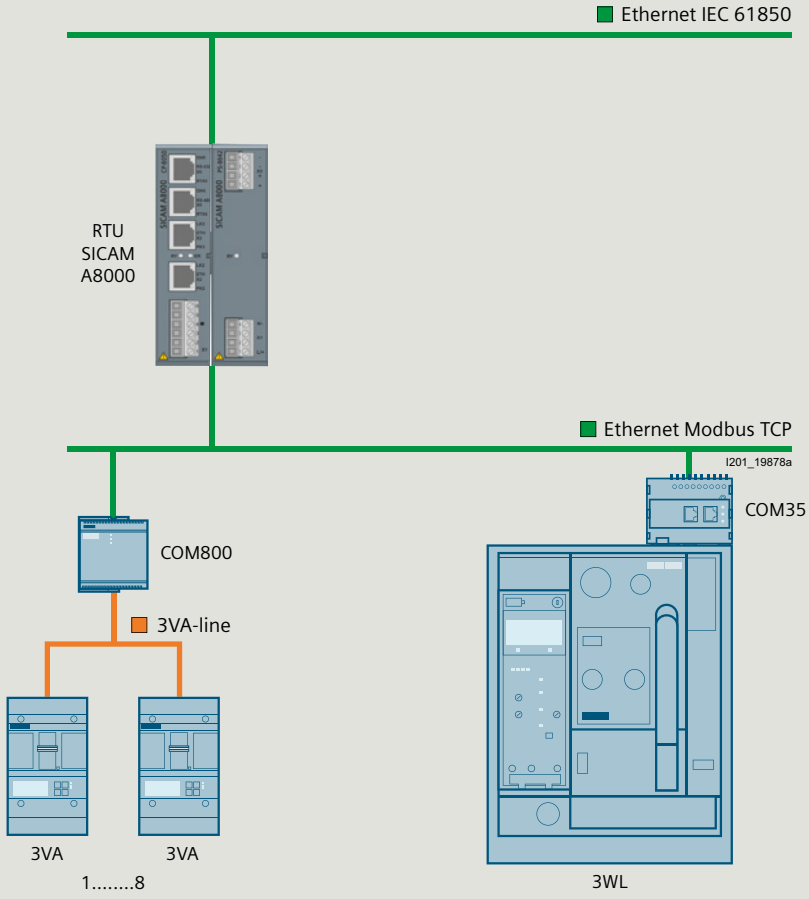

© Siemens 2022

Communication

Accessories for communication

T-connectors (spare part)



Use	Article No.
Provides a stub connection to the COM060 and loops through to the next circuit breaker.	3VA9987-0TG10

DIN-rail adapters



Use	Article No.
For snapping the T-Connector onto a DIN rail.	3VA9987-0TG11

Prefabricated connecting cables, T-connector – T-connector or T-connector – COM800/COM100



Length	Article No.
0.4 m	3VA9987-0TC10
1 m	3VA9987-0TC20
2 m	3VA9987-0TC30
4 m	3VA9987-0TC40

Prefabricated connecting cables for extending the COM060 – T-connector stub connection



Length	Article No.
0.4 m	3VA9987-0TF20
0.8 m	3VA9987-0TF10

Additional bus terminating resistors (spare part)



Use	Article No.
For COM800 and COM060	3VA9987-0TE10

Voltage tap to external N conductors (spare part)



Use	Article No.
Cable for connection of the star point for the measurement function of the 8-series ETU, length 1.5 m	3VA9987-0UC10

External current transformer for N conductors



Use	Rated current	Article No.
For 3VA2 3-pole molded case circuit breakers, for 5 and 8-series ETUs, including connecting cables	25 ... 150 A	3VA9007-0NA10
	160 ... 350 A	3VA9107-0NA10
	400 ... 630 A	3VA9307-0NA10

External current transformers as straight-through transformers



Rated current	Article No.
25 ... 150 A	3VA9077-0NA10
160 ... 350 A	3VA9177-0NA10
400 ... 630 A	3VA9377-0NA10
600 ... 1250 A	3VA9677-0NA10

Connecting cables for external current transformers for N conductors (spare part)



Article No.
3VA9907-0NB10

Display

DSP800 displays



Use	Article No.
For displaying the status and measured values of up to eight devices • 3VA2 via COM800/100 • 3VA27 • 3WL10 • 3WL11-13 • PAC3200T	3VA9987-0TD10

System overview, page 2/20

© Siemens 2022

External function box

EFB300 external function boxes



- 4 digital outputs for information output
- 1 digital input
- ZSI functionality
- S0 interface
- Including cable 1.5 m in length

Use	Article No.
For connection to the ETU of 3VA2 molded case circuit breakers	3VA9987-0UA10

Connecting cables for EFB300



Length	Use	Article No.
1.5 m	For 3VA2 with EFB	3VA9987-0UB10
3.0 m	For 3VA2 with EFB	3VA9987-0UB20
	For 3VA2 with EFB and RCD820	3VA9987-0UB30

Test devices

TD300 test devices



Use	Connection	Article No.
For activation of the ETU and initiation of a test tripping operation	On the front interface of the ETU	3VA9987-0MA10

TD400 test devices [1]



- Energy supply via batteries or the USB-C interface
- USB-C interface for connecting a PC with SENTRON powerconfig
- Bluetooth interface for connection to a PC, smartphone or tablet
- ETU parameterization
- Including adapter and connecting cable to 3VA2 molded case circuit breaker and IEC 3WL (ETU release 2)
- Including case

Use	Connection	Article No.
Initiation of a test tripping operation	On the front interface of the ETU (3VA and IEC 3WL ETU release 2)	3VW9011-0AT40

TD500 test devices



- USB interface for connecting a PC with SENTRON powerconfig
- Including external power supply
- Including connecting cable to 3VA2 molded case circuit breaker

Use	Connection	Article No.
Initiation of various test tripping operations (LSING), ETU parameterization	On the front interface of the ETU	3VA9987-0MB10

External power supplies for TD500 (spare part)



Voltage	Article No.
110 ... 240 V	3VA9987-0MX10

Connecting cables for connecting TD500 to 3VA2 molded case circuit breakers (spare part)





	Article No.
	3VA9987-0MY10

[1] A country-specific radio license is required to operate the Bluetooth interface. Before activating the Bluetooth function, ensure that the license is available: www.siemens.com/lowvoltage/certificates

System overview, page 2/20

© Siemens 2022

Locking, blocking and interlocking

			3VA11	3VA12	3VA20 3VA21 3VA22
Locking					
• The locking provisions make it possible to lock the 3VA molded case circuit breakers in either the OFF or the ON operating position.					
Version					
 Cylinder lock	Key 1 (lock number 1)			3VA9980-0VL10	
	Key 3 (lock number 3)			3VA9980-0VL30	
	Key 4 (lock number 4)			3VA9980-0VL40	
 Adapter kit for mounting the cylinder lock (type RONIS) in the accessories compartment of the molded case circuit breaker			3VA9157-0LF10	3VA9257-0LF10	3VA9167-0LF10
 Locking provision for handle operating mechanism			3VA9088-0LB10		3VA9388-0LB10
Interlocking					
• Using interlocking technology, it is possible to mutually interlock two or more molded case circuit breakers. • The interlock system is designed to ensure that no more than one molded case circuit breaker can be operated at a time. • The following methods of interlocking can be used on 3VA molded case circuit breakers: – Front interlock – Rear interlock					
Version					
 Cylinder lock	Key 1 (lock number 1)			3VA9980-0VL10	
	Key 3 (lock number 3)			3VA9980-0VL30	
	Key 4 (lock number 4)			3VA9980-0VL40	
 Sliding bar interlock			3VA9158-0VF30	3VA9258-0VF30	3VA9168-0VF30
 Module for handle interlocking module with bowden cable			3VA9157-0VF10	3VA9257-0VF10	3VA9167-0VF10
Bowden cable		Length 0.6 m		3VA9980-0VC10	
		Length 1.0 m		3VA9980-0VC20	
		Length 1.5 m		3VA9980-0VC30	
 Rear interlock with rod		Circuit breaker, fixed-mounted		3VA9088-0VM10	
		Plug-in/withdrawable technology		3VA9088-0VM30	
 Mounting frame for rear interlock with rod		Profile rails		3VA9088-0VK10	
		Mounting plate	3VA9158-0VK20	3VA9258-0VK20	3VA9268-0VK20

[1] With mounting frame for rear interlock.
Can be used with breaker 3VA15 from "E02" and 3VA25 from "E05" (Line protection CB with TMTU, 3-Series ETU and 5-Series ETU)

System overview, page 2/20

© Siemens 2022

3VA13
3VA14 | 3VA15
3VA23 | 3VA25
3VA24 | 3VA26

Locking

		Use in	Locking in OFF position	Locking in ON position	Front mounting	Rear mounting	Interlocked breakers
3VA9980-0VL10 3VA9980-0VL30 3VA9980-0VL40		Breakers, motor-drive mechanisms, manual operators, withdrawable technology	■	■	■	–	–
3VA9367-0LF10	3VA9587-0LF10	Circuit breaker	■	■	■	–	–
3VA9388-0LB10	3VA9588-0LB10	Circuit breaker	■	■	■	–	–

Interlocking

		Use in	Locking in OFF position	Locking in ON position	Front mounting	Rear mounting	Interlocked breakers
3VA9980-0VL10 3VA9980-0VL30 3VA9980-0VL40	–	Breakers, manual operators	■	■	■	–	Unlimited
3VA9368-0VF30	–	Circuit breaker	–	–	■	–	3
3VA9367-0VF10	3VA9587-0VF10	Circuit breaker	–	–	■	–	3
3VA9980-0VC10 3VA9980-0VC20 3VA9980-0VC30							
3VA9088-0VM10	3VA9588-0VM10 [1]	Circuit breaker, fixed-mounted	–	–	–	■	2
3VA9088-0VM30	–	Plug-in/withdrawable technology					
3VA9088-0VK10	–		–	–	–	■	
3VA9468-0VK20	–						

System overview, page 2/20

© Siemens 2022

Cover frames and mounting

		3VA10 3VA11	3VA12
Cover frames for door cut-outs for molded case circuit breakers			
			
Number of poles	**Door cut-out with trip unit**		
3P	No	3VA9053-0SB10	3VA9253-0SB10
	Yes	3VA9053-0SB20	3VA9253-0SB20
4P	No	3VA9054-0SB10	3VA9254-0SB10
	Yes	3VA9054-0SB20	3VA9254-0SB20
Cover frames for MO320 motor operators			
			
Use			
MO320 motor operator		3VA9053-0SB20	3VA9257-0SB30
Motor operator with SEO520 stored energy operator		–	–
Cover frames for RCD320, RCD520 and RCD820 residual current devices			
			
Number of poles			
3P		3VA9053-0SB10	3VA9253-0SB10
4P		3VA9054-0SB10	3VA9254-0SB10
Cover frames for front mounted rotary operators			
			
		3VA9053-0SB10	3VA9253-0SB10
Cover frames for door feedthroughs			
			
		–	3VA9253-0SB20
Labeling plates for cover frame			
			
			3VA9087-0SX10
DIN-rail adapter for 3VA1 molded case circuit breakers			
			
Number of poles			
1P		3VA9181-0SH10 [1]	–
2P		3VA9182-0SH10	–
3P and 4P		3VA9187-0SH10	–
3P and 4P in connection with RCD310 or RCD510		3VA9187-0SH20	–
Mounting screw kits			
			
Use	**Number of poles**		
For fixed-mounted breakers	1P	3VA9111-0SS10	–
	2P and 3P (apart from 125 A/160 A with 55 kA and 70 kA)	3VA9116-0SS10	
	3P (125 A/160 A with 55 kA and 70 kA) and 4P	3VA9114-0SS10	
	3P	–	–
	4P	–	–
	3P and 4P	–	–
For plug-in units	–	3VA9114-0SS10	
For plug-in and withdrawable technology	–	–	3VA9114-0SS10

[1] For 1-pole 3VA11 molded case circuit breakers up to 25 kA

Adapter for 60 mm busbar system (8US), see page 13/26

System overview, page 2/20

© Siemens 2022

3VA20 3VA21 3VA22	3VA13 3VA14 3VA23 3VA24	3VA15 3VA25 3VA26
3VA9163-0SB10	3VA9383-0SB10	3VA9503-0SB10
3VA9163-0SB20	3VA9363-0SB20	3VA9503-0SB20
3VA9164-0SB10	3VA9384-0SB10	3VA9504-0SB10
3VA9164-0SB20	3VA9364-0SB20	3VA9504-0SB20
3VA9257-0SB30	3VA9387-0SB30	–
3VA9167-0SB30	–	–
3VA9253-0SB10	3VA9303-0SB40	–
3VA9254-0SB10	3VA9304-0SB40	–
3VA9163-0SB10	3VA9383-0SB10	3VA9503-0SB50
3VA9253-0SB20	3VA9353-0SB20	–
	3VA9087-0SX10	
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
3VA9126-0SS10	–	–
3VA9124-0SS10	–	–
–	3VA9328-0SS10	3VA9517-0SS10
–	–	3VA9603-0SS10
3VA9124-0SS10	3VA9328-0SS10	–

System overview, page 2/20

© Siemens 2022

System overview

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

Molded case circuit breakers




Handle



Stored energy operator

Trip units



Electronic trip unit (ETU)

Accessories



Communication module



Rating plugs



Breaker Connect module



Test devices and breaker data adapters

Main conductor connections



Rear vertical/ horizontal



Rear broadened



Front extended



Front broadened




Cable lug

Accessories



Phase barriers



Terminal cover

Motors



Spring charging motor

Accessories



Mechanical operating cycles counter (MOC)

Auxiliary releases/closing coils



Undervoltage release (UVR)/ Shunt trip (ST)



Closing coil (CC)/ Remote reset magnet (RR)

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022

Auxiliary switches


Tripped signaling switch



Ready-to-close signaling switch (RTC)


Auxiliary switch ON/OFF (AUX)


Tripped signaling switch (S24)


Trip alarm switch (TAS)

Other accessories


Interlocking sets


Locking provision


Locking mechanism


Door sealing frame


Protective cover


Mechanical interlock


Manual operator

Note:
You will find a detailed range of accessories in the Accessories and spare parts section.

© Siemens 2022

Structure of the article numbers

Basic configuration with handle operating mechanism

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

	6	7		8	9	10	11	12		13	14	15	16
3VA27			–						–				

Molded case circuit breakers and ETUs

Max. rated current $I_{n\,max}$	800 A			8 0		
	1000 A			1 0		
	1250 A			1 2		
	1600 A			1 6		
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	Handle operating mechanism	55 kA		5		
		85 kA		6		
		110 kA		7		
Non-automatic air circuit breakers	Without measurement function, without a communication link	Without trip unit			A	A
Circuit breakers, ETU 3-series	Without measurement function, without a communication link	With trip unit	ETU320 LI	(N) [1]	A	B
			ETU350 LSI	(N) [1]	A	C
			ETU360 LSIG	(N) [1]	A	D
Circuit breakers, ETU 6-series		With trip unit	ETU650 LSI	(N) [1]		E
			ETU660 LSIG	(N) [1]		F
	Without a communication link	Without measurement function			A	
	With a communication link	Without measurement function			B	
		Measurement function Basic	Voltage tap on bottom		C	
			Voltage tap on top		D	
		Measurement function Advanced	Voltage tap on bottom		E	
			Voltage tap on top		F	

[1] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or 4-pole breakers

Number of poles	Fixed-mounted versions	3-pole		0
		4-pole	Neutral left	1
			Neutral right	2
	Withdrawable	3-pole		3
		4-pole	Neutral left	4
			Neutral right	5

Connections

Type of mounting	Withdrawable	Withdrawable circuit breaker without guide frame (guide frame must be ordered separately)	0
	Fixed-mounted breaker/ withdrawable breaker	Rear vertical connection	1
		Rear horizontal connection	2
		Front terminal for main circuit connection	3
		Front-accessible, extended terminal for main circuit connection	5
		Front-accessible, broadened terminal for main circuit connection	6
		Rear broadened bus connectors	7

Quick selection guide, page 2/12

© Siemens 2022

3VA27 6 7 – 8 9 10 11 12 – 13 14 15 16

Alarm switch combinations

Alarm switches	Without	0
	With tripped signaling switch TAS and tripped signaling switch S25	1
	With two leading changeover switches S26	2
	With tripped signaling switch TAS and tripped signaling switch S25 and two leading changeover switches S26	3

Auxiliary releases, closing coils

Closing coil (CC), remote reset magnet (RR)	Without	A

2nd auxiliary release	Without 2nd auxiliary release		A
	With undervoltage release (UVR)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
		380 ... 400 V AC/DC	K
		415 ... 440 V AC/DC	L
	With undervoltage release (UVR), delayable with external time-delay device Scope of supply: UVR + time-delay device	24 ... 30 V AC/DC	M
		110 ... 127 V AC/DC	N
		220 ... 250 V AC/DC	P
	With 2nd shunt trip (ST2)	24 V AC/DC	Q
		30 V AC/DC	R
		48 V AC/DC	S
		60 V AC/DC	T
		110 ... 120 V AC/DC	U
		120 ... 127 V AC/DC	V
		220 ... 240 V AC/DC	W
		240 ... 250 V AC/DC	X

1st auxiliary release	Without 1st auxiliary release		0
	Shunt trip (ST)	24 V AC/DC	1
		30 V AC/DC	2
		48 V AC/DC	3
		60 V AC/DC	4
		110 ... 120 V AC/DC	5
		120 ... 127 V AC/DC	6
		220 ... 240 V AC/DC	7
		240 ... 250 V AC/DC	8

Quick selection guide, page 2/12

© Siemens 2022

Structure of the article numbers

Basic configuration with stored energy mechanism

The structure shown below is intended as an overview of each position and its meaning. For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

	6	7		8	9	10	11	12		13	14	15	16
3VA27			–						–				

Molded case circuit breakers and ETUs

					6	7	8	9	10	11	12	13
Max. rated current $I_{n\,max}$	800 A				8	0						
	1000 A				1	0						
	1250 A				1	2						
	1600 A				1	6						
Short-circuit breaking capacity $I_{cu} = I_{cs}$ at 415 V	Stored energy mechanism	55 kA					1					
		85 kA					2					
		110 kA					3					
Non-automatic air circuit breakers	Without measurement function, without a communication link	Without trip unit						A	A			
Circuit breakers, ETU 3-series	Without measurement function, without a communication link	With trip unit	ETU320 LI	(N) [1]				A	B			
			ETU350 LSI	(N) [1]				A	C			
			ETU360 LSIG	(N) [1]				A	D			
Circuit breakers, ETU 6-series		With trip unit	ETU650 LSI	(N) [1]					E			
			ETU660 LSIG	(N) [1]					F			
	Without a communication link	Without measurement function						A				
	With a communication link	Without measurement function						B				
		Measurement function Basic	Voltage tap on bottom					C				
			Voltage tap on top					D				
		Measurement function Advanced	Voltage tap on bottom					E				
			Voltage tap on top					F				

[1] Neutral conductor protection for 3-pole breakers with an external neutral conductor transformer or 4-pole breakers

				11
Number of poles	Fixed-mounted versions	3-pole		0
		4-pole	Neutral left	1
			Neutral right	2
	Withdrawable	3-pole		3
		4-pole	Neutral left	4
			Neutral right	5

Connections

			12
Type of mounting	Withdrawable	Withdrawable circuit breaker without guide frame (guide frame must be ordered separately)	0
	Fixed-mounted breaker/ withdrawable breaker	Rear vertical connection	1
		Rear horizontal connection	2
		Front terminal for main circuit connection	3
		Front-accessible, extended terminal for main circuit connection	5
		Front-accessible, broadened terminal for main circuit connection	6
		Rear broadened bus connectors	7

Motor

			13
Operating mechanisms	Manual operator		0
	Spring charging motor	24 ... 30 V AC/DC	1
		48 ... 60 V AC/DC	2
		110 V AC/DC	3
		230 V AC/DC	4

Quick selection guide, page 2/12

© Siemens 2022

3VA27 6 7 – 8 9 10 11 12 13 14 15 16

Auxiliary releases, closing coils, remote reset magnets

Closing coil (CC), remote reset magnet (RR)	Without		A
	Closing coil (CC)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
	Closing coil (CC) and additional remote reset magnet (RR)	24 V AC/DC	K
		110 V AC/DC	L
		220 V AC/DC	M
2nd auxiliary release	Without 2nd auxiliary release		A
	With undervoltage release (UVR)	24 V AC/DC	B
		30 V AC/DC	C
		48 V AC/DC	D
		60 V AC/DC	E
		110 ... 120 V AC/DC	F
		120 ... 127 V AC/DC	G
		220 ... 240 V AC/DC	H
		240 ... 250 V AC/DC	J
		380 ... 400 V AC/DC	K
		415 ... 440 V AC/DC	L
	With undervoltage release (UVR), delayable with external time-delay device Scope of supply: UVR + time-delay device	24 ... 30 V AC/DC	M
		110 ... 127 V AC/DC	N
		220 ... 250 V AC/DC	P
	With 2nd shunt trip (ST2)	24 V AC/DC	Q
		30 V AC/DC	R
		48 V AC/DC	S
		60 V AC/DC	T
		110 ... 120 V AC/DC	U
		120 ... 127 V AC/DC	V
		220 ... 240 V AC/DC	W
		240 ... 250 V AC/DC	X
1st auxiliary release	Without 1st auxiliary release		0
	Shunt trip (ST)	24 V AC/DC	1
		30 V AC/DC	2
		48 V AC/DC	3
		60 V AC/DC	4
		110 ... 120 V AC/DC	5
		120 ... 127 V AC/DC	6
		220 ... 240 V AC/DC	7
		240 ... 250 V AC/DC	8

Quick selection guide, page 2/12

© Siemens 2022

Accessory options

For a complete and valid configuration of your molded case circuit breaker, please use our online configurator at www.siemens.com/lowvoltage/3va27-configurator

To specify the options, add „-Z" to the complete article number and indicate the appropriate order code(s).

3VA27..-.....-.... -Z

Order code

Accessories for basic configuration

Mounting options for fixed-mounted circuit breakers

- In the basic configuration, the fixed-mounted circuit breaker is mounted onto the rear panel. Floor mounting is possible as an option. The device must additionally be modified if it is to be extended to include functionalities such as external auxiliary switches or mechanical interlocking mechanism.[1)]

Mounting options for fixed-mounted circuit breakers[1)]	Floor mounting	Mounting support standard	≋	◢			A07
		Mounting support extended[2)]	≋	◢			S56
	Rear panel mounting onto mounting plate	Side wall extended[2)]	≋	◢			S57

Accessories for electronic trip units ETU

Rating plugs

- The electronic trip units are equipped as standard with a rating plug for setting the rated current I_n, which is equal to the maximum rated circuit breaker current (< $I_{n\,max}$). The rated current of the selected rating plug must be less than or equal to $I_{n\,max}$.
- To downrate the circuit breaker, a rated current smaller than $I_{n\,max}$ is selected for the rating plug via a Z option.
- Other functions can also be activated using rating plugs (L = OFF or Rc protection).

Rating plug	For setting the rated current I_n	For all ETUs	400 A	≋	◢		B04
			630 A	≋	◢		B06
			800 A	≋	◢		B08
			1000 A	≋	◢		B10
			1200 A	≋	◢		B12
	For setting the rated current I_n, with overload protection L = OFF	For 6-series ETUs	400 A	≋	◢		L04
			630 A	≋	◢		L06
			800 A	≋	◢		L08
			1000 A	≋	◢		L10
			1250 A	≋	◢		L12
			1600 A	≋	◢		L16
	For setting the rated current I_n, For enabling the residual current protective function. The residual current function is only possible with the MF Advanced measurement function.	For ETU660 only	400 A	≋	◢		G04
			630 A	≋	◢		G06
			800 A	≋	◢		G08
			1250 A	≋	◢		G12

Communication modules

- Up to 2 different communication modules can be used at the same time.
- When using an IOM040 digital I/O module (Z option K56), only 1 communication module can be used.

Communication modules	COM040	Modbus TCP	≋	◢		F02
	COM041	Modbus RTU	≋	◢		F03
	COM043	Modbus TCP	≋	◢		F11
	COM042	Modbus RTU	≋	◢		F12

Breaker Connect modules

- When a circuit breaker with a communication link is ordered, a Breaker Connect module for external 24 V DC power supply of the electronic components is also supplied ready installed as standard.
- By means of this Z option, the Breaker Connect module for 24 V DC is replaced by a Breaker Connect module for 110–240 V AC/DC.

Breaker Connect module	110 ... 240 V AC/DC	≋	◢			F26

I/O modules internal

I/O modules internal	IOM040 digital I/O module	2 inputs, 2 outputs	≋	◢		K56

≋ For molded case circuit breakers with stored energy mechanism

◢ For molded case circuit breakers with handle operating mechanism

[1)] These functionalities can be applied directly to the frame of the withdrawable circuit breaker, without any modification of the side wall.

[2)] Not possible in connection with or as an alternative to the mounting support, standard (A07).

System overview, page 2/66

© Siemens 2022

To specify the options, add „-Z" to the complete article number and indicate the appropriate order code(s).

3VA27..-.....-.... -Z

						Order code
Accessories for motors						
5-digit mechanical operating cycles counter				–		C01
Auxiliary switches and signaling switches						
• Auxiliary and signaling switches for currents >100 mA and up to 400 V AC are installed as standard. • For currents <100 mA for PLC connections, these auxiliary and signaling switches can be replaced. • The auxiliary/signaling switches for 24 V DC digital signals are designed for – a minimum load above 1 mA at 5 V DC, and – a maximum breaking capacity of 100 mA at 24 V DC.						
Position signaling switches for guide frames [1]		2 CO | 2 CO | 2 CO (connected | test | disconnected position)				K55
Signaling switch	Ready-to-close signaling		1 CO digital 24 V DC	–		K50
	Tripped signaling switch (S24)		1 CO digital 24 V DC			K53
	Spring charge signaling switch (S21)		1 CO digital 24 V DC	–		K54
Auxiliary switch	On/Off AUX	4 CO digital 24 V DC				K51
		2 CO 400 V AC, and 2 CO digital 24 V DC				K52
Locking, blocking and interlocking						
Locking provisions [1]	To prevent movement of withdrawable circuit breaker	Cylinder lock	Made by RONIS			R78
		For no more than 3 padlocks, 8 mm				R65
Locking mechanism	To prevent movement to disconnected position					R79
Locking provision	Against unauthorized closing in the operator panel (safe OFF)	Cylinder lock, made by RONIS		–		S08
		For no more than 3 padlocks, plastic 4 mm		–		S22
		For no more than 1 padlock, metal 7 mm		–		S23
		For no more than 2 padlocks, metal 8 mm		–		S07
Interlocking sets	For mechanical ON and/or OFF on the operator panel	For no more than 3 padlocks, plastic 4 mm		–		S42
		For no more than 1 padlock, metal 7 mm		–		S43
		For no more than 2 padlocks, metal 8 mm		–		S44
Protective cover	For mechanical ON/OFF, not lockable			–		S41
Door sealing frame IP30	IP3x					T30

For molded case circuit breakers with stored energy mechanism


For molded case circuit breakers with handle operating mechanism

[1] Can be used both for individual orders of the guide frame and complete orders (circuit breaker + guide frame).

System overview, page 2/66

© Siemens 2022

Guide frames



Guide frames for ordering separately without circuit breakers

- Guide frames without breakers up to 1600 A
- **Note:** All CB bus modules for communication COM04x/IOM300/Breaker Connect module, as well as COMPSS signaling switches are configured without frames in the withdrawable circuit breaker and defined there by means of Z options, and are included with the breaker. PSS Standard is always included in the frame and can be changed to an electronics-capable signal by means of a Z option.

Number of poles	Connection type	3VA27 Article No.
3-pole	Rear vertical	3VW8116-7AA01
	Rear horizontal	3VW8116-7AB01
	Front straight bus connectors extended	3VW8116-7AE01
	Broadened bus connectors	3VW8116-7AF01
	Rear broadened bus connectors	3VW8116-7AG01
4-pole	Rear vertical	3VW8116-7BA01
	Rear horizontal	3VW8116-7BB01
	Front straight bus connectors extended	3VW8116-7BE01
	Broadened bus connectors	3VW8116-7BF01
	Rear broadened bus connectors	3VW8116-7BG01

To specify the options, add „-Z" to the complete article number and indicate the appropriate order code(s).

3VW8....-.....-.... -Z

Order code

Locking, blocking and interlocking

					Order code
Locking provision	To prevent movement of withdrawable circuit breaker	Cylinder lock, made by RONIS	≡	◢	R78
		For no more than 3 padlocks, 8 mm	≡	◢	R65
Locking mechanism	To prevent movement to disconnected position (only in combination with R78 or R65)		≡	◢	R79

Auxiliary/signaling switches

					Order code
Position signaling switch PSS for guide frame	For 24 V DC digital signals, for minimum currents	2 CO | 2 CO | 2 CO (connected | test | disconnected position)	≡	◢	K55

Auxiliary and signaling switches for currents >100 mA and up to 400 V AC are installed as standard.
For currents <100 mA for PLC connections, these auxiliary and signaling switches can be modified.
The auxiliary/signaling switches for 24 V DC digital signals are designed for
- A minimum load above 1 mA at 5 V DC, and
- A maximum breaking capacity of 100 mA at 24 V DC.

≡ For molded case circuit breakers with stored energy mechanism


◢ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Electronic trip unit ETU and accessories

Electronic trip units (ETU)

Version	With communications/ measurement function, enhanced protective functions	Type	Protective function		3VA27 Article No.
 With rotary coding switches	No	ETU320	LIN		3VW9011-5AA00
		ETU350	LSIN		3VW9012-5AA00
		ETU360	LSING		3VW9012-7AA00
 With display	Yes	ETU650	LSIN		3VW9017-5AA00
		ETU660	LSING		3VW9017-7AA00


Measurement functions for ETU650 or ETU660

Description	Protective function/version	Arrangement		3VA27 Article No.
 Measurement function	MF Basic	–		3VW9011-0AT01
	MF Advanced	–		3VW9011-0AT04
Set of cables for voltage tap for MF	For 4-pole circuit breakers with N conductor right	Top or bottom		3VW9011-0AT08
	For 4-pole circuit breakers with N conductor left	Top		3VW9011-0AT75
		Bottom		3VW9011-0AT76
	For 3-pole circuit breakers	Top		3VW9011-0AT72
		Bottom		3VW9011-0AT73

External current transformers for N conductors


Accessory for	Use		3VA27 Article No.
 ETU320, ETU350, ETU360, ETU650, ETU660	Only for 3-pole circuit breakers		3VW9011-0AA30

External current transformers for grounded transformer star points

Accessory for	G_{ret} (Ground return)		3VA27 Article No.
 ETU660	100 A		3VW9011-0GF30
	250 A		3VW9011-0GF31

Summation current transformers external Rc-CT for residual current measurement

- Only with MF Advanced measurement function and Rc rating plug

Accessory for	Use		3VA27 Article No.
 ETU660	For external residual current measurement		3VW9011-0RC30

Remote reset magnets RR for the circuit breakers including tripped signaling

- Remote reset magnet (RR) for resetting the circuit breaker after tripping as a result of overcurrent conditions

Accessory for	Voltage			3VA27 Article No.
 ETU320, ETU350, ETU360, ETU650, ETU660	24 V DC		–	3VW9011-0AK03
	110 V AC/DC		–	3VW9011-0AK05
	250 V AC/DC		–	3VW9011-0AK06

Spare part batteries for electronic trip unit ETU

Accessory for			3VA27 Article No.
 ETU320, ETU350, ETU360, ETU650, ETU660			3VW9011-0AT38

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Electronic trip unit ETU and accessories

Rating plugs



- Only one module is possible per circuit breaker.

Accessory for	Version	Rated current I_n			3VA27 Article No.
ETU320, ETU350, ETU360, ETU650, ETU660	Rating plugs for setting (< $I_{n\,max}$) the rated current I_n	400 A	✓	✓	3VW9011-0AA53
		630 A	✓	✓	3VW9011-0AA55
		800 A	✓	✓	3VW9011-0AA56
		1000 A	✓	✓	3VW9011-0AA57
		1250 A	✓	✓	3VW9011-0AA58
		1600 A	✓	✓	3VW9011-0AA61
ETU 6-series	Rating plug without overload protection (L = OFF) and for setting (< $I_{n\,max}$) the rated current I_n	400 A	✓	✓	3VW9011-0LF53
		630 A	✓	✓	3VW9011-0LF55
		800 A	✓	✓	3VW9011-0LF56
		1000 A	✓	✓	3VW9011-0LF57
		1250 A	✓	✓	3VW9011-0LF58
		1600 A	✓	✓	3VW9011-0LF61
ETU660	Rating plug Rc for ETU660 for enabling the residual current protective function and setting (< $I_{n\,max}$) the rated current I_n. The residual current function is only possible with the MF Advanced measurement function.	400 A	✓	✓	3VW9011-0RC53
		630 A	✓	✓	3VW9011-0RC55
		800 A	✓	✓	3VW9011-0RC56
		1250 A	✓	✓	3VW9011-0RC58


CB bus modules - communication modules



- Contains the communication module
- Up to 2 different communication modules can be used at the same time.
- When using a digital I/O module IOM040 (Z option K56), only 1 communication module can be used.
- Can only be used with ETU of the 6-series and require a Breaker Connect module for connection to the circuit breaker. This can also be configured directly on the device by means of a Z option if the communication link to the ETU 6-series is selected.

Communication module	Protocol			3VA27 Article No.
COM040	PROFIBUS	✓	✓	3VW9011-0AT15
COM041	PROFINET	✓	✓	3VW9011-0AT14
COM043	Modbus TCP	✓	✓	3VW9011-0AT16
COM042	Modbus RTU	✓	✓	3VW9011-0AT17

CB bus modules - I/O modules external IOM300



- For snapping onto DIN rail

Accessory for	Maximum switching current per contact	Inputs	Outputs			3VA27 Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	11	10	✓	✓	3VW9011-0AT20

CB bus modules - I/O modules internal IOM040



- When using a digital I/O module IOM040, only 1 communication module can be used.

Accessory for	Maximum switching current per contact	Inputs	Outputs			3VA27 Article No.
ETU 6-series	• 2 A at ≤ 30 V DC • 0.8 A at 50 V DC • 0.2 A at 150 V DC • 4 A at 250 V AC	2	2	✓	✓	3VW9011-0AT30

✓ For molded case circuit breakers with stored energy mechanism

✓ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

				3VA27
Actuator modules COM ACT				
 • For switching the circuit breaker on/off remotely via communication. • Actuation of the closing coil (CC) and the 1st shunt trip (ST). • Can only be used in combination with a communication module, spring charging motor, closing coil and 1st shunt trip. • Automatically included if the communication link of the ETU 6-series is selected in the basic circuit breaker configuration.				
Accessory for				**Article No.**
ETU 6-series			–	3VW9011-0AT10
Breaker Connect modules				
 • For external power supply for the electronics components				
Voltage				**Article No.**
110 ... 240 V AC/DC				3VW9011-0AT06
24 ... 48 V DC				3VW9011-0AT07
Auxiliary contact signals for communication link				
 • Auxiliary contacts for signaling the readiness to close or for position signaling switches of the withdrawable positions. • Can only be used in combination with communication module. • Can be combined with standard position signaling switches or ready-to-close signaling contacts. • **Note:** Both signaling switches are automatically included in the basic circuit breaker (COM PSS only with withdrawable versions) if the communication link of the ETU 6-series is selected.				
Function				**Article No.**
Ready-to-close signaling switch for communication (COM RTC)			–	3VW9011-0AT11
Position signaling switch COM PSS (for withdrawable breaker only)				3VW9011-0AT12
Test devices and breaker data adapters				
 • Usable for all ETU 3-series and 6-series				
Description	**Type**			**Article No.**
Test device • For the trip test via ETU and tripping solenoid including release • Activation of the ETU and the tripping solenoid by means of a battery built into the test device • On activation in the ETU 6-series, the parameters can be configured on the display	TD310			3VW9011-0AT32
Breaker data adapter • As gateway for parameterization of the ETU with SENTRON powerconfig • For generation of a report of the set parameters with powerservice	TD410			3VW9011-0AT34
Test device and breaker data adapter • As gateway for parameterization of the ETU with SENTRON powerconfig – Testing a tripping operation using SENTRON powerconfig • For use with the powerservice software – Testing of the basic protective functions LSING – Testing of the enhanced protective functions – Test data storage – Readout of ETU buffer – Generation of a report of the set parameters	TD420			3VW9011-0AT33

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Accessories for connection and insulation

Front terminals for main circuit connections acc. to IEC 60947-2

- Acc. to IEC 60947-2 for 3VA27 up to 1600 A (depending on application conditions)
- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/quantity	3VA27 Article No.
Fixed-mounted	Front terminals for main circuit connection	–	3-pole/3 units	3VW9011-0AL01
			4-pole/4 units	3VW9011-0AL02
	Extended main terminals, including insulation plate and phase barriers, standard	Front terminals for main circuit connection	3-pole/3 units	3VW9011-0AL77
			4-pole/4 units	3VW9011-0AL78
	Broadened main terminals, including insulation plate and extended phase barriers	Front terminals for main circuit connection, top	3-pole/3 units	3VW9011-0AL73
		Front terminals for main circuit connection, bottom	3-pole/3 units	3VW9011-0AL75
		Front terminals for main circuit connection, top/bottom	4-pole/4 units	3VW9011-0AL74
Withdrawable	Front-accessible terminals for main circuit connection	Guide frame flange	3-pole/3 units	3VW9011-0AN01
			4-pole/4 units	3VW9011-0AN02
	Broadened main circuit connections	Front-accessible terminals for main circuit connection	3-pole/3 units	3VW9011-0AN73
			4-pole/4 units	3VW9011-0AN74

Rear terminals for main circuit connections acc. to IEC 60947-2

- Acc. to IEC 60947-2 for 3VA27 up to 1600 A (depending on application conditions)
- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/quantity	3VA27 Article No.
Fixed-mounted	Rear terminals for main circuit connection, rotatable for horizontal/vertical connection, including terminal cover	–	3-pole/3 units	3VW9011-0AL32
			4-pole/4 units	3VW9011-0AL33
Withdrawable	Rear terminals for main circuit connection, rotatable for horizontal/vertical connection, including terminal cover	–	3-pole/3 units	3VW9011-0AN32
			4-pole/4 units	3VW9011-0AN33
	Broadened main terminals	Rear horizontal main connections	3-pole/3 units	3VW9011-0AN75
			4-pole/4 units	3VW9011-0AN76

Cu/Al cable connections acc. to IEC 60947-2

- Acc. to IEC 60947-2 for 3VA27 up to 1600 A (depending on application conditions)
- To be ordered separately for top and bottom

Mounting	Version	Mounting onto	Number of poles/quantity	3VA27 Article No.
Fixed-mounted	Circular conductor terminals 4 x 240 mm² for front cable connection [1], including insulation plate and high, extended terminal cover	Front terminals for main circuit connection	3-pole/3 units	3VW9011-0AL71
			4-pole/4 units	3VW9011-0AL72
Withdrawable	Set of circular conductor connection pieces 4 x 240 mm² for cable lugs for rear cable connection	Rear vertical main connections	3-pole/3 units	3VW9011-0AN71
			4-pole/4 units	3VW9011-0AN72

Auxiliary supply connectors in push-in version

[1] For connecting Al cables up to 1000 A

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/66


© Siemens 2022



- Control wire tap in push-in version for upgrading fixed-mounted breakers and guide frames.
- The device is always fitted at the factory with the exact number of control wire taps required.

Version	3VA27 Article No.
Push-in	3VW9011-0AB11

Terminal covers for fixed-mounted circuit breakers



- Finger-proof for front terminals for main circuit connection for fixed-mounted versions
- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.

Version	Number of poles/quantity	3VA27 Article No.
Standard	3-pole/2 units	3VW9723-0WD30
	4-pole/2 units	3VW9724-0WD40
Extended	3-pole/2 units	3VW9723-0WF30
	4-pole/2 units	3VW9724-0WF40

Phase barriers for fixed-mounted breakers



- Necessary isolation measures are always supplied with the corresponding connection technology and do not need to be ordered separately.
- For operating voltages >440 V AC the use of phase barriers is mandatory; up to 440 V AC their use is optional.

Height	Number of poles/quantity	3VA27 Article No.
100 mm (standard)	3-pole/4 units	3VW9723-0WA00
	4-pole/6 units	3VW9724-0WA10
200 mm (extended)	3-pole/4 units	3VW9723-0WA01
	4-pole/6 units	3VW9724-0WA11

Supports for mounting the fixed-mounted breakers on the floor

- For fixed-mounted versions only

Version	Use	3VA27 Article No.
Mounting support standard (circuit breaker feet) (= Z option A07)		3VW9011-0BB51
Mounting support extended (circuit breaker feet) including mechanical transmission of switch position on circuit breaker side panel (= Z option S56)	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16), • Mechanical interlock to 3WA/3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB52

Extension kits for modification of the side wall of the fixed-mounted breakers



- For fixed-mounted breakers only
- Rear fixation on mounting plate
- For modification for mechanical transmission of switch position on circuit breaker side panel (= Z option S57)

Version	Use	3VA27 Article No.
Extension kit for side wall	• Fixation for external auxiliary switches AUX 15 CO (3VW9011-0AG15) • Locking mechanism for control cabinet door, direct (for 3VW9011-0BB10) • Locking mechanism for control cabinet door, Bowden cable (for 3VW9011-0BB16), • Mechanical interlock to 3WA/3WL/3VA (for 3VW9011-0BB21)	3VW9011-0BB53

Spring charging motor (MO)

For molded case circuit breakers with stored energy mechanism

For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Motor operators and manual operators



Description	Voltage			3VA27 Article No.
For automatic charging of the stored energy mechanism	24 ... 30 V AC/DC	≋	–	3VW9011-0AF01
	48 ... 60 V AC/DC	≋	–	3VW9011-0AF02
	100 ... 130 V AC/DC	≋	–	3VW9011-0AF03
	220 ... 250 V AC/DC	≋	–	3VW9011-0AF04

Mechanical operating cycles counter MOC




Description	Version			Article No.
Only possible in combination with a spring charging motor.	5 digits	≋	–	3VW9011-0AH07


Manual operators for handle operating mechanism











Description	Version	Color	Degree of protection			Article No.
Front mounted rotary operator incl. door sealing frame	Standard	Gray	IP30	–	✍	3VW9727-0EK11
	EMERCENCY-OFF	Yellow-red	IP30	–	✍	3VW9727-0EK15
Door mounted rotary operator	Standard	Gray	IP30	–	✍	3VW9727-0FK21
	EMERCENCY-OFF	Yellow-red	IP30	–	✍	3VW9727-0FK25
	Basic without handle		IP30	–	✍	3VW9727-0GK00
	Shaft stub		IP30	–	✍	8UD1900-3WD00
	Handle	Gray	IP30	–	✍	8UD1861-0AB11
		Yellow-red	IP30	–	✍	8UD1861-0AB15

≋ For molded case circuit breakers with stored energy mechanism

✍ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Auxiliary release, closing coil

Closing coils CC/shunt trips ST



- **Note:**
  - For molded case circuit breakers with handle operating mechanism, the products can only be used as closing shunt trips ST.
  - For molded case circuit breakers with stored energy mechanism, the products can be used as closing coils CC and shunt trips ST.

Voltage	Article No.
24 V AC/DC	3VW9011-0AD01
30 V AC/DC	3VW9011-0AD02
48 V AC/DC	3VW9011-0AD03
60 V AC/DC	3VW9011-0AD04
110 ... 120 V AC/DC	3VW9011-0AD05
120 ... 127 V AC/DC	3VW9011-0AD06
220 ... 240 V AC/DC	3VW9011-0AD07
240 ... 250 V AC/DC	3VW9011-0AD08
380 ... 400 V AC	3VW9011-0AD17
415 ... 440 V AC	3VW9011-0AD18

TD320 function test units for closing coils/shunt trips



- The TD320 test unit allows the operational availability and functions of the closing coils and shunt trips with a rated operational voltage between 24 V and 250 V (AC and DC) to be tested.
- The operational availability test is performed cyclically at intervals of 30 seconds.
- The unit has visual indicators in the form of LEDs on the front in order to display the following states:
  - LED POWER ON LIT: Correct function of the YO/YC test unit
  - LED DEACTIVATION LIT: Power supply failure, wire break
  - LED SHORT-CIRCUIT LIT: Winding short-circuit
  - LED DEACTIVATION and SHORT-CIRCUIT FLASHING: Incorrect power supply
  - LED DEACTIVATION and SHORT-CIRCUIT OFF: Closing coil/shunt trips OK

Description		Article No.
For all closing coils/shunt trips	–	3VW9011-0AT31

Auxiliary/signaling switches



- The auxiliary/signaling switches for 24 V DC digital signals are designed for
  - a minimum load above 1 mA at 5 V DC, and
  - a maximum breaking capacity of 100 mA at 24 V DC
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted breakers a 3VW9011-0BB5x side wall modification

Description	Contacts			Article No.
Ready-to-close signal RTC	1 CO standard	≡	–	3VW9011-0AH01
	1 CO digital	≡	–	3VW9011-0AH02
Auxiliary switch ON/OFF AUX	4 CO standard	≡	✍	3VW9011-0AG01
	4 CO digital	≡	✍	3VW9011-0AG02
	2 CO standard + 2 CO digital	≡	✍	3VW9011-0AG03
External auxiliary switch ON/OFF AUX	15 CO standard	≡	✍	3VW9011-0AG05
	15 CO digital	≡	✍	3VW9011-0AG06
Tripped signaling switch S24	1 CO standard	≡	✍	3VW9011-0AH14
	1 CO digital	≡	✍	3VW9011-0AH15
Spring charge signaling switch S21	1 CO standard	≡	–	3VW9011-0AH10
	1 CO digital	≡	–	3VW9011-0AH08
Position signaling switches PSS (only with withdrawable versions)	2 CO | 2 CO | 2 CO (connected | test | disconnected position) standard	≡	✍	3VW9011-0AH11
	2 CO | 2 CO | 2 CO (connected | test | disconnected position) digital	≡	✍	3VW9011-0AH12

≡ For molded case circuit breakers with stored energy mechanism

✍ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Auxiliary release, closing coil

Auxiliary/signaling switches for handle operating mechanism



- Auxiliary and signaling switches are each offered in two versions:
  - Standard version for currents >100 mA and up to 400/250 V AC, minimum load above 100 mA at 24 V DC, and maximum breaking capacity 5 A at 250 V AC
  - Digital version for currents <100 mA for PLC connections, minimum load above 1 mA at 5 V DC, and maximum breaking capacity 100 mA at 24 V DC
- For external auxiliary switches ON/OFF AUX 15 CO, a 3VW9011-0AG1x fixation must be ordered in addition, and for fixed-mounted breakers a 3VW9011-0BB5x side wall modification.

Description	Contacts		3VA27 Article No.
Trip alarm switch TAS signals the trip position irrespective of the tripping reason	1 CO standard	– ✍	3VW9727-0AB11
	1 CO digital	– ✍	3VW9727-0AB13
Tripped signaling switch via auxiliary release S25 signals tripping operations via auxiliary releases (UVR, ST) in UVR/ST2 pocket	1 CO standard	– ✍	3VW9727-0AB41
	1 CO digital	– ✍	3VW9727-0AB43
Leading auxiliary switch S26 (2 units)	1 NO standard, 250 V AC	– ✍	3VW9727-0AA21

Fixation for external auxiliary switches AUX 15 CO



- External auxiliary switches ON/OFF AUX 15 CO must be ordered separately.

Version		3VA27 Article No.
For fixed-mounted breakers with rear panel or floor mounting (in combination with Z option S56 or S57)	≋ ✍	3VW9011-0AG15
For guide frames	≋ ✍	3VW9011-0AG17

Undervoltage releases UVR



Voltage		3VA27 Article No.
24 V AC/DC	≋ ✍	3VW9011-0AE01
30 V AC/DC	≋ ✍	3VW9011-0AE02
48 V AC/DC	≋ ✍	3VW9011-0AE03
60 V AC/DC	≋ ✍	3VW9011-0AE04
110 ... 120 V AC/DC	≋ ✍	3VW9011-0AE05
120 ... 127 V AC/DC	≋ ✍	3VW9011-0AE06
220 ... 240 V AC/DC	≋ ✍	3VW9011-0AE07
240 ... 250 V AC/DC	≋ ✍	3VW9011-0AE08
380 ... 400 V AC	≋ ✍	3VW9011-0AE17
415 ... 440 V AC	≋ ✍	3VW9011-0AE18

External time-delay devices for undervoltage releases



- With adjustable delay time from 0.5 to 3 s.
- Suitable for mounting onto DIN rail.

Voltage		3VA27 Article No.
24 ... 30 V AC/DC	≋ ✍	3VW9011-0AE10
48 V AC/DC	≋ ✍	3VW9011-0AE11
60 V AC/DC	≋ ✍	3VW9011-0AE15
110 ... 127 V AC/DC	≋ ✍	3VW9011-0AE12
220 ... 250 V AC/DC	≋ ✍	3VW9011-0AE13



≋ For molded case circuit breakers with stored energy mechanism

✍ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Locking provisions and interlocks

				3VA27
Locking provision to prevent movement of the withdrawable circuit breaker				
	**Version**			**Article No.**
	RONIS cylinder lock (spare part for R78)	≡	✓	3VW9011-0BA80
	Padlock 8 mm (spare part for R65), for no more than 3 padlocks	≡	✓	3VW9011-0BA87
Locking mechanisms to prevent movement of the withdrawable circuit breakers in disconnected position				
	• Only possible as a supplement in conjunction with R78 (3VW9011-0BA80) and/or R65 (3VW9011-0BA87).			
	Description			**Article No.**
	Locking mechanism (spare part for R79)	≡	✓	3VW9011-0BA84
Locking provisions in OFF position				
	• For fixed-mounted versions and withdrawable versions • Against unauthorized closing in the operator panel (safe OFF) • The disconnector unit fulfills the conditions for a supply disconnecting (isolating) device acc. to EN 60204-1.			
	Description			**Article No.**
	Cylinder lock, made by RONIS (spare part for S08)	≡	–	3VW9011-0BA33
Locking provisions in OFF position				
	• For fixed-mounted versions and withdrawable versions • Against unauthorized closing in the operator panel (safe OFF) • The disconnector unit fulfills the conditions for a supply disconnecting (isolating) device acc. to EN 60204-1.			
	Description	**Version**		**Article No.**
	Padlock 4 mm (spare part for S22)	Plastic for no more than 3 locks	≡ –	3VW9011-0BA41
	Padlock 7 mm (spare part for S23)	Metal for no more than 1 lock	≡ –	3VW9011-0BA42
	Padlock 8 mm (spare part for S07)	Metal for no more than 2 locks	≡ –	3VW9011-0BA44
Locking provision in OFF position for handle operating mechanism with rotary operators				
	• Against unauthorized activation in the case of molded case circuit breakers with rotary operator			
	Description			**Article No.**
	For RONIS		– ✓	3VW9727-0VL10
Locking provision in OFF position for handle operating mechanism without rotary operators				
	• Against unauthorized closing in the operator panel in the case of molded case circuit breakers without rotary operator			
	Description			**Article No.**
	For padlocks		– ✓	3VW9727-0LB10
	For RONIS		– ✓	3VW9727-0LF10
Interlocking sets for mechanical Open and/or Close on the operator panels				
	**Description**	**Version**		**Article No.**
	Padlock 4 mm (spare part for S42)	Plastic for no more than 3 locks	≡ –	3VW9011-0BA22
	Padlock 7 mm (spare part for S43)	Metal for no more than 1 lock	≡ –	3VW9011-0BA23
	Padlock 8 mm (spare part for S44)	Metal for no more than 2 locks	≡ –	3VW9011-0BA24

≡ For molded case circuit breakers with stored energy mechanism


✓ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

Locking provisions and interlocks

Protective covers for mechanical ON/OFF



- Mechanical ON/OFF to protect against unintentional actuation on the operator panel.
- Not lockable.

Description			3VA27 Article No.
Not lockable (spare part for S41)	≣	–	3VW9011-0BA21

Mechanical interlock



- Mechanical interlock with Bowden cable 2 m
- For fixed-mounted versions, an additional support 3VW9011-0BB52 (option S56) or extension kit 3VW9011-0BB53 (option S57) must be ordered

Mounting	Mounting			3VA27 Article No.
Fixed-mounted	Rear panel or floor mounting	≣	✍	3VW9011-0BB21
Withdrawable	Mounting onto guide frame	≣	✍	3VW9011-0BB22

Bowden cables, separate

- One required for each circuit breaker

Type	3VA27 Article No.
1000 mm	3VW9011-0BB23
2000 mm	3WL9111-0BB45-0AA0
3000 mm	3WL9111-0BB46-0AA0

Locking mechanisms to prevent opening of the control cabinet doors in ON position



- To prevent opening of the control cabinet door in ON position
- It additionally prevents the circuit breaker from being closed when the control cabinet door is open.

Mounting	Version			3VA27 Article No.
Fixed mounted on side panel or floor	Direct fixed interlocking	≣	✍	3VW9011-0BB10
	Locking with Bowden cable	≣	✍	3VW9011-0BB16
Withdrawable	Direct fixed interlocking	≣	✍	3VW9011-0BB14
	Locking with Bowden cable	≣	✍	3VW9011-0BB18

Door sealing frames IP30



- For IP4x and higher, you must order the protective cover IP54 3VW9011-0AP03 or 3VW9011-0AP13.

Description	Mounting	Version			3VA27 Article No.
Spare part for Z option T30.	Fixed-mounted	IP3x	≣	✍	3VW9011-0AP01
	Withdrawable	IP3x	≣	–	3VW9011-0AP02
			–	✍	3VW9011-0AP04

Protective covers IP54



- Protective cover/hood IP54 lockable for fixed-mounted breakers and withdrawable breakers
- For implementing degrees of protection IP4x and IP54 when installing in switchboard door.
- Cannot be combined with IP30 door sealing frame and door mounted rotary operator.

Description	Version			3VA27 Article No.
Lock with unique key	IP54	≣	✍	3VW9011-0AP03
Lock with standard key	IP54	≣	✍	3VW9011-0AP13

≣ For molded case circuit breakers with stored energy mechanism

✍ For molded case circuit breakers with handle operating mechanism

System overview, page 2/66

© Siemens 2022

3VL up to 1600 A, IEC



3VL molded case circuit breaker


Product Discontinuation

The 3VL molded case circuit breaker up to 1600 A IEC can only be ordered as a spare part (since 10/2020), and will be removed from the order portfolio from 10/2025.

Documents available for downloading:
You can find comprehensive information on the 3VL molded case circuit breaker in the catalog extract.

3VL molded case circuit breaker
www.siemens.com/lowvoltage/catalogs (109769073)

© Siemens 2022

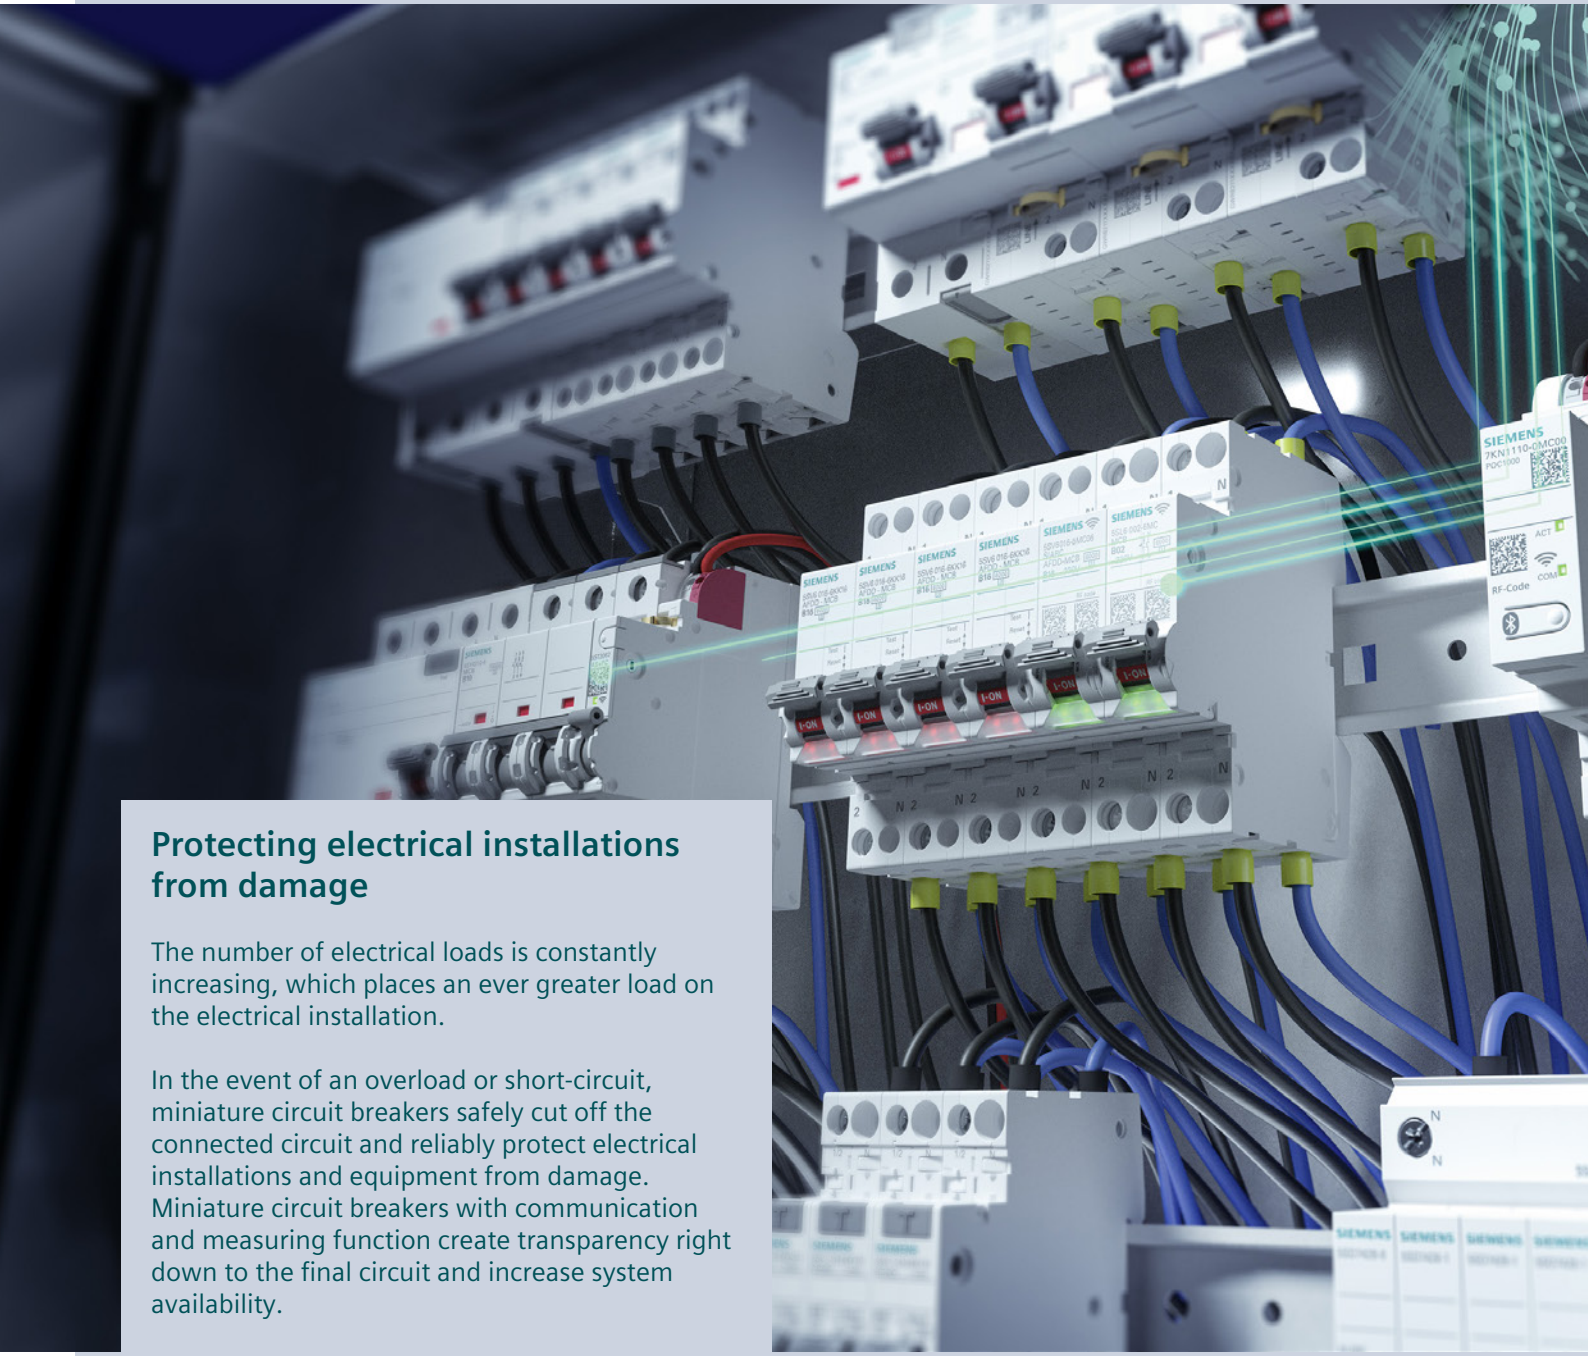

Protecting electrical installations from damage

The number of electrical loads is constantly increasing, which places an ever greater load on the electrical installation.

In the event of an overload or short-circuit, miniature circuit breakers safely cut off the connected circuit and reliably protect electrical installations and equipment from damage. Miniature circuit breakers with communication and measuring function create transparency right down to the final circuit and increase system availability.

Miniature circuit breakers from the SENTRON portfolio are also simple to mount and install. The devices have a uniform design and, with the appropriate accessories, can be expanded by many additional functions.

For industry, buildings or infrastructure – with our versatile portfolio, you will find a suitable miniature circuit breaker for any application.

© Siemens 2022

Miniature Circuit Breakers



All the information you need 3/2
Devices for all applications 3/4
System overview 3/5
Quick selection guide 3/6
- Miniature circuit breakers 3/6
- Device protection switches 3/10

Basic units 3/12
- 5SL3 miniature circuit breakers 3/12
- 5SL6 miniature circuit breakers 3/14
- 5SL4 miniature circuit breakers 3/16
- 5SJ6...-.KS miniature circuit breakers 3/18
- 5SL30 miniature circuit breakers 3/20
- 5SL60 miniature circuit breakers 3/22
- 5SY6 miniature circuit breakers 3/24
- 5SY4 miniature circuit breakers 3/26
- 5SP4 miniature circuit breakers 3/28
- 5SY5 miniature circuit breakers 3/30
- 5SY7 miniature circuit breakers 3/32
- 5SY8 miniature circuit breakers 3/34
- 5SJ4..HG.. miniature circuit breakers 3/36
- 5SL6 COM miniature circuit breakers with communication and measuring functions 3/38
- 5SP3 selective main miniature circuit breakers (SHU) 3/40
- 5SY17 device protection switches 3/42
- 5SK9 device protection switches 3/43

Accessories 3/44
- Overview of the modular system 3/44
- Electrical accessories 3/46
- Mechanical accessories 3/56
- Standard busbars 3/58
- Compact busbars 3/69
- Accessories for busbars 3/74
- Distribution blocks for DIN-rail mounting 3/80
- SIKclip wiring system 3/83

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about miniature circuit breakers, please visit our websites
www.siemens.com/mcb
www.siemens.com/protection-concept

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technical basic information
  - SENTRON protection concept **(109767456)**
- Technology primer
  - Miniature circuit breakers **(109482304)**

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Miniature circuit breakers (general)
  bit.ly/2kJP2Dq

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Miniature circuit breakers **sie.ag/2kTFXI5**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Miniature circuit breakers **(45302792)**
- Installation manual
  – Circuit protection devices with communication and measuring function **(109791805)**
- System manual
  – Circuit protection devices with communication and measuring function **(109791806)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)
- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

Technical overview – Miniature circuit breakers

The fast way to get you to our online services

This page provides you with comprehensive information and links on miniature circuit breakers
www.siemens.com/lowvoltage/product-support (109769082)

© Siemens 2022

Devices for all applications

Miniature circuit breakers for basic applications



Ideal for standard applications
The 5SL miniature circuit breakers are the new standard with B and C tripping characteristics for applications up to 63 A. They can be used to disconnect or isolate equipment.

The 5SL devices are mainly installed in meter panels and small distribution boards to protect circuits for lamps, cookers and even machines, for example, in residential or commercial buildings.

Miniature circuit breakers for advanced applications



Ideal for industrial applications
For circuits with motors or large lamps, semiconductors or strong pulse-generating equipment such as transformers and solenoid valves – the 5SY and 5SP devices are optimized for industrial applications and are proven in use.

The 5SY devices offer you top quality and functionality for installation in complex buildings and industry. With a rated breaking capacity of up to 25 kA, they are able to handle the most challenging requirements at a rated current of 0.3 to 80 A.

Special features
- Dual-chamber terminals
- Simple to detach without tools using sliding catches
- Separate switching position indication
- A wide range of accessories
- 5SL60 available as communication-capable miniature circuit breaker

Device protection switches for advanced applications




Ideal for devices in industry
Device protection switches from Siemens offer optimum protection for all applications in AC and DC control circuits in industrial applications and plant engineering.

Thermomagnetic 5SY17 device protection switches are used to protect solenoid valves, servo motors, signal lamps or even PLC inputs. Everywhere where loads have to be precisely protected from overloads and short-circuits.

Electronic 5SK9 device protection switches are optimally suited to protecting, for example, relays, programmable controllers, motors, sensors, actuators and valves. A current analysis in conjunction with fast tripping in the event of a fault avoid the danger of overloading the switched-mode power supply.

5SL6 COM miniature circuit breakers and 5ST3 COM auxiliary switches/fault signal contacts with communication and measuring functions

The new communication-capable protective devices and auxiliary components record measured values and status information and transmit this data wirelessly to higher-level systems.

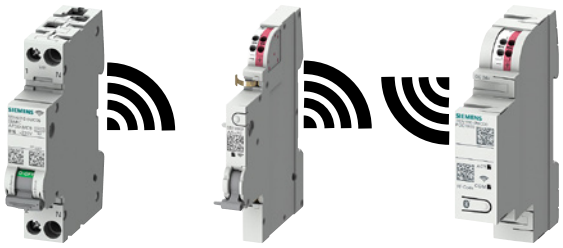

5SL6 COM
see page 3/38

5ST3 COM
see page 3/50

7KN POC1000
see page 10/19

- Recording of energy and active power, current, voltage, line frequency and temperature
- Integrated status acquisition, operating hours counter and trip counter
- Higher system availability through early response to warning messages
- Convenient integration into new and existing systems thanks to compact mounting widths of 1 MW
- Fast parameterization and commissioning with the SENTRON powerconfig mobile app or the SENTRON powerconfig software
- Wireless transmission of measurement data from up to 24 communication-capable devices to the 7KN Powercenter 1000 data transceiver

© Siemens 2022

System overview

Basic units and accessories

Miniature circuit breakers for basic applications


5SL3


5SL6


5SL4


5SJ6...-.KS


5SL30


5SL60


5SP3

Miniature circuit breakers for advanced applications


5SY6


5SY4


5SP4


5SY5


5SY7


5SY8


5SJ4..HG..


5SL6 COM

Device protection switches for advanced applications


5SY17


5SK9

Electrical accessories


Auxiliary switches (AS)


Fault signal contacts (FC)


Auxiliary switches and fault signal contacts (AS+FC)/(AS+FC) COM


Shunt trips (ST)


Undervoltage releases (UR)


Remote control mechanisms (RC mech.)


5SM6 arc fault detection units

Mechanical accessories


Rotary operating mechanisms


Spacers


Terminal covers


Wall enclosures


Molded-plastic enclosures


Holders for front panel installation


Intermediate frames

Busbars and accessories


Compact busbars


Standard busbars


Terminals


Touch protection


End caps


Series connectors


Distribution blocks

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

Miniature circuit breakers

For basic applications for buildings and infrastructure





			5SL3	5SL6
Standards				
Standards			IEC/EN 60898-1	IEC/EN 60898-1
Basic data				
Breaking capacity I_{cn} for AC (230/400 V)		kA	4.5	6
Rated current		A	0.3 ... 63	0.3 ... 63
Number of poles			1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N
Tripping characteristic			B | C	B | C
Approvals				
General product approvals			VDE, CEBEC, TSE	VDE, CEBEC, TSE
Marine classifications			–	–
Operational voltage				
Max. AC		V	250/440	250/440
Max. DC per pole	Acc. to EN 60898-2, EN 60947-2	V	72	72
Max. AC	Acc. to UL 1077, CSA C22.2 No.235	V	–	–
Rated voltage AC	Acc. to UL 489	V	–	–
Rated impulse withstand voltage U_{imp}		kV	4	4
Rated frequency f_n		Hz	50/60	50/60
Connection				
Dual-chamber terminal			–	–
Conductor cross-section 1 wire	Solid/stranded	mm^2	0.75 ... 35	0.75 ... 35
	Finely stranded with end sleeve	mm^2	0.75 ... 25	0.75 ... 25
	Finely stranded without end sleeve	mm^2	1 ... 35	1 ... 35
Conductor cross-section 2 wires (same cross-section and same conductor type)	Solid/stranded	mm^2	0.75 ... 10	0.75 ... 10
	Finely stranded with end sleeve	mm^2	0.75 ... 4	0.75 ... 4
	Finely stranded without end sleeve	mm^2	1 ... 4	1 ... 4
Conductor cross-section 1-wire + busbar (pin thickness 1.5 mm)	Solid/stranded	mm^2	10 ... 25	10 ... 25
	Finely stranded with non-insulated end sleeve	mm^2	6 ... 25	6 ... 25
	Finely stranded with insulated end sleeve	mm^2	6 ... 16	6 ... 16
Ambient conditions				
Ambient temperature [5]		°C	–25 ... +45 [1]	–25 ... +45 [1]
Storage temperature		°C	–40 ... +75 [3]	–40 ... +75 [3]
Shock acc. to IEC 60068-2-27 150 m/s^2 at 11 ms half-sine			–	–
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s [2])			–	–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)			–	–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)			–	–
Pollution degree for overvoltage category			2/III	2/III
More information				
			See page 3/12	See page 3/14

[1] Periodically +55 °C, max. 95% humidity
[2] Max. 95% humidity
[3] 95% humidity up to 55 °C
55% humidity up to 70 °C
30% humidity up to 75 °C
[4] Max. 85% rel. humidity, > 45°C max. 0.056kg/m³ abs. humidity

[5] The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.

System overview, page 3/5

© Siemens 2022

				
5SL4	**5SJ6...-.KS**	**5SL30**	**5SL60**	**5SP3**
IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	IEC/EN 60898-1	DIN VDE 0641-21
10	6	4.5	6	25
0.3 ... 63	10 ... 20	2 ... 40	2 ... 40	16 ... 63
1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 1P+N	1P+N	1P+N	1P | 2P | 3P | 4P
B | C | D	B | C	C	B | C	E
VDE, CEBEC, IMQ	VDE	VDE, IMQ, NF, CCC	VDE, IMQ, NF, CCC	VDE
–	–	–	DNV-GL	–
250/440	250/440	250	250	–
72	60	72	72	–
–	–	–	–	–
–	–	–	–	–
4	4	4	4	4
50/60	50/60	50/60	50/60	50/60
–	Plug-in terminal on outgoing side	–	–	–
0.75 ... 35	1.5 ... 4 (top) | 0.75 ... 25 (bottom)	0.75 ... 16	0.75 ... 16	2.5 ... 50 (bottom)
0.75 ... 25	1.5 ... 2.5 (top) | 0.75 ... 25 (bottom)	0.75 ... 10	0.75 ... 10	2.5 ... 50 (bottom)
1 ... 35	1.5 ... 4	0.75 ... 16	0.75 ... 16	2.5 ... 16 (top)
0.75 ... 10	–	0.75 ... 4	0.75 ... 4	–
0.75 ... 4	–	0.75 ... 1.5	0.75 ... 1.5	–
1 ... 4	–	0.75 ... 4	0.75 ... 4	–
10 ... 25	–	–	–	–
6 ... 25	–	6 ... 10	6 ... 10	–
6 ... 16	–	6 ... 10	6 ... 10	–
–25 ... +55 [2]	–25 ... +45 [1]	–25 ... +60 [4]	–25 ... +60 [4]	–25 ... +55
–40 ... +75 [3]	–40 ... +75 [3]	–40 ... +75	–40 ... +75	–40 ... +70
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
2/III	2/III	2/III	2/III	3/IV
See page 3/16	See page 3/18	See page 3/20	See page 3/22	See page 3/40

System overview, page 3/5

© Siemens 2022

Miniature circuit breakers

For advanced applications for buildings and infrastructure and for industry and machine manufacturing







				5SL6 COM	5SY6	5SY4
Standards						
Standards				IEC/EN 60898-1	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077
Basic data						
Breaking capacity I_{cn}	For AC (230/400 V) acc. to IEC/EN 60898-1 AC		kA	6	6	10
	Acc. to UL1077 and CSA C22.2 No.235			–	Suplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C	Suplementary protector, OC, FW 0, OL 0, TC 3 at 50 °C
			SC	–	U2: see Certificate of Compliance	U2: see Certificate of Compliance
Rated breaking capacity I_{cu} acc. to IEC/EN 60947-2 at U_e 230 V | at U_e 400 V (1P, 1P+N) | (2P, 3P, 4P, 3P+N)		I_n 0.3 ... 2 A	kA	–	30 | 30	35 | 35
		I_n 3 ... 6 A	kA	–	30 | 30	35 | 35
		I_n 8 ... 10 A	kA	–	15 | 15	20 | 20
		I_n 13 ... 32 A	kA	–	15 | 15	20 | 20
		I_n 35 ... 40 A	kA	–	10 | 10	15 | 15
		I_n 50 ... 63 A	kA	–	10 | 10	15 | 15
		I_n 80 ... 125 A	kA	–	– | –	10 | 10
Rated current			A	2 ... 32	0.3 ... 63	0.3 ... 80
Number of poles				1P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N
Tripping characteristic				B | C	B | C	A | B | C | D
Approvals						
General product approvals				VDE, RED	VDE, IMQ, CCC, cULus	VDE, IMQ, CCC, cULus
Marine classifications				–	DNV-GL, LR, BV, RINA, ABS	DNV-GL, LR, BV, RINA, ABS
Operational voltage						
Max. AC	Acc. to EN 60898-1/-2, EN 60947-2		V	250	250/440	250/440
	Acc. to UL 1077, CSA C22.2 No.235		V	–	277/480	277/480
Max. DC per pole	Acc. to EN 60898-1/-2, EN 60947-2		V	72	72 [1]	72 [1]
Rated voltage AC	Acc. to UL 489		V	–	–	–
Rated impulse withstand voltage U_{imp}			kV	4	4	4
Rated frequency f_n			Hz	50/60	50/60	50/60
Connection						
Dual-chamber terminal				–	■	■
Conductor cross-section 1 wire	Solid/stranded		mm^2	0.75 ... 16	0.75 ... 35	0.75 ... 35
	Finely stranded, with end sleeve		mm^2	0.75 ... 10	0.75 ... 25	0.75 ... 25
	Conductors (Cu 60/75 °C I_n ≤40 A; 60 °C I_n >40 A)			–	AWG 18 ... 4	AWG 18 ... 4
Terminal tightening torque			Nm	1.2 ... 2 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
			lb-in	11 ... 18	22 ... 26	22 ... 26
Ambient conditions						
Ambient temperature [7]			°C	–25 ... +60 [5]	–25 ... +55 [4]	–40 ... +70 [3]
Storage temperature			°C	–40 ... +75	–40 ... +75 [3]	–40 ... +75 [3]
Shock acc. to IEC 60068-2-27 150 m/s² at 11 ms half-sine				–	■	■
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s²)				–	■	■
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)				–	–	■
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)					–	■
Pollution degree for overvoltage category				2/III	3/III	3/III
Additional functions						
Communication and measuring function [8]				■	–	–
More information						
				See page 3/38	See page 3/24	See page 3/26

[1] Exempt: C/D 0.3 A ... 0.5 A
[2] 5SY54.. 4-pole, degree of pollution 2 for overvoltage category II
[3] 95% humidity up to 55 °C
55% humidity up to 70 °C
30% humidity up to 75 °C
[4] Max. 95% humidity
[5] Max. 85% rel. humidity, > 45°C max. 0.056kg/m³ abs. humidity
[6] When used with a busbar at the front or 2 conductors, the terminal area at the rear is restricted, see notes on the Internet

System overview, page 3/5

© Siemens 2022







5SP4	5SY5	5SY7	5SY8	5SJ4..HG..
IEC/EN 60898-1 UL 1077	IEC/EN 60898-2 UL 1077	IEC/EN 60898-1 IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 1077	IEC/EN 60947-2 UL 489
10	10	15	25	–
Suplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Suplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Suplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	Suplementary protector, OC, FW 0, OL 0, TC 3 at 50°C	–
U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	U2: see Certificate of Compliance	–
– | –	– | –	50 | 50	70 | 70	10
– | –	– | –	40 | 40	50 | 50	10
– | –	– | –	30 | 30	40 | 40	10
– | –	– | –	25 | 25	30 | 30	10
– | –	– | –	20 | 20	25 | 25	10
– | –	– | –	15 | 15	20 | 20	10
10 | 10	– | –	– | –	– | –	–
80 ... 125	0.3 ... 63	0.3 ... 63	0.3 ... 63	0.3 ... 63
1P | 2P | 3P | 4P	1P | 2P | 4P	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P | 4P | 1P+N | 3P+N	1P | 2P | 3P
B | C | D	B | C	B | C | D	C | D	B | C | D
VDE, CCC, cULus	VDE, CCC, cULus	VDE, IMQ, CCC, cULus	cULus	VDE, CCC, UL
LR	ABS	DNV-GL, LR, BV, RINA, ABS	ABS	–
250/440	250/440	250/440	250/440	250/440
277/480	–	277/480	277/480	–
72	250	72 [1)]	72 [1)]	60
–	–	–	–	277/480
4	4	4	4	4
50/60	50/60	50/60	50/60	50/60
–	■	■	■	■
10 ... 50	0.75 ... 35	0.75 ... 35	0.75 ... 35	0.75 ... 25 (16) [6)]
10 ... 35	0.75 ... 25	0.75 ... 25	0.75 ... 25	0.75 ... 25 (10)
AWG 3 ... 1	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4	AWG 18 ... 4 (5)
2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.	2.5 ... 3.5 max.
22 ... 31	22 ... 26	22 ... 26	22 ... 26	22 ... 26
–25 ... +55 [4)]	–40 ... +70 [3)]	–40 ... +70 [3)]	–25 ... +55 [4)]	–25 ... +55 [4)]
–40 ... +75 [3)]	–40 ... +75 [3)]	–40 ... +75 [3)]	–40 ... +75 [3)]	–40 ... +75 [3)]
–	■	■	–	■
■	■	■	■	■
–	■	■	–	–
■	■	■	–	–
3/III	3/III [4)]	3/III	3/III	3/III
–	–	–	–	–
See page 3/28	See page 3/30	See page 3/32	See page 3/34	See page 3/36

[7)] The device properties specified, for example, in the product standards, such as service life, breaking capacity and surface temperature, cannot be guaranteed at the specified ambient temperatures that lie outside the specified product standards.

[8)] Please note the country-specific radio licenses of the products in SIOS: www.siemens.com/lowvoltage/certificates (109801197)

System overview, page 3/5

© Siemens 2022

Device protection switches

For advanced applications for industry and machine manufacturing



				5SY17
Standards				
Standards				IEC/EN 60934 UL 1077
Basic data				
Breaking capacity I_{cn}	At rated voltage		kA	3
Rated current			A	0.5 ... 16
Number of poles				1P+AS
DC tripping	Magnetic			F1 (2.5 ... 4 × I_n) | F2 (4 ... 7 × I_n)
	Thermal			1.05 × holding current | 1.35 × tripping current | TC3 1.35 × I_n
	Electronic			–
Service life	Actuations			6000
Approvals				
General product approvals				CCC, cULus
Operational voltage				
Min. AC	Acc. to EN 60934		V	12 [2]
	Acc. to UL 1077, CSA C22.2 No.235		V	12 [2]
Max. AC	Acc. to EN 60934		V	250
	Acc. to UL 1077, CSA C22.2 No.235		V	277
Min. DC per pole			V	12 [2]
Max. DC per pole			V	72
Rated voltage	Acc. to IEC/EN 60934		V	230
	Acc. to UL 1077		V	277
Rated impulse withstand voltage U_{imp}			kV	4
Rated frequency f_n			Hz	50/60
Auxiliary switch				
MIn. operational voltage (AC)			V	12
Max. operational voltage (AC)			V	250
MIn. operational voltage (DC)			V	12
Max. operational voltage (DC)			V	60
Utilization category AC-12				6A at 230 V AC
Utilization category AC-14				6A at 230 V AC
Utilization category DC-13				1A at 60 V DC
Connection				
Dual-chamber terminal				–
Conductor cross-section 1 wire	Solid/stranded		mm²	0.75 ... 16
	Finely stranded with end sleeve		mm²	0.75 ... 10
	Finely stranded with insulated end sleeve		mm²	0.75 ... 10
	Finely stranded without end sleeve		mm²	0.75 ... 16
	Conductor cross-section AWG			–
2-wire (same cross-section)	Solid/stranded		mm²	0.75 ... 4
	Finely stranded with end sleeve		mm²	0.75 ... 2.5
	Finely stranded with insulated end sleeve		mm²	0.75 ... 1.5
	Finely stranded without end sleeve		mm²	0.75 ... 4
Terminal tightening torque			Nm	2.0 ... 2.5 max.
			lb-in	17.7 ... 22.1
Ambient conditions				
Ambient temperature			°C	–25 ... +60 [3]
Storage temperature			°C	–40 ... +70
Shock acc. to IEC 60068-2-27 150 m/s² at 11 ms half-sine				–
Resistance to vibrations acc. to IEC 60068-2-6: 5 ... 25 Hz (±1mm) and at 25 ... 150 Hz (50 m/s²)				–
Resistant to shock and vibrations acc. to EN 61373 and EN 50155 "1B" (railway engineering)				–
Fire behavior of materials acc. to EN 45545-2 (fire protection on railway vehicles)				–
Pollution degree for overvoltage category	Acc. to IEC			2/III
More information				
				See page 3/42

[1] Max. 95% humidity

[2] At a minimum current of 100 mA

System overview, page 3/5

© Siemens 2022



5SK9

EN 61000-6-2, EN 61000-6-3, EN 60068-2-78, EN 50178, EN 60068-2-6, EN 60068-2-27, UL 508, UL 2367
–
1 ... 8
1P+AS
–
–
Overload 1.2 × I_n/1s | Short-circuit 2 × I_n/<10 ms
–
cULus
–
–
–
–
–
30
–
–
0.5
–
–
–
–
–
–
–
–
–
0.2 ... 4
0.2 ... 2.5
0.2 ... 2.5
–
AWG 24 ... 12
–
–
–
–
–
–
–25 ... +60 [1)]
–40 ... +70
–
–
–
–
–
See page 3/43



[3)] Max. 85% rel. humidity, > 45°C max. 0.056kg/m³ abs. humidity

System overview, page 3/5


© Siemens 2022

5SL3 miniature circuit breakers

4.5 kA

	1P 230/400 V AC		1P+N 230 V AC		2P 400 V AC		3P 400 V AC	
Mounting width	1 MW		2 MW		2 MW		3 MW	
								
Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SL3114-7	–	5SL3514-7	–	5SL3214-7	–	–
0.5 A	–	5SL3105-7	–	5SL3505-7	–	5SL3205-7	–	–
1 A	–	5SL3101-7	–	5SL3501-7	–	5SL3201-7	–	5SL3301-7
1.6 A	–	5SL3115-7	–	5SL3515-7	–	5SL3215-7	–	–
2 A	–	5SL3102-7	–	5SL3502-7	–	5SL3202-7	–	5SL3302-7
3 A	–	5SL3103-7	–	5SL3503-7	–	5SL3203-7	–	5SL3303-7
4 A	–	5SL3104-7	–	5SL3504-7	–	5SL3204-7	–	5SL3304-7
6 A	5SL3106-6	5SL3106-7	5SL3506-6	5SL3506-7	5SL3206-6	5SL3206-7	5SL3306-6	5SL3306-7
8 A	–	5SL3108-7	–	5SL3508-7	–	5SL3208-7	–	–
10 A	5SL3110-6	5SL3110-7	5SL3510-6	5SL3510-7	5SL3210-6	5SL3210-7	5SL3310-6	5SL3310-7
13 A	5SL3113-6	5SL3113-7	5SL3513-6	5SL3513-7	5SL3213-6	5SL3213-7	–	–
16 A	5SL3116-6	5SL3116-7	5SL3516-6	5SL3516-7	5SL3216-6	5SL3216-7	5SL3316-6	5SL3316-7
20 A	5SL3120-6	5SL3120-7	5SL3520-6	5SL3520-7	5SL3220-6	5SL3220-7	5SL3320-6	5SL3320-7
25 A	5SL3125-6	5SL3125-7	5SL3525-6	5SL3525-7	5SL3225-6	5SL3225-7	5SL3325-6	5SL3325-7
32 A	5SL3132-6	5SL3132-7	5SL3532-6	5SL3532-7	5SL3232-6	5SL3232-7	5SL3332-6	5SL3332-7
40 A	5SL3140-6	5SL3140-7	5SL3540-6	5SL3540-7	5SL3240-6	5SL3240-7	5SL3340-6	5SL3340-7
50 A	5SL3150-6	5SL3150-7	5SL3550-6	5SL3550-7	5SL3250-6	5SL3250-7	5SL3350-6	5SL3350-7
63 A	5SL3163-6	5SL3163-7	5SL3563-6	5SL3563-7	5SL3263-6	5SL3263-7	5SL3363-6	5SL3363-7

Mounting concept

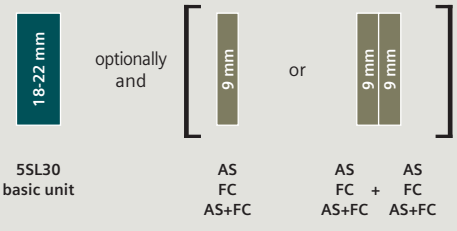

AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49

Quick selection guide, page 3/6

© Siemens 2022



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	–	–	–
–	–	–	–
–	5SL3601-7	–	5SL3401-7
–	–	–	–
–	5SL3602-7	–	5SL3402-7
–	5SL3603-7	–	5SL3403-7
–	5SL3604-7	–	5SL3404-7
5SL3606-6	5SL3606-7	–	5SL3406-7
–	5SL3608-7	–	–
5SL3610-6	5SL3610-7	–	5SL3410-7
5SL3613-6	5SL3613-7	–	5SL3413-7
5SL3616-6	5SL3616-7	–	5SL3416-7
5SL3620-6	5SL3620-7	–	5SL3420-7
5SL3625-6	5SL3625-7	–	5SL3425-7
5SL3632-6	5SL3632-7	–	5SL3432-7
5SL3640-6	5SL3640-7	–	5SL3440-7
5SL3650-6	5SL3650-7	–	5SL3450-7
5SL3663-6	5SL3663-7	–	5SL3463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016



Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022
Auxiliary switches and fault signal contacts (AS+FC)	**Article No.**
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Quick selection guide, page 3/6


© Siemens 2022

5SL6 miniature circuit breakers

6 kA

	1P 230/400 V AC		1P+N 230 V AC		2P 400 V AC		3P 400 V AC	
Mounting width	1 MW		2 MW		2 MW		3 MW	
								
Rated current I_n	Characteristic B	C	Characteristic B	C	Characteristic B	C	Characteristic B	C
0.3 A	–	5SL6114-7	–	5SL6514-7	–	5SL6214-7	–	5SL6314-7
0.5 A	–	5SL6105-7	–	5SL6505-7	–	5SL6205-7	–	5SL6305-7
1 A	–	5SL6101-7	–	5SL6501-7	–	5SL6201-7	–	5SL6301-7
1.6 A	–	5SL6115-7	–	5SL6515-7	–	5SL6215-7	–	5SL6315-7
2 A	5SL6102-6	5SL6102-7	–	5SL6502-7	–	5SL6202-7	–	5SL6302-7
3 A	–	5SL6103-7	–	5SL6503-7	–	5SL6203-7	–	5SL6303-7
4 A	5SL6104-6	5SL6104-7	–	5SL6504-7	–	5SL6204-7	–	5SL6304-7
6 A	5SL6106-6	5SL6106-7	5SL6506-6	5SL6506-7	5SL6206-6	5SL6206-7	5SL6306-6	5SL6306-7
8 A	–	5SL6108-7	–	5SL6508-7	–	5SL6208-7	–	5SL6308-7
10 A	5SL6110-6	5SL6110-7	5SL6510-6	5SL6510-7	5SL6210-6	5SL6210-7	5SL6310-6	5SL6310-7
13 A	5SL6113-6	5SL6113-7	5SL6513-6	5SL6513-7	5SL6213-6	5SL6213-7	5SL6313-6	5SL6313-7
16 A	5SL6116-6	5SL6116-7	5SL6516-6	5SL6516-7	5SL6216-6	5SL6216-7	5SL6316-6	5SL6316-7
20 A	5SL6120-6	5SL6120-7	5SL6520-6	5SL6520-7	5SL6220-6	5SL6220-7	5SL6320-6	5SL6320-7
25 A	5SL6125-6	5SL6125-7	5SL6525-6	5SL6525-7	5SL6225-6	5SL6225-7	5SL6325-6	5SL6325-7
32 A	5SL6132-6	5SL6132-7	5SL6532-6	5SL6532-7	5SL6232-6	5SL6232-7	5SL6332-6	5SL6332-7
40 A	5SL6140-6	5SL6140-7	5SL6540-6	5SL6540-7	5SL6240-6	5SL6240-7	5SL6340-6	5SL6340-7
50 A	5SL6150-6	5SL6150-7	5SL6550-6	5SL6550-7	5SL6250-6	5SL6250-7	5SL6350-6	5SL6350-7
63 A	5SL6163-6	5SL6163-7	5SL6563-6	5SL6563-7	5SL6263-6	5SL6263-7	5SL6363-6	5SL6363-7

Mounting concept

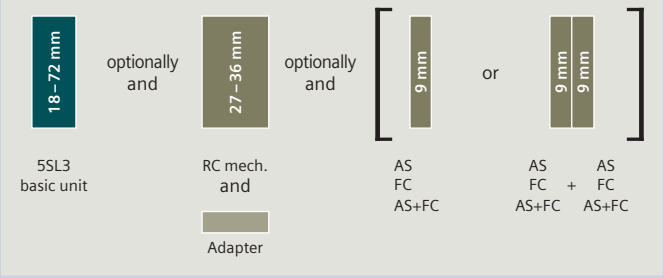

AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49
RC mech.	Remote control mechanisms	See page 3/54

Quick selection guide, page 3/6

© Siemens 2022



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
B	C	B	C
–	5SL6614-7	–	5SL6414-7
–	5SL6605-7	–	5SL6405-7
–	5SL6601-7	–	5SL6401-7
–	5SL6615-7	–	5SL6415-7
–	5SL6602-7	–	5SL6402-7
–	5SL6603-7	–	5SL6403-7
–	5SL6604-7	–	5SL6404-7
5SL6606-6	5SL6606-7	5SL6406-6	5SL6406-7
–	5SL6608-7	–	5SL6408-7
5SL6610-6	5SL6610-7	5SL6410-6	5SL6410-7
5SL6613-6	5SL6613-7	5SL6413-6	5SL6413-7
5SL6616-6	5SL6616-7	5SL6416-6	5SL6416-7
5SL6620-6	5SL6620-7	5SL6420-6	5SL6420-7
5SL6625-6	5SL6625-7	5SL6425-6	5SL6425-7
5SL6632-6	5SL6632-7	5SL6432-6	5SL6432-7
5SL6640-6	5SL6640-7	5SL6440-6	5SL6440-7
5SL6650-6	5SL6650-7	5SL6450-6	5SL6450-7
5SL6663-6	5SL6663-7	5SL6463-6	5SL6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022



Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 ... 2 MW		5ST3820-6
3 ... 4 MW		5ST3820-7

Quick selection guide, page 3/6


© Siemens 2022


5SL4 miniature circuit breakers

10 kA

	1P 230/400 V AC			1P+N 230 V AC			2P 400 V AC		
Mounting width	1 MW			2 MW			2 MW		
									
Rated current I_n	Characteristic B	C	D	Characteristic B	C	D	Characteristic B	C	D
0.3 A	–	5SL4114-7	5SL4114-8	–	5SL4514-7	5SL4514-8	–	5SL4214-7	5SL4214-8
0.5 A	–	5SL4105-7	5SL4105-8	–	5SL4505-7	5SL4505-8	–	5SL4205-7	5SL4205-8
1 A	5SL4101-6	5SL4101-7	5SL4101-8	5SL4501-6	5SL4501-7	5SL4501-8	5SL4201-6	5SL4201-7	5SL4201-8
1.6 A	–	5SL4115-7	5SL4115-8	–	5SL4515-7	5SL4515-8	–	5SL4215-7	5SL4215-8
2 A	5SL4102-6	5SL4102-7	5SL4102-8	5SL4502-6	5SL4502-7	5SL4502-8	5SL4202-6	5SL4202-7	5SL4202-8
3 A	5SL4103-6	5SL4103-7	5SL4103-8	5SL4503-6	5SL4503-7	5SL4503-8	5SL4203-6	5SL4203-7	5SL4203-8
4 A	5SL4104-6	5SL4104-7	5SL4104-8	5SL4504-6	5SL4504-7	5SL4504-8	5SL4204-6	5SL4204-7	5SL4204-8
6 A	5SL4106-6	5SL4106-7	5SL4106-8	5SL4506-6	5SL4506-7	5SL4506-8	5SL4206-6	5SL4206-7	5SL4206-8
8 A	5SL4108-6	5SL4108-7	5SL4108-8	5SL4508-6	5SL4508-7	5SL4508-8	5SL4208-6	5SL4208-7	5SL4208-8
10 A	5SL4110-6	5SL4110-7	5SL4110-8	5SL4510-6	5SL4510-7	5SL4510-8	5SL4210-6	5SL4210-7	5SL4210-8
13 A	5SL4113-6	5SL4113-7	5SL4113-8	5SL4513-6	5SL4513-7	5SL4513-8	5SL4213-6	5SL4213-7	5SL4213-8
16 A	5SL4116-6	5SL4116-7	5SL4116-8	5SL4516-6	5SL4516-7	5SL4516-8	5SL4216-6	5SL4216-7	5SL4216-8
20 A	5SL4120-6	5SL4120-7	5SL4120-8	5SL4520-6	5SL4520-7	5SL4520-8	5SL4220-6	5SL4220-7	5SL4220-8
25 A	5SL4125-6	5SL4125-7	5SL4125-8	5SL4525-6	5SL4525-7	5SL4525-8	5SL4225-6	5SL4225-7	5SL4225-8
32 A	5SL4132-6	5SL4132-7	5SL4132-8	5SL4532-6	5SL4532-7	5SL4532-8	5SL4232-6	5SL4232-7	5SL4232-8
40 A	5SL4140-6	5SL4140-7	5SL4140-8	5SL4540-6	5SL4540-7	5SL4540-8	5SL4240-6	5SL4240-7	5SL4240-8
50 A	5SL4150-6	5SL4150-7	5SL4150-8	5SL4550-6	5SL4550-7	5SL4550-8	5SL4250-6	5SL4250-7	5SL4250-8
63 A	5SL4163-6	5SL4163-7	5SL4163-8	5SL4563-6	5SL4563-7	5SL4563-8	5SL4263-6	5SL4263-7	5SL4263-8

Mounting concept

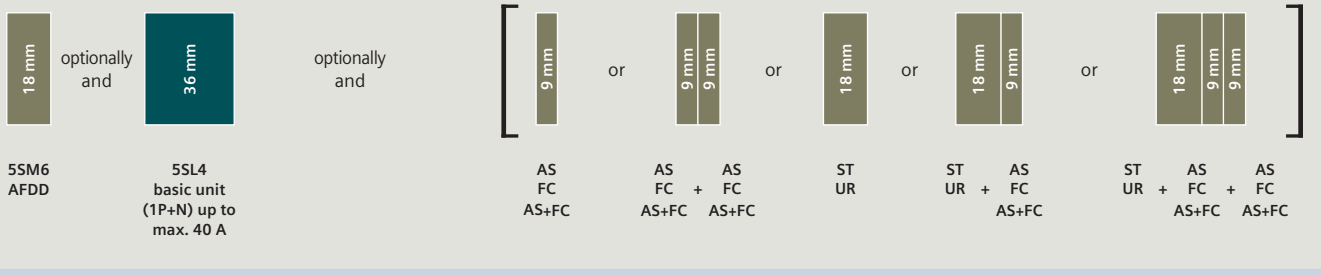



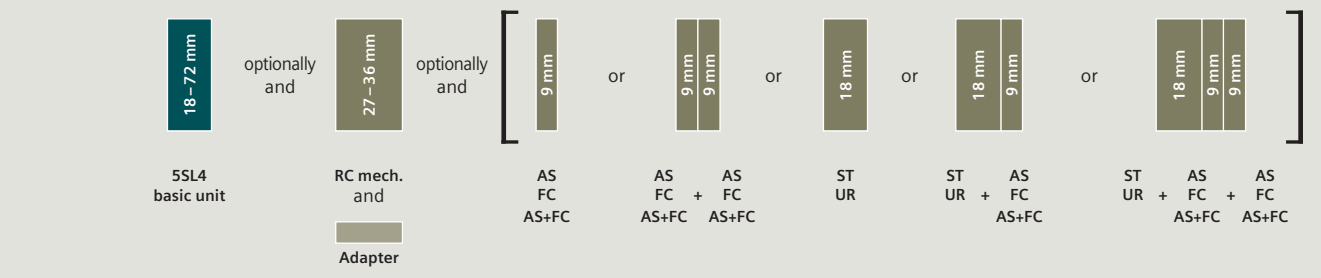


AFDD Arc fault detection units See page 3/55
AS Auxiliary switches See page 3/46
FC Fault signal contacts See page 3/48
AS+FC Auxiliary switches and fault signal contacts See page 3/49
ST Shunt trips See page 3/52
UR Undervoltage releases See page 3/53
RC mech. Remote control mechanisms See page 3/54

Quick selection guide, page 3/6

© Siemens 2022



3P 400 V AC 3 MW			3P+N 400 V AC 4 MW			4P 400 V AC 4 MW		
								
Characteristic			**Characteristic**			**Characteristic**		
B	**C**	**D**	**B**	**C**	**D**	**B**	**C**	**D**
–	5SL4314-7	5SL4314-8	–	5SL4614-7	5SL4614-8	–	5SL4414-7	5SL4414-8
–	5SL4305-7	5SL4305-8	–	5SL4605-7	5SL4605-8	–	5SL4405-7	5SL4405-8
5SL4301-6	5SL4301-7	5SL4301-8	5SL4601-6	5SL4601-7	5SL4601-8	5SL4401-6	5SL4401-7	5SL4401-8
–	5SL4315-7	5SL4315-8	–	5SL4615-7	5SL4615-8	–	5SL4415-7	5SL4415-8
5SL4302-6	5SL4302-7	5SL4302-8	5SL4602-6	5SL4602-7	5SL4602-8	5SL4402-6	5SL4402-7	5SL4402-8
5SL4303-6	5SL4303-7	5SL4303-8	5SL4603-6	5SL4603-7	5SL4603-8	5SL4403-6	5SL4403-7	5SL4403-8
5SL4304-6	5SL4304-7	5SL4304-8	5SL4604-6	5SL4604-7	5SL4604-8	5SL4404-6	5SL4404-7	5SL4404-8
5SL4306-6	5SL4306-7	5SL4306-8	5SL4606-6	5SL4606-7	5SL4606-8	5SL4406-6	5SL4406-7	5SL4406-8
5SL4308-6	5SL4308-7	5SL4308-8	5SL4608-6	5SL4608-7	5SL4608-8	5SL4408-6	5SL4408-7	5SL4408-8
5SL4310-6	5SL4310-7	5SL4310-8	5SL4610-6	5SL4610-7	5SL4610-8	5SL4410-6	5SL4410-7	5SL4410-8
5SL4313-6	5SL4313-7	5SL4313-8	5SL4613-6	5SL4613-7	5SL4613-8	5SL4413-6	5SL4413-7	5SL4413-8
5SL4316-6	5SL4316-7	5SL4316-8	5SL4616-6	5SL4616-7	5SL4616-8	5SL4416-6	5SL4416-7	5SL4416-8
5SL4320-6	5SL4320-7	5SL4320-8	5SL4620-6	5SL4620-7	5SL4620-8	5SL4420-6	5SL4420-7	5SL4420-8
5SL4325-6	5SL4325-7	5SL4325-8	5SL4625-6	5SL4625-7	5SL4625-8	5SL4425-6	5SL4425-7	5SL4425-8
5SL4332-6	5SL4332-7	5SL4332-8	5SL4632-6	5SL4632-7	5SL4632-8	5SL4432-6	5SL4432-7	5SL4432-8
5SL4340-6	5SL4340-7	5SL4340-8	5SL4640-6	5SL4640-7	5SL4640-8	5SL4440-6	5SL4440-7	5SL4440-8
5SL4350-6	5SL4350-7	5SL4350-8	5SL4650-6	5SL4650-7	5SL4650-8	5SL4450-6	5SL4450-7	5SL4450-8
5SL4363-6	5SL4363-7	5SL4363-8	5SL4663-6	5SL4663-7	5SL4663-8	5SL4463-6	5SL4463-7	5SL4463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 ... 2 MW		5ST3820-6
3 ... 4 MW		5ST3820-7
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (2 MW), not in combination with RC mech.	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2



Quick selection guide, page 3/6

© Siemens 2022

5SJ6...-.KS miniature circuit breakers

6 kA – plug-in terminal on outgoing side



	1P 230/400 V AC		1P+N 230/400 V AC		2P 230/400 V AC		3P 230/400 V AC	
Mounting width	1 MW		2 MW		2 MW		3 MW	
								
Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
10 A	5SJ6110-6KS	5SJ6110-7KS	5SJ6510-6KS	5SJ6510-7KS	5SJ6210-6KS	5SJ6210-7KS	5SJ6310-6KS	5SJ6310-7KS
13 A	5SJ6113-6KS	5SJ6113-7KS	5SJ6513-6KS	5SJ6513-7KS	5SJ6213-6KS	5SJ6213-7KS	5SJ6313-6KS	5SJ6313-7KS
16 A	5SJ6116-6KS	5SJ6116-7KS	5SJ6516-6KS	5SJ6516-7KS	5SJ6216-6KS	5SJ6216-7KS	5SJ6316-6KS	5SJ6316-7KS
20 A	5SJ6120-6KS	5SJ6120-7KS	5SJ6520-6KS	5SJ6520-7KS	5SJ6220-6KS	5SJ6220-7KS	5SJ6320-6KS	5SJ6320-7KS

Quick selection guide, page 3/6


© Siemens 2022

Quick selection guide, page 3/6


© Siemens 2022

5SL30 miniature circuit breakers

1P+N 4.5 kA compact miniature circuit breakers

	1P+N (N pole right) 230 V AC	1P+N (N pole left) 230 V AC
Mounting width	2 MW	2 MW
		
Rated current I_n	**Characteristic** **C**	**Characteristic** **C**
2 A	5SL3002-7	5SL3002-7KL
4 A	5SL3004-7	5SL3004-7KL
6 A	5SL3006-7	5SL3006-7KL
8 A	5SL3008-7	5SL3008-7KL
10 A	5SL3010-7	5SL3010-7KL
13 A	5SL3013-7	5SL3013-7KL
16 A	5SL3016-7	5SL3016-7KL
20 A	5SL3020-7	5SL3020-7KL
25 A	5SL3025-7	5SL3025-7KL
32 A	5SL3032-7	5SL3032-7KL
40 A	5SL3040-7	5SL3040-7KL

Mounting concept

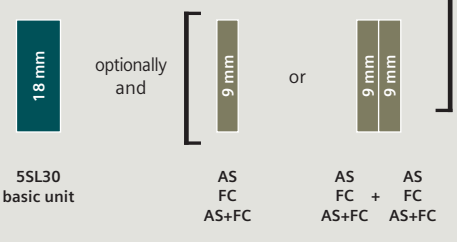

AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49

Quick selection guide, page 3/6

© Siemens 2022



Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016


Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022
Auxiliary switches and fault signal contacts (AS+FC)	**Article No.**
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Quick selection guide, page 3/6


© Siemens 2022


5SL60 miniature circuit breakers

1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right) 230 V AC		1P+N (N pole left) 230 V AC
Mounting width	1 MW		1 MW
			
Rated current I_n	Characteristic B	C	Characteristic C
2 A	–	5SL6002-7	5SL6002-7KL
4 A	–	5SL6004-7	5SL6004-7KL
6 A	5SL6006-6	5SL6006-7	5SL6006-7KL
8 A	–	5SL6008-7	5SL6008-7KL
10 A	5SL6010-6	5SL6010-7	5SL6010-7KL
13 A	5SL6013-6	5SL6013-7	5SL6013-7KL
16 A	5SL6016-6	5SL6016-7	5SL6016-7KL
20 A	5SL6020-6	5SL6020-7	5SL6020-7KL
25 A	5SL6025-6	5SL6025-7	5SL6025-7KL
32 A	5SL6032-6	5SL6032-7	5SL6032-7KL
40 A	5SL6040-6	5SL6040-7	5SL6040-7KL

Mounting concept

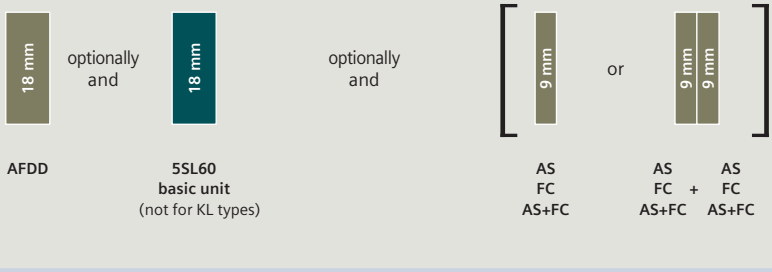

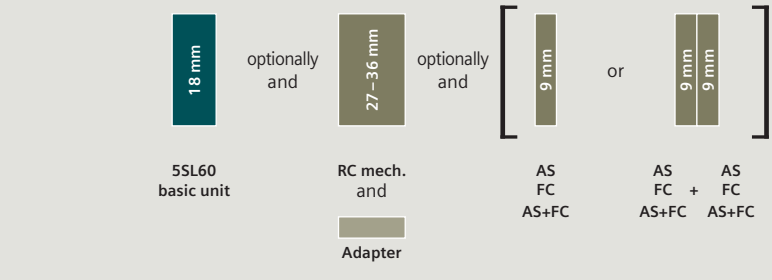

AFDD	Arc fault detection units	See page 3/55
AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49
RC mech.	Remote control mechanisms	See page 3/54

Quick selection guide, page 3/6

© Siemens 2022



Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Remote control mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
1 MW	5ST3820-6



Arc fault detection units (AFDD)		Article No.
For basic units 1P + N (1 MW), not for KL types	I_n up to 16 A	5SM6011-2
	I_n up to 40 A	5SM6014-2

Quick selection guide, page 3/6

© Siemens 2022


5SY6 miniature circuit breakers


6 kA

	1P 230/400 V AC	1P+N 230 V AC	2P 400 V AC	3P 400 V AC
Mounting width	1 MW	2 MW	2 MW	3 MW
				

Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C	B	C
0.3 A	–	5SY6114-7	–	5SY6514-7	–	5SY6214-7	–	5SY6314-7
0.5 A	–	5SY6105-7	–	5SY6505-7	–	5SY6205-7	–	5SY6305-7
1 A	–	5SY6101-7	–	5SY6501-7	–	5SY6201-7	–	5SY6301-7
1.6 A	–	5SY6115-7	–	5SY6515-7	–	5SY6215-7	–	5SY6315-7
2 A	5SY6102-6	5SY6102-7	–	5SY6502-7	–	5SY6202-7	–	5SY6302-7
3 A	–	5SY6103-7	–	5SY6503-7	–	5SY6203-7	–	5SY6303-7
4 A	5SY6104-6	5SY6104-7	–	5SY6504-7	–	5SY6204-7	–	5SY6304-7
5 A	–	5SY6111-7	–	–	–	5SY6211-7	–	5SY6311-7
6 A	5SY6106-6	5SY6106-7	5SY6506-6	5SY6506-7	5SY6206-6	5SY6206-7	5SY6306-6	5SY6306-7
8 A	–	5SY6108-7	–	5SY6508-7	–	5SY6208-7	–	5SY6308-7
10 A	5SY6110-6	5SY6110-7	5SY6510-6	5SY6510-7	5SY6210-6	5SY6210-7	5SY6310-6	5SY6310-7
13 A	5SY6113-6	5SY6113-7	5SY6513-6	5SY6513-7	5SY6213-6	5SY6213-7	5SY6313-6	5SY6313-7
15 A	–	5SY6118-7	–	–	–	5SY6218-7	–	5SY6318-7
16 A	5SY6116-6	5SY6116-7	5SY6516-6	5SY6516-7	5SY6216-6	5SY6216-7	5SY6316-6	5SY6316-7
20 A	5SY6120-6	5SY6120-7	5SY6520-6	5SY6520-7	5SY6220-6	5SY6220-7	5SY6320-6	5SY6320-7
25 A	5SY6125-6	5SY6125-7	5SY6525-6	5SY6525-7	5SY6225-6	5SY6225-7	5SY6325-6	5SY6325-7
30 A	–	5SY6130-7	–	–	–	5SY6230-7	–	5SY6330-7
32 A	5SY6132-6	5SY6132-7	5SY6532-6	5SY6532-7	5SY6232-6	5SY6232-7	5SY6332-6	5SY6332-7
40 A	5SY6140-6	5SY6140-7	5SY6540-6	5SY6540-7	5SY6240-6	5SY6240-7	5SY6340-6	5SY6340-7
50 A	5SY6150-6	5SY6150-7	5SY6550-6	5SY6550-7	5SY6250-6	5SY6250-7	5SY6350-6	5SY6350-7
63 A	5SY6163-6	5SY6163-7	5SY6563-6	5SY6563-7	5SY6263-6	5SY6263-7	5SY6363-6	5SY6363-7

Mounting concept

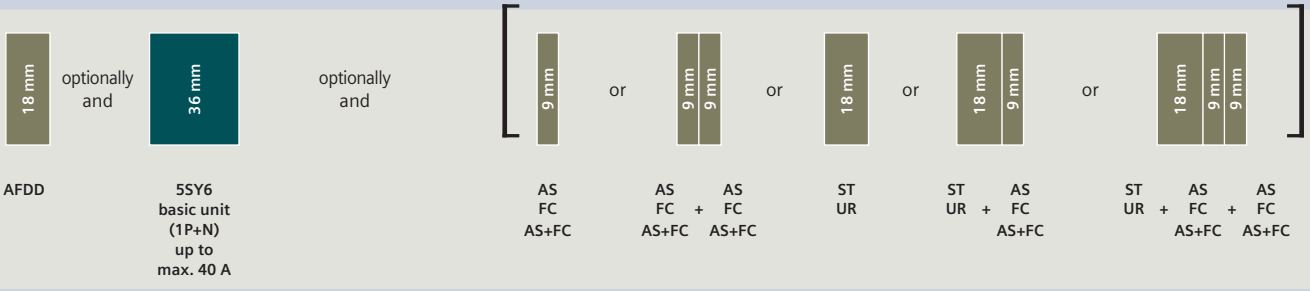


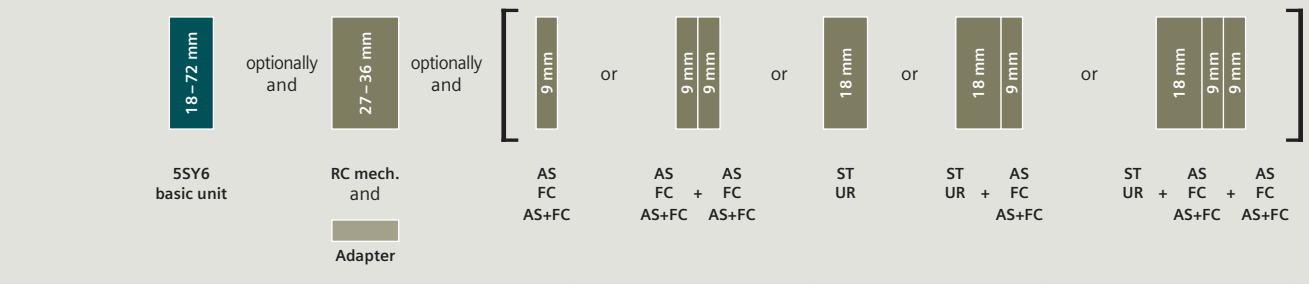


AFDD Arc fault detection units See page 3/55
AS Auxiliary switches See page 3/46
FC Fault signal contacts See page 3/48
AS+FC Auxiliary switches and fault signal contacts See page 3/49
ST Shunt trips See page 3/52
UR Undervoltage releases See page 3/53
RC mech. Remote control mechanisms See page 3/54

Quick selection guide, page 3/8

© Siemens 2022



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
			
Characteristic		Characteristic	
B	C	B	C
–	5SY6614-7	–	5SY6414-7
–	5SY6605-7	–	5SY6405-7
–	5SY6601-7	–	5SY6401-7
–	5SY6615-7	–	5SY6415-7
–	5SY6602-7	–	5SY6402-7
–	5SY6603-7	–	5SY6403-7
–	5SY6604-7	–	5SY6404-7
–	–	–	–
5SY6606-6	5SY6606-7	5SY6406-6	5SY6406-7
–	5SY6608-7	–	5SY6408-7
5SY6610-6	5SY6610-7	5SY6410-6	5SY6410-7
5SY6613-6	5SY6613-7	5SY6413-6	5SY6413-7
–	–	–	–
5SY6616-6	5SY6616-7	5SY6416-6	5SY6416-7
5SY6620-6	5SY6620-7	5SY6420-6	5SY6420-7
5SY6625-6	5SY6625-7	5SY6425-6	5SY6425-7
–	–	–	–
5SY6632-6	5SY6632-7	5SY6432-6	5SY6432-7
5SY6640-6	5SY6640-7	5SY6440-6	5SY6440-7
5SY6650-6	5SY6650-7	5SY6450-6	5SY6450-7
5SY6663-6	5SY6663-7	5SY6463-6	5SY6463-7

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01


Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (2 MW), not in combination with RC mech.	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 3/8


© Siemens 2022


5SY4 miniature circuit breakers

10 kA

	1P 230/400 V AC				1P+N 230 V AC				2P 400 V AC			
Mounting width	1 MW				2 MW				2 MW			
												
Rated current I_n	Characteristic				Characteristic				Characteristic			
	A	B	C	D	A	B	C	D	A	B	C	D
0.3 A	–	–	5SY4114-7	5SY4114-8	–	–	5SY4514-7	5SY4514-8	–	–	5SY4214-7	5SY4214-8
0.5 A	5SY4105-5	–	5SY4105-7	5SY4105-8	–	–	5SY4505-7	5SY4505-8	5SY4205-5	–	5SY4205-7	5SY4205-8
1 A	5SY4101-5	5SY4101-6	5SY4101-7	5SY4101-8	5SY4501-5	–	5SY4501-7	5SY4501-8	5SY4201-5	5SY4201-6	5SY4201-7	5SY4201-8
1.6 A	5SY4115-5	5SY4115-6	5SY4115-7	5SY4115-8	5SY4515-5	5SY4515-6	5SY4515-7	5SY4515-8	5SY4215-5	5SY4215-6	5SY4215-7	5SY4215-8
2 A	5SY4102-5	5SY4102-6	5SY4102-7	5SY4102-8	5SY4502-5	–	5SY4502-7	5SY4502-8	5SY4202-5	5SY4202-6	5SY4202-7	5SY4202-8
3 A	5SY4103-5	5SY4103-6	5SY4103-7	5SY4103-8	5SY4503-5	–	5SY4503-7	5SY4503-8	5SY4203-5	5SY4203-6	5SY4203-7	5SY4203-8
4 A	5SY4104-5	5SY4104-6	5SY4104-7	5SY4104-8	5SY4504-5	5SY4504-6	5SY4504-7	5SY4504-8	5SY4204-5	5SY4204-6	5SY4204-7	5SY4204-8
5 A	–	–	5SY4111-7	–	–	–	–	–	–	–	5SY4211-7	–
6 A	5SY4106-5	5SY4106-6	5SY4106-7	5SY4106-8	5SY4506-5	5SY4506-6	5SY4506-7	5SY4506-8	5SY4206-5	5SY4206-6	5SY4206-7	5SY4206-8
8 A	5SY4108-5	5SY4108-6	5SY4108-7	5SY4108-8	5SY4508-5	–	5SY4508-7	5SY4508-8	5SY4208-5	5SY4208-6	5SY4208-7	5SY4208-8
10 A	5SY4110-5	5SY4110-6	5SY4110-7	5SY4110-8	5SY4510-5	5SY4510-6	5SY4510-7	5SY4510-8	5SY4210-5	5SY4210-6	5SY4210-7	5SY4210-8
13 A	5SY4113-5	5SY4113-6	5SY4113-7	5SY4113-8	5SY4513-5	5SY4513-6	5SY4513-7	5SY4513-8	5SY4213-5	5SY4213-6	5SY4213-7	5SY4213-8
15 A	–	–	5SY4118-7	–	–	–	–	–	–	–	5SY4218-7	–
16 A	5SY4116-5	5SY4116-6	5SY4116-7	5SY4116-8	5SY4516-5	5SY4516-6	5SY4516-7	5SY4516-8	5SY4216-5	5SY4216-6	5SY4216-7	5SY4216-8
20 A	5SY4120-5	5SY4120-6	5SY4120-7	5SY4120-8	5SY4520-5	5SY4520-6	5SY4520-7	5SY4520-8	5SY4220-5	5SY4220-6	5SY4220-7	5SY4220-8
25 A	5SY4125-5	5SY4125-6	5SY4125-7	5SY4125-8	5SY4525-5	5SY4525-6	5SY4525-7	5SY4525-8	5SY4225-5	5SY4225-6	5SY4225-7	5SY4225-8
30 A	–	–	5SY4130-7	–	–	–	–	–	–	–	5SY4230-7	–
32 A	5SY4132-5	5SY4132-6	5SY4132-7	5SY4132-8	5SY4532-5	5SY4532-6	5SY4532-7	5SY4532-8	5SY4232-5	5SY4232-6	5SY4232-7	5SY4232-8
35 A	–	–	5SY4135-7	–	–	–	–	–	–	–	5SY4235-7	–
40 A	5SY4140-5	5SY4140-6	5SY4140-7	5SY4140-8	5SY4540-5	5SY4540-6	5SY4540-7	5SY4540-8	5SY4240-5	5SY4240-6	5SY4240-7	5SY4240-8
45 A	–	–	5SY4145-7	–	–	–	–	–	–	–	5SY4245-7	–
50 A	5SY4150-5	5SY4150-6	5SY4150-7	5SY4150-8	5SY4550-5	5SY4550-6	5SY4550-7	5SY4550-8	5SY4250-5	5SY4250-6	5SY4250-7	5SY4250-8
60 A	–	–	5SY4160-7	–	–	–	–	–	–	–	5SY4260-7	–
63 A	5SY4163-5	5SY4163-6	5SY4163-7	5SY4163-8	5SY4563-5	5SY4563-6	5SY4563-7	5SY4563-8	5SY4263-5	5SY4263-6	5SY4263-7	5SY4263-8
80 A	–	5SY4180-6	5SY4180-7	–	–	–	5SY4580-7	–	–	5SY4280-6	5SY4280-7	–

Mounting concept

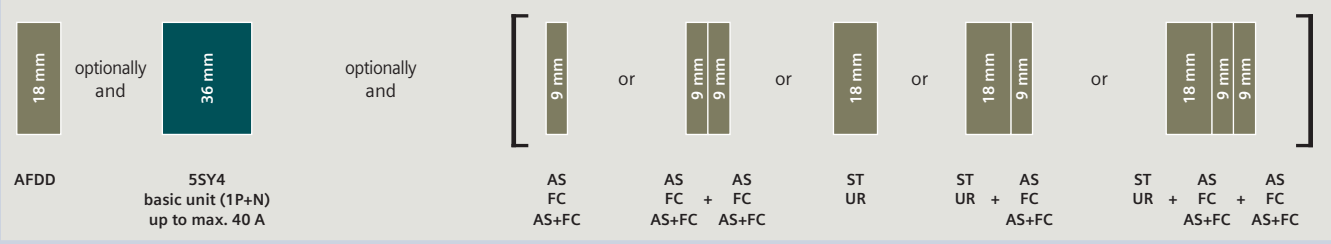

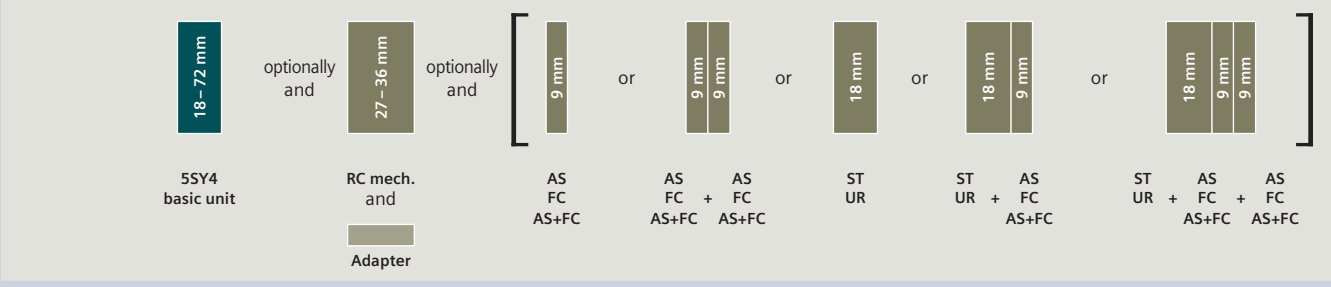

Quick selection guide, page 3/8

© Siemens 2022



3P 400 V AC 3 MW				3P+N 400 V AC 4 MW				4P 400 V AC 4 MW			
Characteristic				Characteristic				Characteristic			
A	B	C	D	A	B	C	D	A	B	C	D
–	–	5SY4314-7	5SY4314-8	–	–	5SY4614-7	5SY4614-8	–	–	5SY4414-7	5SY4414-8
5SY4305-5	–	5SY4305-7	5SY4305-8	–	–	5SY4605-7	5SY4605-8	–	–	5SY4405-7	5SY4405-8
5SY4301-5	5SY4301-6	5SY4301-7	5SY4301-8	5SY4601-5	–	5SY4601-7	5SY4601-8	5SY4401-5	–	5SY4401-7	5SY4401-8
5SY4315-5	5SY4315-6	5SY4315-7	5SY4315-8	5SY4615-5	–	5SY4615-7	5SY4615-8	5SY4415-5	–	5SY4415-7	5SY4415-8
5SY4302-5	5SY4302-6	5SY4302-7	5SY4302-8	5SY4602-5	–	5SY4602-7	5SY4602-8	5SY4402-5	–	5SY4402-7	5SY4402-8
5SY4303-5	5SY4303-6	5SY4303-7	5SY4303-8	5SY4603-5	–	5SY4603-7	5SY4603-8	5SY4403-5	–	5SY4403-7	5SY4403-8
5SY4304-5	5SY4304-6	5SY4304-7	5SY4304-8	5SY4604-5	–	5SY4604-7	5SY4604-8	5SY4404-5	–	5SY4404-7	5SY4404-8
–	–	5SY4311-7	–	–	–	–	–	–	–	–	–
5SY4306-5	5SY4306-6	5SY4306-7	5SY4306-8	5SY4606-5	5SY4606-6	5SY4606-7	5SY4606-8	5SY4406-5	5SY4406-6	5SY4406-7	5SY4406-8
5SY4308-5	5SY4308-6	5SY4308-7	5SY4308-8	5SY4608-5	–	5SY4608-7	5SY4608-8	5SY4408-5	–	5SY4408-7	5SY4408-8
5SY4310-5	5SY4310-6	5SY4310-7	5SY4310-8	5SY4610-5	5SY4610-6	5SY4610-7	5SY4610-8	5SY4410-5	5SY4410-6	5SY4410-7	5SY4410-8
5SY4313-5	5SY4313-6	5SY4313-7	5SY4313-8	5SY4613-5	5SY4613-6	5SY4613-7	5SY4613-8	5SY4413-5	5SY4413-6	5SY4413-7	5SY4413-8
–	–	5SY4318-7	–	–	–	–	–	–	–	–	–
5SY4316-5	5SY4316-6	5SY4316-7	5SY4316-8	5SY4616-5	5SY4616-6	5SY4616-7	5SY4616-8	5SY4416-5	5SY4416-6	5SY4416-7	5SY4416-8
5SY4320-5	5SY4320-6	5SY4320-7	5SY4320-8	5SY4620-5	5SY4620-6	5SY4620-7	5SY4620-8	5SY4420-5	5SY4420-6	5SY4420-7	5SY4420-8
5SY4325-5	5SY4325-6	5SY4325-7	5SY4325-8	5SY4625-5	5SY4625-6	5SY4625-7	5SY4625-8	5SY4425-5	5SY4425-6	5SY4425-7	5SY4425-8
–	–	5SY4330-7	–	–	–	–	–	–	–	–	–
5SY4332-5	5SY4332-6	5SY4332-7	5SY4332-8	5SY4632-5	5SY4632-6	5SY4632-7	5SY4632-8	5SY4432-5	5SY4432-6	5SY4432-7	5SY4432-8
–	–	5SY4335-7	–	–	–	–	–	–	–	–	–
5SY4340-5	5SY4340-6	5SY4340-7	5SY4340-8	5SY4640-5	5SY4640-6	5SY4640-7	5SY4640-8	5SY4440-5	5SY4440-6	5SY4440-7	5SY4440-8
–	–	5SY4345-7	–	–	–	–	–	–	–	–	–
5SY4350-5	5SY4350-6	5SY4350-7	5SY4350-8	5SY4650-5	5SY4650-6	5SY4650-7	5SY4650-8	5SY4450-5	5SY4450-6	5SY4450-7	5SY4450-8
–	–	5SY4360-7	–	–	–	–	–	–	–	–	–
5SY4363-5	5SY4363-6	5SY4363-7	5SY4363-8	5SY4663-5	5SY4663-6	5SY4663-7	5SY4663-8	5SY4463-5	5SY4463-6	5SY4463-7	5SY4463-8
–	5SY4380-6	5SY4380-7	–	–	–	5SY4680-7	–	–	5SY4480-6	5SY4480-7	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Arc fault detection units (AFDD)		Article No.
For basic units 1P+N (2 MW)	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2
Undervoltage releases (UR)		**Article No.**
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2

Quick selection guide, page 3/8


© Siemens 2022

5SP4 miniature circuit breakers

10 kA

	1P 230/400 V AC			2P 400 V AC		
Mounting width	1.5 MW			3 MW		
						
Rated current I_n	Characteristic			Characteristic		
	B	C	D	B	C	D
80 A	5SP4180-6	5SP4180-7	5SP4180-8	5SP4280-6	5SP4280-7	5SP4280-8
100 A	5SP4191-6	5SP4191-7	5SP4191-8	5SP4291-6	5SP4291-7	5SP4291-8
125 A	5SP4192-6	5SP4192-7	–	5SP4292-6	5SP4292-7	–

Mounting concept


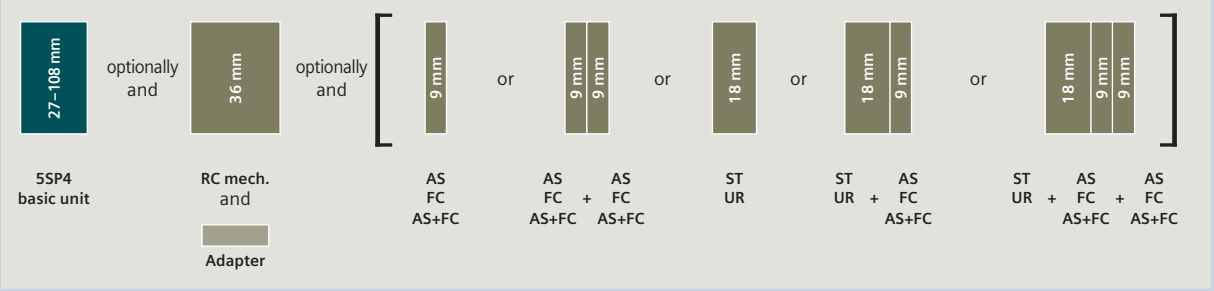


AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49
ST	Shunt trips	See page 3/52
UR	Undervoltage releases	See page 3/53
RC mech.	Remote control mechanisms	See page 3/54

Quick selection guide, page 3/8

© Siemens 2022



3P 400 V AC 4.5 MW			4P 400 V AC 6 MW		
					
Characteristic			**Characteristic**		
B	**C**	**D**	**B**	**C**	**D**
5SP4380-6	5SP4380-7	5SP4380-8	5SP4480-6	5SP4480-7	5SP4480-8
5SP4391-6	5SP4391-7	5SP4391-8	5SP4491-6	5SP4491-7	5SP4491-8
5SP4392-6	5SP4392-7	–	5SP4492-6	5SP4492-7	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC mech.)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070


Adapters for remote control mechanisms (RC mech.)	Article No.
1.5 MW	5ST3820-1
3 ... 6 MW	5ST3820-2

Quick selection guide, page 3/8


© Siemens 2022

5SY5 miniature circuit breakers

10 kA

	1P 230/400 V AC, 220 V DC		2P 400 V AC, 440 V DC		4P 400 V AC, 880 V DC	
Mounting width	1 MW		2 MW		4 MW	
						
Rated current I_n	Characteristic		Characteristic		Characteristic	
	B	C	B	C	B	C
0.3 A	–	5SY5114-7	–	5SY5214-7	–	5SY5414-7
0.5 A	–	5SY5105-7	–	5SY5205-7	–	5SY5405-7
1 A	–	5SY5101-7	–	5SY5201-7	–	5SY5401-7
1.6 A	–	5SY5115-7	–	5SY5215-7	–	5SY5415-7
2 A	5SY5102-6	5SY5102-7	5SY5202-6	5SY5202-7	–	5SY5402-7
3 A	–	5SY5103-7	–	5SY5203-7	–	5SY5403-7
4 A	5SY5104-6	5SY5104-7	5SY5204-6	5SY5204-7	–	5SY5404-7
6 A	5SY5106-6	5SY5106-7	5SY5206-6	5SY5206-7	5SY5406-6	5SY5406-7
8 A	5SY5108-6	5SY5108-7	5SY5208-6	5SY5208-7	–	5SY5408-7
10 A	5SY5110-6	5SY5110-7	5SY5210-6	5SY5210-7	5SY5410-6	5SY5410-7
13 A	5SY5113-6	5SY5113-7	5SY5213-6	5SY5213-7	5SY5413-6	5SY5413-7
16 A	5SY5116-6	5SY5116-7	5SY5216-6	5SY5216-7	5SY5416-6	5SY5416-7
20 A	5SY5120-6	5SY5120-7	5SY5220-6	5SY5220-7	5SY5420-6	5SY5420-7
25 A	5SY5125-6	5SY5125-7	5SY5225-6	5SY5225-7	5SY5425-6	5SY5425-7
32 A	5SY5132-6	5SY5132-7	5SY5232-6	5SY5232-7	5SY5432-6	5SY5432-7
40 A	5SY5140-6	5SY5140-7	5SY5240-6	5SY5240-7	5SY5440-6	5SY5440-7
50 A	5SY5150-6	5SY5150-7	5SY5250-6	5SY5250-7	5SY5450-6	5SY5450-7
63 A	5SY5163-6	5SY5163-7	5SY5263-6	5SY5263-7	5SY5463-6	5SY5463-7

Mounting concept

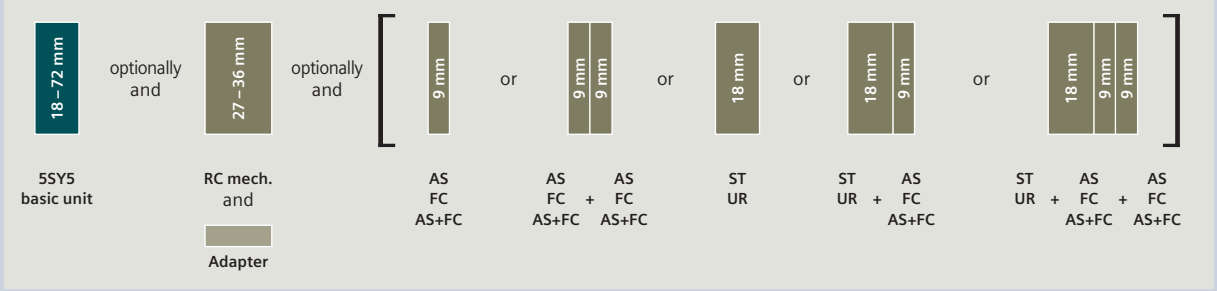

AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49
ST	Shunt trips	See page 3/52
UR	Undervoltage releases	See page 3/53
RC mech.	Remote control mechanisms	See page 3/54

Quick selection guide, page 3/8

© Siemens 2022



Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new


Adapters for remote control mechanisms (RC mech.)	Article No.
1 ... 2 MW	5ST3820-1
4 MW	5ST3820-2

Quick selection guide, page 3/8


© Siemens 2022


5SY7 miniature circuit breakers

15 kA

	1P 230/400 V AC			1P+N 230 V AC			2P 400 V AC		
Mounting width	1 MW			2 MW			2 MW		
									
Rated current I_n	Main MCB, line side of meter	Characteristic B	C	D	Characteristic B	C	D	Characteristic B	C	D
0.3 A	–	–	5SY7114-7	5SY7114-8	–	5SY7514-7	5SY7514-8	–	5SY7214-7	5SY7214-8
0.5 A	–	–	5SY7105-7	5SY7105-8	–	5SY7505-7	5SY7505-8	–	5SY7205-7	5SY7205-8
1 A	–	–	5SY7101-7	5SY7101-8	–	5SY7501-7	5SY7501-8	–	5SY7201-7	5SY7201-8
1.6 A	–	–	5SY7115-7	5SY7115-8	–	5SY7515-7	5SY7515-8	–	5SY7215-7	5SY7215-8
2 A	–	–	5SY7102-7	5SY7102-8	–	5SY7502-7	5SY7502-8	–	5SY7202-7	5SY7202-8
3 A	–	–	5SY7103-7	5SY7103-8	–	5SY7503-7	5SY7503-8	–	5SY7203-7	5SY7203-8
4 A	–	–	5SY7104-7	5SY7104-8	–	5SY7504-7	5SY7504-8	–	5SY7204-7	5SY7204-8
6 A	–	5SY7106-6	5SY7106-7	5SY7106-8	5SY7506-6	5SY7506-7	5SY7506-8	5SY7206-6	5SY7206-7	5SY7206-8
	■	5SY7106-6KK13	–	–	–	–	–	–	–	–
8 A	–	–	5SY7108-7	5SY7108-8	–	5SY7508-7	5SY7508-8	–	5SY7208-7	5SY7208-8
10 A	–	5SY7110-6	5SY7110-7	5SY7110-8	5SY7510-6	5SY7510-7	5SY7510-8	5SY7210-6	5SY7210-7	5SY7210-8
	■	5SY7110-6KK13	–	–	–	–	–	–	–	–
13 A	–	5SY7113-6	5SY7113-7	5SY7113-8	5SY7513-6	5SY7513-7	5SY7513-8	5SY7213-6	5SY7213-7	5SY7213-8
16 A	–	5SY7116-6	5SY7116-7	5SY7116-8	5SY7516-6	5SY7516-7	5SY7516-8	5SY7216-6	5SY7216-7	5SY7216-8
20 A	–	5SY7120-6	5SY7120-7	5SY7120-8	5SY7520-6	5SY7520-7	5SY7520-8	5SY7220-6	5SY7220-7	5SY7220-8
25 A	–	5SY7125-6	5SY7125-7	5SY7125-8	5SY7525-6	5SY7525-7	5SY7525-8	5SY7225-6	5SY7225-7	5SY7225-8
32 A	–	5SY7132-6	5SY7132-7	5SY7132-8	5SY7532-6	5SY7532-7	5SY7532-8	5SY7232-6	5SY7232-7	5SY7232-8
40 A	–	5SY7140-6	5SY7140-7	5SY7140-8	5SY7540-6	5SY7540-7	5SY7540-8	5SY7240-6	5SY7240-7	5SY7240-8
50 A	–	5SY7150-6	5SY7150-7	5SY7150-8	5SY7550-6	5SY7550-7	5SY7550-8	5SY7250-6	5SY7250-7	5SY7250-8
63 A	–	5SY7163-6	5SY7163-7	5SY7163-8	5SY7563-6	5SY7563-7	5SY7563-8	5SY7263-6	5SY7263-7	5SY7263-8

Mounting concept

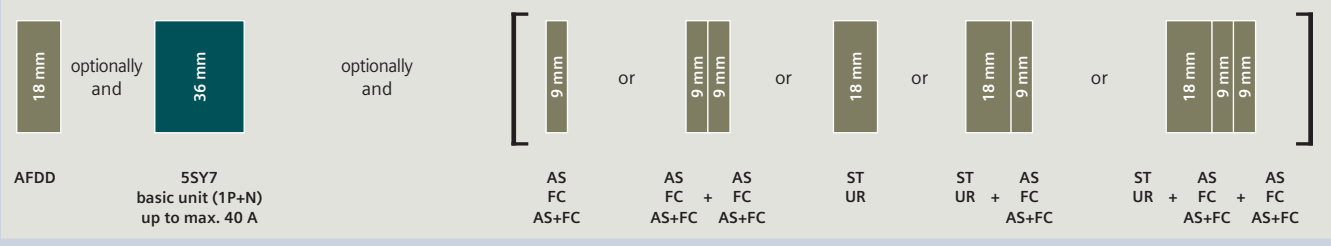



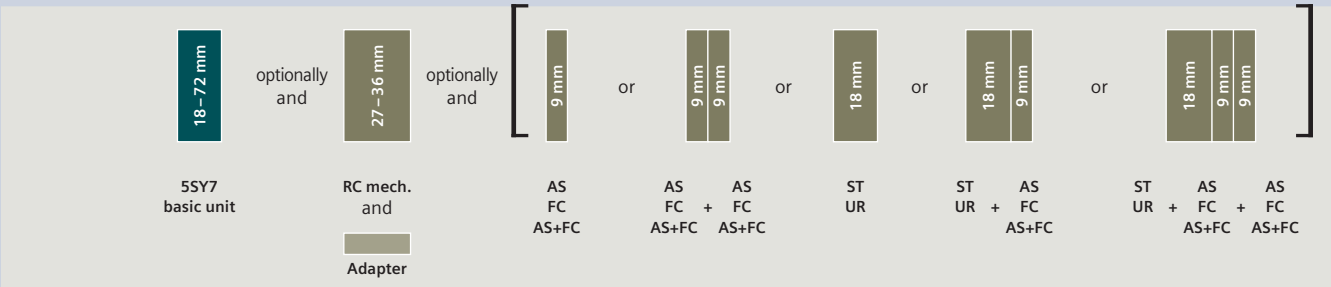


AFDD	Arc fault detection units	See page 3/55	AS+FC	Auxiliary switches and fault signal contacts	See page 3/49	UR	Undervoltage releases	See page 3/53
AS	Auxiliary switches	See page 3/46				RC mech.	Remote control mechanisms	See page 3/54
FC	Fault signal contacts	See page 3/48	ST	Shunt trips	See page 3/52			

Quick selection guide, page 3/8

© Siemens 2022



3P 400 V AC 3 MW			3P+N 400 V AC 4 MW			4P 400 V AC 4 MW		
								
Characteristic			Characteristic			Characteristic		
B	C	D	B	C	D	B	C	D
–	5SY7314-7	5SY7314-8	–	5SY7614-7	5SY7614-8	–	5SY7414-7	5SY7414-8
–	5SY7305-7	5SY7305-8	–	5SY7605-7	5SY7605-8	–	5SY7405-7	5SY7405-8
–	5SY7301-7	5SY7301-8	–	5SY7601-7	5SY7601-8	–	5SY7401-7	5SY7401-8
–	5SY7315-7	5SY7315-8	–	5SY7615-7	5SY7615-8	–	5SY7415-7	5SY7415-8
–	5SY7302-7	5SY7302-8	–	5SY7602-7	5SY7602-8	–	5SY7402-7	5SY7402-8
–	5SY7303-7	5SY7303-8	–	5SY7603-7	5SY7603-8	–	5SY7403-7	5SY7403-8
–	5SY7304-7	5SY7304-8	–	5SY7604-7	5SY7604-8	–	5SY7404-7	5SY7404-8
5SY7306-6	5SY7306-7	5SY7306-8	5SY7606-6	5SY7606-7	5SY7606-8	5SY7406-6	5SY7406-7	5SY7406-8
–	–	–	–	–	–	–	–	–
–	5SY7308-7	5SY7308-8	–	5SY7608-7	5SY7608-8	–	5SY7408-7	5SY7408-8
5SY7310-6	5SY7310-7	5SY7310-8	5SY7610-6	5SY7610-7	5SY7610-8	5SY7410-6	5SY7410-7	5SY7410-8
–	–	–	–	–	–	–	–	–
5SY7313-6	5SY7313-7	5SY7313-8	5SY7613-6	5SY7613-7	5SY7613-8	5SY7413-6	5SY7413-7	5SY7413-8
5SY7316-6	5SY7316-7	5SY7316-8	5SY7616-6	5SY7616-7	5SY7616-8	5SY7416-6	5SY7416-7	5SY7416-8
5SY7320-6	5SY7320-7	5SY7320-8	5SY7620-6	5SY7620-7	5SY7620-8	5SY7420-6	5SY7420-7	5SY7420-8
5SY7325-6	5SY7325-7	5SY7325-8	5SY7625-6	5SY7625-7	5SY7625-8	5SY7425-6	5SY7425-7	5SY7425-8
5SY7332-6	5SY7332-7	5SY7332-8	5SY7632-6	5SY7632-7	5SY7632-8	5SY7432-6	5SY7432-7	5SY7432-8
5SY7340-6	5SY7340-7	5SY7340-8	5SY7640-6	5SY7640-7	5SY7640-8	5SY7440-6	5SY7440-7	5SY7440-8
5SY7350-6	5SY7350-7	5SY7350-8	5SY7650-6	5SY7650-7	5SY7650-8	5SY7450-6	5SY7450-7	5SY7450-8
5SY7363-6	5SY7363-7	5SY7363-8	5SY7663-6	5SY7663-7	5SY7663-8	5SY7463-6	5SY7463-7	5SY7463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01



Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P+N (2 MW)	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 3/8


© Siemens 2022


5SY8 miniature circuit breakers

25 kA

	1P 230/400 V AC		1P+N 230 V AC		2P 400 V AC		3P 400 V AC	
Mounting width	1 MW		2 MW		2 MW		3 MW	
								
Rated current I_n	Characteristic		Characteristic		Characteristic		Characteristic	
	C	D	C	D	C	D	C	D
0.3 A	5SY8114-7	5SY8114-8	5SY8514-7	5SY8514-8	5SY8214-7	5SY8214-8	5SY8314-7	5SY8314-8
0.5 A	5SY8105-7	5SY8105-8	5SY8505-7	5SY8505-8	5SY8205-7	5SY8205-8	5SY8305-7	5SY8305-8
1 A	5SY8101-7	5SY8101-8	5SY8501-7	5SY8501-8	5SY8201-7	5SY8201-8	5SY8301-7	5SY8301-8
1.6 A	5SY8115-7	5SY8115-8	5SY8515-7	5SY8515-8	5SY8215-7	5SY8215-8	5SY8315-7	5SY8315-8
2 A	5SY8102-7	5SY8102-8	5SY8502-7	5SY8502-8	5SY8202-7	5SY8202-8	5SY8302-7	5SY8302-8
3 A	5SY8103-7	5SY8103-8	5SY8503-7	5SY8503-8	5SY8203-7	5SY8203-8	5SY8303-7	5SY8303-8
4 A	5SY8104-7	5SY8104-8	5SY8504-7	5SY8504-8	5SY8204-7	5SY8204-8	5SY8304-7	5SY8304-8
6 A	5SY8106-7	5SY8106-8	5SY8506-7	5SY8506-8	5SY8206-7	5SY8206-8	5SY8306-7	5SY8306-8
8 A	5SY8108-7	5SY8108-8	5SY8508-7	5SY8508-8	5SY8208-7	5SY8208-8	5SY8308-7	5SY8308-8
10 A	5SY8110-7	5SY8110-8	5SY8510-7	5SY8510-8	5SY8210-7	5SY8210-8	5SY8310-7	5SY8310-8
12.5 A	–	–	–	–	–	–	–	–
13 A	5SY8113-7	5SY8113-8	5SY8513-7	5SY8513-8	5SY8213-7	5SY8213-8	5SY8313-7	5SY8313-8
16 A	5SY8116-7	5SY8116-8	5SY8516-7	5SY8516-8	5SY8216-7	5SY8216-8	5SY8316-7	5SY8316-8
20 A	5SY8120-7	5SY8120-8	5SY8520-7	5SY8520-8	5SY8220-7	5SY8220-8	5SY8320-7	5SY8320-8
25 A	5SY8125-7	5SY8125-8	5SY8525-7	5SY8525-8	5SY8225-7	5SY8225-8	5SY8325-7	5SY8325-8
32 A	5SY8132-7	5SY8132-8	5SY8532-7	5SY8532-8	5SY8232-7	5SY8232-8	5SY8332-7	5SY8332-8
40 A	5SY8140-7	5SY8140-8	5SY8540-7	5SY8540-8	5SY8240-7	5SY8240-8	5SY8340-7	5SY8340-8
50 A	5SY8150-7	5SY8150-8	5SY8550-7	5SY8550-8	5SY8250-7	5SY8250-8	5SY8350-7	5SY8350-8
63 A	5SY8163-7	5SY8163-8	5SY8563-7	5SY8563-8	5SY8263-7	5SY8263-8	5SY8363-7	5SY8363-8

Mounting concept

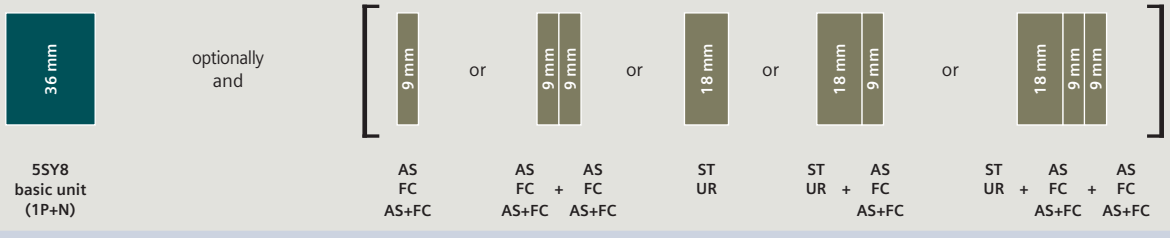

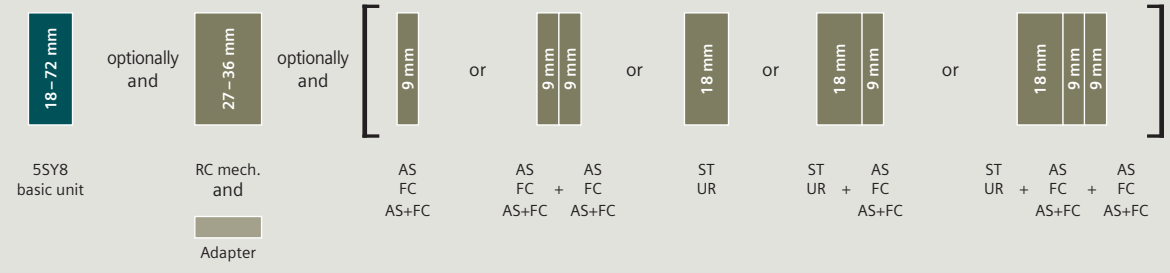

AFDD	Arc fault detection units	See page 3/55	AS+FC	Auxiliary switches and fault signal contacts	See page 3/49	UR Undervoltage releases	See page 3/53
AS	Auxiliary switches	See page 3/46	ST	Shunt trips	See page 3/52	RC mech. Remote control mechanisms	See page 3/54
FC	Fault signal contacts	See page 3/48					

Quick selection guide, page 3/8

© Siemens 2022



3P+N 400 V AC 4 MW		4P 400 V AC 4 MW	
Characteristic		Characteristic	
C	D	C	D
5SY8614-7	5SY8614-8	5SY8414-7	5SY8414-8
5SY8605-7	5SY8605-8	5SY8405-7	5SY8405-8
5SY8601-7	5SY8601-8	5SY8401-7	5SY8401-8
5SY8615-7	5SY8615-8	5SY8415-7	5SY8415-8
5SY8602-7	5SY8602-8	5SY8402-7	5SY8402-8
5SY8603-7	5SY8603-8	5SY8403-7	5SY8403-8
5SY8604-7	5SY8604-8	5SY8404-7	5SY8404-8
5SY8606-7	5SY8606-8	5SY8406-7	5SY8406-8
5SY8608-7	5SY8608-8	5SY8408-7	5SY8408-8
5SY8610-7	5SY8610-8	5SY8410-7	5SY8410-8
–	–	–	–
5SY8613-7	5SY8613-8	5SY8413-7	5SY8413-8
5SY8616-7	5SY8616-8	5SY8416-7	5SY8416-8
5SY8620-7	5SY8620-8	5SY8420-7	5SY8420-8
5SY8625-7	5SY8625-8	5SY8425-7	5SY8425-8
5SY8632-7	5SY8632-8	5SY8432-7	5SY8432-8
5SY8640-7	5SY8640-8	5SY8440-7	5SY8440-8
5SY8650-7	5SY8650-8	5SY8450-7	5SY8450-8
5SY8663-7	5SY8663-8	5SY8463-7	5SY8463-8

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 ... 2 MW		5ST3820-1
3 ... 4 MW		5ST3820-2

Quick selection guide, page 3/8

© Siemens 2022

5SJ4..HG.. miniature circuit breakers

According to UL489, 14/10 kA

	1P "same polarity only"			1P			
	240 V AC	240 V AC	240 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
Mounting width	1 MW			1 MW			
							
Rated current I_n	Characteristic			Characteristic			
	B	C	D	C	C	D	D
0.3 A	–	5SJ4114-7HG40	5SJ4114-8HG40	5SJ4114-7HG41	5SJ4114-7HG42	5SJ4114-8HG41	5SJ4114-8HG42
0.5 A	–	5SJ4105-7HG40	5SJ4105-8HG40	5SJ4105-7HG41	5SJ4105-7HG42	5SJ4105-8HG41	5SJ4105-8HG42
1 A	–	5SJ4101-7HG40	5SJ4101-8HG40	5SJ4101-7HG41	5SJ4101-7HG42	5SJ4101-8HG41	5SJ4101-8HG42
1.6 A	–	5SJ4115-7HG40	5SJ4115-8HG40	5SJ4115-7HG41	5SJ4115-7HG42	5SJ4115-8HG41	5SJ4115-8HG42
2 A	–	5SJ4102-7HG40	5SJ4102-8HG40	5SJ4102-7HG41	5SJ4102-7HG42	5SJ4102-8HG41	5SJ4102-8HG42
3 A	–	5SJ4103-7HG40	5SJ4103-8HG40	5SJ4103-7HG41	5SJ4103-7HG42	5SJ4103-8HG41	5SJ4103-8HG42
4 A	–	5SJ4104-7HG40	5SJ4104-8HG40	5SJ4104-7HG41	5SJ4104-7HG42	5SJ4104-8HG41	5SJ4104-8HG42
5 A	–	5SJ4111-7HG40	5SJ4111-8HG40	5SJ4111-7HG41	5SJ4111-7HG42	5SJ4111-8HG41	5SJ4111-8HG42
6 A	5SJ4106-6HG40	5SJ4106-7HG40	5SJ4106-8HG40	5SJ4106-7HG41	5SJ4106-7HG42	5SJ4106-8HG41	5SJ4106-8HG42
8 A	–	5SJ4108-7HG40	5SJ4108-8HG40	5SJ4108-7HG41	5SJ4108-7HG42	5SJ4108-8HG41	5SJ4108-8HG42
10 A	5SJ4110-6HG40	5SJ4110-7HG40	5SJ4110-8HG40	5SJ4110-7HG41	5SJ4110-7HG42	5SJ4110-8HG41	5SJ4110-8HG42
13 A	5SJ4113-6HG40	5SJ4113-7HG40	5SJ4113-8HG40	5SJ4113-7HG41	5SJ4113-7HG42	5SJ4113-8HG41	5SJ4113-8HG42
15 A	5SJ4118-6HG40	5SJ4118-7HG40	5SJ4118-8HG40	5SJ4118-7HG41	5SJ4118-7HG42	5SJ4118-8HG41	5SJ4118-8HG42
16 A	5SJ4116-6HG40	5SJ4116-7HG40	5SJ4116-8HG40	5SJ4116-7HG41	5SJ4116-7HG42	5SJ4116-8HG41	5SJ4116-8HG42
20 A	5SJ4120-6HG40	5SJ4120-7HG40	5SJ4120-8HG40	5SJ4120-7HG41	5SJ4120-7HG42	5SJ4120-8HG41	5SJ4120-8HG42
25 A	5SJ4125-6HG40	5SJ4125-7HG40	5SJ4125-8HG40	5SJ4125-7HG41	5SJ4125-7HG42	5SJ4125-8HG41	5SJ4125-8HG42
30 A	5SJ4130-6HG40	5SJ4130-7HG40	5SJ4130-8HG40	5SJ4130-7HG41	5SJ4130-7HG42	5SJ4130-8HG41	5SJ4130-8HG42
32 A	5SJ4132-6HG40	5SJ4132-7HG40	5SJ4132-8HG40	5SJ4132-7HG41	5SJ4132-7HG42	5SJ4132-8HG41	5SJ4132-8HG42
35 A	5SJ4135-6HG40	5SJ4135-7HG40	5SJ4135-8HG40	5SJ4135-7HG41	5SJ4135-7HG42	5SJ4135-8HG41	–
40 A	5SJ4140-6HG40	5SJ4140-7HG40	5SJ4140-8HG40	5SJ4140-7HG41	5SJ4140-7HG42	5SJ4140-8HG41	–
45 A	5SJ4145-6HG40	5SJ4145-7HG40	5SJ4145-8HG40	5SJ4145-7HG41	–	5SJ4145-8HG41	–
50 A	5SJ4150-6HG40	5SJ4150-7HG40	5SJ4150-8HG40	5SJ4150-7HG41	–	5SJ4150-8HG41	–
60 A	5SJ4160-6HG40	5SJ4160-7HG40	5SJ4160-8HG40	5SJ4160-7HG41	–	5SJ4160-8HG41	–
63 A	5SJ4163-6HG40	5SJ4163-7HG40	5SJ4163-8HG40	5SJ4163-7HG41	–	5SJ4163-8HG41	–

Mounting concept





AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
ST	Shunt trips	See page 3/52

Quick selection guide, page 3/8

© Siemens 2022



2P				3P			
240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC	240 V AC	480Y/277 V AC
2 MW				3 MW			
							
Characteristic				Characteristic			
C	C	D	D	C	C	D	D
5SJ4214-7HG41	5SJ4214-7HG42	5SJ4214-8HG41	5SJ4214-8HG42	5SJ4314-7HG41	5SJ4314-7HG42	5SJ4314-8HG41	5SJ4314-8HG42
5SJ4205-7HG41	5SJ4205-7HG42	5SJ4205-8HG41	5SJ4205-8HG42	5SJ4305-7HG41	5SJ4305-7HG42	5SJ4305-8HG41	5SJ4305-8HG42
5SJ4201-7HG41	5SJ4201-7HG42	5SJ4201-8HG41	5SJ4201-8HG42	5SJ4301-7HG41	5SJ4301-7HG42	5SJ4301-8HG41	5SJ4301-8HG42
5SJ4215-7HG41	5SJ4215-7HG42	5SJ4215-8HG41	5SJ4215-8HG42	5SJ4315-7HG41	5SJ4315-7HG42	5SJ4315-8HG41	5SJ4315-8HG42
5SJ4202-7HG41	5SJ4202-7HG42	5SJ4202-8HG41	5SJ4202-8HG42	5SJ4302-7HG41	5SJ4302-7HG42	5SJ4302-8HG41	5SJ4302-8HG42
5SJ4203-7HG41	5SJ4203-7HG42	5SJ4203-8HG41	5SJ4203-8HG42	5SJ4303-7HG41	5SJ4303-7HG42	5SJ4303-8HG41	5SJ4303-8HG42
5SJ4204-7HG41	5SJ4204-7HG42	5SJ4204-8HG41	5SJ4204-8HG42	5SJ4304-7HG41	5SJ4304-7HG42	5SJ4304-8HG41	5SJ4304-8HG42
5SJ4211-7HG41	5SJ4211-7HG42	5SJ4211-8HG41	5SJ4211-8HG42	5SJ4311-7HG41	5SJ4311-7HG42	5SJ4311-8HG41	5SJ4311-8HG42
5SJ4206-7HG41	5SJ4206-7HG42	5SJ4206-8HG41	5SJ4206-8HG42	5SJ4306-7HG41	5SJ4306-7HG42	5SJ4306-8HG41	5SJ4306-8HG42
5SJ4208-7HG41	5SJ4208-7HG42	5SJ4208-8HG41	5SJ4208-8HG42	5SJ4308-7HG41	5SJ4308-7HG42	5SJ4308-8HG41	5SJ4308-8HG42
5SJ4210-7HG41	5SJ4210-7HG42	5SJ4210-8HG41	5SJ4210-8HG42	5SJ4310-7HG41	5SJ4310-7HG42	5SJ4310-8HG41	5SJ4310-8HG42
5SJ4213-7HG41	5SJ4213-7HG42	5SJ4213-8HG41	5SJ4213-8HG42	5SJ4313-7HG41	5SJ4313-7HG42	5SJ4313-8HG41	5SJ4313-8HG42
5SJ4218-7HG41	5SJ4218-7HG42	5SJ4218-8HG41	5SJ4218-8HG42	5SJ4318-7HG41	5SJ4318-7HG42	5SJ4318-8HG41	5SJ4318-8HG42
5SJ4216-7HG41	5SJ4216-7HG42	5SJ4216-8HG41	5SJ4216-8HG42	5SJ4316-7HG41	5SJ4316-7HG42	5SJ4316-8HG41	5SJ4316-8HG42
5SJ4220-7HG41	5SJ4220-7HG42	5SJ4220-8HG41	5SJ4220-8HG42	5SJ4320-7HG41	5SJ4320-7HG42	5SJ4320-8HG41	5SJ4320-8HG42
5SJ4225-7HG41	5SJ4225-7HG42	5SJ4225-8HG41	5SJ4225-8HG42	5SJ4325-7HG41	5SJ4325-7HG42	5SJ4325-8HG41	5SJ4325-8HG42
5SJ4230-7HG41	5SJ4230-7HG42	5SJ4230-8HG41	5SJ4230-8HG42	5SJ4330-7HG41	5SJ4330-7HG42	5SJ4330-8HG41	5SJ4330-8HG42
5SJ4232-7HG41	5SJ4232-7HG42	5SJ4232-8HG41	5SJ4232-8HG42	5SJ4332-7HG41	5SJ4332-7HG42	5SJ4332-8HG41	5SJ4332-8HG42
5SJ4235-7HG41	5SJ4235-7HG42	5SJ4235-8HG41	–	5SJ4335-7HG41	5SJ4335-7HG42	5SJ4335-8HG41	–
5SJ4240-7HG41	5SJ4240-7HG42	5SJ4240-8HG41	–	5SJ4340-7HG41	5SJ4340-7HG42	5SJ4340-8HG41	–
5SJ4245-7HG41	–	5SJ4245-8HG41	–	5SJ4345-7HG41	–	5SJ4345-8HG41	–
5SJ4250-7HG41	–	5SJ4250-8HG41	–	5SJ4350-7HG41	–	5SJ4350-8HG41	–
5SJ4260-7HG41	–	5SJ4260-8HG41	–	5SJ4360-7HG41	–	5SJ4360-8HG41	–
5SJ4263-7HG41	–	5SJ4263-8HG41	–	5SJ4363-7HG41	–	5SJ4363-8HG41	–

Accessories

Auxiliary switches (AS) acc. to UL 489	Article No.
1 NO + 1 NC	5ST3010-0HG
2 NO	5ST3011-0HG
2 NC	5ST3012-0HG
Fault signal contacts (FC) acc. to UL 489	**Article No.**
1 NO + 1 NC	5ST3020-0HG
2 NO	5ST3021-0HG
2 NC	5ST3022-0HG
Shunt trips (ST) acc. to UL 489	**Article No.**
110 ... 415 V AC, 110 ... 220 V DC	5ST3030-0HG
24 ... 48 V AC/DC	5ST3031-0HG

Quick selection guide, page 3/8


© Siemens 2022


5SL6 COM miniature circuit breakers with communication and measuring function

1P+N 6 kA compact miniature circuit breakers

	1P+N (N pole right) 230 V AC	
Mounting width	1 MW	
Rated current I_n	Characteristic B	C
2 A	5SL6002-6MC	5SL6002-7MC
4 A	5SL6004-6MC	5SL6004-7MC
6 A	5SL6006-6MC	5SL6006-7MC
8 A	–	5SL6008-7MC
10 A	5SL6010-6MC	5SL6010-7MC
13 A	5SL6013-6MC	5SL6013-7MC
16 A	5SL6016-6MC	5SL6016-7MC
20 A	5SL6020-6MC	5SL6020-7MC
25 A	5SL6025-6MC	5SL6025-7MC
32 A	5SL6032-6MC	5SL6032-7MC

Mounting concept

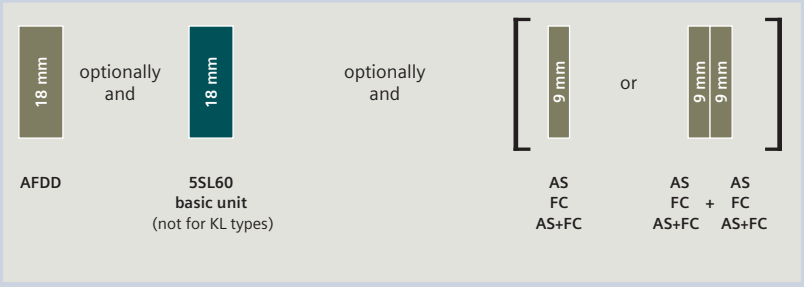

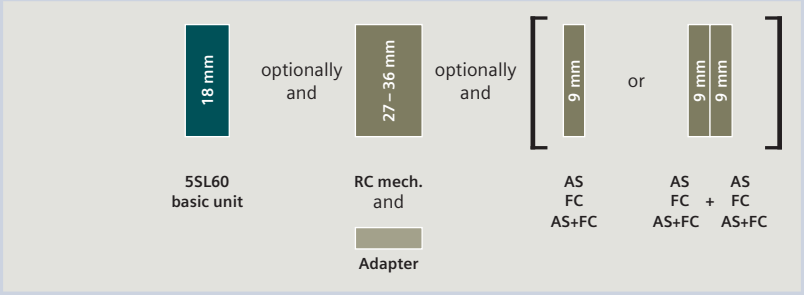

Note:
Please note the country-specific radio licenses of the products in SIOS:
www.siemens.com/lowvoltage/certificates (109801197)

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

Remote control mechanisms (RC mech.)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 MW		5ST3820-6
Arc fault detection units (AFDD)		**Article No.**
For basic units 1P + N (1 MW), not for KL types	I_n up to 16 A	5SM6011-2
	I_n up to 40 A	5SM6014-2


AFDD	Arc fault detection units	See page 3/55	
AS	Auxiliary switches	See page 3/46	
FC	Fault signal contacts	See page 3/48	
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49	
RC mech.	Remote control mechanisms	See page 3/54	

Quick selection guide, page 3/8

© Siemens 2022



7KN Powercenter 1000 data transceiver

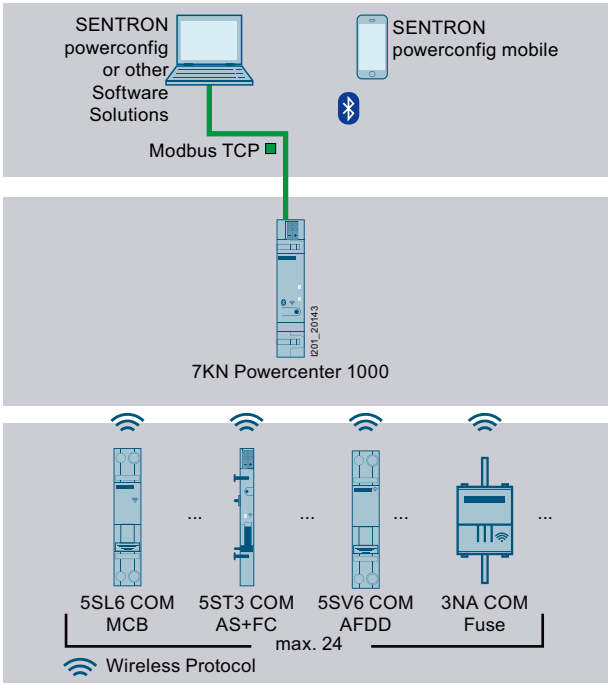

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000	Article No.
	7KN1110-0MC00

See page 10/19

You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation manual – Circuit protection devices with communication and measuring function (109791805)

System manual – Circuit protection devices with communication and measuring function (109791806)

Monitoring functions with limit monitoring

- Trip monitoring: short-circuit, overload
- Counters incl. limit monitoring for:
  - Operating hours
  - Operating hours with load current
  - Operating cycles (ON/OFF)
  - Tripping operations
  - Short circuits
- Limit values for:
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Temperature

Measured values	Unit	Memory
Temperature	°C	1 hour in 1-minute intervals; 7 days in 15-minute intervals
Average temperature	°C	–
Current	A	Min. and max. values over 10 days; 1 hour in 10-second intervals; 7 days in 15-minute intervals
Average current	A	–
Maximum current	A	–
Voltage	V	Min. and max. values over 10 days
Line frequency	Hz	Min. and max. values over 10 days
Active power	W	Min. and max. values over 10 days
Apparent power	VA	Min. and max. values over 10 days
Reactive power	Var	–
Power factor		–
Active energy imported	Wh	7 days in 15-minute intervals; 30 days in 1-day intervals
Active energy exported	Wh	–
Reactive energy imported	Varh	–
Reactive energy exported	Varh	–


Quick selection guide, page 3/8

© Siemens 2022

5SP3 selective main miniature circuit breakers (SHU)



25 kA, mounting on a 40 mm busbar





	1P 230/400 V AC				3× 1P 230/400 V AC
Mounting width	1.5 MW				4.5 MW
					
Rated current I_n	Characteristic E				Characteristic E
	L1	L2	L3	L1 + L2 + L3	
16 A	5SP3716-2KK01	5SP3716-2KK02	5SP3716-2KK03	5SP3716-2	5SP3816-2
20 A	5SP3720-2KK01	5SP3720-2KK02	5SP3720-2KK03	5SP3720-2	5SP3820-2
25 A	5SP3725-2KK01	5SP3725-2KK02	5SP3725-2KK03	5SP3725-2	5SP3825-2
35 A	5SP3735-2KK01	5SP3735-2KK02	5SP3735-2KK03	5SP3735-2	5SP3835-2
40 A	5SP3740-2KK01	5SP3740-2KK02	5SP3740-2KK03	5SP3740-2	5SP3840-2
50 A	5SP3750-2KK01	5SP3750-2KK02	5SP3750-2KK03	5SP3750-2	5SP3850-2
63 A	5SP3763-2KK01	5SP3763-2KK02	5SP3763-2KK03	5SP3763-2	5SP3863-2

Quick selection guide, page 3/8

© Siemens 2022



25 kA, mounting on a DIN rail

	1P 230/400 V AC	3× 1P 230/400 V AC	2P 230/400 V AC	3P 230/400 V AC	4P 230/400 V AC
Mounting width	1.5 MW	4.5 MW	3 MW	4.5 MW	6 MW
					
Rated current I_n	**Characteristic E**	**Characteristic E**	**Characteristic E**	**Characteristic E**	**Characteristic E**
16 A	5SP3716-3	5SP3816-3	5SP3216-3	5SP3316-3	5SP3416-3
20 A	5SP3720-3	5SP3820-3	5SP3220-3	5SP3320-3	5SP3420-3
25 A	5SP3725-3	5SP3825-3	5SP3225-3	5SP3325-3	5SP3425-3
35 A	5SP3735-3	5SP3835-3	5SP3235-3	5SP3335-3	5SP3435-3
40 A	5SP3740-3	5SP3840-3	5SP3240-3	5SP3340-3	5SP3440-3
50 A	5SP3750-3	5SP3850-3	5SP3250-3	5SP3350-3	5SP3450-3
63 A	5SP3763-3	5SP3863-3	5SP3263-3	5SP3363-3	5SP3463-3

Quick selection guide, page 3/8


© Siemens 2022

5SY17 device protection switches

Electromechanical




	1P+AS
	230 V AC/12 ... 72 V DC
Mounting width	1 MW (18 mm)



3

Rated current I_n	Characteristic	
	F1 (quick)	F2 (slow)
0.5 A	5SY1705-2	5SY1705-4
1 A	5SY1701-2	5SY1701-4
2 A	5SY1702-2	5SY1702-4
4 A	5SY1704-2	5SY1704-4
6 A	5SY1706-2	5SY1706-4
8 A	5SY1708-2	5SY1708-4
10 A	5SY1710-2	5SY1710-4
16 A	5SY1716-2	5SY1716-4

Mounting concept

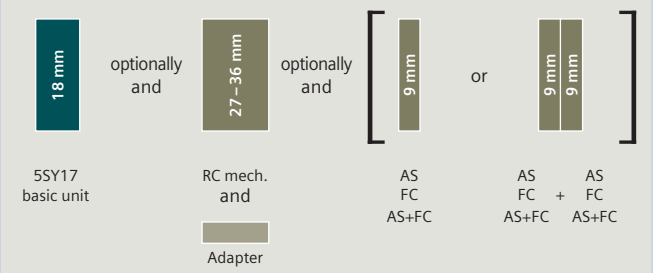

AS	Auxiliary switches	See page 3/46
FC	Fault signal contacts	See page 3/48
AS+FC	Auxiliary switches and fault signal contacts	See page 3/49
RC mech.	Remote control mechanisms	See page 3/54

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Remote control mechanisms (RC mech.)		**Article No.**
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new
Adapters for remote control mechanisms (RC mech.)		**Article No.**
1 MW		5ST3820-6


Quick selection guide, page 3/10

© Siemens 2022

5SK9 device protection switches

Electronic



	1P+AS
	24 V DC
Mounting width	6.2 mm
	

Rated current I_n	
1 A	5SK9101-1
2 A	5SK9102-1
3 A	5SK9103-1
4 A	5SK9104-1
6 A	5SK9106-1
8 A	5SK9108-1

Specific accessories

Connecting combs



Type	Number of poles	Max. load current I_{max}	Article No.
For parallel infeed	2-pole	24 A	8WH9020-6BC10
		32 A	8WH9020-6CC10
	5-pole	24 A	8WH9020-6BF10
		32 A	8WH9020-6CF10
For remote signal – group signal	2-pole	32 A	8WH9020-6CC10

Reducing combs for 10 mm² terminal blocks



Type	Number of poles	Max. load current I_{max}	Article No.
For bypassing the power supply	2-pole	40 A	8WH9020-0AC10


See general accessories, from page 3/56 onwards


Quick selection guide, page 3/10

© Siemens 2022

Overview of the modular system

Miniature circuit breakers

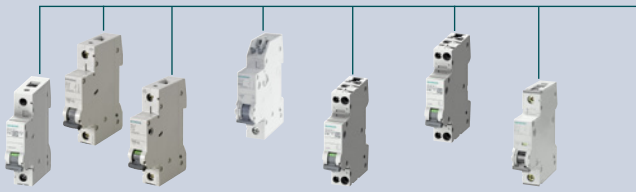

				5SL3	5SL6	5SL4	5SJ6...-.KS	5SL30	5SL60/ 5SL6 COM	5SY
Auxiliary switches (AS)			**Article No.**							
	1 NO + 1 NC	Standard	5ST3010	■	■	■	–	■	■	■
		For low power	5ST3013	■	■	■	–	■	■	■
		For low power (with diode)	5ST3013-0XX01	■	■	■	–	■	■	■
	2 NO	Standard	5ST3011	■	■	■	–	■	■	■
		For low power	5ST3014	■	■	■	–	■	■	■
	2 NC	Standard	5ST3012	■	■	■	–	■	■	■
		For low power	5ST3015	■	■	■	–	■	■	■
	1 CO	Standard	5ST3016	■	■	■	–	■	■	■
			5ST1010-0FP	–	–	–	–	–	–	–
Fault signal contacts (FC)			**Article No.**							
	1 NO + 1 NC		5ST3020	■	■	■	–	■	■	■
	2 NO		5ST3021	■	■	■	–	■	■	■
	2 NC		5ST3022	■	■	■	–	■	■	■
Auxiliary switches and fault signal contacts (AS+FC)			**Article No.**							
	1 CO (AS) + 1 CO (FC)	Standard	5ST3062	■	■	■	–	■	■	■
	5ST3 COM (AS+FC)	With communication and measuring function	5ST3062-0MC	■	■	■	–	■	■	■
Shunt trips (ST)			**Article No.**							
	110 ... 415 V AC, 110 ... 220 V DC		5ST3030	–	–	■	–	–	–	■
	24 ... 48 V AC/DC		5ST3031	–	–	■	–	–	–	■
	12 V DC		5ST3031-0XX01	–	–	■	–	–	–	■
Undervoltage releases (UR)			**Article No.**							
	With integrated auxiliary switch	230 V AC	5ST3040	–	–	■	–	–	–	■
		110 V DC	5ST3041	–	–	■	–	–	–	■
		24 V DC	5ST3042	–	–	■	–	–	–	■
	Without integrated auxiliary switch	230 V AC	5ST3043	–	–	■	–	–	–	■
		110 V DC	5ST3044	–	–	■	–	–	–	■
		24 V DC	5ST3045	–	–	■	–	–	–	■
Remote control mechanisms (RC mech.)			**Article No.**							
	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053	–	■	■	–	–	■	■
		177 ... 270 V AC	5ST3054	–	■	■	–	–	■	■
	Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055	–	■	■	–	–	■	■
		177 ... 270 V AC	5ST3056	–	■	■	–	–	■	■
	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057	–	■	■	–	–	■	■
		177 ... 270 V AC	5ST3058	–	■	■	–	–	■	■
	Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070	–	■	■	–	–	■	■
		170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new	–	■	■	–	–	■	■
5SM6 arc fault detection units			**Article No.**							
	Rated current up to 16 A	Standard	5SM6021-2	–	–	□	–	–	–	□
		For compact devices 1P+N in 1 MW	5SM6011-2	–	–	–	–	–	□	–
	Rated current up to 40 A	Standard	5SM6024-2	–	–	□	–	–	–	□
		For compact devices 1P+N in 1 MW	5SM6014-2	–	–	–	–	–	□	–
Standard busbars			**Article No.**							
	Cannot be cut		5ST36..	■	■	■	■	■	■	■
	Can be cut		5ST37..	■	■	■	■	■	■	■
Compact busbars			**Article No.**							
	Cannot be cut		5ST36..	□	□	□	–	■	■	–
	Can be cut		5ST37..	□	□	□	–	■	■	–

From page 3/12

■ Suitable for all versions □ Suitable for some versions

System overview, page 3/5


© Siemens 2022

Device protection switches

Residual current protective devices

Arc fault detection devices

Switching devices

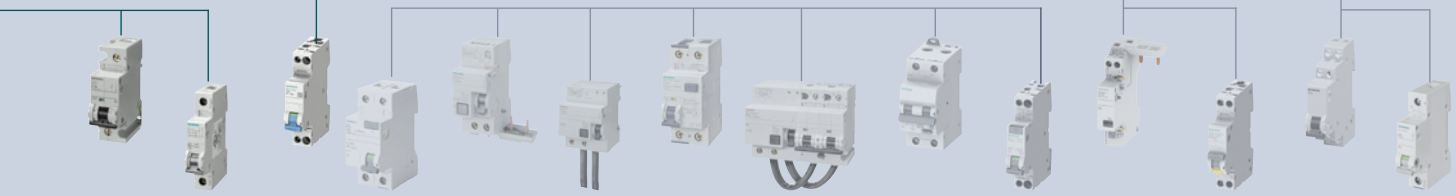

5SP4	5SJ4..HG..	5SY17	5SV	5SM2 + LS	5SM2 + 5SP4	5SU1	5SU1 (125 A)	5SU1...FP/ FR	5SV1	5SM6	5SV6/ 5SV6 COM	5TE8	5TL
■	...-0HG	■	■	■	■	■	■	–	■	□	■	■	■
■	–	■	■	■	■	■	■	–	■	□	■	■	■
■	–	■	■	■	■	■	■	–	■	□	■	■	■
■	...-0HG	■	■	■	■	■	■	–	■	□	■	■	■
■	–	■	■	■	■	■	■	–	■	□	■	■	■
■	...-0HG	■	■	■	■	■	■	–	■	□	■	■	■
■	–	■	■	■	■	■	■	–	■	□	■	■	■
■	–	■	■	■	■	■	■	–	■	□	■	■	■
–	–	–	–	–	–	–	–	■	–	–	–	–	–
■	...-0HG	■	■	■	■	■	■	–	■	□	■	–	–
■	...-0HG	■	■	■	■	■	■	–	■	□	■	–	–
■	...-0HG	■	■	■	■	■	■	–	■	□	■	–	–
■	–	■	■	■	■	■	■	–	■	□	■	–	–
■	–	■	■	■	■	■	■	–	■	□	■	–	–
■	...-0HG	–	■	■	■	■	■	–	–	□	–	–	–
■	...-0HG	–	■	■	■	■	■	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	□	–	–	–
■	–	–	■	■	■	■	■	–	–	□	–	–	–
–	–	■	–	–	–	■	–	–	■	–	–	–	■
–	–	■	–	–	–	■	–	–	■	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	■
■	–	■	■	■	–	■	–	–	■	–	–	–	–
–	–	■	■	–	–	■	–	–	■	–	–	–	–
–	–	–	–	–	–	■	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	■	–	–	–	–
–	–	–	–	–	–	■	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	■	–	–	–	–
■	■	■	■	■	■	■	■	■	■	□	■	□	■
■	■	■	■	■	■	■	■	■	■	□	■	□	■
–	–	■	■	–	–	–	–	–	■	■	■	–	–
–	–	–	■	–	–	–	–	–	■	■	■	–	–
From page 3/12		From page 3/42	From page 4/18							From page 4/52		From page 5/6	

System overview, page 3/5

© Siemens 2022

Electrical accessories



Auxiliary switches (AS)

- Signals the contact position of the mounted device
- Version for the switching of small currents and voltages according to EN 61131-2 for control of programmable control systems (PLCs)
- Test button enables the testing of control circuits without the need to switch the mounted device

For combining with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	ON/OFF switches				
Auxiliary switches (AS)									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
Auxiliary switches (AS) with TEST button									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2
Auxiliary switches (AS) acc. to UL 489									
5SJ4...-.HG	–	–	–		–	1 NO + 1 NC	Standard	0.5 MW	5ST3010-0HG
						2 NO	Standard	0.5 MW	5ST3011-0HG
						2 NC	Standard	0.5 MW	5ST3012-0HG

[1] 5ST3805-1 handle coupler required

Quick selection guide, page 3/44

© Siemens 2022

Further technical specifications

		5ST3010, 5ST3011, 5ST3012, 5ST3016	5ST3010-0HG, 5ST3011-0HG, 5ST3012-0HG	5ST3010-2, 5ST3011-2, 5ST3012-2	5ST3013, 5ST3014, 5ST3015, 5ST3013-0XX01 [1]	5ST3013-2, 5ST3014-2, 5ST3015-2
Standards						
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	–	IEC/EN 62019, IEC/EN 60947-5-1		
	UL, CSA	UL 1077, CSA C22.2 No. 235	UL 489, CSA 22.2 No. 5-02	–	UL 1077, CSA C22.2 No. 235	–
Contacts						
Minimum contact load		50 mA, 24 V			1 mA, 5 V DC	5 mA, 5 V DC
Maximum contact load		–			100 mA, 30 V DC	50 mA, 30 V DC
Contact load acc. to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-12	–				
	230 V AC, AC-13	6 A/6 A			–	
	400 V AC, AC-13	2 A/2 A			–	
	230 V AC, AC-14	6 A/6 A			–	
	400 V AC, AC-14	2 A/2 A			–	
	24 V DC, DC-13	6 A/3 A			–	
	30 V DC, DC-14	–			0.1 A	
	60 V DC, DC-13	3 A/1.5 A			–	
	110 V DC, DC-13	1 A/0.75 A			–	
	220 V DC, DC-12	–				
	220 V DC, DC-13	1 A/0.5 A			–	
Contact load acc. to UL	120 V AC	–	6 A	–		
	125 V AC	3 A	–			
	240 V AC	4 A		–		
	277 V AC	–	3 A	–		
	480 V AC	1,5 A		–		
	60 V DC	–	3 A	–		
	125 V DC	1,1 A	1 A	–		
	250 V DC	0,55 A	–			
Service life, on average, with rated load	Actuations	20000	12000	20000		
Safety						
Short-circuit protection		5SY... 6A miniature circuit breaker or gG 6 A fuse				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)				
Ambient conditions						
Permissible ambient temperature		–40 ... +70 °C				
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²				
Resistance to vibrations at 5 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				

[1] No approvals

Quick selection guide, page 3/44

© Siemens 2022

Electrical accessories



Fault signal contacts (FC)

- Signals automatic tripping of the protective switching device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the protective switching device is tripped manually
- Version with TEST and RESET buttons enable the testing of control circuits without operation of the protective switching device
- Red RESET button in the operating handle indicates automatic tripping of the mounted protective switching device

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with TEST and RESET button							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2
Fault signal contacts (FC) acc. to UL 489							
5SJ4...-.HG	–	–	–	–	1 NO + 1 NC	0.5 MW	5ST3020-0HG
					2 NO	0.5 MW	5ST3021-0HG
					2 NC	0.5 MW	5ST3022-0HG

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST3020, 5ST3021, 5ST3022	5ST3020-2, 5ST3021-2, 5ST3022-2	5ST3020-0HG, 5ST3021-0HG, 5ST3022-0HG
Standards				
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1		
	UL, CSA	UL 1077, CSA C22.2 No. 235	–	UL 489, CSA 22.2 No. 5-02
Contacts				
Minimum contact load		50 mA, 24 V		
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A		
	400 V AC, AC-13	6 A/6 A		
	230 V AC, AC-14	2 A/2 A		
	400 V AC, AC-14	2 A/2 A		
	24 V DC, DC-13	6 A/3 A		
	60 V DC, DC-13	3 A/1.5 A		
	110 V DC, DC-13	1 A/0.75 A		
	220 V DC, DC-13	1 A/0.5 A		
Contact load acc. to UL	120 V AC	–		6 A
	125 V AC	3 A	–	
	240 V AC	4 A	–	
	277 V AC	–		3 A
	480 V AC	1.5 A	–	
	60 V DC	–		3 A
	125 V DC	1.1 A	–	1 A
	250 V DC	0.55 A	–	
Service life, on average, with rated load	Actuations	20000		12000
Safety				
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse		
Connections				
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)		
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)		
Ambient conditions				
Permissible ambient temperature		–25 ... +55 °C		
Permissible storage temperature		–40 ... +75 °C		
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles		
Mounting position		Any		
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²		
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²		

Quick selection guide, page 3/44

© Siemens 2022



Auxiliary switches and fault signal contacts (AS+FC)

- Combines the function of both switches in a width of only 0.5 MW (9 mm)
- Signals the contact position of the mounted device
- Signals automatic tripping of the protective switching device in the event of a fault, such as an overload, a short circuit or a fault current
- If the fault signal contact is activated, the contact position does not change if the protective switching device is tripped manually

For combining with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices			
Auxiliary switches and fault signal contacts (AS+FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW	5ST3062

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST3062
Standards		
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1
	UL, CSA	UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A
	400 V AC, AC-14	2 A/2 A
Contact load acc. to IEC/EN 62019/IEC/EN 60947-5-1	24 V DC, DC-13	3 A/3 A
	60 V DC, DC-13	3 A/1 A
	110 V DC, DC-13	0.5 A/0.5 A
	220 V DC, DC-13	0.5 A/0.3 A
Contact load acc. to UL	125 V AC	2 A
	240 V AC	1.5 A
	480 V AC	0.75 A
	125 V DC	0.5 A
	250 V DC	0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²

Quick selection guide, page 3/44

© Siemens 2022

Electrical accessories

5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function



- Reports the switching state of the mounted standard circuit protection device (ON, tripped, manual OFF, tripped with locked handle)
- Measures the temperature of the device and counts operating cycles, trips and operating hours
- Communication via radio to 7KN Powercenter 1000 data transceiver
- Plug-in terminals for 24 V DC power supply incl. daisy chain function
- Low space requirements of 0.5 MW (9 mm)

For combining with basic units						Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	Communication		
5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	Radio link to 7KN Powercenter 1000	0.5 MW	5ST3062-0MC

[1] 5ST3805-1 handle coupler required

Note:
Please note the country-specific radio licenses of the products in SIOS:
www.siemens.com/lowvoltage/certificates (109801197)


Further technical specifications

		5ST3062-0MC
Standards		
Standards	IEC/EN; UL, CSA	60669-2-5
	RED	2014/53/EU
Power supply		
Power supply		24 V DC ±20%, SELV
Conductor cross-sections		0.2 ... 1.5 mm²
Connection type		Plug-in terminal
Safety		
Pollution degree for overvoltage category		2/II
Degree of protection		IP40, with front cover
Ambient conditions		
Permissible ambient temperature		–25 ... +60 °C
Permissible storage temperature		–40 ... +85 °C
Humidity		93% at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Schock		150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²
Service life		10000
Communication		
Interface	7KN Powercenter 1000	Radio link
Temperature		Measuring accuracy of 2.5 °C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycle counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring
Operating hours counter		Operating hours with limit monitoring

Quick selection guide, page 3/44

© Siemens 2022

7KN Powercenter 1000 data transceiver

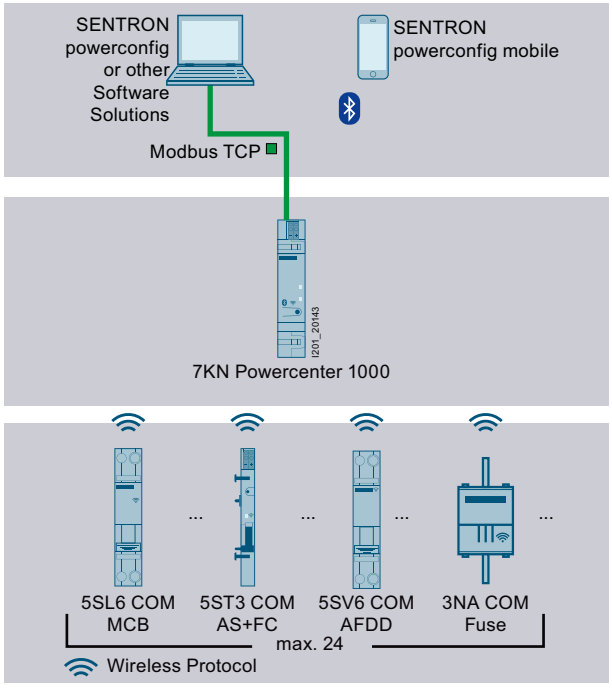

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000	Article No.
	7KN1110-0MC00

See page 10/19

You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation manual – Circuit protection devices with communication and measuring function **(109791805)**

System manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 3/44

© Siemens 2022

Electrical accessories



Shunt trips (ST)

- For remote-controlled tripping of the mounted device

For combining with basic units Miniature circuit breakers	RCCBs	RCBOs	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Shunt trips (ST)					
5SL4, 5SY, 5SP	5SV	5SU1 [1]	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01
Shunt trips (ST) acc. to UL 489					
5SJ4...-.HG	–	–	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030-0HG
			24 ... 60 V AC/DC	1 MW	5ST3031-0HG

[1] 5ST3805-1 handle coupler required

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01	5ST3030-0HG	5ST3031-0HG
Standards						
Standards	IEC/EN	EN 60947-1			IEC/EN 60947-1	
	UL, CSA	–			UL 489, UL-File E321559, CSA 22.2 No. 5-02	
Supply						
Primary operating range		0.7 ... 1.1 × U_n				
Rated frequency f_n		50 ... 60 Hz		–	50 ... 60 Hz	
Contacts						
Minimum contact load		50 mA, 24 V		1 mA, 5 V	50 mA, 24 V	
Tripping operations		Max. 2000				
Service life, on average, with rated load	Actuations	20000			12000	
Safety						
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A				
Connections						
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)				
Ambient conditions						
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C	–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C				
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles				
Mounting position		Any				
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²				
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²				

Quick selection guide, page 3/44

© Siemens 2022



Undervoltage releases (UR)

- Are integrated (e.g. in EMERGENCY-OFF loops), thus ensuring that the MCB trips in the event of an emergency. EMERGENCY OFF is a function provided to disconnect the electricity supply to all or some parts of the installation in case of emergency, when there is a risk of electric shock or any other hazard caused by electrical power
- In addition, an undervoltage release also trips if the voltage is interrupted or too low, or prevents the MCB from closing
- Combination with 5SV RCCB not suitable for implementation of EMERGENCY-OFF/ EMERGENCY-STOP circuits

For combining with basic units Miniature circuit breakers	RCCBs	RCBOs	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
With integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 [1]	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 [1]	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST304.
Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... 1.1 × U_n
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breaker B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm (6.8 lb-in)
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²

Quick selection guide, page 3/44

© Siemens 2022

Electrical accessories



5ST3 remote control mechanisms (RC mech.)

- For locations that are spread out over a wide area or not permanently attended
- Permits direct and immediate access to the installation even if it is remote or in a location that is hard to access
- Permits fast reconnection after a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type of remote control mechanism	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to EN 61373/ EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070
				170 ... 277 V AC, 77 ... 286 V DC	2 MW	5ST3071 new

Further technical specifications

	5ST3053	5ST3054	5ST3055	5ST3056	5ST3057	5ST3058	5ST3070	5ST3071
Standards								
Standards	EN 50557 (VDE 0640-20)							
Supply								
Rated frequency f_n	50 ... 60 Hz							
Rated power dissipation in standby	≤1 VA							
Contacts								
Service life, on average, with rated load — Actuations	10000							
Number of remote switching operations per minute	2							
Number of automatic reclose attempts	–				3		–	
Cable length in the control circuit	≤1500 m							≤1500 m (DC)/ ≤200 m (AC)
Sliding selector with locking device	–	■						
Integrated auxiliary switches	–		1W (1CO); 2 A; 250 V					
Integrated fault signal contact	–		1W (1CO); 2 A; 250 V					
Connections								
Conductor cross-sections	0.5 ... 1.5 mm² (AWG 14 ... 30)							
Terminal tightening torque	0.2 ... 0.25 Nm (2.0 lb-in)							
Ambient conditions								
Permissible storage temperature	–40 ... +55 °C						–40 ... +70 °C	
Degree of protection	IP20							
Pollution degree for overvoltage category	3/II							

Suitable adapters for combination with basic units



Basic units	Mounting width 1 ... 2 MW	3 ... 4 MW	3 ... 6 MW	Article No.
5SY4/5/6/7/8	■	–	–	5ST3820-1
	–	■	–	5ST3820-2
5SL3/4/6	■	–	–	5ST3820-6
	–	■	–	5ST3820-7
5SL60/5SY17	■	–	–	5ST3820-6
5SP4	■	–	–	5ST3820-1
	–	–	■	5ST3820-2

Quick selection guide, page 3/44

© Siemens 2022



5SM6 arc fault detection units (AFDD)

- Detects arcing faults
- Offers extremely effective protection against fires started by electrical faults
- Ensures adequate fire protection even in applications without residual current protective device

For combining with basic units			Rated current I_e	Mounting width (1 MW = 18 mm)	Article No.
Width of basic unit	Miniature circuit breakers	RCBOs			
1 MW	5SL60 1P + N (no KL types)	5SV1	Up to 16 A	1 MW	5SM6011-2
			Up to 40 A	1 MW	5SM6014-2
2 MW	5SY [1], 5SL4 (1P+N devices only, not compact)	5SU1.5	Up to 16 A	1 MW	5SM6021-2
			Up to 40 A	1 MW	5SM6024-2

[1] Not suitable for use with 5SY5, 5SY8

Further technical specifications

		5SM6
Standards		
Standards		IEC/EN 62606
Supply		
Rated voltage U_n		230 V
Rated current I_n		Up to 16/40 A
Rated frequency		50 Hz
Power loss		0.6 W
Contacts		
Number of poles		2-pole
Service life	Average number of operating cycles	>10000
Safety		
Touch protection	Acc. to EN 50274 (VDE 0660-514)	Finger and back-of-hand safe
Degree of protection	Acc. to EN 60529 (VDE 0470-1)	IP20, with connected conductors
Overvoltage category		III
Tripping in the event of overvoltage		>275 V
Connections		
Terminal/conductor cross-sections	Solid and stranded	0.75 ... 16 mm²
	Finely stranded with end sleeve	0.75 ... 10 mm²
Terminal tightening torque		2.0 ... 2.5 Nm
Mains connection		Bottom
Ambient conditions		
Permissible ambient temperature		–25 ... +40 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate at 95% relative air humidity	Acc. to IEC 60068-2-30	28 cycles, 55 °C
Pollution degree		2
CFC and silicone-free		Yes
Mounting position		Any


Suitable busbars, from page 3/58 onwards
Suitable terminals and end caps, from page 3/74 onwards

Quick selection guide, page 3/44

© Siemens 2022

Mechanical accessories

Mechanical rotary operating mechanisms complete with handle



- For 5SY, 5SP4, 5SL (but not for 5SL.0 1P + N in 1TE), 5TL1, 5TE2, 5TE8, 5SU1

Types	Article No.
Handle black	5ST3060
Handle red/yellow	5ST3061

Terminal cover



- For miniature circuit breakers, but not for 5SL60..
- For additional covering of the screw openings per pole
- Lockable
- In the case of 5SY, also prevents removal of device from the DIN rail

Article No.
5ST3800

Handle locking devices

- To prevent undesired mechanical ON/OFF switching
- Sealable and lockable





For miniature circuit breakers	For padlocks with	Article No.
5SP4, 5SY	Max. 3 mm shackle	5ST3801
5SL, 5TL1	3 ... 6 mm shackle	5ST3806

Padlocks



- For 5ST3801 and 5ST3806 handle locking devices and remote control mechanisms 5ST3054 ... 58, 5ST3070

Article No.
5ST3802

Locking devices

- Comprising 5ST3801 or 5ST3806 handle locking device and 5ST3802 padlock

For miniature circuit breakers	Comprising	Article No.
5SP4 and 5SY	5ST3801 handle locking device, 5ST3802 padlock	5ST3803
5SL, 5SV, 5TL1	5ST3806 handle locking device, 5ST3802 padlock	5ST3807

Spacers



- Can be placed on either side of the DIN rail. Two spacers allow for convenient cable routing

Mounting width	Article No.
0.5 MW	5TG8240

System overview, page 3/5

© Siemens 2022

Device labels

- Adhesive
- For modular installation devices, e.g. 5SY, 5SL, 5TL1

Types	Article No.
15 x 6 mm, white (WIN 098)	8WH8210-0AA35
15 x 6 mm, yellow (WIN 099)	8WH8210-0AA36

Terminal covers, gray



- For surface mounting, degree of protection IP40
- Sealable
- Can be used with 35 mm DIN rail

For widths up to	Article No.
2.5 MW	5SW3004
4.5 MW	5SW3005

Wall enclosures, gray



- For flush mounting, degree of protection IP40
- Can be used with 35 mm DIN rail

For widths up to	Article No.
2.5 MW	5SW3006
4.5 MW	5SW3007

Molded-plastic enclosures, gray



- For surface mounting, degree of protection IP54
- Sealable
- Can be used with 35 mm DIN rail
- With transparent hinged lid

For widths up to	Article No.
4.5 MW	5SW1200

Covers



- Can be assembled as mini distribution board
- Suitable for all devices
- Cover parts prepared for rail mounting of conventional label caps

Comprising	Article No.
End plate	5ST2134
Angled profile	5ST2135
Alternatively flat profile	5ST2136

Holders for front panel installation



- Universal use for devices from 1 to 6 MW

Cutout height	Cutout width	Article No.
$45^{+0.5}$ mm	23, 41, 59, 77, 95 or 113 mm	7LF9006

Intermediate frames



- For 70 mm devices in 55 mm ALPHA SIMBOX small distribution boards

Types	Article No.
1-tier	8GB4561
2-tier	8GB4562
3-tier	8GB4563
4-tier	8GB4564

System overview, page 3/5


© Siemens 2022

Standard busbars

General information


Infeed

At the start or end of the busbar

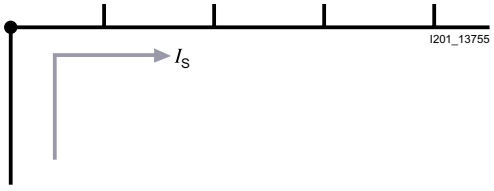

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A


Along the busbar or midpoint infeed

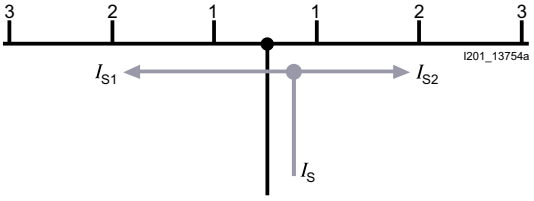

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A







Quick selection guide, page 3/44

© Siemens 2022



Fixed length, cannot be cut

For miniature circuit breakers (MCBs)

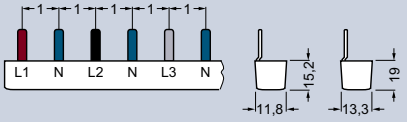Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
1-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	33 mm	5ST3600	5ST3630
	For 6 MCBs 1P	6 MW	105 mm	5ST3601	5ST3631
	For 12 MCBs 1P	12 MW	212 mm	5ST3602	5ST3632
2-phase/1-phase + N				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 2 MCBs (2P/1P+N)	4 MW	76 mm	5ST3606	5ST3636
	For 3 MCBs (2P/1P+N)	6 MW	105 mm	5ST3607	5ST3637
	For 6 MCBs (2P/1P+N)	12 MW	210 mm	5ST3608	5ST3638
3-phase				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 2 MCBs 3P	6 MW	102 mm	5ST3613	5ST3643
	For 3 MCBs 3P	9 MW	157.5 mm	5ST3614	5ST3644
	For 4 MCBs 3P	12 MW	210 mm	5ST3615	5ST3645
	For 14 MCBs 1P	14 MW	250 mm	5ST3613-4	–
	Combi pack: 20× 5ST3613 + 10× 5ST3614 + 50× 5ST3615 + 50× 5ST3655			5ST3656	–
	Combi pack: 20× 5ST3643 + 10× 5ST3644 + 50× 5ST3645 + 50× 5ST3655			–	5ST3657
4-phase/3-phase + N				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 2 MCBs (4P/3P+N)	8 MW	138 mm/ 140 mm	5ST3621	5ST3651
	For 3 MCBs (4P/3P+N)	12 MW	210 mm	5ST3622	5ST3652
 Ø 10 mm² Ø 16 mm²	For 6 MCBs (1P+N)	12 MW	210 mm	5ST3623	5ST3653
	For 7 MCBs (1P+N)	14 MW	248 mm	5ST3623-4	–






Quick selection guide, page 3/44

© Siemens 2022

Standard busbars

Fixed length, cannot be cut

For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

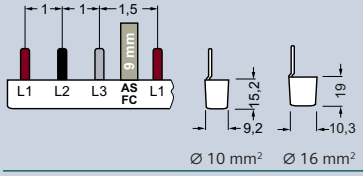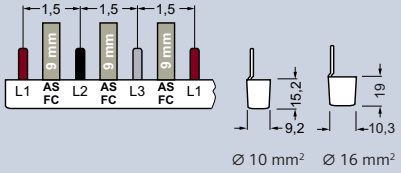Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
1-phase				Article No.	Article No.
	For 2 MCBs 1P	2 MW	40 mm	5ST3603	5ST3633
	For 6 MCBs 1P	6 MW	158 mm	5ST3604	5ST3634
	For 9 MCBs 1P	9 MW	237 mm	5ST3605	5ST3635
2-phase/1-phase + N				Article No.	Article No.
	For 2 MCBs (2P/1P+N)	4 MW	76 mm	–	5ST3640
	For 3 MCBs (2P/1P+N)	6 MW	121 mm	–	5ST3641
	For 5 MCBs (2P/1P+N)	10 MW	210 mm	–	5ST3642
3-phase				Article No.	Article No.
	For 2 MCBs 3P	6 MW	115 mm	5ST3616	5ST3646
	For 4 MCBs 3P	12 MW	237 mm	5ST3617	5ST3647
	For 6 MCBs 1P	9 MW	156 mm/ 158 mm	5ST3618	5ST3648
	For 9 MCBs 1P	12 MW	227 mm	5ST3620	5ST3650


Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5







Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5× 1 pin		5ST3655

Quick selection guide, page 3/44

© Siemens 2022



For MCBs with RCCB

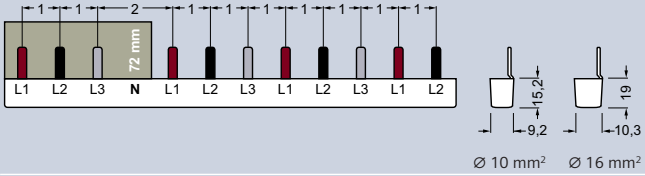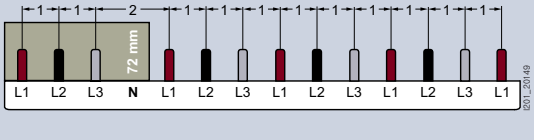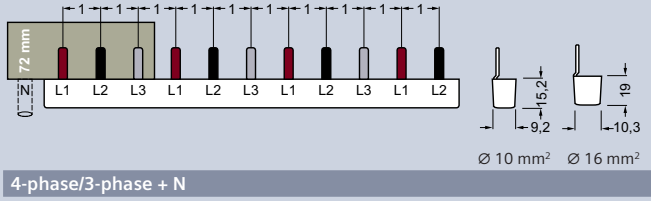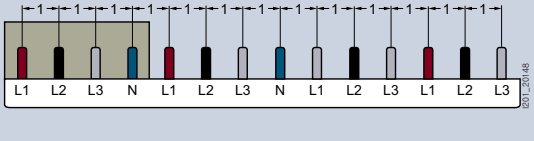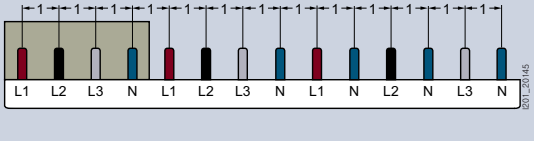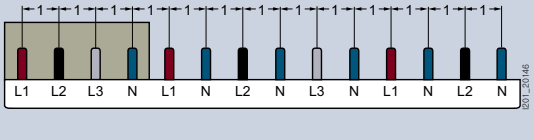Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
3-phase				Article No.	Article No.
	For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	5ST3624	5ST3654
	For 10 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCBs 3P and 7 MCBs 1P	14 MW	249 mm	5ST3624-4	–
	For 6 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCB 3P and 3 MCBs 1P	10 MW	176 mm	5ST3624-1	–
	For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668
4-phase/3-phase + N				Article No.	Article No.
	For 1 RCCB 3P+N, 1 MCBs 3P+N and 6 MCBs 1P	14 MW	248 mm	5ST3724-4	–
	For 1 RCCB 3P+N, 1 MCBs 3P+N and 3 MCBs 1P+N	14 MW	248 mm	5ST3725-4	–
	For 1 RCCB 3P+N, 1 MCBs 3P and 3 MCBs 1P+N	13 MW	230 mm	5ST3725-3	–
	For 1 RCCB 3P+N and 5 MCBs 1P+N	14 MW	248 mm	5ST3625-4	–








Quick selection guide, page 3/44

© Siemens 2022

Standard busbars

Can be cut

For miniature circuit breakers (MCBs)

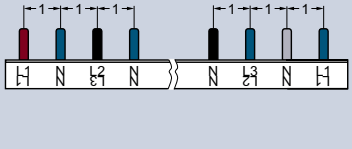Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Color	Conductor cross-section 10 mm²	Conductor cross-section 16 mm²
1-phase, straight						Article No.	Article No.
	For MCBs 1P+N compact	12 MW	216 mm	■	Gray	5ST3762	–
					Blue	5ST3687-0	–
		56 MW	1016 mm	–	Gray	5ST3764	–
					Blue	5ST3787-0	–
1-phase, angled 45°						Article No.	Article No.
	For MCBs 1P+N compact	12 MW	216 mm	■	Blue	5ST3763	–
		56 MW	1016 mm	–	Blue	5ST3765	–
1-phase, angled 90°						Article No.	Article No.
	For MCBs 1P	12 MW	214 mm	■		5ST3730	5ST3700
		56 MW	1016 mm	–		5ST3731	5ST3701
2-phase/1-phase + N						Article No.	Article No.
	For 2MW devices (2P/1P+N)	12 MW	214 mm	■		5ST3734	5ST3704
		56 MW	1016 mm	–		5ST3735	5ST3705
3-phase						Article No.	Article No.
	For MCBs 3P	12 MW	214 mm	■		5ST3738	5ST3708
		56 MW	1016 mm	–		5ST3740	5ST3710
4-phase/3-phase + N						Article No.	Article No.
	For MCBs 4P or 3P+N	12 MW	214 mm	■		5ST3745	5ST3715
		56 MW	1016 mm	–		5ST3746	5ST3716
 Ø 10 mm² Ø 16 mm²	For RCCB/MCBs or MCBs 1P+N	56 MW	1000 mm	–		5ST3770-2	5ST3770-3


Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5
Terminals for Infeed at side		**Article No.**
For conductors 6 ... 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2






End caps		Article No.
For 1-phase busbars (MCB 1P+N compact)	Gray	5ST3766
	Blue	5ST3767
	White	5ST3748
For 2-phase busbars		5ST3750
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5× 1 pin		5ST3655

Quick selection guide, page 3/44


© Siemens 2022



For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²	16 mm²
1-phase, angled 90°					**Article No.**	**Article No.**
	For MCBs 1P	12 MW	214 mm	■	5ST3732	5ST3702
		56 MW	1016 mm	–	5ST3733	5ST3703
2-phase/1-phase + N					**Article No.**	**Article No.**
	For 2 MW devices (2P/1P+N)	12 MW	214 mm	■	5ST3736	5ST3706
		56 MW	1016 mm	–	5ST3737	5ST3707
3-phase					**Article No.**	**Article No.**
	For MCBs 3P	12 MW	214 mm	■	5ST3741	5ST3711
		56 MW	1016 mm	–	5ST3742	5ST3712
	For MCBs 1P	12 MW	214 mm	■	5ST3743	5ST3713
		56 MW	1016 mm	–	5ST3744	5ST3714
4-phase/3-phase + N					**Article No.**	**Article No.**
	For MCBs 1P+N	56 MW	1016 mm	–	5ST3746-2	–

For MCBs equipped with undervoltage release (UR) or shunt trips (ST)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²	16 mm²
2-phase					**Article No.**	**Article No.**
	For MCBs 1P with UR/ST	56 MW	1016 mm	–	5ST3735-2	–

Quick selection guide, page 3/44



© Siemens 2022

Standard busbars



Can be cut

For MCBs with line-side RCCB or RCCBs equipped with AS/FC devices

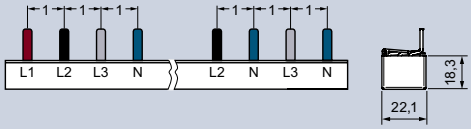Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²	16 mm²
4-phase/3-phase + N					Article No.	Article No.
	For RCCB/MCBs	56 MW	1016 mm	–	5ST3746-2	–
	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	5ST3770-4	5ST3770-5


Accessories

Terminals for 5ST36 and 5ST37		Article No.
For conductors 6 ... 25 mm²	Cable entry on the left	5ST3768-4
	Cable entry in the center	5ST3768-3
	Cable entry on the right	5ST3768-5
For conductors 6 ... 50 mm²	Cable entry on the left	5ST3760-4
	Cable entry in the center	5ST3760-3
	Cable entry on the right	5ST3760-5

End caps	Article No.
For 3-phase busbars	5ST3750
For 4-phase busbars	5ST3718
Touch protection	**Article No.**
For free connections, yellow (RAL 1004) 5× 1 pin	5ST3655







Quick selection guide, page 3/44

© Siemens 2022



5ST37 acc. to UL 508, can be cut

For miniature circuit breakers (MCBs)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²	25 mm²
1-phase				**Article No.**	**Article No.**
	For MCBs 1P or fuse holders 10 x 38 mm/class CC	56 MW	1000 mm	5ST3701-0HG	–
	For MCBs 1P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3701-2HG
2-phase				**Article No.**	**Article No.**
	For MCBs 2P or fuse holders 10 x 38 mm/class CC	56 MW	1000 mm	5ST3705-0HG	–
	For MCBs 2P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3705-2HG
3-phase				**Article No.**	**Article No.**
	For MCBs 3P or fuse holders 10 x 38 mm/class CC	56 MW	1000 mm	5ST3710-0HG	–
	For MCBs 3P or fuse holders 14 x 51 mm	56 MW	1000 mm	–	5ST3710-2HG

3

Quick selection guide, page 3/44





© Siemens 2022

Standard busbars



5ST37 acc. to UL 508, can be cut

For MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²	25 mm²
1-phase				**Article No.**	**Article No.**
	For MCBs 1P	56 MW	1000 mm	5ST3703-0HG	–
2-phase				**Article No.**	**Article No.**
	For MCBs 2P	56 MW	1000 mm	5ST3707-0HG	–
3-phase				**Article No.**	**Article No.**
	For MCBs 3P	56 MW	1000 mm	5ST3712-0HG	–
	For MCBs 1P	56 MW	1000 mm	5ST3714-0HG	–


Accessories

Terminals according to UL 489		Article No.
For infeed at the device	6 ... 35 mm²	5ST3770-0HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3770-1HG
End caps according to UL 508		**Article No.**
For 1-phase busbars		5ST3748-0HG
For 2 and 3-phase busbars		5ST3750-0HG

Touch protection according to UL 508	Article No.
For open terminals, yellow 5× 1 pin	5ST3655-0HG




Quick selection guide, page 3/44

© Siemens 2022






5ST3.. acc. to UL 489 specially for 5SJ4... -.HG..

Fixed length, cannot be cut, for miniature circuit breakers (MCBs) [1)]

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 16 mm²
1-phase				**Article No.**
	For 6 MCBs 1P	6 MW	100 mm	5ST3663-0HG
	For 12 MCBs 1P	12 MW	205 mm	5ST3663-1HG
	For 18 MCBs 1P	18 MW	310 mm	5ST3663-2HG
2-phase				**Article No.**
	For 3 MCBs 2P	6 MW	100 mm	5ST3664-0HG
	For 6 MCBs 2P	12 MW	205 mm	5ST3664-1HG
	For 9 MCBs 2P	18 MW	310 mm	5ST3664-2HG
3-phase				**Article No.**
	For 2 MCBs 3P	6 MW	100 mm	5ST3665-0HG
	For 4 MCBs 3P	12 MW	205 mm	5ST3665-1HG
	For 6 MCBs 3P	18 MW	310 mm	5ST3665-2HG

[1)] All unassigned pins of the busbars that cannot be cut must be covered with 5ST3666-1HG touch protection covers.


Can be cut, for MCBs

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²
1-phase				**Article No.**
	For MCBs 1P	56 MW	1016 mm	5ST3701-3HG
2-phase				**Article No.**
	For MCBs 2P	56 MW	1016 mm	5ST3705-3HG
3-phase				**Article No.**
	For MCBs 3P	56 MW	1016 mm	5ST3710-3HG

Quick selection guide, page 3/44





© Siemens 2022

Standard busbars



5ST3.. according to UL 489 speziell For 5SJ4... -.HG..

Can be cut, for MCBs equipped with auxiliary switch (AS) or fault signal contact (FC)

Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 18 mm²
1-phase				**Article No.**
	For MCBs 1P	56 MW	1016 mm	5ST3703-3HG
2-phase				**Article No.**
	For MCBs 2P	56 MW	1016 mm	5ST3707-3HG
3-phase				**Article No.**
	For MCBs 3P	56 MW	1016 mm	5ST3712-3HG
	For MCBs 1P	56 MW	1016 mm	5ST3714-3HG

Accessories

Terminals according to UL 489		Article No.
For infeed at the 5SJ4... -.HG.. miniature circuit breaker	2.5 ... 35 mm²	5ST3666-0HG
	6 ... 35 mm²	5ST3770-3HG
For infeed at the busbar	2.5 ... 50 mm²	5ST3666-2HG
End caps acc. to UL 489		**Article No.**
For 1, 2 and 3-phase busbars		5ST3750-3HG

Touch protection acc. to UL 489		Article No.
For open terminals, yellow 3× 1 pin	For 5ST37..-.HG busbars that cannot be cut	5ST3666-1HG
	For 5ST37..-3HG busbars that can be cut	5ST3655-3HG

Quick selection guide, page 3/44


© Siemens 2022

Compact busbars

General information


Infeed

At the start or end of the busbar

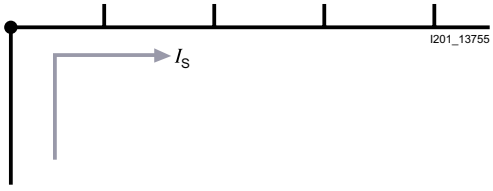

Maximum busbar current I_s/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed

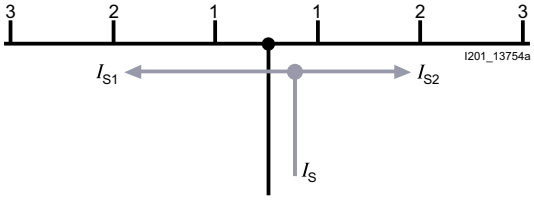







Maximum busbar current I_s/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

Quick selection guide, page 3/44

© Siemens 2022

Compact busbars


5ST36, fixed length, cannot be cut

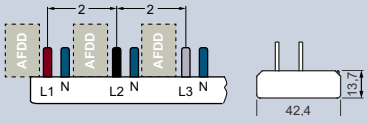Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1× RCCB 1P+N and 5× compact devices equipped with 5SM6 arc fault detection unit	12 MW	216 mm	■	5ST3685-0
2-phase/1-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3674-6
		9 MW	166 mm	■	5ST3674-7
		12 MW	218 mm	■	5ST3674-0
	For 12x 5SY17 CBE (device protection switch)	12 MW	218 mm	■	5ST3674-1
	For 6× compact devices equipped with 5SM6 arc fault detection unit	11 MW	200 mm	■	5ST3676-0
4-phase/3-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3673-6
		9 MW	116 mm	■	5ST3673-7
		12 MW	218 mm	■	5ST3673-0
		14 MW	254 mm	■	5ST3673-4
	For 6× compact devices equipped with 5SM6 arc fault detection unit	11 MW	200 mm	■	5ST3675-0








3

Quick selection guide, page 3/44

© Siemens 2022



5ST37, can be cut

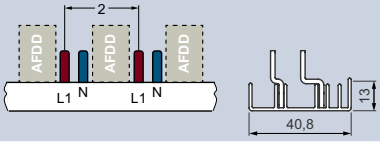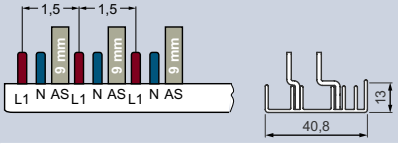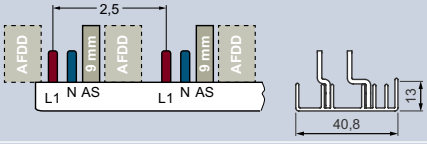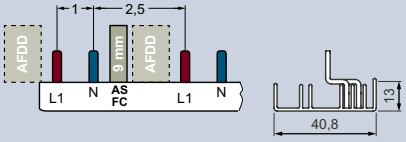Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1× RCCB 1P+N and 10× compact devices	12 MW	215 mm	■	5ST3784-0
	For 1× RCCB 1P+N (RCCB N left only) and 10× compact devices	12 MW	215 mm	■	5ST3784-0KL
2-phase/1-phase + N					**Article No.**
	For compact devices	60 MW	1060 mm	–	5ST3774-0
	For compact devices equipped with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3776-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3778-0
	For compact devices equipped with 5SM6 arc fault detection unit and auxiliary switch	58.5 MW	1036 mm	–	5ST3780-0
	For 2 MW units (MCBs or RCBOs) with mounted 5SM6 arc fault detection unit and auxiliary switch	54 MW	956 mm	–	5ST3786-0

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short, IP20	5ST3771-2

End caps	Article No.
2 and 4-phase compact busbars	5ST3788-0








Touch protection		Article No.
For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
	For pins L2, L3	5ST3655-0HG

Quick selection guide, page 3/44

© Siemens 2022


Compact busbars






5ST37, can be cut

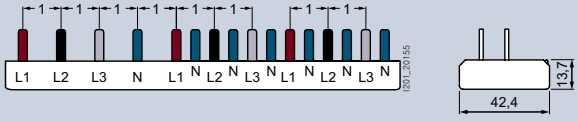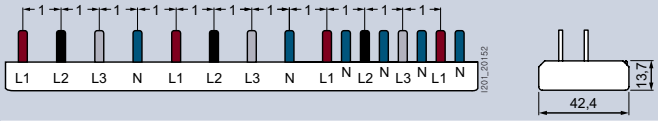Pin spacing in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²
4-phase/3-phase + N, for infeed via RCCB					**Article No.**
	For 1× RCCB 3P+N and 6× compact devices	10 MW	181 mm	■	5ST3783-1
	For 1× RCCB 3P+N and 8× compact devices	12 MW	216 mm	■	5ST3783-0
	For 1× RCCB 3P+N and 10× compact devices	14 MW	251 mm	■	5ST3783-4
	For 1× RCCB 3P+N (RCCB N left only) and 6× compact devices	10 MW	181 mm	■	5ST3783-1KL
	For 1× RCCB 3P+N (RCCB N left only) and 8× compact devices	12 MW	216 mm	■	5ST3783-0KL
	For 1× RCCB 3P+N, 1× MCBs 3P and 7× compact devices	14 MW	253 mm	■	5ST3785-4
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 12× compact devices	24 MW	430 mm	■	5ST3790-1
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 45× compact devices	57 MW	1009 mm	–	5ST3790-2
	For 1× RCCB 3P+N, 1× MCBs 3P+N and 4× compact devices	12 MW	217 mm	■	5ST3795-0
	For 1× RCCB 3P+N, 1× MCBs 3P+N and 6× compact devices	14 MW	253 mm	■	5ST3795-4

Quick selection guide, page 3/44

© Siemens 2022



Pin spacing in MW (1 MW = 18 mm)		Application	No. of MW	Length	End caps incl.	Conductor cross-section 10 mm²
4-phase/3-phase + N						**Article No.**
		For compact devices	60 MW	1060 mm	–	5ST3773-0
		For compact devices equipped with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3775-0
		For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

Accessories

Terminals for infeed at side		Article No.
For conductors 6 ... 25 mm²	Short, IP20	5ST3771-2
End caps		**Article No.**
2 and 4-phase compact busbars		5ST3788-0

Touch protection		Article No.
For free connections, yellow (RAL 1004)	For pins L1, N	5ST3655
	For pins L2, L3	5ST3655-0HG

Quick selection guide, page 3/44

© Siemens 2022

Accessories for busbars

General accessories

Terminals

	For conductors	Version	Cable entry	Infeed	Article No.
	6 ... 25 mm²	Short	–	Side	5ST3768
		Short, IP20	–	Side	5ST3771-2
	6 ... 25 mm²	–	Center	–	5ST3768-3
			Left	–	5ST3768-4
			Right	–	5ST3768-5
	6 ... 50 mm²	–	Center	–	5ST3760-3
			Left	–	5ST3760-4
			Right	–	5ST3760-5
	2.5 ... 50 mm²	–	–	Busbar	5ST3770-1HG
	6 ... 35 mm²	–	–	Device	5ST3770-0HG
	2.5 ... 35 mm²	For 5SJ4... -.HG..	–	Miniature circuit breaker	5ST3666-0HG
	6 ... 35 mm²	For 5ST37..-3HG that can be cut	–	Miniature circuit breaker	5ST3770-3HG
	2.5 ... 50 mm²	–	–	Busbar	5ST3666-2HG

System overview, page 3/5

© Siemens 2022

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
■	■			
■	■			■
	■			
	■			
	■			
	■			
	■			
	■			
		■		
		■		
			■	
			■	
			■	

3

System overview, page 3/5

© Siemens 2022

Accessories for busbars

General accessories

Touch protection



Version	Scope of supply	Version	Article No.
For free connections, yellow (RAL 1004)	5× 1 pin	–	5ST3655
			5ST3655-0HG
	3× 1 pin	–	5ST3666-1HG
		–	5ST3655-3HG
For 10 mm² conductors	20× 5ST3613 + 10× 5ST3614 + 50× 5ST3615 + 50× 5ST3655	–	5ST3656
For 16 mm² conductors	20× 5ST3643 + 10× 5ST3644 + 50× 5ST3645 + 50× 5ST3655	For 5ST337..-3HG	5ST3657

End caps









Version	Color	Article No.
For 1-phase busbars	Gray	5ST3748
For 2 and 3-phase busbars	Gray	5ST3750
For 4-phase busbars	Gray	5ST3718
For 1, 2 and 3-phase busbars	Gray	5ST3750-3HG
–	Gray	5ST3766
	Blue	5ST3767
For 1-phase busbars	Gray	5ST3748-0HG
For 2 and 4-phase busbars	Gray	5ST3750-0HG
For 2 and 4-phase compact busbars	Gray	5ST3788-0

System overview, page 3/5

© Siemens 2022

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
■				■
		■		■
			■	
			■	
■				
■				
	■			
	■			
	■			
			■	
■				
■				
			■	
			■	
				■

3


System overview, page 3/5

© Siemens 2022

Accessories for busbars

General accessories

Series connectors





Conductor cross-section	Length of cable	Color	Number of phases	Article No.
10 mm²	125 mm	N conductor blue	1	5ST3781-0
		Cable black	1	5ST3791-0
			3	5ST3793-0
	150 mm	N conductor blue	1	5ST3781-1
		Cable black	1	5ST3791-1
			3	5ST3793-1
16 mm²	125 mm	N conductor blue	1	5ST3782-0
		Cable black	1	5ST3792-0
			3	5ST3794-0
	150 mm	N conductor blue	1	5ST3782-1
		Cable black	1	5ST3792-1
			3	5ST3794-1
	200 mm	N conductor blue	1	5ST3781-2
		Cable black	1	5ST3791-2
			3	5ST3793-2
		3× cables black and 1× N conductor blue	3+N	5ST3793-3

System overview, page 3/5

© Siemens 2022

5ST36	5ST37	5ST37 (acc. to UL 508)	5ST3.. (acc. to UL 489)	5ST3 compact
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			
	■			

System overview, page 3/5

© Siemens 2022

Distribution blocks for DIN-rail mounting

Acc. to IEC

Distribution blocks acc. to IEC					
	Number of poles	Rated operational voltage U_e	Rated current I_e	Mounting width	Article No.
	4-pole	690 V AC	80 A	5 MW	5ST2501
			125 A	5.5 MW	5ST2502
			160 A	9 MW	5ST2503

Further technical specifications

			5ST2501	5ST2502	5ST2503
Standards					
Standards			IEC 60947-7-1		
Supply					
Rated operational voltage AC			690 V		
Max. rated current			80 A	125 A	160 A
Conductor cross-section					
Inputs per pole	Solid/stranded		1× 2.5 ... 16 mm²	1× 6 ... 35 mm²	1× 10 ... 50 mm²
	Finely stranded with end sleeve		1× 1.5 ... 10 mm²	1× 6 ... 25 mm²	1× 10 ... 35 mm²
Outputs per pole	Solid/stranded		8× 1.5 ... 10 mm²	5× 1.5 ... 6 mm² 2× 4 ... 16 mm²	8× 2.5 ... 16 mm² 3× 10 ... 35 mm²
	Finely stranded with end sleeve		8× 1.5 ... 10 mm²	5× 1.5 ... 6 mm² (small) 2× 4 ... 10 mm² (large)	8× 1.5 ... 16 mm² (small) 3× 10 ... 25 mm² (large)
Tightening torque					
Inputs	Screw terminals		13.5 lb-in (1.5 Nm)		3.5 ... 5 lb-in (2 Nm)
	Tools		PZ2		
Outputs	Screw terminals	Large	13.5 lb-in (1.5 Nm)		
		Small	–	7.2 lb-in (0.8 Nm)	13.5 lb-in (1.5 Nm)
	Tools	Large	PZ1	PZ2	
		Small	–	PZ1	PZ2
Safety					
Rated peak withstand current I_{pk}			21.6 kA	24 kA	20 kA
Rated short-time withstand current I_{cw} (1 s)			3 kA	4.2 kA	6.2 kA
Ambient conditions					
Permissible ambient temperature			–25 ... +70 °C		
Degree of protection	Acc. to EN 60529		IP20		
Approved cable			Copper		

System overview, page 3/5

© Siemens 2022

According to IEC and UL

Distribution blocks acc. to IEC and UL



Number of poles	Rated operational voltage U_e	Rated current I_e	Mounting width	Article No.
1-pole	600 V AC	80 A	1.5 MW	5ST2504
		125 A	1.5 MW	5ST2505
		160 A	2 MW	5ST2507
		250 A	2.5 MW	5ST2508
		350 A	2.5 MW	5ST2511


Connector for 5ST2505 distribution board



- Touch protection
- 20 mm²
- 32 mm

Version	Article No.
1-phase	5ST2506

Terminal lug for ring terminal ends



Types	Article No.
For 5ST2508 distribution block	5ST2510
For 5ST2511 distribution block	5ST2512

Further technical specifications

			5ST2504	5ST2505	5ST2507	5ST2508	5ST2511
Standards							
Standards			UL 1059/UL 486E/IEC 60947-7-1 UL File No. E80027/XCFR2 C22.2 No. 158 -1987/XCFR8				
Supply							
Rated operational voltage		UL	600 V AC				
		IEC	1000/1500 V AC/DC				
Max. rated current		UL	80 A	115 A	160 A	230 A	310 A
		IEC	80 A	125 A	160 A	250 A	400 A
Conductor cross-section							
Inputs per pole	Solid/stranded	Large	3× 2.5 ... 25 mm²	10 ... 35 mm²	10 ... 70 mm²	35 ... 120 mm²	95 ... 185 mm²
			AWG 3× 14 ... 4	AWG 1× 8 ... 2	AWG 1× 8 ... 2/0	AWG 1× 2 ... 4/0	AWG 1× 3/0 ... 350 MCM
		Small	–	2.5 ... 25 mm²	–		
			–	AWG 1× 14 ... 6	–		
	Finely stranded with end sleeve	Large	3× 2.5 ... 16 mm²	10 ... 35 mm²	10 ... 50 mm²	35 ... 95 mm²	95 ... 150 mm²
			AWG 3× 14 ... 6	AWG 1× 8 ... 2	AWG 1× 8 ... 1	AWG 1× 2 ... 3/0	AWG 3/0 ... 300 MCM
		Small	–	2.5 ... 25 mm²	–		
			–	AWG 1× 14 ... 6	–		
Outputs per pole	Solid/stranded	Top	2.5 ... 6 mm²	2.5 ... 16 mm²	2.5 ... 16 mm²	2.5 ... 10 mm²	2× 2.5... 35 mm²
			AWG 4× 14 ... 10	AWG 6× 14 ... 4	AWG 6× 14 ... 4	AWG 4× 16 ... 8	AWG 2× 14 ... 2
		Center	–			2.5 ... 16 mm²	5× 2.5 ... 16 mm²
			–			AWG 5 x 14 ... 6	
		Bottom	2.5 ... 6 mm²	–		2× 2.5... 35 mm²	4× 2.5 ... 10 mm²
			AWG 4× 14 ... 10	–		AWG 2 x 14 ... 2	AWG 4 x 14 ... 8
	Finely stranded with end sleeve	Top	2.5 ... 6 mm²	2.5 ... 16 mm²		2× 2.5... 25 mm²	
			AWG 4× 14 ... 10	AWG 6× 14 ... 6	AWG 6× 14 ... 4	AWG 2× 14 ... 4	
		Bottom	2.5 ... 6 mm²	–		2× 2.5... 25 mm²	4× 2.5 ... 25 mm²
			AWG 4× 14 ... 10	–		AWG 2 x 14 ... 4	AWG 5 x 14 ... 4

Continued on next page

System overview, page 3/5

© Siemens 2022

Distribution blocks for DIN-rail mounting

According to IEC and UL (continued)

Further technical specifications			5ST2504	5ST2505	5ST2507	5ST2508	5ST2511
Tightening torque							
Inputs	Screw terminals		13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	31 ... 44 lb-in (3.5 ... 5 Nm)	44 ... 53 lb-in (5 ... 6 Nm)	170 ... 186 lb-in (19 ... 21 Nm)	222 lb-in (25 Nm)
	Tools		PZ2	Allen key 4 mm	Allen key 5 mm	Allen key 6 mm	Allen key 8 mm
Outputs	Screw terminals	Large	13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	17.7 ... 26.5 lb-in (2 ... 3 Nm)	13.2 ... 26.5 lb-in (1.5 ... 3 Nm)	31 ... 62 lb-in (3.5 ... 7 Nm)	
		Small	7 ... 13.2 lb-in (0.8 ... 1.5 Nm)	–		18 ... 27 lb-in (2 ... 3 Nm)	
	Tools	Large	PZ2			Standard screwdriver	
		Small	PZ1	PZ2		Standard screwdriver	
Safety							
Rated peak withstand current I_{pk}			2.7 kA	30 kA		51 kA	
Rated short-time withstand current I_{cw} (1 s)			1.9 kA	4.2 kA	11 kA	21 kA	
Overcurrent protection class			J				
Short circuit current rating (SCCR)	RMS Sym A		100 kA				
Electrical isolation	Creepage distances		1/2" (12.7 mm)				
	Clearances		3/8" (9.5 mm)				
Ambient conditions							
Permissible ambient temperature			–25 ... +70 °C				
Degree of protection	Acc. to EN 60529		IP20				
Fire class			UL 94V-0				
Approved cable			Copper				

System overview, page 3/5

© Siemens 2022

SIKclip wiring system

SIKclip busbar



Length	Article No.
12 MW	5ST2520
24 MW	5ST2521
36 MW	5ST2522

Connecting cables with plug



Length	Conductor cross-section	Color	Article No.
120 mm	6 mm²	Black	5ST2523
		Blue	5ST2524
	10 mm²	Black	5ST2525
		Blue	5ST2526
200 mm	6 mm²	Black	5ST2527
		Blue	5ST2528
	10 mm²	Black	5ST2530
		Blue	5ST2531

Crimp connector



- For connection to cables 4/6 mm²

Article No.
5ST2532

Mounting brackets



- For mounting on the rear of the DIN rail (pair)

Article No.
5ST2533

Further technical specifications

	5ST25..
Standards	
Test specifications	EN 60947-1, EN 61439-1
Rated values	
Rated operational voltage U_n	400 V AC
Max. rated current I_n	250 A
Max. rated output current I_n (at 40 °C ambient temperature)	63 A
Rated insulation voltage	660 V AC
Test voltage (50 Hz)	2.5 kV
Ambient conditions	
Degree of protection	IP20
Connecting cables	40 A (6 mm²), 63 A (10 mm²)
Connecting cable type	H07VK
Ambient temperature	−5 ... +60 °C

System overview, page 3/5

© Siemens 2022



More safety for humans, plants and assets

The number of electrical consumers in residential homes and commercial buildings has increased dramatically in recent decades.


Modern appliances often have quite different characteristics in terms of current consumption than earlier equipment due, for example, to the use of frequency converters in washing machines, or switched-mode power supply units in TVs, PCs or LED lights.

There are also decentralized power generators like photovoltaic systems or charging devices for electric vehicles.

All of this requires new protection strategies for electrical installations. This also includes appropriate residual current protection devices or residual current circuit breakers that will cut the current immediately and safely in the event of a fault.

© Siemens 2022

Residual Current Protective Devices/ Arc Fault Detection Devices (AFDDs)

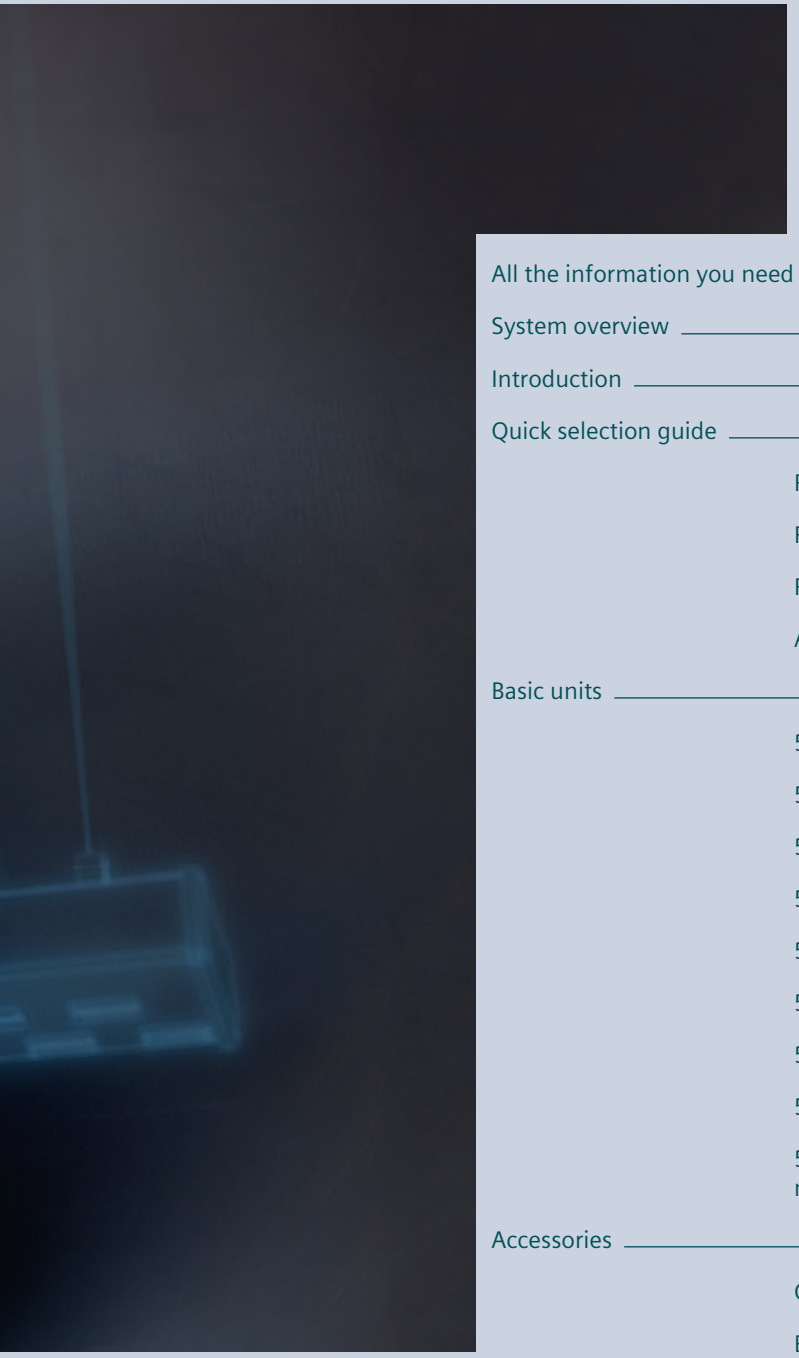

All the information you need 4/2

System overview 4/4

Introduction 4/5

Quick selection guide 4/6

- RCCBs 4/6
- RC units 4/8
- RCBOs 4/10
- Arc fault detection devices (AFDD) 4/12

Basic units 4/14

- 5SV RCCBs, type A, F and AC 4/14
- 5SV3 RCCBs, type B and B+ (SIQUENCE) 4/26
- 5SM3 RCCBs, type A and AC 4/30
- 5SM2 RC units, type A, F and AC 4/32
- 5SU1 RCBOs, type A, F, AC, B and B+ 4/38
- 5SV1 RCBOs (1 MW), type A, F and AC 4/50
- 5SM6 arc fault detection units 4/52
- 5SV6 arc fault detection devices (1 MW) 4/53
- 5SV6 COM AFDD/MCB with communication and measuring function 4/54

Accessories 4/56

- Overview of modular system 4/56
- Electrical accessories 4/58
- Mechanical accessories 4/67
- RCCB protective socket outlets 4/68
- Standard busbars 4/70
- Compact busbars 4/75

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about residual current protective devices/arc fault detection devices, please visit our websites
www.siemens.com/rccb
www.siemens.com/protection-concept

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technical basic information
  - SENTRON protection concept (109767456)
- Technology primer
  - Residual current protective devices (109482301)

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- Residual current protective devices (general)
  bit.ly/2YuWkNc

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Residual current protective devices/arc fault detection devices sie.ag/2m55Y7j

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number www.siemens.com/product?Article No.

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Residual current protective devices/arc fault detection devices **(45303255)**
- Installation manual
  – Circuit protection devices with communication and measuring function **(109791805)**
- System manual
  – Circuit protection devices with communication and measuring function **(109791806)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- 5SM6/5SV6 arc fault detection devices (WT-LVBAFDD)
- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)
- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

Technical overview – Residual current protective devices/arc fault detection devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on residual current protective devices/ arc fault detection devices

www.siemens.com/lowvoltage/product-support (109769082)

© Siemens 2022

System overview

Basic devices and accessories

Basic units


5SV3 RCCBs


5SM3 RCCBs


5SM2 RC units


5SU1 RCBOs


5SV1 RCBOs


5SM6 arc fault detection units and 5SV6 AFDD/MCB and 5SV6 COM AFDD/MCB

Electrical accessories


Auxiliary switches (AS)


Fault signal contacts (FC)


Auxiliary switches and fault signal contacts (AS+FC)/(AS+FC) COM


Shunt trips (ST)


Undervoltage releases (UR)


Remote control mechanisms (RC)

Mechanical accessories


Locking devices


Handle couplers


Touch protection


Wall enclosures


Molded-plastic enclosures


Terminal covers

Busbars and accessories


Compact busbars


Standard busbars


Terminals


Touch protection


End caps

RCCB protective socket outlets


In molded-plastic enclosure


For mounting on device box

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

Introduction

Residual current protective devices

Selection criteria

Equipment, power, ambient conditions

Design

RCCBs

RCBOs

RC units

Number of pole

1P+N

2P

3P

3P+N

4P

Rated current I_n

0.3 ... 125 A

Types and waveform

					6 mA	10 mA		
Type AC	■	–	–	–	–	–	–
Type A	■	■	■	■	–	–	–
Type F	■	■	■	■	■	■	–
Type B	■	■	■	■	■	■	■
Type B+	■	■	■	■	■	■	■

Version

SIGRES	With active condensation protection for use in severe ambient conditions
[G]/[K]	Super resistant, 10 ms short-term delayed devices with increased immunity to false triggering due to transient disruptions
[S]	As an upstream group switch for selective shutdown against downstream RCCBs
500 V	With their creepage distances and clearances designed for power grids up to 500 V alternating voltage
50 ... 400 Hz	Meet the triggering conditions up to 400 Hz due to low decrease in sensitivity with increasing frequency

Protection objective, equipment directives VDE 0100-410, VDE 0100-530, VDE 0100-7xx, VDS 3501, shutdown conditions according to VDE 0100-410

Rated residual current $I_{\Delta n}$ (protection objective)

Additional protection $I_{\Delta n}$ ≤30 mA

Error protection $I_{\Delta n}$ >30 mA

Fire protection $I_{\Delta n}$ ≤300 mA

Characteristic CB (for residual current operated circuit breakers)

A

B

C

D

© Siemens 2022

RCCBs



Types			5SV Instantaneous	5SV SIGRES, instantaneous	5SV Short-time delayed [G]
Type AC			■	–	–
Type A			■	■	■
Type F			–	–	–
Type B/B+			–	–	–
Surge current withstand capability 8/20 µs					
Type A		kA	>1		>3
Type F		kA	–	–	>3
Type B/B+		kA	–	–	–
Minimum operational voltage for test function operation					
30-mA devices		V AC	195		
Non-30-mA devices		V AC	100		
24 V devices		V AC	20		
Terminal conductor cross-sections					
1 conductor	Solid/stranded	mm^2	0.75 ... 35		
	Finely stranded with end sleeve	mm^2	0.75 ... 25		
	Finely stranded without end sleeve	mm^2	1 ... 35		
2 conductors, same cross-section, same conductor type	Solid/stranded	mm^2	0.75 ... 10		
	Finely stranded with end sleeve	mm^2	0.75 ... 4		
	Finely stranded without end sleeve	mm^2	1 ... 4		
1 conductor + busbar (pin thickness 1.5 mm)	Solid/stranded	mm^2	10 ... 25		
	Finely stranded with non-insulated end sleeve	mm^2	6 ... 25		
	Finely stranded with insulated end sleeve	mm^2	6 ... 16		
Terminal tightening torque		Nm	2.5... 3.5		
Poles					
Number of poles			1P+N | 3P+N		
Rated voltage U_n		V AC	24 ... 125 | 230 | 400 | 500		
Operating frequency		Hz	50 | 50 ... 400 | 50/60		
Standards			IEC/EN 61008 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40), ÖVE EN 61008,ÖVE/ÖNORM E 8601		
Rated residual current $I_{\Delta n}$		mA	10, 30, 100, 300, 500, 1000		
Rated current I_n		A	16 ... 80		
Rated breaking capacity I_{cn}		kA	–		
Connection			N right | N left		
Service life	Average number of operating cycles		>10000		
Test button Test cycles			Half-yearly [1] | SIGRES annually [2]		
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors		
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe		
Temperatures	Storage temperature	°C	-40 ... +75 °C		
	Ambient temperature	°C	-25 ... +45, marked with		
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. air humidity)		
CFC and silicone-free			■		
Mains connection			Top | bottom | SIGRES on top only		
Overvoltage category | Pollution degree			III | 2		
More information					
			See page 4/14		

[1] Extension to annual test interval under certain conditions
[2] Extension to four-yearly test interval under certain conditions

System overview, page 4/4

© Siemens 2022







5SV			SIQUENCE 5SV3		5SM3	
Super resistant [K]	Selective [S]	SIGRES, selective [S]	SIGRES, super resistant [K]	SIGRES, selective [S]	Instantaneous	Selective [S]
–	–	–	–	–	■	■
■	■	■	–	–	■	■
■	■	–	–	–	–	–
–	–	–	■	■	–	–
>3		>5	–	–	>1	>5
>3	–	–	–	–	–	–
–	–	–	>3	>5	–	–
195			70		195	
100			70		195	
20			–		–	
0.75 ... 35			0.75 ... 35		1.5 ... 50 (2 MW) | 2.5 ... 50 (4 MW)	
0.75 ... 25			0.75 ... 25		–	
1 ... 35			1 ... 35		–	
0.75 ... 10			0.75 ... 10		–	
0.75 ... 4			0.75 ... 4		–	
1 ... 4			1 ... 4		–	
10 ... 25			0.75 ... 35		–	
6 ... 25			0.75 ... 25		–	
6 ... 16			1 ... 35		–	
2.5... 3.5			2.5 ... 3.0		3.0... 3.5	
1P+N | 3P+N			1P+N | 3P+N		1P+N | 3P+N	
24 ... 125 | 230 | 400 | 500			230 | 400		230 | 400	
50/60			50/60		50	
IEC/EN 61008 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40), ÖVE EN 61008,ÖVE/ÖNORM E 8601			IEC/EN 62423 (VDE 0664-40), IEC/EN 61543 (VDE 0664-30), DIN VDE 0664-400 (Type B+ only)		IEC/EN 61008-1 (VDE 0664-10), IEC/EN 61008-2-1 (VDE 0664-11), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
10, 30, 100, 300, 500, 1000			30, 300, 500		30, 100, 300, 500	
16 ... 80			16 ... 80		100 ... 125	
–			–		–	
N right | N left			N right		N right	
>10000			>10000		>10000	
Half-yearly [1] | SIGRES annually [2]			Annually [2]		Half-yearly	
IP20, if the distribution board is installed, with connected conductors			IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors	
Finger and back-of-hand safe			Finger and back-of-hand safe		Finger and back-of-hand safe	
-40 ... +75 °C			-40 ... +75 °C		-40 ... +75 °C	
-25 ... +45, marked with			-25 ... +45, marked with		-25 ... +45, marked with	
28 cycles (55 °C; 95% rel. air humidity)			28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)	
■			■		■	
Top | bottom | SIGRES on top only			Top | bottom | SIGRES on top only		Top | bottom	
III | 2			III | 2		III | 2	
See page 4/14			See page 4/26		See page 4/30	

System overview, page 4/4

© Siemens 2022

RC units



			5SM2 (0.3 ... 63 A)
Types			**Instantaneous**
Type AC			■
Type A			■
Type F			–
Surge current withstand capability 8/20 µs			
Type A		kA	>1
Type F		kA	–
Minimum operational voltage for test equipment			
30-mA devices		V AC	195
Non-30-mA devices		V AC	100
Terminal conductor cross-sections			
Solid/stranded		mm^2	1.0 ... 25
Terminal tightening torque		Nm	2.5 ... 3.0
Poles			
Number of poles			2P | 3P | 4P
Rated voltage U_n		V AC	230 | 400
Operating frequency		Hz	50 | 50/60
Standards			
			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)
Rated residual current $I_{\Delta n}$		mA	10, 30, 100, 300, 500, 1000
Rated current I_n		A	0.3 ... 63
Service life	Average number of operating cycles		>10000
Test button Test cycles			Half-yearly [1]
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe
Temperatures	Storage temperature	°C	-40 ... +75 °C
	Ambient temperature	°C	-25 ... +45, marked with
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. air humidity)
CFC and silicone-free			■
Mains connection			Top | bottom
Overvoltage category | Pollution degree			III | 2
More information			
			See page 4/32

[1] Extension to annual test interval under certain conditions
[2] Extension to four-yearly test interval under certain conditions

System overview, page 4/4

© Siemens 2022





5SM2 (0.3 ... 63 A)			5SM2 (80 ... 100 A)	
Super resistant [K]	**Selective [S]**	**SIGRES, instantaneous new**	**Instantaneous**	**Selective [S]**
■	■	–	■	■
■	■	■	■	■
■	–	–	–	–
>3	>5	>1	>1	>5
>3	–	–	–	–
195			195	
100			100	
1.0 ... 25			6.0 ... 50	
2.5 ... 3.0			2.5 ... 3.0	
2P | 3P | 4P		4P	2P | 4P	
230 | 400			230 | 400	
50 | 50/60			50 | 50/60	
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
30	300, 500, 1000	30, 300	30, 300	300, 1000
0.3 ... 63			80 ... 100	
>10000			>10000	
Half-yearly [1]		Yearly [2]	Half-yearly [1]	
IP20, if the distribution board is installed, with connected conductors			IP20, if the distribution board is installed, with connected conductors	
Finger and back-of-hand safe			Finger and back-of-hand safe	
-40 ... +75 °C			-40 ... +75 °C	
-25 ... +45, marked with ❄			-25 ... +45, marked with ❄	
28 cycles (55 °C; 95% rel. air humidity)			28 cycles (55 °C; 95% rel. air humidity)	
■			■	
Top | bottom			Top | bottom	
III | 2			III | 2	
See page 4/32			See page 4/32	

System overview, page 4/4

© Siemens 2022

RCBOs



Types			5SU1 (up to 40 A) Instantaneous	Short-time delayed/ Super resistant	Selective [S]
Type AC			■	■	–
Type A			■	■	■
Type B			–	–	–
Type B+			–	–	–
Type F			–	■	–
Surge current withstand capability 8/20 µs					
Type A		kA	>1	>3	>5
Type F		kA	–	>3	–
Minimum voltage for operation of the test equipment					
30-mA devices		AC V	195		
Non-30-mA devices		AC V	100		
Terminal conductor cross-sections					
1 conductor at front + busbar at rear	Solid/stranded	mm^2	0.75 ... 35		
	Finely stranded with end sleeve	mm^2	0.75 ... 25		
	Finely stranded without end sleeve	mm^2	1 ... 25		
2 conductors at rear	Solid/stranded	mm^2	0.75 ... 6		
	Finely stranded with non-insulated end sleeve	mm^2	0.75 ... 4		
	Finely stranded with insulated end sleeve	mm^2	0.75 ... 4		
	Finely stranded without end sleeve	mm^2	1 ... 4		
Terminal tightening torque		Nm	2.5 ... 3.0		
Poles					
Number of poles			1P+N | 2P		
Rated voltage U_n		AC V	110 | 230		
Operating frequency		Hz	50 | 50/60		
Standards					
			IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		
Rated residual current $I_{\Delta n}$		mA	10, 30, 100, 300		
Rated current I_n		A	6 ... 40		
Rated breaking capacity I_{cn}		kA	4.5 | 6 | 10		
Connection			N right | N left		
Service life	Average number of operating cycles		>10000		
Test button Test cycles			Half-yearly [1]		
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, if the distribution board is installed, with connected conductors		
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe		
Temperatures	Storage temperature	°C	-40 ... +75 °C		
	Ambient temperature	°C	-25 ... +45, marked with		
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. air humidity)		
CFC and silicone-free			■		
Mains connection			Top | bottom		
Energy limitation class			3		
Overvoltage category | Pollution degree			III | 2		
More information					
			See page 4/42		

[1] Extension to annual test interval under certain conditions

System overview, page 4/4

© Siemens 2022









5SV1		5SU1 (up to 32 A)		5SU1 (125 A)		5SU1 (100 A, 125 A)	
Instantaneous	Short-time delayed/ Super resistant	Instantaneous	Short-time delayed/ Super resistant	Instantaneous	Short-time delayed/ Super resistant	Short-time delayed/ Super resistant	Selective [S]
■	–	–	–	■	■	–	–
■	■	■	■	■	■	–	–
–	–	–	–	–	–	■	■
–	–	–	–	–	–	■	■
–	■	–	–	–	–	–	–
>1	>3	>0.25	>3	>1	>3	>3	>5
–	>3	–	–	–	–	–	–
195		2P, 4P: 195 V | 3P: 340 V		195		195	
100		2P, 4P: 195 V | 3P: 340 V		100		100	
0.75 ... 16		1 ... 35		25 ... 50		20 ... 50	
0.75 ... 10		1 ... 35		25 ... 35		25 ... 35	
0.75 ... 16		–		–		–	
0.75 ... 4		–		–		–	
0.75 ... 2.5		–		–		–	
0.75 ... 1.5		–		–		–	
0.75 ... 4		–		–		–	
1.2 ... 2.0		2.0		3.0 ... 3.5		3.0 ... 3.5	
1P+N		2P | 3P | 4P		2P | 4P		4P	
230		230 V | 400 V		230 | 400		400 | 430	
50 | 50/60		50 | 50/60		50 | 50/60		50/60	
IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)		IEC/EN 61009-1 (VDE 0664-20), IEC/EN 61009-2-1 (VDE 0664-21), IEC/EN 61543 (VDE 0664-30), IEC/EN 62423 (VDE 0664-40)	
30, 300		30, 300		30, 300, 1000		30, 300	
2 ... 16		6 ... 32		125		100, 125	
4.5 | 6		6 | 10		10		10	
N right		–		N right | N left		N right | N left	
>10 000		>10000		>10000		>10000	
Half-yearly [1]		Monthly		Half-yearly [1]		Half-yearly [1]	
IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors		IP20, if the distribution board is installed, with connected conductors	
Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe		Finger and back-of-hand safe	
-40 ... +75 °C		–40 ... +70 °C		-40 ... +75 °C		-40 ... +75 °C	
-25 ... +45, marked with		-25 ... +40, marked with		-25 ... +45, marked with		-25 ... +45, marked with	
28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)		28 cycles (55 °C; 95% rel. air humidity)	
■		–		■		■	
Top | bottom		Top | bottom		Top | bottom		Top | bottom	
3		3 | 1		3		3	
III | 2		III | 3		III | 2		III | 2	
See page 4/50		See page 4/44		See page 4/42		See page 4/49	

System overview, page 4/4

© Siemens 2022

Arc fault detection devices (AFDDs)





			5SM6	5SV6	5SV6....KP..
Poles					
Number of poles			2P	1P+N	1P+N
Rated voltage U_n		V AC	230	230	230
Operating frequency		Hz	50	50	50
Terminal conductor cross-sections					
Solid and stranded		mm^2	0.75 ... 16	0.75 ... 16	0.75 ... 16 (top) 0.75 ... 35 (bottom)
Finely stranded with end sleeve		mm^2	0.75 ... 10	0.75 ... 10	0.75 ... 10 (top) 0.75 ... 25 (bottom)
Terminal tightening torque		Nm	2.0 ... 2.5	1.2 ... 2.0	1.2 ... 2.0 (top) 2.5 ... 3.5 (bottom)
Standards					
			IEC/EN 62606	IEC/EN 62606	IEC/EN 62606
Rated current I_n		A	Up to 16/40 A	6 ... 40	6 ... 40
Service life	Average number of operating cycles		>10000	>10000	>10000
Mounting position			Any	Any	Any
Degree of protection	Acc. to EN 60529 (VDE 0470-1)		IP20, with connected conductors	IP20, with connected conductors	IP20, with connected conductors
Touch protection	Acc. to EN 50274 (VDE 0660-514)		Finger and back-of-hand safe	Finger and back-of-hand safe	Finger and back-of-hand safe
Temperatures	Storage temperature	°C	-40 ... +75 °C	-40 ... +75 °C	-40 ... +75 °C
	Ambient temperature	°C	-25 ... +45, marked with	-25 ... +45, marked with	-25 ... +45, marked with
Resistance to climate	Acc. to IEC 60068-2-30		28 cycles (55 °C; 95% rel. air humidity)	28 cycles (55 °C; 95% rel. air humidity)	28 cycles (55 °C; 95% rel. air humidity)
CFC and silicone-free			■	■	■
Mains connection			Bottom	Top | bottom	Bottom
Overvoltage category | Pollution degree			III | 2	III | 2	III | 2
Tripping in the event of overvoltage		V	>275	>285	>285
Additional functions					
Communication and measuring function			–	■	–
More information					
			See page 4/52	See page 4/53 und page 4/54	See page 4/53

System overview, page 4/4

© Siemens 2022

System overview, page 4/4

© Siemens 2022


5SV RCCBs

Type A, 1P+N (2 MW)

				Instantaneous			Instantaneous (only available in Belgium) [2]
				24 ... 125 V AC	230 V AC		230 V AC
			N connection	Right	Right	Left	Right
							
$I_{\Delta n}$	I_n	Thermal overload protection [1]	Bulk packaging (36 units)				
Type A							
10 mA	16 A	–	–	–	5SV3111-6	5SV3111-6KL	–
	25 A	–	–	–	5SV3112-6 new	–	–
30 mA	16 A	–	–	5SV3311-6KK13	5SV3311-6	5SV3311-6KL	–
		–	■	–	5SV3311-6GV01	–	–
	25 A	–	–	5SV3312-6KK13	5SV3312-6	5SV3312-6KL	5SV3312-6BA
		–	■	–	5SV3312-6GV01	–	–
	40 A	–	–	5SV3314-6KK13	5SV3314-6	5SV3314-6KL	5SV3314-6BA
		–	■	–	5SV3314-6GV01	–	–
		■	–	–	5SV3314-6LA	–	–
	63 A	–	–	5SV3316-6KK13	5SV3316-6	5SV3316-6KL	5SV3316-6BA
	80 A	–	–	–	5SV3317-6	5SV3317-6KL	–
100 mA	25 A	–	–	–	5SV3412-6	5SV3412-6KL	5SV3612-6BA
	40 A	–	–	–	5SV3414-6	5SV3414-6KL	5SV3614-6BA
	63 A	–	–	–	5SV3416-6	5SV3416-6KL	5SV3616-6BA
	80 A	–	–	–	5SV3417-6	5SV3417-6KL	–
300 mA	25 A	–	–	–	5SV3612-6	5SV3612-6KL	–
	40 A	–	–	–	5SV3614-6	5SV3614-6KL	–
	63 A	–	–	–	5SV3616-6	5SV3616-6KL	–
	80 A	–	–	–	5SV3617-6	5SV3617-6KL	–

[1] Thermal overload protection according to OVE E 8101 possible up to rated current of the RCCB (40 A, 63 A).
[2] These products cannot be used in France according to NF C 15-100. Product complies with the specifications of the Belgian market only. (Simultaneous tripping of the 3 poles and the N conductor.) Available for the export market only.

Mounting concept

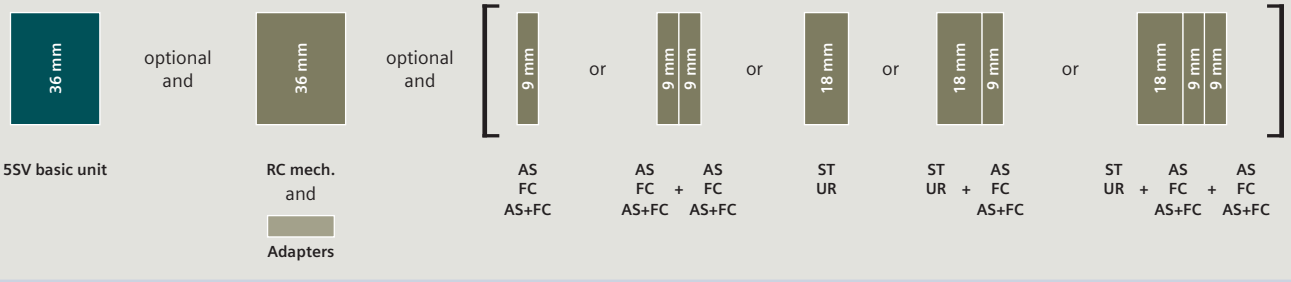

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

SIGRES, instantaneous 230 V AC	Short-time delayed [G] 230 V AC	Super resistant [K] 230 V AC	Selective [S] 230 V AC	
Right	Right	Right	Right	Left
				
–	–	–	–	–
–	–	–	–	–
5SV3311-6KK12	–	–	–	–
–	–	–	–	–
5SV3312-6KK12	–	5SV3312-6KK01	–	–
–	–	–	–	–
5SV3314-6KK12	–	5SV3314-6KK01	–	–
–	–	–	–	–
–	5SV3314-6LA01	–	–	–
5SV3316-6KK12	–	5SV3316-6KK01	–	–
–	–	5SV3317-6KK01	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	5SV3416-8	–
–	–	–	–	–
–	–	5SV3612-6KK01	5SV3612-8	–
–	–	5SV3614-6KK01	5SV3614-8	5SV3614-8KL
–	–	5SV3616-6KK01	5SV3616-8	5SV3616-8KL
–	–	5SV3617-6KK01	5SV3617-8	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		**Article No.**
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		**Article No.**
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-6

Quick selection guide, page 4/6


© Siemens 2022

5SV RCCBs

Type F, 1P+N (2 MW)

		Super resistant [K] 230 V AC	Selective [S] 230 V AC
N connection		Right	Right
			
$I_{\Delta n}$	I_n		
Type F			
30 mA	25 A	5SV3312-3	–
	40 A	5SV3314-3	–
	63 A	5SV3316-3	–
	80 A	5SV3317-3	–
300 mA	25 A	5SV3612-3	–
	40 A	5SV3614-3	5SV3614-7
	63 A	5SV3616-3	–
	80 A	5SV3617-3	5SV3617-7

Mounting concept

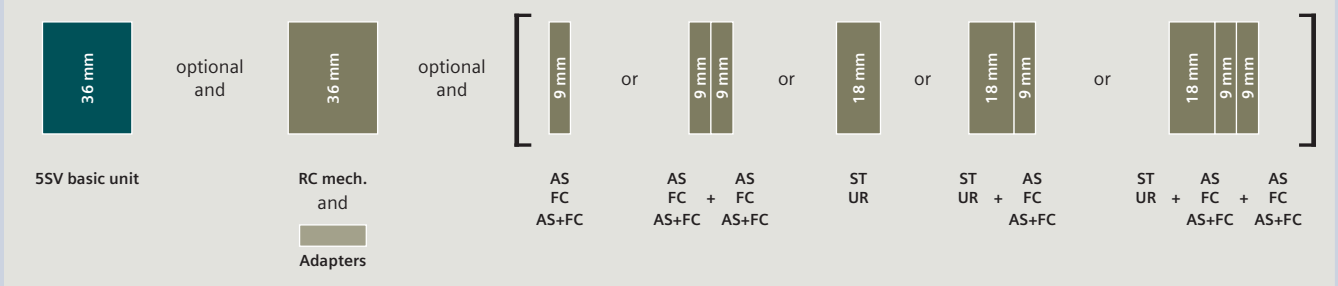

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-6

Quick selection guide, page 4/6


© Siemens 2022

5SV RCCBs

Type AC, 1P+N (2 MW)

			Instantaneous		
			230 V AC		24 ... 125 V AC
		N connection	Right	Left	Right
					
$I_{\Delta n}$	I_n	Bulk packaging (36 units)			
Type AC					
10 mA	16 A	–	5SV4111-0	5SV4111-0KL	–
	25 A	–	5SV4112-0 new	–	–
30 mA	16 A	–	5SV4311-0	5SV4311-0KL	5SV4311-0KK13
	25 A	–	5SV4312-0	5SV4312-0KL	5SV4312-0KK13
		■	5SV4312-0GV01	–	–
	40 A	–	5SV4314-0	5SV4314-0KL	5SV4314-0KK13
		■	5SV4314-0GV01	5SV4314-0GV02	–
	63 A	–	5SV4316-0	5SV4316-0KL	5SV4316-0KK13
	80 A	–	5SV4317-0	5SV4317-0KL	–
100 mA	25 A	–	5SV4412-0	–	–
	40 A	–	5SV4414-0	5SV4414-0KL	–
	63 A	–	5SV4416-0	5SV4416-0KL	–
	80 A	–	5SV4417-0	–	–
300 mA	25 A	–	5SV4612-0	5SV4612-0KL	–
	40 A	–	5SV4614-0	5SV4614-0KL	–
	63 A	–	5SV4616-0	5SV4616-0KL	–
	80 A	–	5SV4617-0	5SV4617-0KL	–

Mounting concept

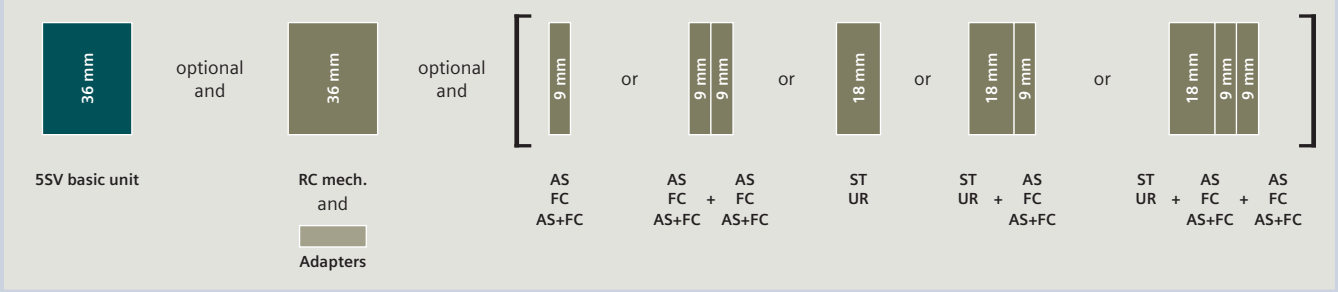

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		**Article No.**
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		**Article No.**
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-6

Quick selection guide, page 4/6

© Siemens 2022


5SV RCCBs

Type A, 3P + N (4 MW)

				Instantaneous			
				400 V AC		400 V AC/400 Hz	500 V AC
			N connection	Right	Left	Right	Right
							
$I_{\Delta n}$	I_n	Thermal overload protection [1]	Bulk packaging (18 units)				
Type A							
30 mA	25 A	–	–	5SV3342-6	5SV3342-6KL	5SV3342-6KK03	5SV3352-6
		–	■	5SV3342-6GV01	–	–	–
	40 A	–	–	5SV3344-6	5SV3344-6KL	5SV3344-6KK03	5SV3354-6
		–	■	5SV3344-6GV01	5SV3344-6GV02	–	–
		■	–	5SV3344-6LA	–	–	–
	63 A	–	–	5SV3346-6	5SV3346-6KL	–	5SV3356-6
		–	■	5SV3346-6GV01	–	–	–
		■	–	5SV3346-6LA	–	–	–
	80 A	–	–	5SV3347-6	5SV3347-6KL	–	5SV3357-6
100 mA	25 A	–	–	5SV3442-6	–	–	–
	40 A	–	–	5SV3444-6	–	–	–
		■	–	5SV3444-6LA	–	–	–
	63 A	–	–	5SV3446-6	–	–	–
		■	–	5SV3446-6LA	–	–	–
	80 A	–	–	5SV3447-6	–	–	–
300 mA	25 A	–	–	5SV3642-6	5SV3642-6KL	–	5SV3652-6
	40 A	–	–	5SV3644-6	5SV3644-6KL	–	5SV3654-6
		■	–	–	–	–	–
	63 A	–	–	5SV3646-6	5SV3646-6KL	–	5SV3656-6
		■	–	–	–	–	–
	80 A	–		5SV3647-6	5SV3647-6KL	–	5SV3657-6
500 mA	25 A	–	–	5SV3742-6	–	–	–
	40 A	–	–	5SV3744-6	–	–	–
	63 A	–	–	5SV3746-6	5SV3746-6KL	–	–
		–	■	5SV3746-6GV01	–	–	–
	80 A	–	–	5SV3747-6	–	–	–
1000 mA	63 A	–	–	–	–	–	–

[1] Thermal overload protection according to OVE E 8101 possible up to rated current of the RCCB (40 A, 63 A).
[2] These products cannot be used in France according to NF C 15-100. Product complies with the specifications of the Belgian market only. (Simultaneous tripping of the 3 poles and the N conductor.) Available for the export market only.

Mounting concept

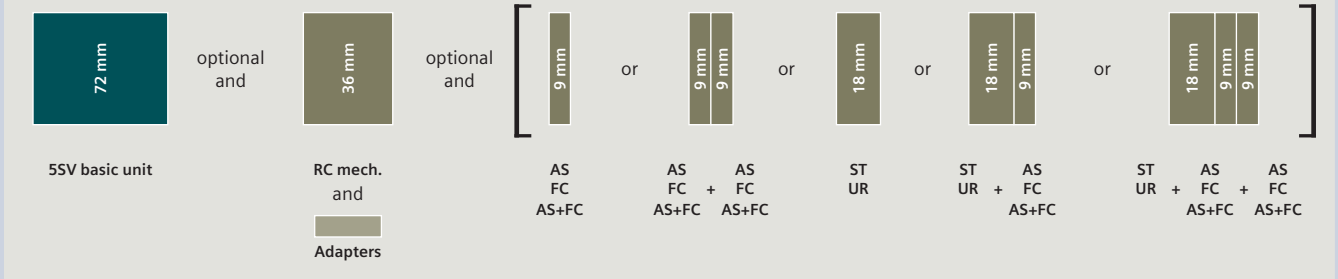

AS	Auxiliary switch	See page 4/58	ST	Shunt trips	See page 4/64
FC	Fault signal contact	See page 4/60	UR	Undervoltage release	See page 4/65
AS+FC	Auxiliary switch and fault signal contact	See page 4/61	RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Instantaneous (only available in Belgium) [2] 400 V AC	SIGRES, instantaneous 400 V AC	Short-time delayed [G] 400 V AC	Super resistant [K] 400 V AC	Selective [S] 400 V AC		SIGRES, selective [S] 400 V AC
Right	Right	Right	Right	Right	Left	Right
						
5SV3342-6BA	5SV3342-6KK12	–	5SV3342-6KK01	–	–	–
–	–	–	–	–	–	–
5SV3344-6BA	5SV3344-6KK12	5SV3344-6LB01	5SV3344-6KK01	–	–	–
–	–	–	–	–	–	–
–	–	5SV3344-6LA01	–	–	–	–
5SV3346-6BA	5SV3346-6KK12	5SV3346-6LB01	5SV3346-6KK01	–	–	–
–	–	–	–	–	–	–
–	–	5SV3346-6LA01	–	–	–	–
–	5SV3347-6KK12	5SV3347-6LB01	5SV3347-6KK01	–	–	–
–	–	–	–	–	–	–
–	–	5SV3444-6LB01	–	5SV3444-8	–	–
–	–	5SV3444-6LA01	–	5SV3444-8LA	–	–
–	–	5SV3446-6LB01	–	5SV3446-8	–	–
–	–	5SV3446-6LA01	–	5SV3446-8LA	–	–
–	–	–	–	–	–	–
5SV3642-6BA	5SV3642-6KK12	–	5SV3642-6KK01	5SV3642-8	–	–
5SV3644-6BA	5SV3644-6KK12	–	5SV3644-6KK01	5SV3644-8	–	–
–	–	–	–	5SV3644-8LA	–	–
5SV3646-6BA	5SV3646-6KK12	–	5SV3646-6KK01	5SV3646-8	5SV3646-8KL	5SV3646-8KK12
–	–	–	–	5SV3646-8LA	–	–
–	5SV3647-6KK12	–	5SV3647-6KK01	5SV3647-8	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	5SV3846-8	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		**Article No.**
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045
Remote control mechanisms (RC)		**Article No.**
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
4 MW	5ST3820-6

Quick selection guide, page 4/6

© Siemens 2022


5SV RCCBs

Type F, 3P+N (4 MW)

		Super resistant [K] 400 V AC	Selective [S] 400 V AC
N connection		Right	Right
			
$I_{\Delta n}$	I_n		
Type F			
30 mA	25 A	5SV3342-3	–
	40 A	5SV3344-3	–
	63 A	5SV3346-3	–
	80 A	5SV3347-3	–
300 mA	25 A	5SV3642-3	–
	40 A	5SV3644-3	5SV3644-7
	63 A	5SV3646-3	–
	80 A	5SV3647-3	5SV3647-7

4

Mounting concept

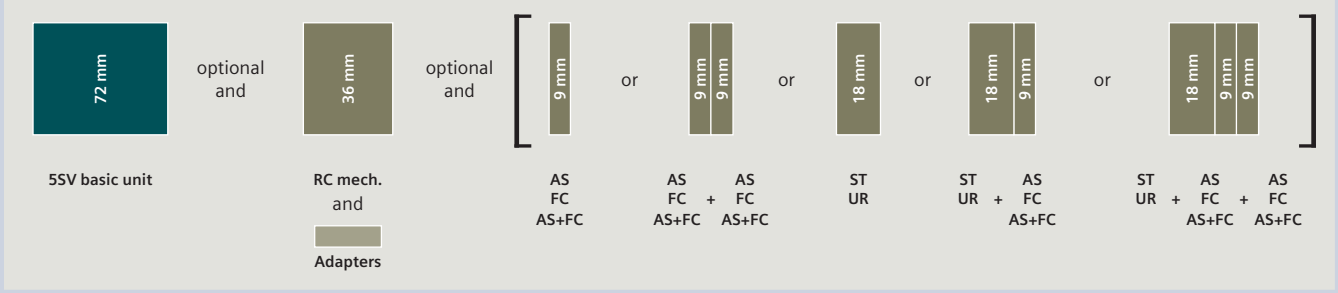

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
4 MW	5ST3820-6

Quick selection guide, page 4/6


© Siemens 2022

5SV RCCBs

Type AC, 3P + N (4 MW)

			Instantaneous 400 V AC	
		N connection	Right	Left
				
$I_{\Delta n}$	I_n	Bulk packaging (18 units)		
Type AC				
30 mA	25 A	–	5SV4342-0	5SV4342-0KL
		■	5SV4342-0GV01	–
	40 A	–	5SV4344-0	5SV4344-0KL
		■	5SV4344-0GV01	–
	63 A	–	5SV4346-0	5SV4346-0KL
	80 A	–	5SV4347-0	5SV4347-0KL
100 mA	25 A	–	5SV4442-0	–
	40 A	–	5SV4444-0	–
	63 A	–	5SV4446-0	–
	80 A	–	5SV4447-0	–
300 mA	25 A	–	5SV4642-0	5SV4642-0KL
	40 A	–	5SV4644-0	5SV4644-0KL
	63 A	–	5SV4646-0	5SV4646-0KL
	80 A	–	5SV4647-0	5SV4647-0KL
500 mA	25 A	–	5SV4742-0	–
	40 A	–	5SV4744-0	–
	63 A	–	5SV4746-0	–
	80 A	–	5SV4747-0	–

Mounting concept

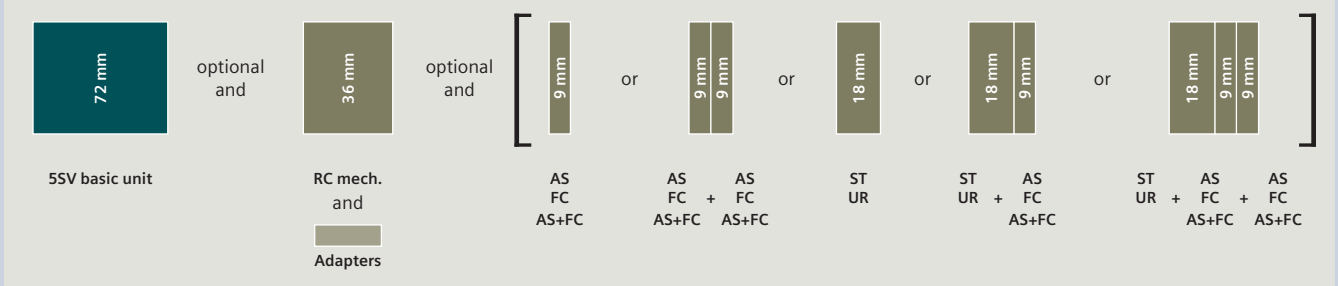

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)		Article No.
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
4 MW	5ST3820-6

Quick selection guide, page 4/6

© Siemens 2022


5SV3 RCCBs (SIQUENCE)

Type B, 1P+N (4 MW)

	SIGRES, super resistant [K] 230 V AC
N connection	Right
	

$I_{\Delta n}$	I_n	Bulk packaging (18 units)	
Type B			
30 mA	16 A	–	5SV3321-4
	25 A	–	5SV3322-4
	40 A	–	5SV3324-4
		■	5SV3324-4GV01
	63 A	–	5SV3326-4
300 mA	16 A	–	5SV3621-4
	25 A	–	5SV3622-4
	40 A	–	5SV3624-4
	63 A	–	5SV3626-4

Mounting concept

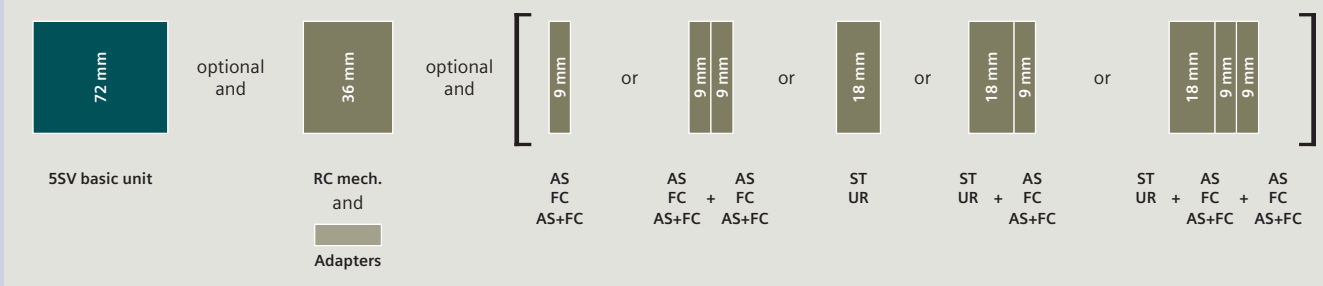

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
4 MW	5ST3820-6

Quick selection guide, page 4/6


© Siemens 2022

5SV3 RCCBs (SIQUENCE)

Type B and B +, 3P+N (4 MW)

			SIGRES, super resistant [K] 230 ... 400 V AC	SIGRES, selective [S] 230 ... 400 V AC
		N connection	Right	Right
				
$I_{\Delta n}$	I_n	Bulk packaging (18 units)		
Type B				
30 mA	25 A	–	5SV3342-4	–
		■	5SV3342-4GV01	–
	40 A	–	5SV3344-4	–
		■	5SV3344-4GV01	–
	63 A	–	5SV3346-4	–
		■	5SV3346-4GV01	–
	80 A	–	5SV3347-4	–
300 mA	25 A	–	5SV3642-4	–
		■	5SV3642-4GV01	–
	40 A	–	5SV3644-4	–
		■	5SV3644-4GV01	–
	63 A	–	5SV3646-4	5SV3646-5
		■	5SV3646-4GV01	–
	80 A	–	5SV3647-4	5SV3647-5
500 mA	25 A	–	5SV3742-4	–
	40 A	–	5SV3744-4	–
	63 A	–	5SV3746-4	5SV3746-5
	80 A	–	5SV3747-4	5SV3747-5
Type B+				
30 mA	25 A	–	5SV3342-4KK14	–
	40 A	–	5SV3344-4KK14	–
	63 A	–	5SV3346-4KK14	–
	80 A	–	5SV3347-4KK14	–
300 mA	25 A	–	5SV3642-4KK14	–
	40 A	–	5SV3644-4KK14	–
	63 A	–	5SV3646-4KK14	5SV3646-5KK14
	80 A	–	5SV3647-4KK14	5SV3647-5KK14

Mounting concept

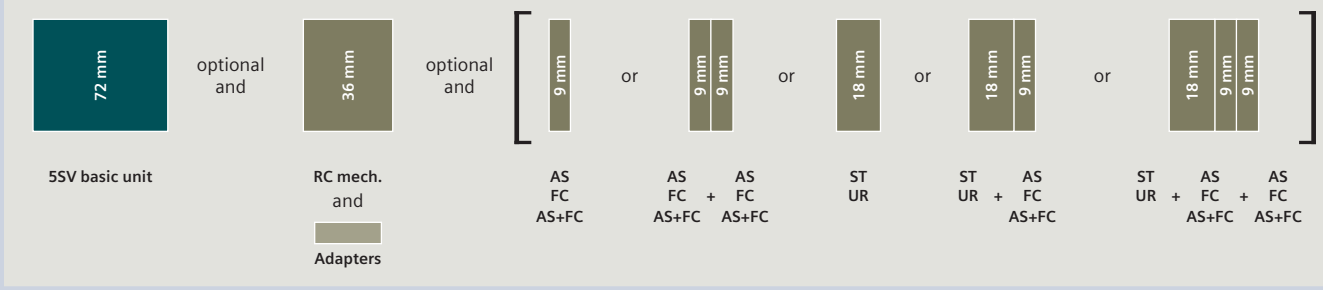

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/6

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
4 MW	5ST3820-6

Quick selection guide, page 4/6

© Siemens 2022

5SM3 RCCBs

Type A and AC, 1P+N (2 MW), high-current

		Instantaneous 230 V AC
N connection		Right
		
$I_{\Delta n}$	I_n	
Type A		
30 mA	100 A	5SM3318-6KK
	125 A	5SM3315-6KK
100 mA	100 A	5SM3418-6KK
	125 A	5SM3415-6KK
300 mA	100 A	5SM3618-6KK
	125 A	5SM3615-6KK
Type AC		
30 mA	100 A	5SM3318-0KK
	125 A	5SM3315-0KK
100 mA	100 A	5SM3418-0KK
	125 A	5SM3415-0KK
300 mA	100 A	5SM3618-0KK
	125 A	5SM3615-0KK

4

Quick selection guide, page 4/6

© Siemens 2022

Type A and AC, 3P + N (4 MW), high-current

		Instantaneous 400 V AC	Selective [S] 400 V AC
N connection		Right	Right
			
$I_{\Delta n}$	I_n		
Type A			
30 mA	100 A	5SM3348-6	–
	125 A	5SM3345-6	–
100 mA	100 A	5SM3448-6	–
	125 A	5SM3445-6	–
300 mA	100 A	5SM3648-6	5SM3648-8
	125 A	5SM3645-6	5SM3645-8
500 mA	100 A	5SM3748-6	–
	125 A	5SM3745-6	5SM3745-8
Type AC			
30 mA	100 A	5SM3348-0	–
	125 A	5SM3345-0	–
100 mA	100 A	5SM3448-0	–
	125 A	5SM3445-0	–
300 mA	100 A	5SM3648-0	5SM3648-2
	125 A	5SM3645-0	–
500 mA	100 A	5SM3748-0	–
	125 A	5SM3745-0	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5SW3330

Quick selection guide, page 4/6

© Siemens 2022


5SM2 RC units


Type A, F and AC, 2-pole

		For 5SY miniature circuit breakers [1] 230 V AC		
Version		Instantaneous	Super resistant [K]	Selective [S]
Mounting width		2 MW	2 MW	2 MW
				
$I_{\Delta n}$	I_n			
Type A				
10 mA	0.3 ... 16 A	5SM2121-6	–	–
30 mA	0.3 ... 40 A	5SM2322-6	5SM2322-6KK01	–
	0.3 ... 63 A	5SM2325-6	5SM2325-6KK01	–
	80 ... 100 A	–	–	–
100 mA	0.3 ... 63 A	5SM2425-6	–	–
300 mA	0.3 ... 40 A	5SM2622-6	–	5SM2622-8
	0.3 ... 63 A	5SM2625-6	–	5SM2625-8
	80 ... 100 A	–	–	–
500 mA	0.3 ... 63 A	5SM2725-6	–	–
1000 mA	0.3 ... 40 A	–	–	5SM2822-8
	0.3 ... 63 A	–	–	5SM2825-8
	80 ... 100 A	–	–	–
Type F				
30 mA	0.3 ... 40 A	–	5SM2322-3	–
	0.3 ... 63 A	–	5SM2325-3	–
Type AC				
10 mA	0.3 ... 40 A	5SM2121-0	–	–
30 mA	0.3 ... 40 A	5SM2322-0	–	–
	0.3 ... 63 A	5SM2325-0	–	–
	80 ... 100 A	–	–	–
300 mA	0.3 ... 40 A	5SM2622-0	–	5SM2622-2
	0.3 ... 63 A	5SM2625-0	–	5SM2625-2
	80 ... 100 A	–	–	–
500 mA	0.3 ... 63 A	5SM2725-0	–	–
1000 mA	0.3 ... 63 A	5SM2825-0	–	–

[1] Not suitable for use with 5SY5 and type A + type F not suitable for use with 5SY8

Mounting concept

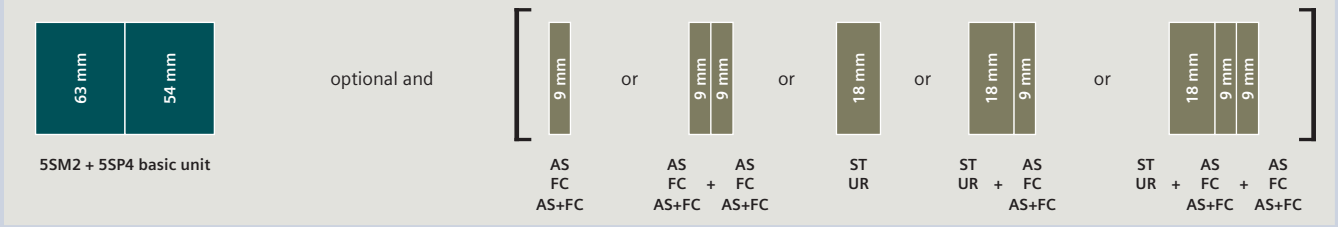

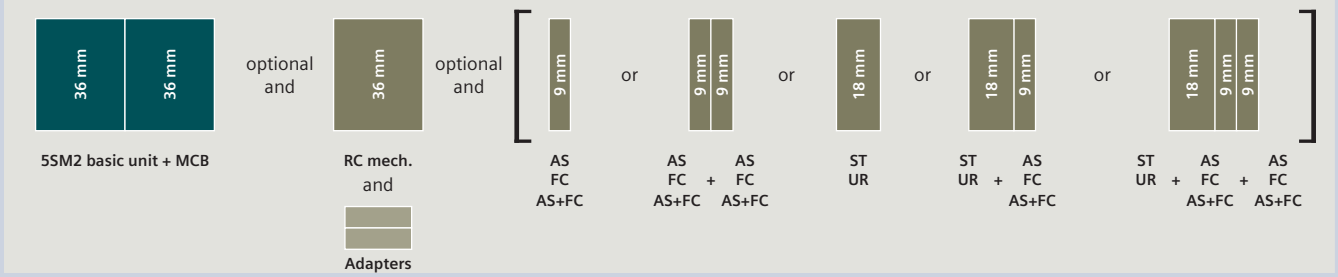

MCB Miniature circuit breaker See page 3/1
AS Auxiliary switch See page 4/58
FC Fault signal contact See page 4/60
AS+FC Auxiliary switch and fault signal contact See page 4/61
ST Shunt trips See page 4/64
UR Undervoltage release See page 4/65
RC mech. Remote control mechanism See page 4/66

Quick selection guide, page 4/8

© Siemens 2022

For 5SL4 miniature circuit breakers 230 V AC		For 5SP4 miniature circuit breakers (B and C characteristics) 230 V AC	
Instantaneous	Selective [S]	Instantaneous	Selective [S]
2 MW	2 MW	3.5 MW	3.5 MW
			
–	–	–	–
5SM2323-6	–	–	–
5SM2326-6	–	–	–
–	–	5SM2327-6	–
–	–	–	–
5SM2623-6	5SM2623-8	–	–
5SM2626-6	5SM2626-8	–	–
–	–	5SM2627-6	5SM2627-8
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	5SM2827-8
–	–	–	–
–	–	–	–
–	–	–	–
5SM2323-0	–	–	–
5SM2326-0	–	–	–
–	–	–	–
5SM2623-0	5SM2623-2	5SM2327-0	–
5SM2626-0	5SM2626-2	5SM2627-0	–
–	–	–	–
–	–	–	–
–	–	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070

Adapters for remote control mechanisms (RC mech.)	Article No.
5SM2 with 5SY (2P)	5ST3820-3 + 5ST3820-1
5SM2 with 5SL (2P)	5ST3820-3 + 5ST3820-6

Quick selection guide, page 4/8

© Siemens 2022


5SM2 RC units

Type A and AC, 3-pole

		For 5SY miniature circuit breakers [1] 400 V AC			For 5SL4 miniature circuit breakers 400 V AC	
Version		Instantaneous	Super resistant [K]	Selective [S]	Instantaneous	Selective [S]
Mounting width		3 MW	3 MW	3 MW	3 MW	3 MW
						
$I_{\Delta n}$	I_n					
Type A						
30 mA	0.3 ... 40 A	5SM2332-6	5SM2332-6KK01	–	5SM2333-6	–
	0.3 ... 63 A	5SM2335-6	5SM2335-6KK01	–	5SM2336-6	–
100 mA	0.3 ... 63 A	5SM2435-6	–	–	–	–
300 mA	0.3 ... 40 A	5SM2632-6	–	–	5SM2633-6	–
	0.3 ... 63 A	5SM2635-6	–	5SM2635-8	5SM2636-6	5SM2636-8
500 mA	0.3 ... 63 A	5SM2735-6	–	5SM2735-8	–	–
1000 mA	0.3 ... 40 A	–	–	5SM2832-8	–	–
	0.3 ... 63 A	–	–	5SM2835-8	–	–
Type AC						
30 mA	0.3 ... 40 A	5SM2332-0	–	–	5SM2333-0	–
	0.3 ... 63 A	5SM2335-0	–	–	5SM2336-0	–
300 mA	0.3 ... 40 A	5SM2632-0	–	–	5SM2633-0	–
	0.3 ... 63 A	5SM2635-0	–	–	5SM2636-0	–
500 mA	0.3 ... 63 A	5SM2735-0	–	–	–	–

[1] Not suitable for use with 5SY5 and type A not suitable for use with 5SY8

Mounting concept

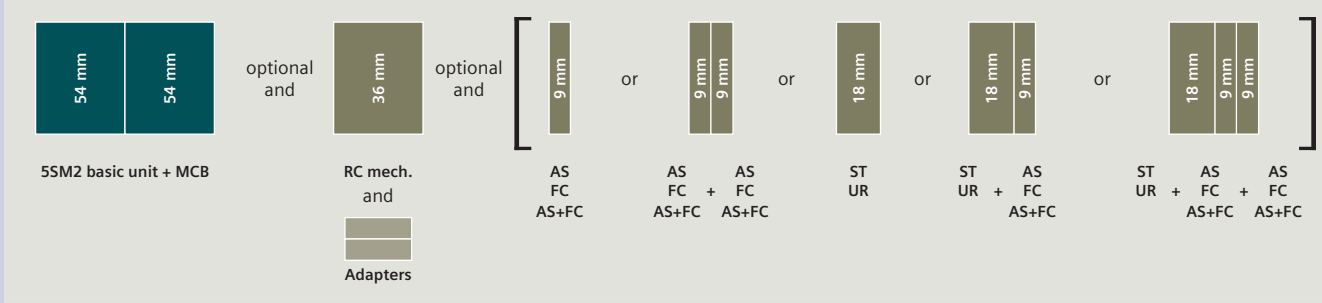

MCB	Miniature circuit breaker	See page 3/1	ST	Shunt trips	See page 4/64
AS	Auxiliary switch	See page 4/58	UR	Undervoltage release	See page 4/65
FC	Fault signal contact	See page 4/60	RC mech.	Remote control mechanism	See page 4/66
AS+FC	Auxiliary switch and fault signal contact	See page 4/61			

Quick selection guide, page 4/8

© Siemens 2022

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070

Adapters for remote control mechanisms (RC mech.)	Article No.
5SM2 with 5SY (2P)	5ST3820-3 + 5ST3820-1
5SM2 with 5SL (2P)	5ST3820-3 + 5ST3820-6

Quick selection guide, page 4/8

© Siemens 2022


5SM2 RC units


Type A and AC, 4-pole

		For 5SY miniature circuit breakers [1] 400 V AC			
Version		Instantaneous	Super resistant [K]	Selective [S]	SIGRES, instantaneous new
Mounting width		3 MW	3 MW	3 MW	3 MW
					
$I_{\Delta n}$	I_n				
Type A					
30 mA	0.3 ... 40 A	5SM2342-6	5SM2342-6KK01	–	–
	0.3 ... 63 A	5SM2345-6	5SM2345-6KK01	–	5SM2345-6KK12
	80 ... 100 A	–	–	–	–
100 mA	0.3 ... 63 A	5SM2445-6	–	–	–
300 mA	0.3 ... 40 A	5SM2642-6	–	–	–
	0.3 ... 63 A	5SM2645-6	–	5SM2645-8	5SM2645-6KK12
	80 ... 100 A	–	–	–	–
500 mA	0.3 ... 63 A	5SM2745-6	–	5SM2845-8	–
1000 mA	0.3 ... 40 A	–	–	5SM2842-8	–
	0.3 ... 63 A	–	–	5SM2845-8	–
	80 ... 100 A	–	–	–	–
Type AC					
30 mA	0.3 ... 40 A	5SM2342-0	–	–	–
	0.3 ... 63 A	5SM2345-0	–	–	–
	80 ... 100 A	–	–	–	–
300 mA	0.3 ... 40 A	5SM2642-0	–	–	–
	0.3 ... 63 A	5SM2645-0	–	5SM2645-2	–
	80 ... 100 A	–	–	–	–
500 mA	0.3 ... 63 A	5SM2745-0	–	–	–
1000 mA	0.3 ... 63 A	–	–	5SM2845-2	–

[1] Not suitable for use with 5SY5 and type A not suitable for use with 5SY8

Mounting concept

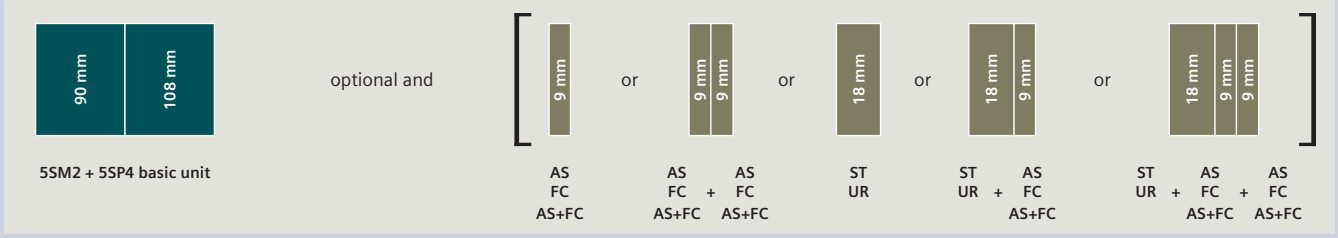

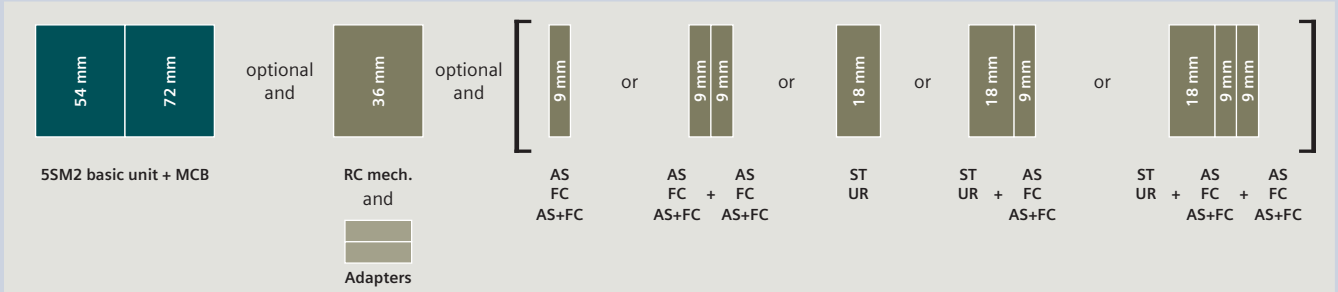

MCB Miniature circuit breaker See page 3/1
AS Auxiliary switch See page 4/58
FC Fault signal contact See page 4/60
AS+FC Auxiliary switch and fault signal contact See page 4/61
ST Shunt trips See page 4/64
UR Undervoltage release See page 4/65
RC mech. Remote control mechanism See page 4/66

Quick selection guide, page 4/8

© Siemens 2022

For 5SL4 miniature circuit breakers 400 V AC		For 5SP4 miniature circuit breakers (B and C characteristics) 400 V AC	
Instantaneous	Selective [S]	Instantaneous	Selective [S]
3 MW	3 MW	5 MW	5 MW
			
5SM2343-6	–	–	–
5SM2346-6	–	–	–
–	–	5SM2347-6	–
–	–	–	–
5SM2643-6	–	–	–
5SM2646-6	5SM2646-8	–	–
–	–	5SM2647-6	5SM2647-8
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	5SM2847-8
5SM2343-0	–	–	–
5SM2346-0	–	–	–
–	–	5SM2347-0	–
5SM2643-0	–	–	–
5SM2646-0	5SM2646-2	–	–
–	–	5SM2647-0	–
–	–	–	–
–	–	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Remote control mechanisms (RC)		Article No.
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070

Adapters for remote control mechanisms (RC mech.)	Article No.
5SM2 with 5SY (4P)	5ST3820-3 + 5ST3820-2
5SM2 with 5SL (4P)	5ST3820-3 + 5ST3820-7

Quick selection guide, page 4/8


© Siemens 2022

5SU1 RCBOs

Type A, 1P+N

			Instantaneous 230 V AC			
		Mounting width	2 MW	2 MW	2 MW	
		Short-circuit breaking capacity	4.5 kA	4.5 kA	6 kA	
		N connection	Right	Left	Right	
						
$I_{\Delta n}$	I_n	Bulk packaging (36 units)	Characteristic C	C	Characteristic B	C
Type A						
10 mA	6 A	–	–	–	–	–
	10 A	–	–	–	–	–
	13 A	–	–	–	–	–
	16 A	–	–	–	–	–
30 mA	6 A	–	5SU1353-7KK06	5SU1353-7KL06	5SU1356-6KK06	5SU1356-7KK06
		■	–	–	5SU1356-6GV06	5SU1356-7GV06
	8 A	–	5SU1353-7KK08	–	–	5SU1356-7KK08
	10 A	–	5SU1353-7KK10	5SU1353-7KL10	5SU1356-6KK10	5SU1356-7KK10
		■	–	–	5SU1356-6GV10	5SU1356-7GV10
	13 A	–	5SU1353-7KK13	–	5SU1356-6KK13	5SU1356-7KK13
	16 A	–	5SU1353-7KK16	5SU1353-7KL16	5SU1356-6KK16	5SU1356-7KK16
		■	–	–	5SU1356-6GV16	5SU1356-7GV16
	20 A	–	5SU1353-7KK20	5SU1353-7KL20	5SU1356-6KK20	5SU1356-7KK20
	25 A	–	5SU1353-7KK25	5SU1353-7KL25	5SU1356-6KK25	5SU1356-7KK25
	32 A	–	5SU1353-7KK32	5SU1353-7KL32	5SU1356-6KK32	5SU1356-7KK32
	40 A	–	5SU1353-7KK40	5SU1353-7KL40	5SU1356-6KK40	5SU1356-7KK40
300 mA	6 A	–	5SU1653-7KK06	–	5SU1656-6KK06	5SU1656-7KK06
	10 A	–	5SU1653-7KK10	–	5SU1656-6KK10	5SU1656-7KK10
	13 A	–	5SU1653-7KK13	–	5SU1656-6KK13	5SU1656-7KK13
	16 A	–	5SU1653-7KK16	–	5SU1656-6KK16	5SU1656-7KK16
	20 A	–	5SU1653-7KK20	–	5SU1656-6KK20	5SU1656-7KK20
	25 A	–	5SU1653-7KK25	–	5SU1656-6KK25	5SU1656-7KK25
	32 A	–	5SU1653-7KK32	–	5SU1656-6KK32	5SU1656-7KK32
	40 A	–	5SU1653-7KK40	–	5SU1656-6KK40	5SU1656-7KK40

Mounting concept

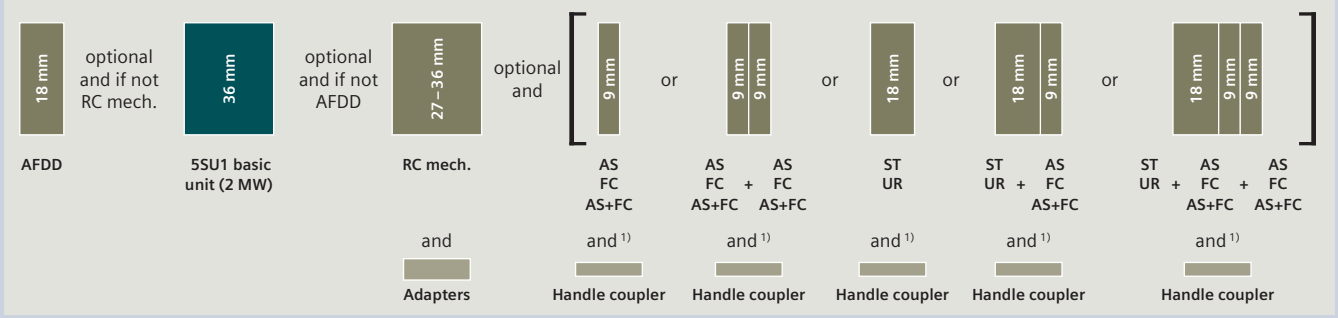

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

AFDD	Arc fault detection unit	See page 4/52
AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/10

© Siemens 2022

Instantaneous		Short-time delayed [G], super resistant [K]	
230 V AC		230 V AC	
2 MW		2 MW	
10 kA		10 kA	
Right		Right	
			
Characteristic		Characteristic	
B	C	B	C
5SU1154-6KK06	5SU1154-7KK06	–	–
5SU1154-6KK10	5SU1154-7KK10	–	–
5SU1154-6KK13	5SU1154-7KK13	–	–
5SU1154-6KK16	5SU1154-7KK16	–	–
5SU1354-6KK06	5SU1354-7KK06	–	–
5SU1354-6GV06	5SU1354-7GV06	–	–
–	5SU1354-7KK08	–	–
5SU1354-6KK10	5SU1354-7KK10	5SU1354-6LB10	5SU1354-7LB10
5SU1354-6GV10	5SU1354-7GV10	–	–
5SU1354-6KK13	5SU1354-7KK13	5SU1354-6LB13	5SU1354-7LB13
5SU1354-6KK16	5SU1354-7KK16	5SU1354-6LB16	5SU1354-7LB16
5SU1354-6GV16	5SU1354-7GV16	–	–
5SU1354-6KK20	5SU1354-7KK20	5SU1354-6LB20	5SU1354-7LB20
5SU1354-6KK25	5SU1354-7KK25	5SU1354-6LB25	5SU1354-7LB25
5SU1354-6KK32	5SU1354-7KK32	5SU1354-6LB32	5SU1354-7LB32
5SU1354-6KK40	5SU1354-7KK40	5SU1354-6LB40	5SU1354-7LB40
5SU1654-6KK06	5SU1654-7KK06	–	–
5SU1654-6KK10	5SU1654-7KK10	–	–
5SU1654-6KK13	5SU1654-7KK13	–	–
5SU1654-6KK16	5SU1654-7KK16	–	–
5SU1654-6KK20	5SU1654-7KK20	–	–
5SU1654-6KK25	5SU1654-7KK25	–	–
5SU1654-6KK32	5SU1654-7KK32	–	–
5SU1654-6KK40	5SU1654-7KK40	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Handle couplers for AS, FC, AS+FC, ST and UR	Article No.
1 set = 5 units	5ST3805-1

Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-5

Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 4/10

© Siemens 2022

5SU1 RCBOs

Type F, 1P+N


	Super resistant [K] 230 V AC
Mounting width	2 MW
Short-circuit breaking capacity	10 kA
N connection	Right



4

$I_{\Delta n}$	I_n	Characteristic B	Characteristic C
Type F			
30 mA	6 A	5SU1354-3KK06	5SU1354-4KK06
	10 A	5SU1354-3KK10	5SU1354-4KK10
	13 A	5SU1354-3KK13	5SU1354-4KK13
	16 A	5SU1354-3KK16	5SU1354-4KK16
	20 A	5SU1354-3KK20	5SU1354-4KK20
	25 A	5SU1354-3KK25	5SU1354-4KK25
	32 A	5SU1354-3KK32	5SU1354-4KK32
	40 A	5SU1354-3KK40	5SU1354-4KK40

Mounting concept

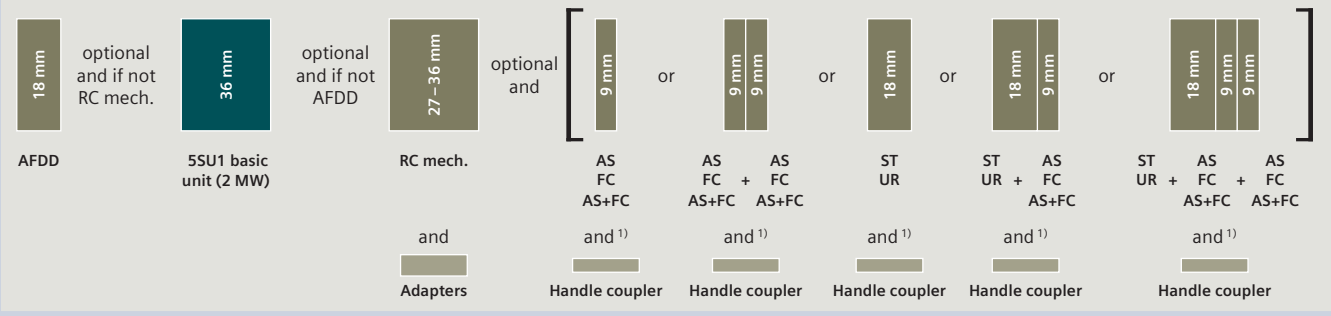

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

AFDD	Arc fault detection unit	See page 4/52
AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/10

© Siemens 2022

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Handle couplers for AS, FC, AS+FC, ST and UR	Article No.
1 set = 5 units	5ST3805-1

Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	AC 170 ... 277 V, DC 77 ... 286 V	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-5

Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 4/10


© Siemens 2022

5SU1 RCBOs

Type AC, 1P+N

			Instantaneous 230 V AC			
		Mounting width	2 MW	2 MW	2 MW	
		Short-circuit breaking capacity	4.5 kA	4.5 kA	6 kA	
		N connection	Right	Left	Right	
						
$I_{\Delta n}$	I_n	Bulk packaging (36 units)	Characteristic C	C	Characteristic B	C
Type AC						
30 mA	6 A	–	5SU1353-1KK06	5SU1353-1KL06	5SU1356-0KK06	5SU1356-1KK06
	8 A	–	5SU1353-1KK08	–	–	5SU1356-1KK08
	10 A	–	5SU1353-1KK10	5SU1353-1KL10	5SU1356-0KK10	5SU1356-1KK10
		■	5SU1353-1GV10	–	–	–
	13 A	–	5SU1353-1KK13	5SU1353-1KL13	5SU1356-0KK13	5SU1356-1KK13
	16 A	–	5SU1353-1KK16	5SU1353-1KL16	5SU1356-0KK16	5SU1356-1KK16
		■	5SU1353-1GV16	–	–	5SU1356-1GV16
	20 A	–	5SU1353-1KK20	5SU1353-1KL20	5SU1356-0KK20	5SU1356-1KK20
	25 A	–	5SU1353-1KK25	5SU1353-1KL25	5SU1356-0KK25	5SU1356-1KK25
	32 A	–	5SU1353-1KK32	5SU1353-1KL32	5SU1356-0KK32	5SU1356-1KK32
	40 A	–	5SU1353-1KK40	5SU1353-1KL40	5SU1356-0KK40	5SU1356-1KK40
100 mA	6 A	–	–	–	–	–
	10 A	–	–	–	–	–
	13 A	–	–	–	–	–
	16 A	–	–	–	–	–
	20 A	–	–	–	–	–
	25 A	–	–	–	–	–
	32 A	–	–	–	–	–
	40 A	–	–	–	–	–
300 mA	6 A	–	5SU1653-1KK06	5SU1653-1KL06	5SU1656-0KK06	5SU1656-1KK06
	10 A	–	5SU1653-1KK10	5SU1653-1KL10	5SU1656-0KK10	5SU1656-1KK10
	13 A	–	5SU1653-1KK13	5SU1653-1KL16	5SU1656-0KK13	5SU1656-1KK13
	16 A	–	5SU1653-1KK16	–	5SU1656-0KK16	5SU1656-1KK16
		■	5SU1653-1GV16	–	–	–
	20 A	–	5SU1653-1KK20	5SU1653-1KL20	5SU1656-0KK20	5SU1656-1KK20
	25 A	–	5SU1653-1KK25	5SU1653-1KL25	5SU1656-0KK25	5SU1656-1KK25
	32 A	–	5SU1653-1KK32	5SU1653-1KL32	5SU1656-0KK32	5SU1656-1KK32
	40 A	–	5SU1653-1KK40	5SU1653-1KL40	5SU1656-0KK40	5SU1656-1KK40

Mounting concept

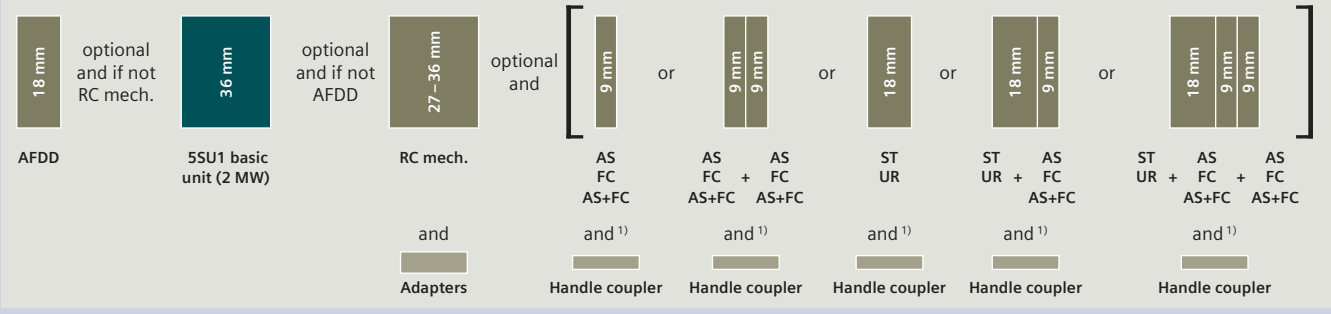

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

AFDD	Arc fault detection unit	See page 4/52
AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61
ST	Shunt trips	See page 4/64
UR	Undervoltage release	See page 4/65
RC mech.	Remote control mechanism	See page 4/66

Quick selection guide, page 4/10

© Siemens 2022

Instantaneous 230 V AC		Short-time delayed [G], super resistant [K] 230 V AC	
2 MW		2 MW	
10 kA		10 kA	
Right		Right	
			
Characteristic		**Characteristic**	
B	**C**	**B**	**C**
5SU1354-0KK06	5SU1354-1KK06	–	–
–	5SU1354-1KK08	–	–
5SU1354-0KK10	5SU1354-1KK10	5SU1354-0LB10	5SU1354-1LB10
–	–	–	–
5SU1354-0KK13	5SU1354-1KK13	5SU1354-0LB13	5SU1354-1LB13
5SU1354-0KK16	5SU1354-1KK16	5SU1354-0LB16	5SU1354-1LB16
–	–	–	–
5SU1354-0KK20	5SU1354-1KK20	5SU1354-0LB20	5SU1354-1LB20
5SU1354-0KK25	5SU1354-1KK25	5SU1354-0LB25	5SU1354-1LB25
5SU1354-0KK32	5SU1354-1KK32	5SU1354-0LB32	5SU1354-1LB32
5SU1354-0KK40	5SU1354-1KK40	5SU1354-0LB40	5SU1354-1LB40
–	5SU1454-1KK06	–	–
–	5SU1454-1KK10	–	–
–	5SU1454-1KK13	–	–
–	5SU1454-1KK16	–	–
–	5SU1454-1KK20	–	–
–	5SU1454-1KK25	–	–
–	5SU1454-1KK32	–	–
–	5SU1454-1KK40	–	–
5SU1654-0KK06	5SU1654-1KK06	–	–
5SU1654-0KK10	5SU1654-1KK10	–	–
5SU1654-0KK13	5SU1654-1KK13	–	–
5SU1654-0KK16	5SU1654-1KK16	–	–
–	–	–	–
5SU1654-0KK20	5SU1654-1KK20	–	–
5SU1654-0KK25	5SU1654-1KK25	–	–
5SU1654-0KK32	5SU1654-1KK32	–	–
5SU1654-0KK40	5SU1654-1KK40	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Handle couplers for AS, FC, AS+FC, ST and UR	Article No.
1 set = 5 units	5ST3805-1

Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-5

Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 4/10


© Siemens 2022

5SU1 RCBOs

Type A, 2/3/4-pole with residual current tripped indication

		2-pole Instantaneous 230 V AC			
Short-circuit breaking capacity		6 kA		10 kA	
					
$I_{\Delta n}$	I_n	Characteristic B	C	Characteristic B	C
30 mA	6 A	5SU1326-6FP06	5SU1326-7FP06	5SU1324-6FP06	5SU1324-7FP06
	10 A	5SU1326-6FP10	5SU1326-7FP10	5SU1324-6FP10	5SU1324-7FP10
	13 A	5SU1326-6FP13	5SU1326-7FP13	5SU1324-6FP13	5SU1324-7FP13
	16 A	5SU1326-6FP16	5SU1326-7FP16	5SU1324-6FP16	5SU1324-7FP16
	20 A	5SU1326-6FP20	5SU1326-7FP20	5SU1324-6FP20	5SU1324-7FP20
	25 A	5SU1326-6FP25	5SU1326-7FP25	5SU1324-6FP25	5SU1324-7FP25
	32 A	5SU1326-6FP32	5SU1326-7FP32	5SU1324-6FP32	5SU1324-7FP32
300 mA	6 A	–	–	–	–
	10 A	–	–	–	–
	16 A	–	–	–	–
	20 A	–	–	–	–
	25 A	–	–	–	–
	32 A	–	–	–	–

Mounting concept

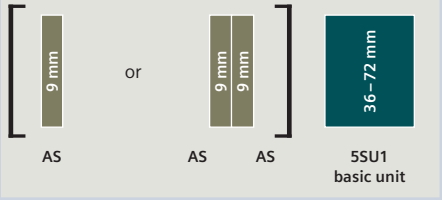

AS Auxiliary switch See page 4/58

Quick selection guide, page 4/10

© Siemens 2022

2-pole Short-time delayed, super resistant [K] 230 V AC		3-pole Instantaneous 400 V AC		4-pole Instantaneous 400 V AC	
10 kA		6 kA		6 kA	
					
Characteristic		Characteristic		Characteristic	
B	C	B	C	B	C
–	5SU1324-7FR06	5SU1336-6FP06	5SU1336-7FP06	5SU1346-6FP06	5SU1346-7FP06
–	5SU1324-7FR10	5SU1336-6FP10	5SU1336-7FP10	5SU1346-6FP10	5SU1346-7FP10
–	–	5SU1336-6FP13	5SU1336-7FP13	5SU1346-6FP13	5SU1346-7FP13
5SU1324-6FR16	5SU1324-7FR16	5SU1336-6FP16	5SU1336-7FP16	5SU1346-6FP16	5SU1346-7FP16
5SU1324-6FR20	5SU1324-7FR20	5SU1336-6FP20	5SU1336-7FP20	5SU1346-6FP20	5SU1346-7FP20
5SU1324-6FR25	5SU1324-7FR25	5SU1336-6FP25	5SU1336-7FP25	5SU1346-6FP25	5SU1346-7FP25
–	5SU1324-7FR32	5SU1336-6FP32	5SU1336-7FP32	5SU1346-6FP32	5SU1346-7FP32
–	–	5SU1636-6FP06	5SU1636-7FP06	5SU1646-6FP06	5SU1646-7FP06
–	–	5SU1636-6FP10	5SU1636-7FP10	5SU1646-6FP10	5SU1646-7FP10
–	–	5SU1636-6FP16	5SU1636-7FP16	5SU1646-6FP16	5SU1646-7FP16
–	–	5SU1636-6FP20	5SU1636-7FP20	5SU1646-6FP20	5SU1646-7FP20
–	–	5SU1636-6FP25	5SU1636-7FP25	5SU1646-6FP25	5SU1646-7FP25
–	–	5SU1636-6FP32	5SU1636-7FP32	5SU1646-6FP32	5SU1646-7FP32

Accessories

Auxiliary switch (AS)		Article No.
1 CO	Standard	5ST1010-0FP

Quick selection guide, page 4/10


© Siemens 2022

5SU1 RCBOs


Type A and AC, 2-pole

		Instantaneous		
		110 V AC		230 V AC
Mounting width		3 MW		3 MW
Short-circuit breaking capacity		10 kA		10 kA
				
$I_{\Delta n}$	I_n	Characteristic		Characteristic
		B	C	B
Type A				
30 mA	6 A	5SU1324-6KX06	5SU1324-7KX06	5SU1324-6FA06
	10 A	5SU1324-6KX10	5SU1324-7KX10	5SU1324-6FA10
	13 A	5SU1324-6KX13	5SU1324-7KX13	5SU1324-6FA13
	16 A	5SU1324-6KX16	5SU1324-7KX16	5SU1324-6FA16
	20 A	5SU1324-6KX20	5SU1324-7KX20	5SU1324-6FA20
	25 A	5SU1324-6KX25	5SU1324-7KX25	5SU1324-6FA25
	32 A	5SU1324-6KX32	5SU1324-7KX32	5SU1324-6FA32
	40 A	5SU1324-6KX40	5SU1324-7KX40	5SU1324-6FA40
	125 A	–	–	–
300 mA	125 A	–	–	–
Type AC				
30 mA	125 A	–	–	–
300 mA	125 A	–	–	–

Mounting concept

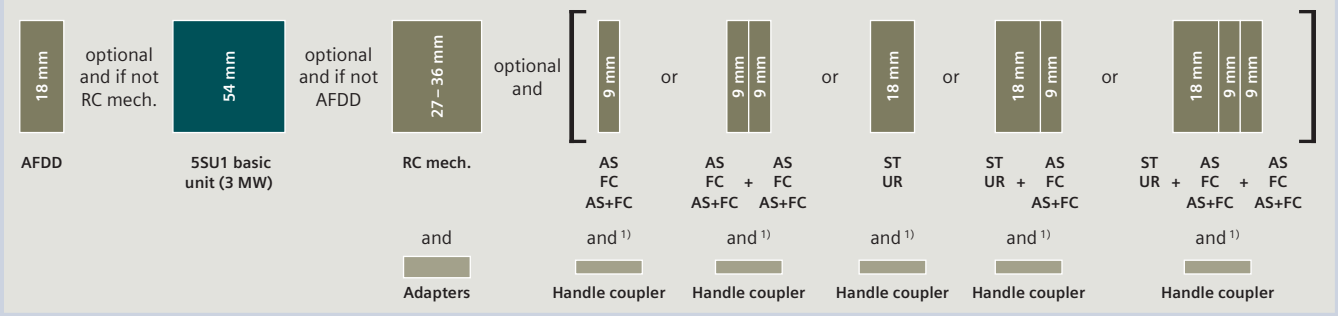

1) Handle couplers are required for direct attachment of the components to the 5SU1. No handle coupler is required for attaching the components to the RC mech.

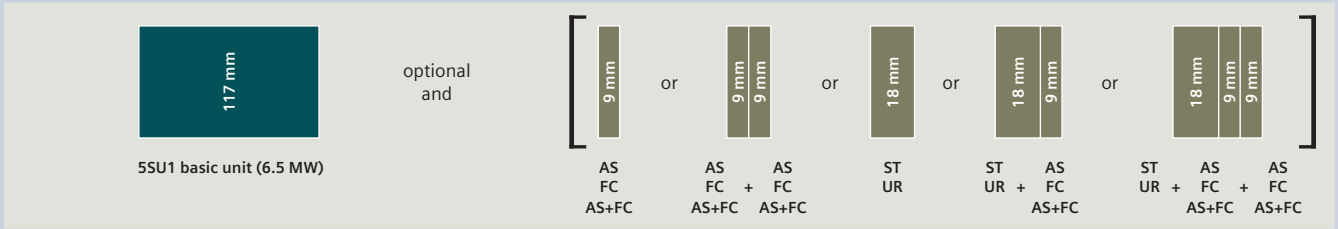

AFDD	Arc fault detection unit	See page 4/52	AS+FC	Auxiliary switch and fault signal contact	See page 4/61	UR	Undervoltage release	See page 4/65
AS	Auxiliary switch	See page 4/58	ST	Shunt trips	See page 4/64	RC mech.	Remote control mechanism	See page 4/66
FC	Fault signal contact	See page 4/60						

Quick selection guide, page 4/10

© Siemens 2022

			Selective [S] 230 V AC	
	6.5 MW		6.5 MW	
	10 kA		10 kA	
				
	Characteristic		Characteristic	
C	B	C	B	C
5SU1324-7FA06	–	–	–	–
5SU1324-7FA10	–	–	–	–
5SU1324-7FA13	–	–	–	–
5SU1324-7FA16	–	–	–	–
5SU1324-7FA20	–	–	–	–
5SU1324-7FA25	–	–	–	–
5SU1324-7FA32	–	–	–	–
5SU1324-7FA40	–	–	–	–
–	5SU1324-6KK82	5SU1324-7KK82	–	–
–	5SU1624-6KK82	5SU1624-7KK82	5SU1624-6WK82	5SU1624-7WK82
–	5SU1324-0KK82	5SU1324-1KK82	–	–
–	5SU1624-0KK82	5SU1624-1KK82	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Shunt trips (ST)	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V DC	5ST3031-0XX01

Undervoltage releases (UR)		Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Handle couplers for AS, FC, AS+FC, ST and UR	Article No.
1 set = 5 units	5ST3805-1

Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with ext. function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
2 MW	5ST3820-5

Arc fault detection units (AFDD)		Article No.
For 5SU1 basic units (3 MW)	I_n up to 16 A	5SM6021-2
	I_n up to 40 A	5SM6024-2

Quick selection guide, page 4/10

© Siemens 2022


5SU1 RCBOs

Type A and AC, 4-pole

	Instantaneous		Selective [S]	
	400 V AC		400 V AC	
Mounting width	11 MW		11 MW	
Short-circuit breaking capacity	10 kA		10 kA	
				
$I_{\Delta n}$ / I_n	Characteristic B	C	Characteristic B	C
Type A				
30 mA / 125 A	5SU1344-6KK82	5SU1344-7KK82	–	–
300 mA / 125 A	5SU1644-6KK82	5SU1644-7KK82	5SU1644-6WK82	5SU1644-7WK82
1000 mA / 125 A	–	–	5SU1844-6WK82	5SU1844-7WK82
Type AC				
30 mA / 125 A	5SU1344-0KK82	5SU1344-1KK82	–	–
300 mA / 125 A	5SU1644-0KK82	5SU1644-1KK82	–	–

4

Mounting concept

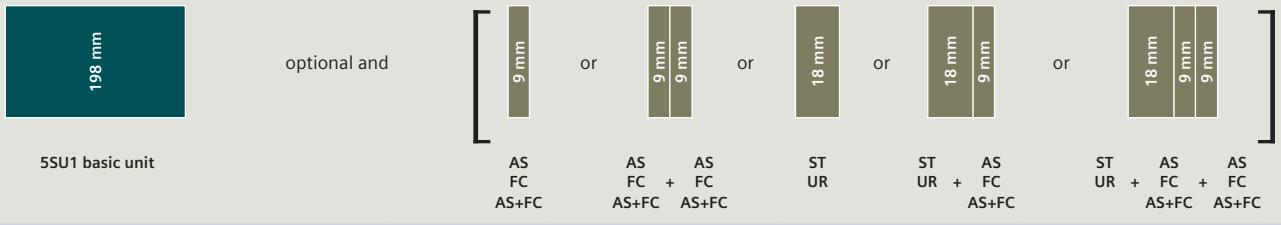

AS Auxiliary switch See page 4/58
FC Fault signal contact See page 4/60
AS+FC Auxiliary switch and fault signal contact See page 4/61

ST Shunt trips See page 4/64
UR Undervoltage release See page 4/65

Quick selection guide, page 4/10

© Siemens 2022

Type B and B+, 4-pole

		Super resistant [K]			Selective [S]	
		400 V AC		480 V AC	400 V AC	
Mounting width		11 MW		11 MW	11 MW	
Short-circuit breaking capacity		10 kA		10 kA	10 kA	
						
$I_{\Delta n}$	I_n	Characteristic C	D	Characteristic C	Characteristic C	D
Type B						
30 mA	100 A	5SU1374-7AK81	5SU1374-8AK81	–	–	–
	125 A	5SU1374-7AK82	–	–	–	–
300 mA	100 A	5SU1674-7AK81	5SU1674-8AK81	5SU1674-7CK81	–	5SU1674-8BK81
	125 A	5SU1674-7AK82	–	5SU1674-7CK82	5SU1674-7BK82	–
Type B+						
30 mA	100 A	5SU1374-7DK81	5SU1374-8DK81	–	–	–
	125 A	5SU1374-7DK82	–	–	–	–
300 mA	100 A	5SU1674-7DK81	5SU1674-8DK81	5SU1674-7FK81	–	5SU1674-8EK81
	125 A	5SU1674-7DK82	–	5SU1674-7FK82	5SU1674-7EK82	–

4

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022

Auxiliary switches and fault signal contacts (AS+FC)		Article No.
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC
Shunt trips (ST)		**Article No.**
110 ... 415 V AC, 110 ... 220 V DC		5ST3030
24 ... 48 V AC/DC		5ST3031
12 V DC		5ST3031-0XX01
Undervoltage releases (UR)		**Article No.**
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045

Quick selection guide, page 4/10


© Siemens 2022

5SV1 RCBOs

Type A, 1P+N

			Instantaneous				Short-time delayed [G], Super resistant [K]	
			230 V AC				230 V AC	
		Mounting width	1 MW		1 MW		1 MW	
		Short-circuit breaking capacity	4.5 kA		6 kA		6 kA	
		N connection	Right		Right		Right	
								
$I_{\Delta n}$	I_n	Bulk packaging (12 units)	Characteristic B	C	Characteristic B	C	Characteristic B	C
Typ A								
30 mA	2 A	–	–	5SV1313-7KK02	–	5SV1316-7KK02	–	–
	4 A	–	–	5SV1313-7KK04	–	5SV1316-7KK04	–	–
	6 A	–	5SV1313-6KK06	5SV1313-7KK06	5SV1316-6KK06	5SV1316-7KK06	5SV1316-6LK06	5SV1316-7LK06
		■	–	–	5SV1316-6GV06	5SV1316-7GV06	–	–
	10 A	–	5SV1313-6KK10	5SV1313-7KK10	5SV1316-6KK10	5SV1316-7KK10	5SV1316-6LK10	5SV1316-7LK10
		■	–	–	5SV1316-6GV10	5SV1316-7GV10	–	–
	13 A	–	5SV1313-6KK13	5SV1313-7KK13	5SV1316-6KK13	5SV1316-7KK13	5SV1316-6LK13	5SV1316-7LK13
		■	–	–	5SV1316-6GV13	5SV1316-7GV13	–	–
	16 A	–	5SV1313-6KK16	5SV1313-7KK16	5SV1316-6KK16	5SV1316-7KK16	5SV1316-6LK16	5SV1316-7LK16
		■	–	–	5SV1316-6GV16	5SV1316-7GV16	–	–
300 mA	2 A	–	–	5SV1613-7KK02	–	5SV1616-7KK02	–	–
	4 A	–	–	5SV1613-7KK04	–	5SV1616-7KK04	–	–
	6 A	–	5SV1613-6KK06	5SV1613-7KK06	5SV1616-6KK06	5SV1616-7KK06	–	–
	10 A	–	5SV1613-6KK10	5SV1613-7KK10	5SV1616-6KK10	5SV1616-7KK10	–	–
	13 A	–	5SV1613-6KK13	5SV1613-7KK13	5SV1616-6KK13	5SV1616-7KK13	–	–
	16 A	–	5SV1613-6KK16	5SV1613-7KK16	5SV1616-6KK16	5SV1616-7KK16	–	–

Mounting concept

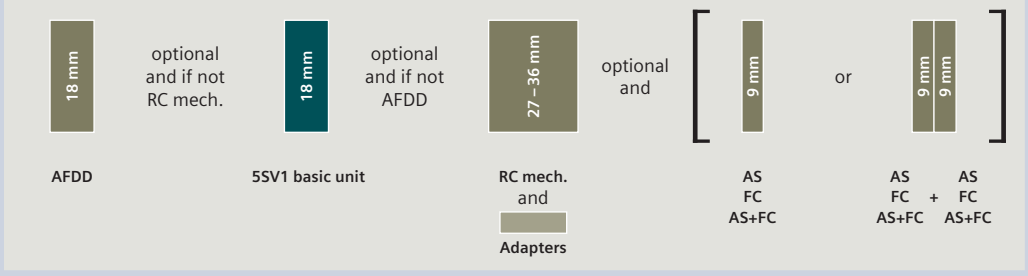

AFDD Arc fault detection units See page 4/52
AS Auxiliary switch See page 4/58
FC Fault signal contact See page 4/60
AS+FC Auxiliary switch and fault signal contact See page 4/61
RC mech. Remote control mechanism See page 4/66

Quick selection guide, page 4/10

© Siemens 2022

Type F and AC, 1P+N

			Instantaneous 230 V AC			Super resistant [K] 230 V AC	
		Mounting width	1 MW	1 MW		1 MW	
		Short-circuit breaking capacity	4.5 kA	6 kA		6 kA	
		N connection	Right	Right		Right	
							
$I_{\Delta n}$	I_n	Bulk packaging (12 units)	Characteristic C	Characteristic B	C	Characteristic B	C
Type F							
30 mA	6 A	–	–	–	–	5SV1316-3KK06	5SV1316-4KK06
	10 A	–	–	–	–	5SV1316-3KK10	5SV1316-4KK10
	13 A	–	–	–	–	5SV1316-3KK13	5SV1316-4KK13
	16 A	–	–	–	–	5SV1316-3KK16	5SV1316-4KK16
Type AC							
30 mA	2 A	–	5SV1313-1KK02	–	5SV1316-1KK02	–	–
	4 A	–	5SV1313-1KK04	–	5SV1316-1KK04	–	–
	6 A	–	5SV1313-1KK06	5SV1316-0KK06	5SV1316-1KK06	–	–
	10 A	–	5SV1313-1KK10	5SV1316-0KK10	5SV1316-1KK10	–	–
		■	5SV1313-1GV10	–	5SV1316-1GV10	–	–
	13 A	–	5SV1313-1KK13	5SV1316-0KK13	5SV1316-1KK13	–	–
	16 A	–	5SV1313-1KK16	5SV1316-0KK16	5SV1316-1KK16	–	–
		■	5SV1313-1GV16	–	5SV1316-1GV16	–	–
300 mA	2 A	–	5SV1613-1KK02	–	5SV1616-1KK02	–	–
	4 A	–	5SV1613-1KK04	–	5SV1616-1KK04	–	–
	6 A	–	5SV1613-1KK06	5SV1616-0KK06	5SV1616-1KK06	–	–
	10 A	–	5SV1613-1KK10	5SV1616-0KK10	5SV1616-1KK10	–	–
	13 A	–	5SV1613-1KK13	5SV1616-0KK13	5SV1616-1KK13	–	–
	16 A	–	5SV1613-1KK16	5SV1616-0KK16	5SV1616-1KK16	–	–

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Fault signal contacts (FC)	Article No.
1 NO + 1 NC	5ST3020
2 NO	5ST3021
2 NC	5ST3022

Auxiliary switches and fault signal contacts (AS+FC)	Article No.
1 CO (AS) + 1 CO (FC)	5ST3062
5ST3 COM (AS+FC)	5ST3062-0MC

Remote control mechanisms (RC)		Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058
Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070
	170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new

Adapters for remote control mechanisms (RC mech.)	Article No.
1 MW	5ST3820-6

Arc fault detection units (AFDD)		Article No.
For 5SV1 basic units	I_n up to 16 A	5SM6011-2

Quick selection guide, page 4/10

© Siemens 2022

5SM6 arc fault detection units


For combination with an MCB or RCBO



For combination with basic units			Rated current I_n	
Width of basic unit	Miniature circuit breakers	RCBO		
1 MW	5SL60 (no KL types)	5SV1	Up to 16 A	5SM6011-2
			Up to 40 A	5SM6014-2
2 MW	5SY [1], 5SL4 (only 1+N devices)	5SU1 (2 MW, 3 MW)	Up to 16 A	5SM6021-2
			Up to 40 A	5SM6024-2

[1] Not suitable for use with 5SY5 or 5SY8

Mounting concept

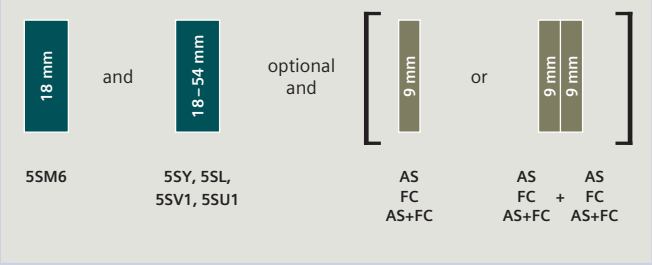

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61

The mounting concept shown is only one example of how devices and accessories can be combined.

Accessories

Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/70 onwards
See suitable terminals and end caps, from page 4/70 onwards


Quick selection guide, page 4/12

© Siemens 2022

5SV6 AFDD/MCB

Mounting width	1 MW		1 MW pigtail	
				
Rated current I_n	**Bulk packaging (12 units)**	**Characteristic**		**Characteristic**	
		B	**C**	**B**	**C**
6 A	–	5SV6016-6KK06	5SV6016-7KK06	5SV6016-6KP06	5SV6016-7KP06
	■	5SV6016-6GV06	5SV6016-7GV06	–	–
10 A	–	5SV6016-6KK10	5SV6016-7KK10	5SV6016-6KP10	5SV6016-7KP10
	■	5SV6016-6GV10	5SV6016-7GV10	–	–
13 A	–	5SV6016-6KK13	5SV6016-7KK13	5SV6016-6KP13	5SV6016-7KP13
	■	5SV6016-6GV13	–	–	–
16 A	–	5SV6016-6KK16	5SV6016-7KK16	5SV6016-6KP16	5SV6016-7KP16
	■	5SV6016-6GV16	5SV6016-7GV16	–	–
20 A	–	5SV6016-6KK20	5SV6016-7KK20	5SV6016-6KP20	5SV6016-7KP20
25 A	–	5SV6016-6KK25	5SV6016-7KK25	5SV6016-6KP25	5SV6016-7KP25
	■	5SV6016-6GV25	–	–	–
32 A	–	5SV6016-6KK32	5SV6016-7KK32	5SV6016-6KP32	5SV6016-7KP32
40 A	–	5SV6016-6KK40	5SV6016-7KK40	5SV6016-6KP40	5SV6016-7KP40

Mounting concept

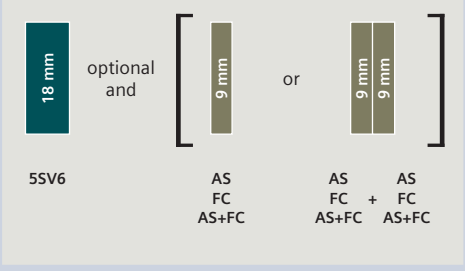

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61

Accessories

Auxiliary switches (AS)		**Article No.**
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/70 onwards
See suitable terminals and end caps, from page 4/70 onwards

Quick selection guide, page 4/12

© Siemens 2022

5SV6 COM AFDD/MCB

With communication and measuring function


Mounting width	1 MW



Rated current I_n	Characteristic B	Characteristic C
6 A	5SV6016-6MC06	5SV6016-7MC06
10 A	5SV6016-6MC10	5SV6016-7MC10
13 A	5SV6016-6MC13	5SV6016-7MC13
16 A	5SV6016-6MC16	5SV6016-7MC16
20 A	5SV6016-6MC20	5SV6016-7MC20
25 A	5SV6016-6MC25	5SV6016-7MC25
32 A	5SV6016-6MC32	5SV6016-7MC32

Note:
Please note the country-specific radio licenses of the products in SIOS
www.siemens.com/lowvoltage/certificates (109801197)

Mounting concept

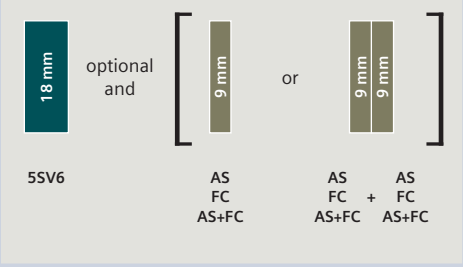

AS	Auxiliary switch	See page 4/58
FC	Fault signal contact	See page 4/60
AS+FC	Auxiliary switch and fault signal contact	See page 4/61

Accessories


Auxiliary switches (AS)		Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016
Fault signal contacts (FC)		**Article No.**
1 NO + 1 NC		5ST3020
2 NO		5ST3021
2 NC		5ST3022
Auxiliary switches and fault signal contacts (AS+FC)		**Article No.**
1 CO (AS) + 1 CO (FC)		5ST3062
5ST3 COM (AS+FC)		5ST3062-0MC

See suitable busbars, from page 4/75 onwards
See suitable terminals and end caps, from page 4/72 onwards

Quick selection guide, page 4/12

© Siemens 2022

7KN Powercenter 1000 data transceiver

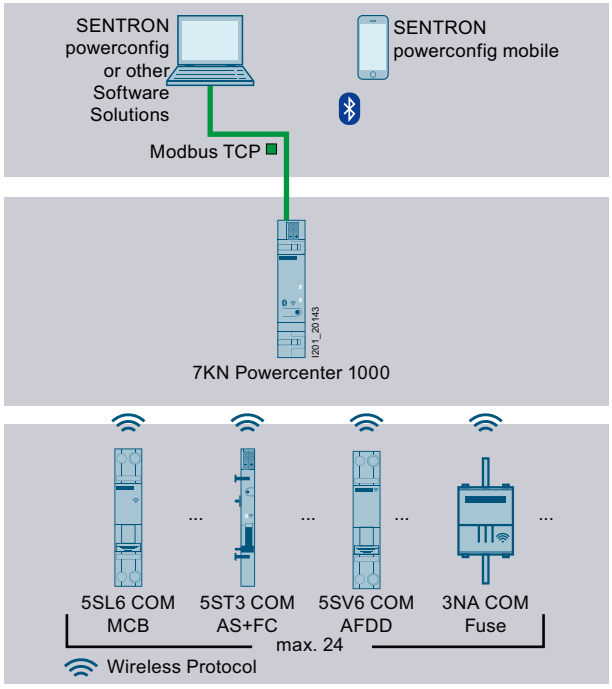

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000	Article No.
	7KN1110-0MC00

See page 10/19

You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation manual – Circuit protection devices with communication and measuring function **(109791805)**

System manual – Circuit protection devices with communication and measuring function **(109791806)**

4

Monitoring functions with limit monitoring

- Trip monitoring: short-circuit, overload, arc fault
- Counters incl. limit monitoring for:
  - Operating hours
  - Operating hours with load current
  - Operating cycles (ON/OFF)
  - Tripping operations
  - Short circuits
- Limit values for:
  - Overcurrent alarm 1 and alarm 2
  - Undercurrent alarm 1 and alarm 2
  - Overvoltage alarm 1 and alarm 2
  - Undervoltage alarm 1 and alarm 2
  - Lower voltage threshold for AFDD tripping
  - Temperature


Measured values	Unit	Memory
Temperature	°C	1 hour in 1-minute intervals; 7 days in 15-minute intervals
Average temperature	°C	–
Current	A	Min. and max. values over 10 days; 1 hour in 10-second intervals; 7 days in 15-minute intervals
Average current	A	–
Maximum current	A	–
Voltage	V	Min. and max. values over 10 days
Line frequency	Hz	Min. and max. values over 10 days
Active power	W	Min. and max. values over 10 days
Apparent power	VA	Min. and max. values over 10 days
Reactive power	Var	–
Power factor		–
Active energy imported	Wh	7 days in 15-minute intervals; 30 days in 1-day intervals
Active energy exported	Wh	–
Reactive energy imported	Varh	–
Reactive energy exported	Varh	–

Quick selection guide, page 4/12

© Siemens 2022

Overview of modular system

Residual current protective devices

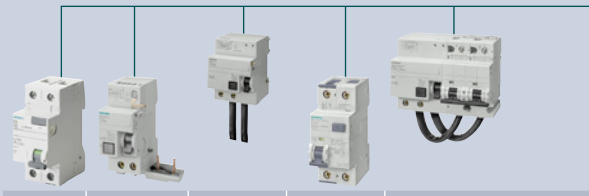

				5SV	5SM2 + LS	5SM2 + 5SP4	5SU1	5SU1 (125 A)
5SM6 arc fault detection units			**Article No.**					
	Rated current up to 16 A	Standard	5SM6021-2	–	–	–	■	–
		For compact devices 1P+N in 1 MW	5SM6011-2	–	–	–	–	–
	Rated current up to 40 A	Standard	5SM6024-2	–	–	–	■	–
		For compact devices 1P+N in 1 MW	5SM6014-2	–	–	–	–	–
Auxiliary switches (AS)			**Article No.**					
	1 NO + 1 NC	Standard	5ST3010	■	■	■	■	■
		For low power	5ST3013	■	■	■	■	■
		For low power (with diode)	5ST3013-0XX01	■	■	■	■	■
	2 NO	Standard	5ST3011	■	■	■	■	■
		For low power	5ST3014	■	■	■	■	■
	2 NC	Standard	5ST3012	■	■	■	■	■
		For low power	5ST3015	■	■	■	■	■
	1 CO	Standard	5ST3016	■	■	■	■	■
			5ST1010-0FP	–	–	–	–	–
Fault signal contacts (FC)			**Article No.**					
	1 NO + 1 NC		5ST3020	■	■	■	■	■
	2 NO		5ST3021	■	■	■	■	■
	2 NC		5ST3022	■	■	■	■	■
Auxiliary switches and fault signal contacts (AS+FC)			**Article No.**					
	1 CO (AS) + 1 CO (FC)	Standard	5ST3062	■	■	■	■	■
	5ST3 COM (AS+FC)	With communication and measuring function	5ST3062-0MC	■	■	■	■	■
Shunt trips (ST)			**Article No.**					
	110 ... 415 V AC, 110 ... 220 V DC		5ST3030	■	■	■	■	■
	24 ... 48 V AC/DC		5ST3031	■	■	■	■	■
	12 V DC		5ST3031-0XX01	■	■	■	■	■
Undervoltage releases (UR)			**Article No.**					
	With integrated auxiliary switch	230 V AC	5ST3040	■	■	■	■	■
		110 V DC	5ST3041	■	■	■	■	■
		24 V DC	5ST3042	■	■	■	■	■
	Without integrated auxiliary switch	230 V AC	5ST3043	■	■	■	■	■
		110 V DC	5ST3044	■	■	■	■	■
		24 V DC	5ST3045	■	■	■	■	■
Remote control mechanisms (RC)			**Article No.**					
	Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053	–	–	–	■	–
		177 ... 270 V AC	5ST3054	–	–	–	■	–
	Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055	■	■	–	■	–
		177 ... 270 V AC	5ST3056	■	■	–	■	–
	Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057	■	■	–	■	–
		177 ... 270 V AC	5ST3058	■	■	–	■	–
	Power with extended function	12 ... 30 V AC, 12 ... 48 V DC	5ST3070	■	■	–	■	–
		170 ... 277 V AC, 77 ... 286 V DC	5ST3071 new	■	–	–	■	–
Standard busbars			**Article No.**					
	Cannot be cut		5ST36..	■	■	■	■	■
	Can be cut		5ST37..	■	■	■	■	■
Compact busbars			**Article No.**					
	Cannot be cut		5ST36..	■	–	–	–	–
	Can be cut		5ST37..	■	–	–	–	–

From page 4/18

■ Suitable for all versions □ Suitable for some versions

System overview, page 4/4


© Siemens 2022

Arc fault detection devices

Miniature circuit breakers

Device protection switches

Switching devices

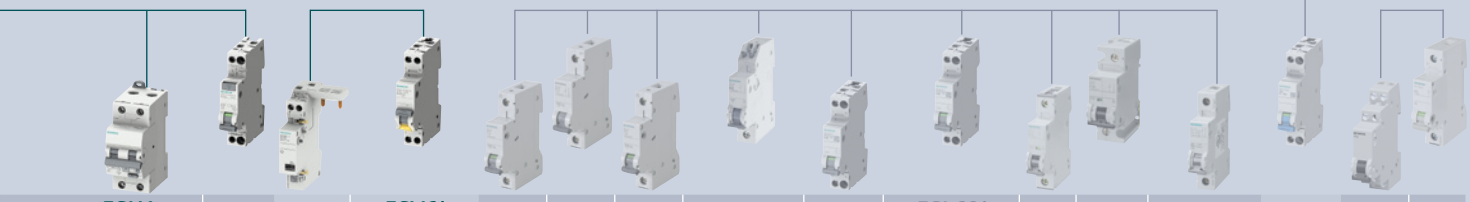

5SU1... FP/FR	5SV1	5SM6	5SV6/ 5SV6 COM	5SL3	5SL6	5SL4	5SJ6...-.KS	5SL30	5SL60/ 5SL6 COM	5SY	5SP4	5SJ4..HG..	5SY17	5TE8	5TL
–	–	–	–	–	–	□	–	–	–	□	–	–	–	–	–
–	■	–	–	–	–	–	–	–	□	–	–	–	–	–	–
–	–	–	–	–	–	□	–	–	–	□	–	–	–	–	–
–	■	–	–	–	–	–	–	–	□	–	–	–	–	–	–
–	■	□	■	■	■	■	–	■	■	■	■	...-0HG	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	–	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	–	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	...-0HG	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	–	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	...-0HG	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	–	■	■	■
–	■	□	■	■	■	■	–	■	■	■	■	–	■	■	■
■	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	■	□	■	■	■	■	–	■	■	■	■	...-0HG	■	–	–
–	■	□	■	■	■	■	–	■	■	■	■	...-0HG	■	–	–
–	■	□	■	■	■	■	–	■	■	■	■	...-0HG	■	–	–
–	■	□	■	■	■	■	–	■	■	■	■	–	■	–	–
–	■	□	■	■	■	■	–	■	■	■	■	–	■	–	–
–	–	□	–	–	–	■	–	–	–	■	■	...-0HG	–	–	–
–	–	□	–	–	–	■	–	–	–	■	■	...-0HG	–	–	–
–	–	□	–	–	–	■	–	–	–	■	■	–	–	–	–
–	–	□	–	–	–	■	–	–	–	■	■	–	–	–	–
–	–	□	–	–	–	■	–	–	–	■	■	–	–	–	–
–	–	□	–	–	–	■	–	–	–	■	■	–	–	–	–
–	–	□	–	–	–	■	–	–	–	■	■	–	–	–	–
–	■	–	–	–	■	■	–	–	■	■	–	–	■	–	■
–	■	–	–	–	■	■	–	–	■	■	–	–	■	–	■
–	■	–	–	–	■	■	–	–	■	■	■	–	■	–	■
–	■	–	–	–	■	■	–	–	■	■	■	–	■	–	■
–	■	–	–	–	■	■	–	–	■	■	■	–	■	–	■
–	■	–	–	–	■	■	–	–	■	■	■	–	■	–	–
–	■	–	–	–	■	■	–	–	■	■	–	–	■	–	–
■	■	□	■	■	■	■	■	■	■	■	■	■	■	□	■
■	■	□	■	■	■	■	■	■	■	■	■	■	■	□	■
–	■	■	■	□	□	□	–	■	■	–	–	–	■	–	–
–	■	■	■	□	□	□	–	■	■	–	–	–	–	–	–
		From page 4/52		From page 3/12									From page 3/42	From page 5/6	

System overview, page 4/4

© Siemens 2022

Electrical accessories



Auxiliary switches (AS)

- Signals contact point of the mounted device
- Version for the switching of small currents and voltages for the control of programmable control systems (PLCs) according to EN 61131-2
- Test button enables the testing of control circuits without the need to switch the mounted device

For combination with basic units						Contacts	Version	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	ON/OFF switches				
Auxiliary switches (AS)									
–	–	5SM3 (3P+N, 100/125 A)	–	–	–	1 NO + 1 NC	Standard	0.5 MW	5SW3330
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010
							For low power	0.5 MW	5ST3013
							For low power (with diode)	0.5 MW	5ST3013-0XX01
						2 NO	Standard	0.5 MW	5ST3011
							For low power	0.5 MW	5ST3014
						2 NC	Standard	0.5 MW	5ST3012
							For low power	0.5 MW	5ST3015
						1 CO	Standard	0.5 MW	5ST3016
–	–	–	5SU1...FP/FR	–	–	1 CO	Standard	0.5 MW	5ST1010-0FP
Auxiliary switches (AS) with TEST button									
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	5TL1, 5TE8	1 NO + 1 NC	Standard	0.5 MW	5ST3010-2
							For low power	0.5 MW	5ST3013-2
						2 NO	Standard	0.5 MW	5ST3011-2
							For low power	0.5 MW	5ST3014-2
						2 NC	Standard	0.5 MW	5ST3012-2
							For low power	0.5 MW	5ST3015-2

[1] 5ST3805-1 handle coupler required

Quick selection guide, page 4/56

© Siemens 2022

Further technical specifications

		5ST3010, 5ST3011, 5ST3012, 5ST3016	5ST3010-2, 5ST3011-2, 5ST3012-2	5ST3013, 5ST3014, 5ST3015, 5ST3013-0XX01[1]	5ST3013-2, 5ST3014-2, 5ST3015-2	5SW3330	5ST1010-0FP
Standards							
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1				IEC/EN 62019	
	UL, CSA	UL 1077, CSA C22.2 No. 235	–	UL 1077, CSA C22.2 No. 235	–		
Contacts							
Minimum contact load		50 mA, 24 V		1 mA, 5 V DC	5 mA, 5 V DC	50 mA, 24 V	5 mA, 24 V DC
Maximum contact load		–		100 mA, 30 V DC	50 mA, 30 V DC	–	
Contact load according to IEC/EN 62019 and IEC/EN 60947-5-1	230 V AC, AC-12	–				5/–	6 A/–
	230 V AC, AC-13	6 A/6 A		–			
	400 V AC, AC-13	2 A/2 A		–			
	230 V AC, AC-14	6 A/6 A		–			
	400 V AC, AC-14	2 A/2 A		–			
	24 V DC, DC-13	6 A/3 A		–			
	30 V DC, DC-14	–		0.1 A		–	
	60 V DC, DC-13	3 A/1.5 A		–			
	110 V DC, DC-13	1 A/0.75 A		–			
	220 V DC, DC-12	–				0.5/–	1 A/–
	220 V DC, DC-13	1 A/0.5 A		–			
Contact load according to UL	120 V AC	–					
	125 V AC	3 A	–				
	240 V AC	4 A	–				
	277 V AC	–					
	480 V AC	–					
	60 V DC	–					
	125 V DC	1.1 A	–				
	250 V DC	0.55 A	–				
Service life, on average, with rated load	Actuations	20000				–	8000
Safety							
Short-circuit protection		Miniature circuit breakers 5SY... 6 A or gG 6 A fuse				B6 or C6 or gL/gG 6 A fuse	
Connections							
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)				0.75 ... 2.5 mm²	
Terminals	Max. tightening torque	0.5 Nm (4.5 lb-in)				–	0.6 Nm
Ambient conditions							
Permissible ambient temperature		–40 ... +70 °C					–25 ... +60 °C
Permissible storage temperature		–40 ... +75 °C					–40 ... +70 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles					
Mounting position		Any					
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²					–
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²					–

[1] No approvals

Quick selection guide, page 4/56

© Siemens 2022

Electrical accessories



Fault signal contacts (FC)

- Signals the automatic tripping of the protective device in the event of a fault, such as an overload or a short circuit
- If the fault signal contact is activated, the contact position does not change if the in-built protective device is tripped manually
- Version with TEST and RESET buttons enables the testing of control circuits without the need to trip the protective device
- Red RESET button in the operating handle indicates automatic shutdown of the mounted protective device

For combination with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBO	Arc fault detection devices			
Fault signal contacts (FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020
					2 NO	0.5 MW	5ST3021
					2 NC	0.5 MW	5ST3022
Fault signal contacts (FC) with Test and Reset buttons							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	1 NO + 1 NC	0.5 MW	5ST3020-2
					2 NO	0.5 MW	5ST3021-2
					2 NC	0.5 MW	5ST3022-2

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST3020, 5ST3021, 5ST3022	5ST3020-2, 5ST3021-2, 5ST3022-2
Standards			
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1	
	UL, CSA	UL 1077, CSA C22.2 No. 235	–
Contacts			
Minimum contact load		50 mA, 24 V	
Contact load according to IEC/EN 62019/IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A	
	400 V AC, AC-13	6 A/6 A	
	230 V AC, AC-14	2 A/2A	
	400 V AC, AC-14	2 A/2A	
	24 V DC, DC-13	6 A/3 A	
	60 V DC, DC-13	3 A/1.5 A	
	110 V DC, DC-13	1 A/0.75 A	
	220 V DC, DC-13	1 A/0.5 A	
Contact load according to UL	120 V AC	–	
	AC 125 V	3 A	–
	AC 240 V	4 A	–
	AC 277 V	–	
	AC 480 V	1.5 A	–
	DC 60 V	–	
	DC 125 V	1.1 A	–
	DC 250 V	0.55 A	–
Service life, on average, with rated load	Actuations	20000	
Safety			
Short-circuit protection		Miniature circuit breakers or gG 6 A fuse	
Connections			
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)	
Terminals	Max. tightening torque	0.5 Nm [4.5 lb-in]	
Ambient conditions			
Permissible ambient temperature		–25 ... +55 °C	
Permissible storage temperature		–40 ... +75 °C	
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles	
Mounting position		Any	
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²	
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²	

Quick selection guide, page 4/56

© Siemens 2022



Auxiliary switches and fault signal contacts (AS+FC)

- Combine the properties of both switches in a width of only 0.5 MW (9 mm)
- Signal contact point of the mounted device
- Signal the automatic tripping of the protective device in the event of a fault, such as an overload, short circuit or residual current
- If the fault signal contact is activated, the contact position does not change if the in-built protective device is tripped manually

For combination with basic units					Contacts	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBO	Arc fault detection devices			
Auxiliary switches and fault signal contacts (AS+FC)							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	1 CO (AS) + 1 CO (FC)	0.5 MW	5ST3062

[1] 5ST3805-1 handle coupler required

4

Further technical specifications

		5ST3062
Standards		
Standards	IEC/EN	IEC/EN 62019, IEC/EN 60947-5-1
	UL, CSA	UL 1077, CSA C22.2 No. 235
Contacts		
Minimum contact load		50 mA, 24 V
Maximum contact load		–
Contact load according to IEC/EN 62019/ IEC/EN 60947-5-1	230 V AC, AC-13	6 A/6 A
	400 V AC, AC-14	2 A/2 A
Contact load according to IEC/EN 62019/ IEC/EN 60947-5-1	24 V DC, DC-13	3 A/3 A
	60 V DC, DC-13	3 A/1 A
	110 V DC, DC-13	0.5 A/0.5 A
	220 V DC, DC-13	0.5 A/0.3 A
Contact load according to UL	125 V AC	2 A
	240 V AC	1.5 A
	480 V AC	0.75 A
	125 V DC	0.5 A
	250 V DC	0.3 A
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breakers or gG 6 A fuse
Connections		
Conductor cross-sections		0.5 ... 2.5 mm^2/AWG 22 ... 14
Terminals	Max. tightening torque	0.5 Nm [4.5 lb-in]
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s^2
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s^2

Quick selection guide, page 4/56

© Siemens 2022

Electrical accessories

5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function



- Reports the switching state of the mounted standard circuit protection device (ON, tripped, manual OFF, tripped with locked handle)
- Measures the temperature of the device and counts operating cycles, trips and operating hours
- Communication via radio to 7KN Powercenter 1000 data transceiver
- Plug-in terminals for 24 V DC power supply incl. daisy chain function
- Low space requirements of 0.5 MW (9 mm)

For combining with basic units						Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	Device protection switches	RCCBs	RCBOs	Arc fault detection devices	Communication		
5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function							
5SL, 5SY, 5SP4	5SY17	5SV	5SU1 [1], 5SV1	5SV6	Radio link to 7KN Powercenter 1000	0.5 MW	5ST3062-0MC

[1] 5ST3805-1 handle coupler required

Note:
Please note the country-specific radio licenses of the products in SIOS
www.siemens.com/lowvoltage/certificates (109801197)


Further technical specifications

		5ST3062-0MC
Standards		
Standards	IEC/EN; UL, CSA	60669-2-5
	RED	2014/53/EU
Power supply		
Power supply		24 V DC ±20%, SELV
Conductor cross-sections		0.2 ... 1.5 mm²
Connection type		Plug-in terminal
Safety		
Pollution degree for overvoltage category		2/II
Degree of protection		IP40, with front cover
Ambient conditions		
Permissible ambient temperature		–25 ... +60 °C
Permissible storage temperature		–40 ... +85 °C
Humidity		93% at 40 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Schock		150 m/s²
Resistance to vibrations at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²
Service life		10000
Communication		
Interface	7KN Powercenter 1000	Radio link
Temperature		Accuracy of 2.5°C with limit monitoring incl. storage (1 hour in 1-minute intervals and 7 days in 15-minute intervals)
Operating cycle counters		Mechanical operation with limit monitoring
Trip counter		Trip of the mounted circuit protection device with limit monitoring
Operating hours counter		Operating hours with limit monitoring

Quick selection guide, page 4/56

© Siemens 2022

7KN Powercenter 1000 data transceiver

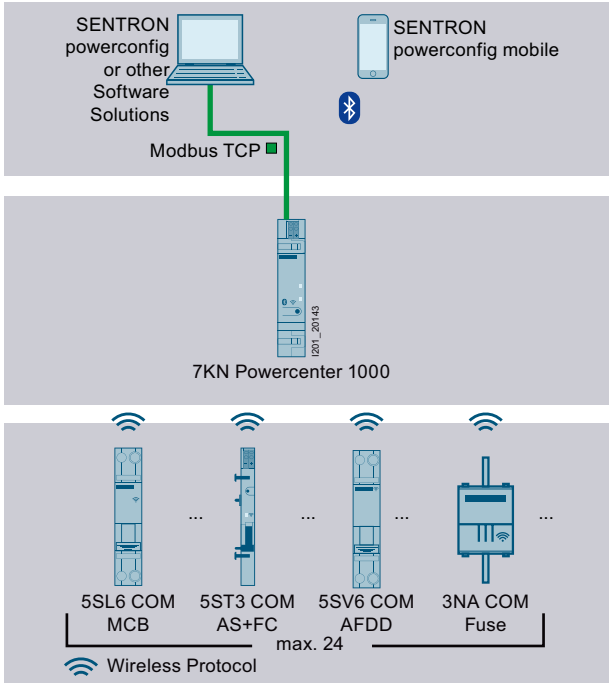

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000	Article No.
	7KN1110-0MC00

See page 10/19

You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation manual – Circuit protection devices with communication and measuring function **(109791805)**

System manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 4/56

© Siemens 2022

Electrical accessories



Shunt trips (ST)

- For remote-control tripping of the mounted device

For combination with basic units Miniature circuit breakers	RCCBs	RCBO	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Shunt trips (ST)					
5SL4, 5SY, 5SP4	5SV	5SU1 [1]	110 ... 415 V AC, 110 ... 220 V DC	1 MW	5ST3030
			24 ... 48 V AC/DC	1 MW	5ST3031
			12 V DC	1 MW	5ST3031-0XX01

[1] 5ST3805-1 handle coupler required

4

Further technical specifications		5ST3030	5ST3031	5ST3031-0XX01
Standards				
Standards	IEC/EN	EN 60947-1		
Supply				
Primary operating range		0.7 ... 1.1 × U_n		
Rated frequency f_n		50 ... 60 Hz		–
Contacts				
Minimum contact load		50 mA, 24 V		1 mA, 5 V
Tripping operations		Max. 2000		
Service life, on average, with rated load	Actuations	20000		
Safety				
Short-circuit protection		Miniature circuit breakers B/C 6 A or fuse gG 6 A		
Connections				
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)		
Terminals	Max. tightening torque	0.8 Nm [6.8 lb-in]		
Ambient conditions				
Permissible ambient temperature		–25 ... +55 °C		–40 ... +70 °C
Permissible storage temperature		–40 ... +75 °C		
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles		
Mounting position		Any		
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²		
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²		

Quick selection guide, page 4/56

© Siemens 2022



Undervoltage releases (UR)

- Are integrated (e.g. in EMERGENCY-OFF loops), thus ensuring that the MCB trips in the event of an emergency. EMERGENCY OFF is a function provided to disconnect the electricity supply to all or some parts of the installation in case of emergency, when there is a risk of electric shock or any other hazard caused by electrical power
- In addition, an undervoltage release also trips if the voltage is interrupted or too low, or prevents the MCB from closing
- Combination with 5SV RCCB not suitable for implementation of EMERGENCY-OFF/ EMERGENCY-STOP circuits

For combination with basic units			Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Miniature circuit breakers	RCCBs	RCBO			
With integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 [1]	230 V AC	1 MW	5ST3040
			110 V DC	1 MW	5ST3041
			24 V DC	1 MW	5ST3042
Without integrated auxiliary switch					
5SL4, 5SY, 5SP4	5SV	5SU1 [1]	230 V AC	1 MW	5ST3043
			110 V DC	1 MW	5ST3044
			24 V DC	1 MW	5ST3045

[1] 5ST3805-1 handle coupler required

Further technical specifications

		5ST304.
Standards		
Standards	IEC/EN	EN 60947-1
Supply		
Primary operating range		0.85 ... 1.1 × U_n
Rated frequency f_n		50/60 Hz
Contacts		
Minimum contact load		50 mA, 24 V
Tripping operations		Max. 2000
Service life, on average, with rated load	Actuations	20000
Safety		
Short-circuit protection		Miniature circuit breakers B/C 6 A or fuse gG 6 A
Connections		
Conductor cross-sections		0.5 ... 2.5 mm² (AWG 22 ... 14)
Terminals	Max. tightening torque	0.8 Nm [6.8 lb-in]
Ambient conditions		
Permissible ambient temperature		–25 ... +55 °C
Permissible storage temperature		–40 ... +75 °C
Resistance to climate	Acc. to IEC 60068-2-30	28 cycles
Mounting position		Any
Shock at 11 ms half-sine	Acc. to IEC 60068-2-27	150 m/s²
Vibration resistance at 10 ... 150 Hz	Acc. to IEC 60068-2-6	50 m/s²

Quick selection guide, page 4/56

© Siemens 2022

Electrical accessories




5ST3 remote control mechanisms (RC)

- For operating facilities that are extensive or not continuously staffed
- Allow direct and immediate access to the plant even if it is remote or in a location that is hard to reach
- Permit fast restarts following a fault
- Version with ARD with automatic restart
- Versions with ARD and Power with integrated auxiliary switches and fault signal contacts

Type of remote control mechanism	Display	Ambient temperature	Vibration and shock requirements	Rated operational voltage U_e	Mounting width (1 MW = 18 mm)	Article No.
Basic	–	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	1.5 MW	5ST3053
				177 ... 270 V AC	2 MW	5ST3054
Power	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3055
				177 ... 270 V AC	2 MW	5ST3056
Power with ARD	LED	–25 °C ... +45 °C	–	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3057
				177 ... 270 V AC	2 MW	5ST3058
Power with extended function	LED	–40 °C ... +70 °C	Acc. to EN 61373/ EN 50155 "1B"	12 ... 30 V AC, 12 ... 48 V DC	2 MW	5ST3070
				170 ... 277 V AC, 77 ... 286 V DC	2 TE	5ST3071 new

Further technical specifications		5ST3053	5ST3054	5ST3055	5ST3056	5ST3057	5ST3058	5ST3070	5ST3071
Standards									
Standards		EN 50557 (VDE 0640-20)							
Supply									
Rated frequency f_n		50 ... 60 Hz							
Rated power dissipation on standby		≤1 VA							
Contacts									
Service life, on average, with rated load	Actuations	10000							
Number of remote switching operations per minute		2							
Number of automatic reclose attempts		–				3		–	
Cable length in the control circuit		≤1500 m							≤1500 m (DC)/ ≤200 m (AC)
Sliding selector with locking device		–	■						
Integrated auxiliary switches		–		1CO; 2 A; 250 V					
Integrated fault signal contacts		–		1CO; 2 A; 250 V					
Connections									
Conductor cross-sections		0.5 ... 1.5 mm² (AWG 14 ... 30)							
Terminal tightening torque		0.2 ... 0.25 Nm (2.0 lb-in)							
Ambient conditions									
Permissible storage temperature		–40 ... +55 °C						–40 ... +70 °C	
Degree of protection		IP20							
Pollution degree for overvoltage category		3/II							

Suitable adapters for combination with basic units



Basic units	Mounting width							Article No.
	1 MW	2 MW	3 MW	4 MW	2-pole	3-pole	4-pole	
5SU1	–	■	■	–	–	–	–	5ST3820-5
5SV1	■	–	–	–	–	–	–	5ST3820-6
5SV3	–	■	–	■	–	–	–	5ST3820-6
5SM2 with 5SY	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-1
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-2
5SM2 with 5SL	–	–	–	–	■	–	–	5ST3820-3 + 5ST3820-6
	–	–	–	–	–	■	■	5ST3820-3 + 5ST3820-7

Quick selection guide, page 4/56

© Siemens 2022

Mechanical accessories

Handle couplers for additional components



- Necessary for mounting the additional components auxiliary switches, fault signal contacts, shunt trips and undervoltage releases onto the 5SU1 RCBO
- 1 set = 5 units

	Article No.
	5ST3805-1

Handle locking devices





- To prevent undesired mechanical ON/OFF switching
- Sealable and lockable
- For padlock with 3 ... 6 mm shackle

Version	Article No.
For 5SV RCCBs, 5SV1 RCBOs, 5SV6 AFDD/MCB	5ST3806
For 5SU1 RCBOs	5ST3801-1

Locking device

- For 5SV RCCBs, 5SV1 RCBOs, 5SV6 AFDD/MCB

Comprising	Article No.
5ST3806 handle locking device and 5ST3802 padlock	5ST3807

Padlock



- For 5ST3801 and 5ST3806 handle locking devices and 5ST3054 ... 58, 5ST3070 remote control mechanisms


	Article No.
	5ST3802

Device labels

- For adhesive attachment
- For modular installation devices, such as 5SY, 5SL, 5TL1

Types	Article No.
15 mm x 6 mm, white (WIN 098)	8WH8210-0AA35
15 mm x 6 mm, yellow (WIN 099)	8WH8210-0AA36

Covers for connection terminals



- For 5SV3 and 5SV4 residual current operated circuit breakers, sealable (2 units in plastic bag)

Mounting width	Article No.
2 MW	5SW3010
4 MW	5SW3008

Terminal covers, gray



- For surface mounting, IP40 degree of protection
- Sealable
- Can be used with 35 mm DIN rail

For width up to	Article No.
2.5 MW	5SW3004
4.5 MW	5SW3005

Wall enclosures, gray



- For flush mounting, IP40 degree of protection
- Can be used with 35 mm DIN rail

For width up to	Article No.
2.5 MW	5SW3006
4.5 MW	5SW3007

System overview, page 4/4

© Siemens 2022

RCCB protective socket outlets

Acc. to VDE 0664

Covers



- Can be assembled as mini-distribution board
- Suitable for all devices
- Cover parts prepared for rail mounting of conventional label caps

Comprising	Article No.
End plates	5ST2134
Angled profile	5ST2135
Flat profile as alternative	5ST2136

RCCB protective socket outlets in molded-plastic enclosures



- Equipped with RCCB and flush-mounted SCHUKO® socket outlet
- IP54 degree of protection

Rated residual current $I_{\Delta n}$	Rated current I_n	Article No.
10 mA	16 A	5SZ9206
30 mA	16 A	5SZ9216

4

System overview, page 4/4

© Siemens 2022

System overview, page 4/4


© Siemens 2022

Standard busbars

General information


Infeed

At the start or end of the busbar

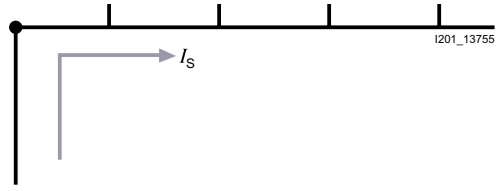


Maximum busbar current I_s/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed









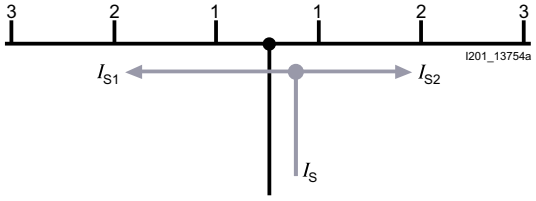


Maximum busbar current I_s/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A

Quick selection guide, page 4/56



Fixed lengths, cannot be cut

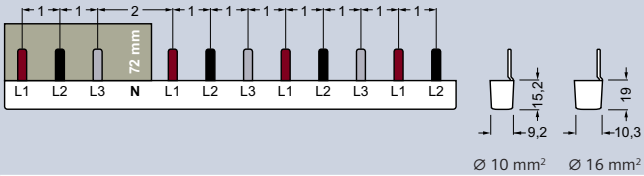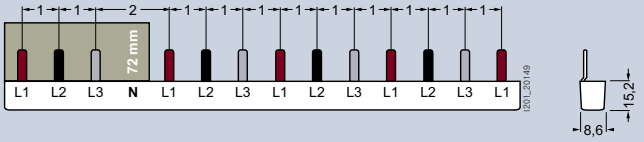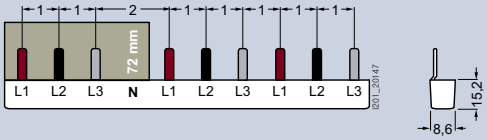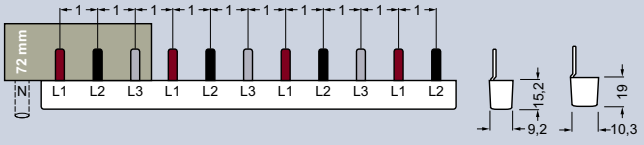
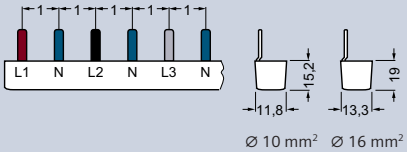
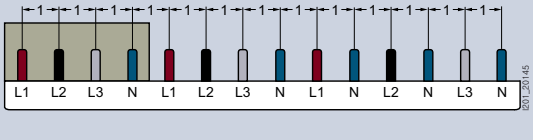
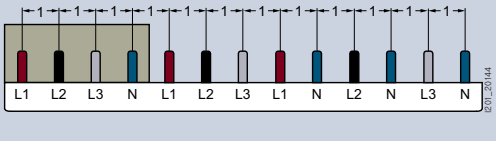
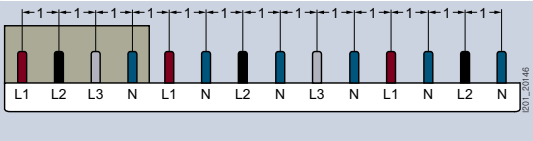
Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	Conductor cross-section 10 mm²	16 mm²
2-phase/1-phase + N				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 6× 2MW devices (2P)	12 MW	210 mm	5ST3608	5ST3638
3-phase, for MCBs with RCCB				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 8 MCBs 1P with 1 RCCB 3P+N, N right	12 MW	210 mm	5ST3624	5ST3654
	For 10 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCBs 3P and 7 MCBs 1P	14 MW	249 mm	5ST3624-4	–
	For 6 MCBs 1P with 1 RCCB 3P+N or for 1 RCCB 3P+N, 1 MCBs 3P and 3 MCBs 1P	10 MW	176 mm	5ST3624-1	–
 Ø 10 mm² Ø 16 mm²	For 8 MCBs 1P with 1 RCCB 3P+N, N left	11 MW	192 mm	5ST3667	5ST3668
4-phase/3-phase + N				Article No.	Article No.
 Ø 10 mm² Ø 16 mm²	For 6× 2MW devices (1P+N)	12 MW	215 mm	5ST3623	5ST3653
4-phase/3-phase + N, for MCBs with RCCB				Article No.	Article No.
	For 1 RCCB 3P+N, 1 MCBs 3P+N and 6 LS 1P	14 MW	248 mm	5ST3724-4	–
	For 1 RCCB 3P+N, 1 MCBs 3P+N and 3 LS 1P+N	14 MW	248 mm	5ST3725-4	–
	For 1 RCCB 3P+N, 1 MCBs 3P and 3 LS 1P+N	13 MW	230 mm	5ST3725-3	–
	For 1 RCCB 3P+N and 5 MCBs 1P+N	14 MW	248 mm	5ST3625-4	–

Quick selection guide, page 4/56

© Siemens 2022

Standard busbars

Can be cut

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²	16 mm²
2-phase/1-phase + N					Article No.	Article No.
	For 2 MW units (2P/1+N)	12 MW	214 mm	■	5ST3734	5ST3704
		56 MW	1016 mm	–	5ST3735	5ST3705
4-phase/3-phase + N, for MCBs with RCCB					Article No.	Article No.
  Ø 10 mm² Ø 16 mm²	For RCBOs or MCBs 1P+N	56 MW	1000 mm	–	5ST3770-2	5ST3770-3
 	For 6 MCBs 1P+N with 1 RCCB 3P+N, N right	16 MW	292 mm	■	5ST3770-4	5ST3770-5

Accessories for busbars 5ST36 and 5ST37

End caps for 5ST37




Version	Article No.
For 2-phase and 3-phase busbars	5ST3750
For 4-phase busbars	5ST3718

4


Quick selection guide, page 4/56

© Siemens 2022








5ST36 and 5ST37

Fixed lengths, cannot be cut, for devices with add-on 5SM6 arc fault detection units

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm²
3-phase						**Article No.**
	For 5SM601.	12 MW	210 mm	–	Gray	5ST3615-1

Can be cut, for devices with add-on 5SM6 arc fault detection units

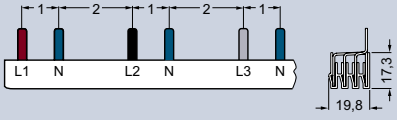Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 10 mm²
1-phase, straight						**Article No.**
	For 5SM601.	56 MW	1000 mm	–	Gray	5ST3764-1
					Blue	5ST3765-2
1-phase, angled 45°						**Article No.**
	For 5SM601.	56 MW	1000 mm	–	Blue	5ST3765-1
2-phase/1-phase + N						**Article No.**
	For 5SM602. (1P+N)	56 MW	1000 mm	–	Gray	5ST3735-1
3-phase						**Article No.**
	For 5SM601.	60 MW	1050 mm	–	Gray	5ST3740-1
4-phase/3-phase + N						**Article No.**
	For 5SM602.	52 MW	950 mm	–	Gray	5ST3746-1

4

Quick selection guide, page 4/56


© Siemens 2022

Standard busbars



5ST36 and 5ST37

Can be cut, for devices with add-on 5SM6 arc fault detection units and infeed via RCCB

Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Color	Conductor cross-section 16 mm²
2-phase/1-phase + N						Article No.
	For RCCB 2P N-right and 5 AFDD (5SM601.) + compact device	12 MW	214 mm	■	Gray	5ST3772

4

Accessories

Terminals for infeed at side		Article No.
For conductors up to 25 mm²	Short	5ST3768
	Short, IP20	5ST3771-2
	Long	5ST3771-1
End caps		**Article No.**
For 1-phase busbars	Gray	5ST3766
	Blue	5ST3767
For 2 and 3-phase busbars		5ST3750
For 4-phase busbars		5ST3718
Touch protection		**Article No.**
For free connections, yellow (RAL 1004) 5× 1 pin		5ST3655

Quick selection guide, page 4/56


© Siemens 2022

Compact busbars

General information


Infeed

At the start or end of the busbar

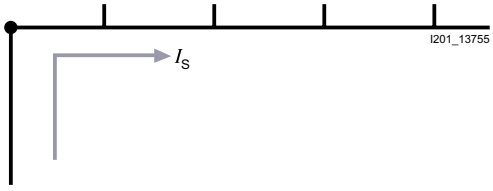

Maximum busbar current I_S/phase
- Cross-section 10 mm²: 63 A
- Cross-section 16 mm²: 80 A

Along the busbar or midpoint infeed

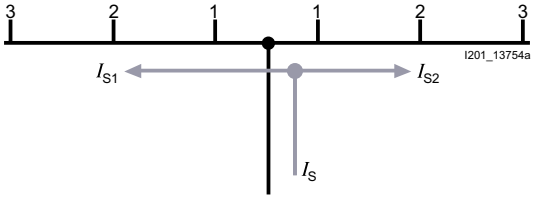

Maximum busbar current I_S/phase
- Cross-section 10 mm²: 100 A
- Cross-section 16 mm²: 130 A






4

Quick selection guide, page 4/56

© Siemens 2022

Compact busbars


5ST36, fixed lengths, cannot be cut

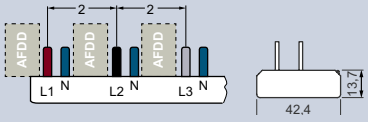Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1 x RCCB 1P+N and 5 x compact devices equipped with 5SM6 arc fault detection unit	12 MW	216 mm	■	5ST3685-0
2-phase/1-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3674-6
		9 MW	166 mm	■	5ST3674-7
		12 MW	218 mm	■	5ST3674-0
	For 6× compact devices with 5SM6 arc fault detection unit	12 MW	200 mm	■	5ST3676-0
4-phase/3-phase + N					**Article No.**
	For compact devices	6 MW	113 mm	■	5ST3673-6
		9 MW	166 mm	■	5ST3673-7
		12 MW	218 mm	■	5ST3673-0
		14 MW	254 mm	■	5ST3673-4
	For 6× compact devices with 5SM6 arc fault detection unit	11 MW	200 mm	■	5ST3675-0

4








Quick selection guide, page 4/56

© Siemens 2022





5ST37, can be cut

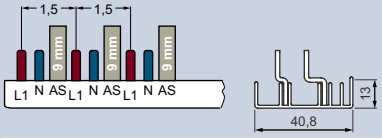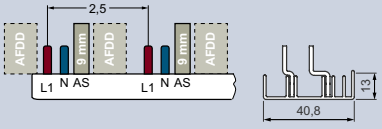Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
2-phase/1-phase + N, for infeed via RCCB					**Article No.**
	For 1× RCCB 1P+N and 10× compact devices	12 MW	215 mm	■	5ST3784-0
	For 1× RCCB 1P+N (RCCB N left only) and 10× compact devices	12 MW	215 mm	■	5ST3784-0KL
2-phase/1-phase + N					**Article No.**
	For compact devices	60 MW	1060 mm	–	5ST3774-0
	For compact devices with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3776-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3778-0
	For compact devices with 5SM6 arc fault detection unit and auxiliary switch	58.5 MW	1036 mm	–	5ST3780-0
	For 2 MW units (MCBs or RCBOs) with 5SM6 arc fault detection device and auxiliary switch	54 MW	956 mm	–	5ST3786-0








4

Quick selection guide, page 4/56

© Siemens 2022


Compact busbars




5ST37, can be cut

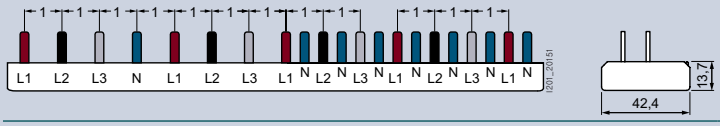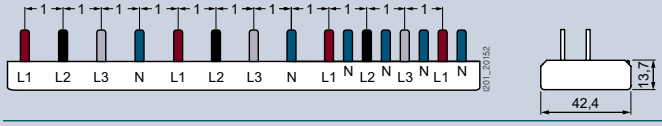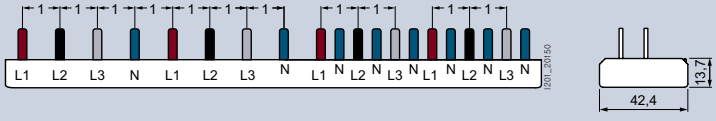Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
4-phase/3-phase + N, for infeed via RCCB					**Article No.**
	For 1× RCCB 3P+N and 6× compact devices	10 MW	181 mm	■	5ST3783-1
	For 1× RCCB 3P+N and 8× compact devices	12 MW	216 mm	■	5ST3783-0
	For 1× RCCB 3P+N and 10× compact devices	14 MW	251 mm	■	5ST3783-4
	For 1× RCCB 3P+N (RCCB N left only) and 6× compact devices	10 MW	181 mm	■	5ST3783-1KL
	For 1× RCCB 3P+N (RCCB N left only) and 8× compact devices	12 MW	216 mm	■	5ST3783-0KL
	For 1× RCCB 3P+N, 1× MCB 3P and 7× compact devices	14 MW	253 mm	■	5ST3785-4
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 12× compact devices	24 MW	430 mm	■	5ST3790-1
	For 1× RCCB 3P+N, 2× MCBs 3P+N and 45× compact devices	57 MW	1009 mm	–	5ST3790-2
	For 1× RCCB 3P+N, 1× MCB 3P+N and 4× compact devices	12 MW	217 mm	■	5ST3795-0
	For 1× RCCB 3P+N, 1× MCB 3P+N and 6× compact devices	14 MW	253 mm	■	5ST3795-4

Quick selection guide, page 4/56

© Siemens 2022



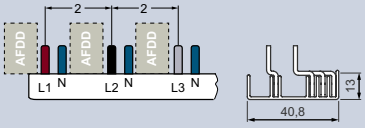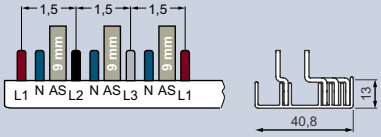Pin spacings in MW (1 MW = 18 mm)	Application	No. of MW	Length	End caps included	Conductor cross-section 10 mm²
4-phase/3-phase + N					**Article No.**
	For compact devices	60 MW	1060 mm	–	5ST3773-0
	For compact devices equipped with 5SM6 arc fault detection unit	59 MW	1042 mm	–	5ST3775-0
	For compact devices equipped with auxiliary switch	59.5 MW	1055 mm	–	5ST3777-0

4

Accessories for 5ST3 compact busbars, versions that can and cannot be cut

Touch protection for 5ST3			
	**Version**	**Color**	**Article No.**
	For free connections, for pins L1, N	Yellow (RAL1004)	5ST3655
	For pins L2/L3	Yellow (RAL1004)	5ST3655-0HG

End caps for 5ST3			
	**Version**	**Color**	**Article No.**
	For 2-phase and 4-phase busbars	Gray	5ST3788-0

Terminals, short, IP20				
	**Version**	**For conductors**	**Infeed**	**Article No.**
	Infeed terminal for connection of larger cross section	Up to 25 mm²	Lateral	5ST3771-2

Quick selection guide, page 4/56

© Siemens 2022



Electrical switching – on the safe side

Control and automatic functions always employ electrical switching.


Remote control switches for pulse controls, switching relays, or Insta contactors switch electrical loads.

Our low-voltage circuit protection technology offers a wide variety of contact versions and rated currents for the different requirements of these devices.

Safety, convenience and energy savings – these characterize automatic switching.

© Siemens 2022

Switching Devices

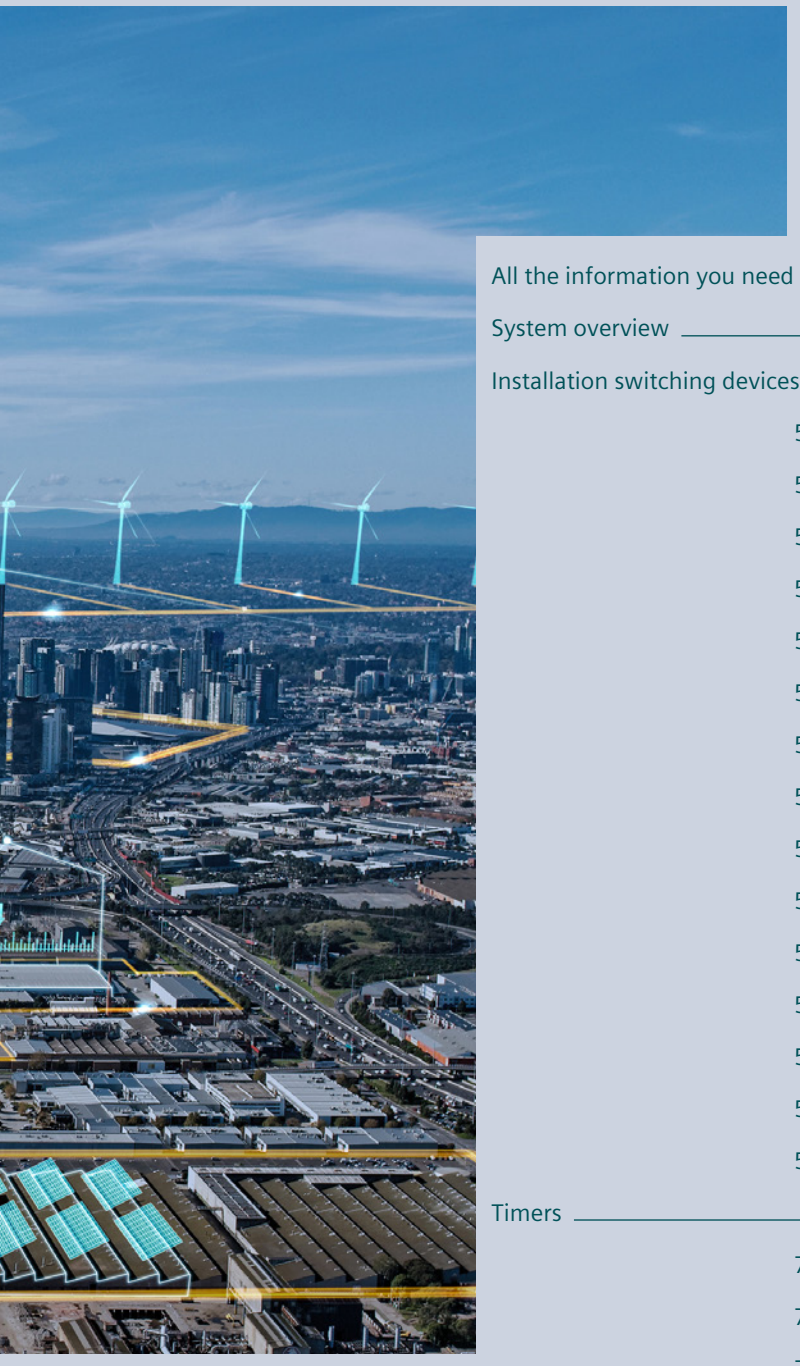

All the information you need 5/2

System overview 5/4

Installation switching devices 5/6

- 5TE8 control switches 5/6
- 5TE48 pushbuttons 5/8
- 5TE58 light indicators 5/10
- 5TE81/82 On/Off switches 5/12
- 5TL1 On/Off switches 5/14
- 5TE DC isolator 5/16
- 5TE busbars 5/18
- 5TT41 remote control switches 5/20
- 5TT44 remote control switches 5/24
- 5TT4 auxiliary switches 5/26
- 5TT42 switching relays 5/28
- 5TT50 Insta contactors 5/30
- 5TT58 Insta contactors 5/32
- 5TT5 auxiliary switches 5/34
- 5TT3 soft-starting devices 5/35

Timers 5/36

- 7LF4 digital time switches 5/36
- 7LF5 mechanical time switches 5/42
- 7LF6 timers for buildings 5/46
- 5TT3 timers for industrial applications 5/47

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about switching devices, please visit our website **www.siemens.com/switching-devices**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Switching devices **sie.ag/2m4eG5M**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Switching devices **(45315361)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- Basic principles of electrical engineering (WT-LVBGET)

Technical overview – Switching devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on switching devices
www.siemens.com/lowvoltage/product-support (109769083)

© Siemens 2022

System overview

Basic units and accessories

Installation switching devices



5TE8
control switches



5TE48
pushbuttons



5TE58
light indicators



5TE81/82, 5TL1
On/Off switches



5TE
DC isolators



5TE
busbars



5TT41, 5TT44
remote control switches



5TT4, 5TT5
auxiliary switches



5TT42
switching relays



5TT50, 5TT58
Insta contactors



5TT3
soft-starting devices

Accessories



Auxiliary switches (AS)



Shunt trips (ST)



Undervoltage releases (UR)



Remote control mechanisms (RC mech.)



Handle locking devices



LEDs



Caps/covers



Connectors

Timers



7LF4 digital time switches



7LF5 mechanical time switches



7LF6 timers for buildings



5TT3 timers for industrial applications

Accessories



Holders

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

© Siemens 2022

5TE8 control switches

	Control switches	Two-way switches	Group switches with center position
Rated operational current I_e per conducting path	20 A	20 A	20 A
Rigid conductor cross-section	1 ... 6 mm²	1 ... 6 mm²	1 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²	1 ... 6 mm²







Contacts	U_e AC	Mounting width	Auxiliary switches Cannot be retrofitted	Mounted	Auxiliary switches Cannot be retrofitted	Mounted	Auxiliary switches Cannot be retrofitted
1 NO	48 V	1 MW	5TE8101-3	–	–	–	–
	230 V	1 MW	5TE8101	–	–	–	–
2 NO	400 V	1 MW	5TE8102	–	–	–	–
3 NO	400 V	1 MW	5TE8103	–	–	–	–
		1.5 MW	–	5TE8108	–	–	–
1 NO + 1 NC	400 V	1 MW	–	–	–	5TE8151	–
2 NO + 2 NC	400 V	1 MW	–	–	5TE8152	–	–
3 NO + 1 NC	400 V	1 MW	–	–	5TE8153	–	–
1 CO	230 V	1 MW	–	–	5TE8161	–	–
2 CO	400 V	1 MW	–	–	5TE8162	–	–
1 toggle switch	230 V	1 MW	–	–	–	–	5TE8141
2 toggle switches	400 V	1 MW	–	–	–	–	5TE8142

Further technical specifications

		5TE8
Standards		
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1 (VDE 0632-1)
Approvals		IEC/EN 60947-3 (VDE 0660-107), GB14048.3-2008 CCC
Supply		
Rated power dissipation P_v	Per pole	0.7 VA
Contacts		
Minimum contact load		10 V; 300 mA
Rated making/rated breaking capacity	At p.f. = 0.65	60 A/60 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I_{th}		20 A
Electrical endurance/mechanical service life	Actuations	10000/25000
Safety		
Clearances	Open contacts	2× >2 mm
	Between the poles	>7 mm
Creepage distances		>7 mm
Sealable switch position		Yes
Separate handle locking device		Yes
Rated short-circuit making capacity I_{cm}		10 kA
Rated impulse withstand voltage U_{imp}		>5 kV
Connections		
Terminals	± Screw (Pozidriv)	PZ1
	Max. tightening torque	0.8 ... 1.0 Nm
Ambient conditions		
Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2022

Accessories

Handle locking device



- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3801

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

Set of mixed caps



- For manual changing of the luminous plates for the control switches

Article No.
5TG8068

5

System overview, page 5/4

© Siemens 2022

5TE48 pushbuttons

With/without LED

	Pushbuttons without maintained-contact function		Pushbuttons with maintained-contact function		Control pushbuttons with maintained-contact function or momentary-contact function	
	Without LED		Without LED		With LED	
Rated operational current I_e per conducting path	20 A		20 A		20 A	
Rigid/flexible conductor cross-section	1 ... 6 mm²		1 ... 6 mm²		1 ... 6 mm²	
Max. cable length	Standard		Standard		Standard	
						
Contacts	**U_e AC**	**Mounting width**				
1 NO	230 V	1 MW		–		–	1× red	5TE4821
				–		–		–
2x 1 NO	400 V	1 MW	1× green, 1× blue	5TE4804		–		–
2 NO	400 V	1 MW		–	1× gray	5TE4811	1× red	5TE4823
1 NO + 1 NC	400 V	1 MW	1× gray	5TE4800	1× gray	5TE4810		–
			1× red	5TE4805		–	1× red	5TE4820
			1× green	5TE4806		–		–
			1× yellow	5TE4807		–		–
			1× blue	5TE4808		–		–
2x (1 NO + 1 NC)	400 V	1 MW		–		–		–
2 NO + 2 NC	400 V	1 MW	1× gray	5TE4801-2	1× gray	5TE4811-2		–
3 NO + 1 NC	400 V	1 MW	1× gray	5TE4802	1× gray	5TE4812-1		–
3 NO + N	400 V	1 MW		–	1× gray	5TE4812		–
2 NC	400 V	1 MW		–		–	1× red	5TE4824
4 NC	400 V	1 MW		–	1× gray	5TE4813		–
2 CO	400 V	1 MW		–	1× gray	5TE4814		–

Further technical specifications

		5TE48
Standards		
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1 (VDE 0632-1)
Approvals		IEC/EN 60947-3 (VDE 0660-107)
Supply		
Rated power dissipation P_v	Per pole	0.6 VA
Contacts		
Minimum contact load		10 V; 300 mA
Rated making/rated breaking capacity	At p.f. = 0.65	60 A/60 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A
	Up to 0.5 s	400 A
	Up to 1 s	290 A
	Up to 3 s	170 A
Thermal rated current I_{th}		20 A
Mechanical service life	Actuations	25000
Safety		
Clearances	Open contacts	2× >2 mm
	Between the poles	>7 mm
Creepage distances		>7 mm
Rated impulse withstand voltage U_{imp}		>5 kV
Connections		
Terminals	± Screw (Pozidriv)	PZ1
	Max. tightening torque	0.8 ... 1.0 Nm
Ambient conditions		
Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2022

		Double pushbuttons with maintained-contact function and/or momentary-contact function			
With LED		**Without LED**		**With LED**	
20 A		20 A		20 A	
1 ... 6 mm²		1 ... 6 mm²		1 ... 6 mm²	
150 m		Standard		Standard	
					
1× red	5TE4822	–		–	
1× blue	5TE4822-1	–		–	
	–	–		1× green, 1× red	5TE4840
	–	–		–	
	–	–		–	
	–	–		–	
	–	1× green, 1× red	5TE4830	1× green, 1× red	5TE4841
	–	–		–	
	–	–		–	
	–	1× green, 1× red	5TE4831	–	
	–	–		–	
	–	–		–	
	–	–		–	
	–	–		–	
	–	–		–	
	–	–		–	

Accessories




LEDs for manual spare part



I_e	U_e	Color	Article No.
0.4 A	12 ... 60 V AC/DC	White	5TG8056-0
		Red	5TG8056-1
		Yellow	5TG8056-2
		Green	5TG8056-3
		Blue	5TG8056-4
	115 V AC/DC	White	5TG8057-0
		Red	5TG8057-1
		Yellow	5TG8057-2
		Green	5TG8057-3
		Blue	5TG8057-4
	230 V AC	White	5TG8058-0
		Red	5TG8058-1
		Yellow	5TG8058-2
		Green	5TG8058-3
		Blue	5TG8058-4

Cap sets

- For manual changing of colored caps with or without lamps
- 1 set = 5 units

	Color	Article No.
	Red, transparent	5TG8061
	Green, transparent	5TG8062
	Yellow, transparent	5TG8063
	Blue, transparent	5TG8064
	Black, non-transparent	5TG8065
	White, transparent	5TG8066
	Gray, non-transparent	5TG8060

Sets of mixed caps



- For manual changing of colored caps with or without lamps

Color	Article No.
10× each of red/green + 5× each of yellow/blue/white	5TG8067
1× each of red/green/yellow	5TG8070

Color coding according to IEC 60073

Color	Safety of people/ environment	Process state	System state
Red	Danger	Emergency	Faulty
Green	Safety	Normal	Normal
Yellow	Warning/Caution	Abnormal	Abnormal
Blue	Stipulation		
Black, white, gray	No special significance assigned		

System overview, page 5/4

© Siemens 2022

5TE58 light indicators

With LED

	5TE58 light indicators			
Rigid conductor cross-section	1.5 ... 6 mm²		1.5 ... 6 mm²	
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²		1 ... 6 mm²	
Max. cable length	Standard		250 m	
				
U_e AC	**Mounting width**			
230 V	1 MW	1× red	5TE5800	1× red	5TE5804
		1× green, 1× red	5TE5801		–
		3× green	5TE5802		–
		1× red, 1× yellow, 1× green	5TE5803		–
12 ... 60 V	1 MW	1× red	5TE5810		–
		1× green	5TE5810-1		–
		1× green, 1× red	5TE5811		–
		3× green	5TE5812		–
		1× red, 1× yellow, 1× green	5TE5812-1		–

5

Further technical specifications

		5TE58
Standards		
Standards		DIN VDE 0710-1-11
Supply		
Rated power dissipation P_v	LED	0.4 VA
Safety		
Clearances	Between the terminals	>7 mm
Connections		
Terminals	± Screw (Pozidriv)	PZ1
	Max. tightening torque	1.2 Nm
Ambient conditions		
Permissible ambient temperature		–5 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2022


Accessories

LEDs for manual spare part



I_e	U_e	Color	Article No.
0.4 A	12 ... 60 V AC/DC	White	5TG8056-0
		Red	5TG8056-1
		Yellow	5TG8056-2
		Green	5TG8056-3
		Blue	5TG8056-4
	115 V AC/DC	White	5TG8057-0
		Red	5TG8057-1
		Yellow	5TG8057-2
		Green	5TG8057-3
		Blue	5TG8057-4
	230 V AC	White	5TG8058-0
		Red	5TG8058-1
		Yellow	5TG8058-2
		Green	5TG8058-3
		Blue	5TG8058-4

Cap sets



- For manual changing of colored caps
- 1 set = 5 units

Color	Article No.
Red, transparent	5TG8061
Green, transparent	5TG8062
Yellow, transparent	5TG8063
Blue, transparent	5TG8064
White, transparent	5TG8066

Sets of mixed caps



- For manual changing of colored caps

Color	Article No.
10× each of red/green + 5× each of yellow/blue/white	5TG8067
1× each of red/green/yellow	5TG8070

Color coding according to IEC 60073

Color	Safety of people/ environment	Process state	System state
Red	Danger	Emergency	Faulty
Green	Safety	Normal	Normal
Yellow	Warning/Caution	Abnormal	Abnormal
Blue	Stipulation		
Black, white, gray	No special significance assigned		

5

System overview, page 5/4

© Siemens 2022

5TE81/82 On/Off switches

	5TE81 On/Off switches	5TE82 On/Off switches
Rated operational current I_e per conducting path	20 A	32 A
Rigid conductor cross-section	1.5 ... 6 mm²	1.5 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²



Contacts	U_e AC	Mounting width	Auxiliary switches			Auxiliary switches		
			Can be retrofitted	Cannot be retrofitted	Mounted	Can be retrofitted	Cannot be retrofitted	Mounted
1 NO	230 V	1 MW	5TE8111	–	–	5TE8211	–	–
2 NO	400 V	1 MW	5TE8112	–	–	5TE8212	–	–
3 NO	400 V	1 MW	5TE8113	–	–	5TE8213	–	–
3 NO + N	400 V	1 MW	–	5TE8114	–	–	5TE8214	–
		1.5 MW	–	–	5TE8118	–	–	5TE8218

Further technical specifications

		5TE81	5TE82
Standards			
Standards		IEC/EN 60947-3 (VDE 0660-107), IEC/EN 60669-1	IEC/EN 60947-3 (VDE 0660-107)
Approvals		IEC/EN 60947-3 (VDE 0660-107)	
Supply			
Rated power dissipation P_v	Per pole	0.7 VA	
Contacts			
Minimum contact load		10 V; 300 mA	
Rated making/rated breaking capacity	At p.f. = 0.65	60 A/60 A	96 A/96 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7	Up to 0.2 s	650 A	1000 A
	Up to 0.5 s	400 A	630 A
	Up to 1 s	290 A	450 A
	Up to 3 s	170 A	250 A
Thermal rated current I_{th}		20 A	32 A
Electrical endurance/mechanical service life	Actuations	10000/25000	
Safety			
Clearances	Open contacts	2× >2 mm	
	Between the poles	>7 mm	
Creepage distances		>7 mm	
Rated short-circuit making capacity I_{cm}		10 kA	
Rated impulse withstand voltage U_{imp}		>5 kV	
Connections			
Terminals	± Screw (Pozidriv)	PZ1	
	Max. tightening torque	0.8 ... 1.0 Nm	
Ambient conditions			
Permissible ambient temperature		–5 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C	

System overview, page 5/4

© Siemens 2022

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Type	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Handle locking device



- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3801

Terminal cover



- For covering screw openings
- Sealable

Article No.
5ST3800

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

5

System overview, page 5/4

© Siemens 2022

5TL1 On/Off switches

	Rated operational current I_e per conducting path				
	32 A	40 A	63 A	80 A	100 A
Rigid conductor cross-section	1 ... 35 mm²	1 ... 35 mm²	1 ... 35 mm²	2.5 ... 50 mm²	2.5 ... 50 mm²
Flexible conductor cross-section, with end sleeve	1 ... 25 mm²	1 ... 25 mm²	1 ... 25 mm²	2.5 ... 50 mm²	2.5 ... 50 mm²



Contacts	Rated operational voltage U_e AC	Mounting width	Gray handle	Gray handle	Gray handle	Red handle	Gray handle	Gray handle
1 NO	230 V	1 MW	5TL1132-0	5TL1140-0	5TL1163-0	5TL1163-1	5TL1180-0	5TL1191-0
2 NO	400 V	2 MW	5TL1232-0	5TL1240-0	5TL1263-0	5TL1263-1	5TL1280-0	5TL1291-0
3 NO	400 V	3 MW	5TL1332-0	5TL1340-0	5TL1363-0	5TL1363-1	5TL1380-0	5TL1391-0
4 NO	400 V	4 MW	5TL1432-0	5TL1440-0	5TL1463-0	–	5TL1480-0	5TL1491-0
3 NO + N	400 V	4 MW	5TL1632-0	5TL1640-0	5TL1663-0	5TL1663-1	5TL1680-0	5TL1691-0

Further technical specifications

		5TL1.32	5TL1.40	5TL1.63	5TL1.80	5TL1.91	5TL1.92
Standards							
Standards		IEC/EN 60947-3 (VDE 0660-107)					
Approvals		IEC/EN 60947-3 (VDE 0660-107)					
Supply							
Rated power dissipation P_v	Per pole, max.	0.7 VA	0.9 VA	2.2 VA	3.5 VA	5.5 VA	8.6 VA
Contacts							
Minimum contact load		24 V; 300 mA					
Rated making/rated breaking capacity AC-22A	At p.f. = 0.65	96 A/ 96 A	120 A/ 120 A	196 A/ 196 A	240 A/ 240 A	300 A/ 300 A	375 A/ 375 A
Rated short-time withstand current I_{cw} per conducting path at p.f. = 0.7 [1]	Up to 0.2 s	760 A	950 A	1500 A	2700 A	3400 A	
	Up to 0.5 s	500 A	630 A	1000 A	1650 A	2100 A	
	Up to 1 s	400 A	500 A	800 A	1350 A	1700 A	
	Up to 3 s	280 A	350 A	560 A	800 A	1000 A	
Thermal rated current I_{th}		32 A	40 A	63 A	80 A	100 A	125 A
Electrical endurance/mechanical service life	Switching cycles	10000/ 20000	10000	5000	2000		
Rated power for the switching of resistive load including moderate overload AC-21	1-pole	5 kW	6.5 kW	10 kW	13 kW	16 kW	
	2-pole	9 kW	11 kW	18 kW	22 kW	28 kW	
	3/4-pole	15 kW		30 kW	39 kW	48 kW	
Safety							
Creepage distances		>7 mm					
Clearances	Open contacts	>7 mm					
	Between the poles	>7 mm					
Rated short-circuit making capacity I_{cm} (in conjunction with fuse of the same rated operational current EN 60269 gL/gG)		10 kA					
Rated impulse withstand voltage U_{imp}		6 kV					
Connections							
Terminals	± Screw (Pozidriv)	PZ2					
	Max. tightening torque	3.5 Nm					
Ambient conditions							
Permissible ambient temperature		–5 ... +40 °C					
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C					

System overview, page 5/4

© Siemens 2022

	125 A	
	2.5 ... 50 mm²	
	2.5 ... 50 mm²	
		
	Red handle	**Gray handle**
	5TL1191-1	5TL1192-0
	5TL1291-1	5TL1292-0
	5TL1391-1	5TL1392-0
	–	5TL1492-0
	5TL1691-1	5TL1692-0

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Type	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Remote control mechanisms (RC mech.)



Type	U_e	Article No.
Basic	12 ... 30 V AC, 12 ... 48 V DC	5ST3053
	177 ... 270 V AC	5ST3054
Power	12 ... 30 V AC, 12 ... 48 V DC	5ST3055
	177 ... 270 V AC	5ST3056
Power with ARD	12 ... 30 V AC, 12 ... 48 V DC	5ST3057
	177 ... 270 V AC	5ST3058

Adapters for remote control mechanisms (RC mech.)



Mounting width	Article No.
1–2 MW	5ST3820-6
3–4 MW	5ST3820-7

Handle locking device



- To prevent undesired mechanical On/Off switching
- Sealable
- For padlock with max. 3 mm shackle

Article No.
5ST3806

Terminal cover



- For covering screw openings
- Sealable

Article No.
5ST3800

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

Phase connectors



- For easy wiring in various circuit versions and bus mountings
- As a support terminal for conductors from 2.5 to 50 mm²

Number of poles	I_e	U_e AC	Mounting width	Article No.
1-pole	125 A	230 V	1 MW	5TL1192-4

N conductor connectors



- For easy wiring in various circuit versions and bus mountings
- As a support terminal for N conductors from 2.5 to 50 mm² with blue color marking

Number of poles	I_e	U_e AC	Mounting width	Article No.
1-pole	125 A	230 V	1 MW	5TL1192-3

5

System overview, page 5/4

© Siemens 2022

5TE DC isolator

Can be used as switch disconnectors according to EN 60947-3

	Rated operational current I_e 63 A
Rigid conductor cross-section	0.75 ... 35 mm²
Flexible conductor cross-section, with end sleeve	0.75 ... 25 mm²



Contacts	Max. operational voltage U_{max} DC	Mounting width	Auxiliary switches can be retrofitted
4 NO	1000 V	4 MW	5TE2515-1

5

Further technical specifications

Standards		
Standards		IEC/EN 60947-3; IEC/EN 60669-1; GB14048.3-2008 CCC
Supply		
Rated operational voltage U_e	For 4 poles in series	880 V DC
Rated power dissipation P_v	Per pole, max.	4.4 W
Contacts		
Minimum contact load		24 V; 300 mA
Rated short-time withstand current I_{cw}	1000 V DC, 4-pole	760 A
Electrical endurance/mechanical service life	Actuations	5000/10000
Safety		
Rated short-circuit making capacity I_{cm}	1000 V DC, 4-pole	500 A
Rated impulse withstand voltage U_{imp}		>5 kV
Overvoltage category	At U = 440 ... 880 V	II
	At U = 1000 V	I
Utilization category		DC-21B
Connections		
Terminals	± Screw (Pozidriv)	PZ2
	Max. tightening torque	2.5 ... 3 Nm
Ambient conditions		
Permissible ambient temperature		–25 ... +40 °C
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	45 °C

System overview, page 5/4

© Siemens 2022

Accessories

Auxiliary switches (AS)



- For right-hand-side retrofitting with factory-fitted brackets

Contacts	Type	Article No.
1 NO + 1 NC	Standard	5ST3010
	For low power	5ST3013
	For low power (with diode)	5ST3013-0XX01
2 NO	Standard	5ST3011
	For low power	5ST3014
2 NC	Standard	5ST3012
	For low power	5ST3015
1 CO	Standard	5ST3016

Shunt trips (ST)



Rated operational voltage U_e	Article No.
110 ... 415 V AC, 110 ... 220 V DC	5ST3030
24 ... 48 V AC/DC	5ST3031
12 V AC/DC	5ST3031-0XX01

Undervoltage releases (UR)



Type	Rated operational voltage U_e	Article No.
With integrated auxiliary switch	230 V AC	5ST3040
	110 V DC	5ST3041
	24 V DC	5ST3042
Without integrated auxiliary switch	230 V AC	5ST3043
	110 V DC	5ST3044
	24 V DC	5ST3045


System overview, page 5/4

© Siemens 2022

5TE busbars

For modular installation devices


1-phase busbar



- For all 5TE8 switches, 20 A and 32 A
- For the cutting of unused terminal lugs and to ensure insulation clearances if one device terminal is to be supplied separately despite being mounted on the bus
- Infeed to unit terminal with conductor cross-section of 6 mm² up to 32 A
- Can be mounted from either top or bottom, in the front or rear terminal area
- An end cap is not required on 1-phase busbars

Length	Division	Article No.
210 mm	12 MW version with 1 MW modular clearance	5TE9100


2-phase busbar



- For all 5TE8 switches, 20 A and 32 A
- Infeed to unit terminal with conductor cross-section of 6 mm² up to 32 A
- Can be mounted from either top or bottom, in the front and/or rear terminal area, thus allowing realization of a 4-wire connection using 2 2-phase busbars
- Both copper conductors of the 2-phase busbar are insulated together

Length	Division	Article No.
220 mm	12 MW version each with 1 MW modular clearance, phases offset by 0.5 MW	5TE9101

End caps for 2-phase busbars



- End caps for 5TE9101 2-phase busbars to maintain insulation clearances when the bar is being cut
- 1 set = 10 units

Article No.
5TE9102

System overview, page 5/4

© Siemens 2022

System overview, page 5/4

© Siemens 2022

5TT41 remote control switches

Rated current 16 A

	Rated operational current I_e 16 A
Rigid conductor cross-section	1 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²



Contacts	U_e	U_c AC	U_c DC	Mounting width 1 MW	Mounting width 2 MW	Auxiliary switches can be retrofitted
1 NO	250 V	230 V	–	■	–	5TT4101-0
		115 V	–	■	–	5TT4101-1
		24 V	–	■	–	5TT4101-2
		12 V	–	■	–	5TT4101-3
		8 V	–	■	–	5TT4101-4
		–	110 V	■	–	5TT4111-1
			24 V	■	–	5TT4111-2
			12 V	■	–	5TT4111-3
1 NO + 1 NC	250 V	230 V	–	■	–	5TT4105-0
		115 V	–	■	–	5TT4105-1
		24 V	–	■	–	5TT4105-2
		12 V	–	■	–	5TT4105-3
		8 V	–	■	–	5TT4105-4
		–	110 V	■	–	5TT4115-1
			24 V	■	–	5TT4115-2
			12 V	■	–	5TT4115-3
2 NO	400 V	230 V	–	■	–	5TT4102-0
		115 V	–	■	–	5TT4102-1
		24 V	–	■	–	5TT4102-2
		12 V	–	■	–	5TT4102-3
		8 V	–	■	–	5TT4102-4
		–	110 V	■	–	5TT4112-1
			24 V	■	–	5TT4112-2
			12 V	■	–	5TT4112-3
3 NO	400 V	230 V	–	–	■	5TT4103-0
		24 V	–	–	■	5TT4103-2
4 NO	400 V	230 V	–	–	■	5TT4104-0
		24 V	–	–	■	5TT4104-2
		–	110 V	–	■	5TT4114-1
			24 V	–	■	5TT4114-2

5

System overview, page 5/4

© Siemens 2022

Further technical specifications

		5TT4101 5TT4102 5TT4105	5TT4111 5TT4112 5TT4115	5TT4103 5TT4104 5TT4114
Standards				
Standards		IEC 60669-1, IEC 60669-2, IEC 60669-3, EN 60669 (VDE 0632), EN 60669-2-2, EN 60669-2-2/A1		
Approvals		VDE		
Supply				
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A		
Primary operating range		0.8 ... 1.1 × U_c		
Rated frequency f_c		50 Hz		
Rated power dissipation P_v	Magnet coil, only pulse	4.5 W/7 VA		9 W/13 VA
	Per pole, max.	1.2 W		
Contacts				
Contact gap		>1.2 mm		
Minimum contact load		10 V; 100 mA		
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000		
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	1200 W		
Glow lamp load at 230 V		5 mA		
	With 1 5TT4920 compensator	25 mA		
	With 2 5TT4920 compensators	45 mA		
Minimum pulse duration		50 ms		
Safety				
Different phases between magnet coil and contact		Permissible		
Clearances	Between magnet coil and contact	>6 mm		
Creepage distances	Between magnet coil and contact	>6 mm		
Rated impulse withstand voltage U_{imp}		4 kV		
Function				
Manual operation		Yes		
Switching position indication		Yes		
Connections				
Terminals	± Screw (Pozidriv)	PZ1		
	Max. tightening torque	0.8 ... 1 Nm		
Ambient conditions				
Permissible ambient temperature		–10 ... +40 °C		
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C		
Degree of protection	Acc. to EN 60529	IP20, with connected conductors		

Accessories

Auxiliary switches



- One device per remote control switch can be retrofitted

Contacts	Type	I_e	U_e	Mounting width	Article No.
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901

Compensator



- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

System overview, page 5/4

© Siemens 2022

5TT41 remote control switches

For special applications, rated current 16 A

				Remote control switches with central On/Off switching	Remote control switches with central and group On/Off switching
			Rigid conductor cross-section	1 ... 6 mm²	1 ... 6 mm²
			Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²
					
Contacts	**U_e**	**U_c AC**	**Mounting width**	**Auxiliary switches cannot be retrofitted**	**Auxiliary switches cannot be retrofitted**
1 NO	250 V	230 V	1.5 MW	5TT4121-0	5TT4151-0
		24 V	1.5 MW	5TT4121-2	5TT4151-2
2 NO	400 V	230 V	1.5 MW	5TT4122-0	5TT4152-0
		24 V	1.5 MW	5TT4122-2	5TT4152-2
3 NO	400 V	230 V	2.5 MW	5TT4123-0	–
1 NO + 1 NC	250 V	115 V	1.5 MW	5TT4125-0	–

				Series remote control switch contact sequence 1 – 2 – 1+2 – 0	Shutter/blind remote control switch contact sequence 1 – 0 – 2 – 0
			Rigid conductor cross-section	1 ... 6 mm²	1 ... 6 mm²
			Flexible conductor cross-section, with end sleeve	1 ... 6 mm²	1 ... 6 mm²
					
Contacts	**U_e**	**U_c AC**	**Mounting width**	**Auxiliary switches cannot be retrofitted**	**Auxiliary switches cannot be retrofitted**
2 NO	250 V	230 V	1 MW	5TT4132-0	5TT4142-0
		24 V	1 MW	–	5TT4142-2
		12 V	1 MW	5TT4132-3	5TT4142-3

5

System overview, page 5/4

© Siemens 2022

Further technical specifications

		5TT412 5TT415	5TT413 5TT414
Standards			
Standards		IEC 60669-1, IEC 60669-2, IEC 60669-3, EN 60669 (VDE 0632), EN 60669-2-2, EN 60669-2-2/A1	
Approvals		VDE	
Supply			
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A	
Primary operating range		0.8 ... 1.1 × U_c	
Rated frequency f_c		50 Hz	
Rated power dissipation P_v	Magnet coil, only pulse	4.5 W/7 VA	
	Per pole, max.	1.2 W	
Contacts			
Contact gap		>1.2 mm	
Minimum contact load		10 V; 100 mA	
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000	
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	1200 W	
Glow lamp load at 230 V		5 mA	
	With 1 5TT4920 compensator	25 mA	
	With 2 5TT4920 compensators	45 mA	
Minimum pulse duration		50 ms	
Safety			
Different phases between magnet coil and contact		Permissible	
Clearances	Between magnet coil and contact	>6 mm	
Creepage distances	Between magnet coil and contact	>6 mm	
Rated impulse withstand voltage U_{imp}		4 kV	
Function			
Manual operation		Yes	
Switching position indication		Yes	–
Connections			
Terminals	± Screw (Pozidriv)	PZ1	
	Max. tightening torque	0.8 ... 1 Nm	
Ambient conditions			
Permissible ambient temperature		–10 ... +40 °C	
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C	
Degree of protection	Acc. to EN 60529	IP20, with connected conductors	

Accessories

Auxiliary switches



- One device per remote control switch can be retrofitted

Contacts	Type	I_e	U_e	Mounting width	Article No.
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901

Compensator



- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

System overview, page 5/4

© Siemens 2022

5TT44 remote control switches

Rated current 20 A – 63 A

	Rated operational current I_e				
	20 A	25 A	32 A	40 A	63 A
Rigid conductor cross-section	1 ... 10 mm²	1 ... 10 mm²	1 ... 10 mm²	2.5 ... 25 mm²	2.5 ... 25 mm²
Flexible conductor cross-section, with end sleeve	1 ... 10 mm²	1 ... 10 mm²	1 ... 10 mm²	2.5 ... 25 mm²	2.5 ... 25 mm²
					

Contacts	U_e	U_c AC	U_c DC	Mounting width					
For AC applications – auxiliary switches can be retrofitted									
1 NO + 1 NC	440 V	230 V	–	1 MW	5TT4405-0	5TT4425-0	5TT4455-0	–	–
				2 MW	–	–	–	5TT4465-0	5TT4475-0
		24 V	–	1 MW	5TT4405-2	5TT4425-2	5TT4455-2	–	–
				2 MW	–	–	–	5TT4465-2	5TT4475-2
1 CO	250 V	230 V	–	1 MW	5TT4407-0	–	–	–	–
		24 V	–	1 MW	5TT4407-2	–	–	–	–
2 NO	440 V	230 V	–	1 MW	5TT4402-0	5TT4422-0	5TT4452-0	–	–
				2 MW	–	–	–	5TT4462-0	5TT4472-0
		24 V	–	1 MW	5TT4402-2	5TT4422-2	5TT4452-2	–	–
				2 MW	–	–	–	5TT4462-2	5TT4472-2
2 CO	440 V	230 V	–	2 MW	–	5TT4428-0	5TT4458-0	5TT4468-0	5TT4478-0
		24 V	–	2 MW	–	5TT4428-2	5TT4458-2	5TT4468-2	5TT4478-2
4 NO	440 V	230 V	–	2 MW	–	5TT4424-0	5TT4454-0	–	–
				4 MW	–	–	–	5TT4464-0	5TT4474-0
		24 V	–	2 MW	–	5TT4424-2	5TT4454-2	–	–
				4 MW	–	–	–	5TT4464-2	5TT4474-2
2 NO + 2 NC	440 V	230 V	–	2 MW	–	5TT4426-0	5TT4456-0	–	–
				4 MW	–	–	–	5TT4466-0	5TT4476-0
		24 V	–	2 MW	–	5TT4426-2	5TT4456-2	–	–
				4 MW	–	–	–	5TT4466-2	5TT4476-2
For DC applications									
1 NO	250 V	–	24 V	1 MW	5TT4411-5	5TT4431-5	5TT4451-5	–	–
2 NO	440 V	–	24 V	1 MW	5TT4412-5	5TT4432-5	5TT4452-5	–	–
1 NO + 1 NC	440 V	–	24 V	1 MW	5TT4415-5	5TT4435-5	5TT4455-5	–	–
1 CO	250 V	–	24 V	1 MW	5TT4417-5	5TT4437-5	5TT4457-5	–	–

5

System overview, page 5/4

© Siemens 2022

Further technical specifications

		5TT440	5TT442	5TT445	5TT446	5TT447
Standards						
Standards		IEC 60669-2-2			IEC/EN 60947-4-1	
Approvals		CE				
Supply						
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	20 A	25 A	32 A	40 A	63 A
Rated frequency f_c		50/60 Hz				
Rated power dissipation P_v	Magnet coil, "On" pulse	13 W/18 VA			12 W/26 VA	
	Per pole, max.	1.5 W	2 W	3 W		3.5 W
Rated operational power (AC-3)	1-phase, at 230 V	0.5 kW	0.75 kW	1.1 kW	2.2 kW	4 kW
	3-phase, at 230 V	1.5 kW	2.2 kW	3 kW	5.5 kW	11 kW
	3-phase, at 400 V	3 kW	4 kW	5.5 kW	11 kW	18.5 kW
Contacts						
Contact gap		>3 mm				
Minimum contact load AC		10 V; 100 mA				
Electrical endurance at I_e/U_e, p. f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000				
Incandescent lamp load (switching of incandescent lamps for 15000 switching cycles)	At AC-5b (230 V)	4400 W	5500 W	7000 W	8800 W	13800 W
Max. switching speed	In switching cycles per hour	600 h^{-1}	450 h^{-1}		360 h^{-1}	
Safety						
Different phases between magnet coil and contact		Permissible				
Rated impulse withstand voltage U_{imp}		3 kV				
Function						
Manual operation		Yes				
Switching position indication		Yes				
Connections						
Terminals	± Screw (Pozidriv)	Coil: PZ1, contact: PZ2				
	Max. tightening torque	Coil: 0.6 Nm, contact: 1.2 Nm			Coil: 0.6 Nm, contact: 2 Nm	
Coil conductor cross-sections		1 ... 4 mm^2				
Ambient conditions						
Permissible ambient temperature	For operation/for storage	–25 ... +55 °C/–30 ... +80 °C				
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	55 °C				
Degree of protection	Acc. to EN 60529	IP20				
Mounting position		Any (not upside down)				

Accessories

Auxiliary switch



Contacts	U_e	I_e	Mounting width	Article No.
1 NO + 1 NC	250 V AC	16 A	0.5 MW	5TT4930

Auxiliary switches, central with diode



- For central function (no auxiliary switch)

U_e	Mounting width	Article No.
250 V AC	0.5 MW	5TT4931

Auxiliary switches, group with several diodes



- For group function (no auxiliary switch)

U_e	Mounting width	Article No.
250 V AC	0.5 MW	5TT4932

System overview, page 5/4

© Siemens 2022

5TT4 auxiliary switches

For 5TT4 remote control switches

	Auxiliary switches for 5TT41	Auxiliary switches for 5TT44
Rigid conductor cross-section	0.5 ... 2.5 mm²	1 ... 4 mm²
Flexible conductor cross-section, with end sleeve	0.5 ... 2.5 mm²	1 ... 4 mm²
		

Contacts	Type	I_e	U_e	Mounting width		
Auxiliary switches						
1 NO + 1 NC	Standard	16 A	250 V AC	0.5 MW	–	5TT4930
1 CO	Standard	5 A	250 V AC	0.5 MW	5TT4900	–
	For low power	0.1 A	30 V AC/DC	0.5 MW	5TT4901	–
Auxiliary switches, central with diode for central function (no auxiliary switch)						
			250 V AC	0.5 MW	–	5TT4931
Auxiliary switches, group with several diodes for group function (no auxiliary switch)						
			250 V AC	0.5 MW	–	5TT4932

Further technical specifications

		Auxiliary switches for 5TT41	Auxiliary switches for 5TT44		
		5TT4900 5TT4901	5TT4930	5TT4931	5TT4932
Standards					
Standards		EN 60947-1 (VDE 0660 Part 100) EN 60947-5-1 (VDE 0660 Part 200)	IEC/EN 60947-5-1		
Approvals		–	CE, EAC		
Supply					
Rated operational current I_e	At p.f. = 0.6 ... 1 (AC-15)	16 A	4 A	–	
Rated frequency f_c		–	50/60 Hz		
Rated power dissipation P_v	Per pole, max.	–	0.3 W		
Contacts					
Contact gap		<1.2 mm	>3 mm		
Minimum contact load		5 V; 1 mA	12 V; 5 mA		
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	–	100000	–	
Safety					
Clearances	Between magnet coil and contact	>6 mm	–		
Creepage distances	Between magnet coil and contact	>6 mm	–		
Rated impulse withstand voltage U_{imp}		1 kV	1 kV		
Pushbutton malfunction protected against continuous voltage, safe due to design		Yes	–		
Function					
Manual operation		–	No		
Switching position indication		–	No		
Connections					
Terminals	± Screw (Pozidriv)	PZ1	PZ1		
	Max. tightening torque	0.5 Nm	0.8 Nm		
Ambient conditions					
Permissible ambient temperature	For operation/for storage	–10 ... +40 °C/–10 ... +40 °C	–25 ... +70 °C/–30 ... +80 °C		
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C	55 °C		
Degree of protection	Acc. to EN 60529	IP20, with connected conductors	IP20		
Mounting position		Any	Any (not upside down)		

System overview, page 5/4

© Siemens 2022

Accessories

Compensator



- For increasing the glow lamp load by 20 mA

U_e	Mounting width	Article No.
250 V AC	1 MW	5TT4920

System overview, page 5/4

© Siemens 2022

5TT42 switching relays

Rated current 16 A

	Rated operational current I_e 16 A
Rigid conductor cross-section	1 ... 6 mm²
Flexible conductor cross-section, with end sleeve	1 ... 6 mm²



Contacts	U_e	U_c AC	U_c DC	Mounting width	
1 NO	250 V	230 V	–	1 MW	5TT4201-0
		115 V	–	1 MW	5TT4201-1
		24 V	–	1 MW	5TT4201-2
		12 V	–	1 MW	5TT4201-3
		8 V	–	1 MW	5TT4201-4
2 NO	400 V	230 V	–	1 MW	5TT4202-0
		115 V	–	1 MW	5TT4202-1
		24 V	–	1 MW	5TT4202-2
		12 V	–	1 MW	5TT4202-3
		8 V	–	1 MW	5TT4202-4
4 NO	400 V	230 V	–	1 MW	5TT4204-0
		115 V	–	1 MW	5TT4204-1
		24 V	–	1 MW	5TT4204-2
		12 V	–	1 MW	5TT4204-3
		8 V	–	1 MW	5TT4204-4
1 NO + 1 NC	400 V	230 V	–	1 MW	5TT4205-0
		115 V	–	1 MW	5TT4205-1
		24 V	–	1 MW	5TT4205-2
		12 V	–	1 MW	5TT4205-3
		8 V	–	1 MW	5TT4205-4
1 CO	250 V	230 V	–	1 MW	5TT4206-0
		115 V	–	1 MW	5TT4206-1
		24 V	–	1 MW	5TT4206-2
		12 V	–	1 MW	5TT4206-3
		8 V	–	1 MW	5TT4206-4
2 CO	400 V	230 V	–	1 MW	5TT4207-0
		115 V	–	1 MW	5TT4207-1
		24 V	–	1 MW	5TT4207-2
		12 V	–	1 MW	5TT4207-3
		8 V	–	1 MW	5TT4207-4
		–	110 V	1 MW	5TT4217-1
			30 V	1 MW	5TT4217-6
			24 V	1 MW	5TT4217-2
			12 V	1 MW	5TT4217-3

System overview, page 5/4

© Siemens 2022

Further technical specifications

		5TT4201-.	5TT4202-.	5TT4204-.	5TT4205-.	5TT4206-.	5TT4207-.	5TT4217-.
Standards								
Standards		EN 60947-5-1, EN 60669-2-2						
Approvals		VDE, CCC						
Supply								
Rated operational current I_e	At p.f. = 0.6 ... 1	16 A						
Primary operating range		0.8 ... 1.1 × U_c						
Rated frequency f_c		50 Hz						
Rated power dissipation P_v	Magnet coil	2.4 W 3.0 VA		4.8 W 6.0 VA	2.4 W 3.0 VA			1.7 W 1.7 VA
	Per pole, max.	1.0 W						
Contacts								
Contact gap		>1.2 mm						
Minimum contact load		10 V AC; 100 mA						
Electrical endurance at I_e/U_e, p.f. = 0.6, incandescent lamp load 600 W	Operating cycles	50000						
Safety								
Different phases between magnet coil and contact		Permissible						
Safe separation		>6 mm						
Rated impulse withstand voltage U_{imp}		4 kV						
Function								
Manual operation		Yes						
Connections								
Terminals	± Screw (Pozidriv)	PZ1						
	Max. tightening torque	0.8 ... 1 Nm						
Ambient conditions								
Permissible ambient temperature		–10 ... +40 °C						
Resistance to climate at 95% relative humidity	Acc. to DIN 50015	35 °C						
Degree of protection	Acc. to EN 60529	IP20, with connected conductors						

Accessories

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

System overview, page 5/4

© Siemens 2022

5TT50 Insta contactors

AC/DC technology

	Rated operational current I_e			
	20 A	25 A	40 A	63 A
Main connection conductor cross-section, solid	1.0 ... 10 mm²	1.5 ... 25 mm²	1.5 ... 25 mm²	1.5 ... 25 mm²
Main connection conductor cross-section, stranded with end sleeve	1.0 ... 6 mm²	1.5 ... 16 mm²	1.5 ... 16 mm²	1.5 ... 16 mm²
Main connection conductor cross-section, AWG	16 ... 8	16 ... 4	16 ... 4	16 ... 4
				

5

Contacts	U_e	U_c AC	U_c DC	Mounting width				
Insta contactors with manual switch								
2 NO	230 V	230 V	220 V	1 MW	5TT5000-0	–	–	–
		24 V	24 V	1 MW	5TT5000-2	–	–	–
4 NO	400 V	230 V	220 V	2 MW	–	5TT5030-0	–	–
				3 MW	–	–	5TT5040-0	5TT5050-0
		115 V	110 V	2 MW	–	5TT5030-1	–	–
		24 V	24 V	2 MW	–	5TT5030-2	–	–
				3 MW	–	–	5TT5040-2	5TT5050-2
2 NC	230 V	230 V	220 V	1 MW	5TT5002-0	–	–	–
		24 V	24 V	1 MW	5TT5002-2	–	–	–
4 NC	400 V	230 V	220 V	2 MW	–	5TT5033-0	–	–
				3 MW	–	–	5TT5043-0	–
		24 V	24 V	2 MW	–	5TT5033-2	–	–
				3 MW	–	–	5TT5043-2	–
1 NO + 1 NC	230 V	230 V	220 V	1 MW	5TT5001-0	–	–	–
		24 V	24 V	1 MW	5TT5001-2	–	–	–
2 NO + 2 NC	400 V	230 V	220 V	2 MW	–	5TT5032-0	–	–
				3 MW	–	–	5TT5042-0	5TT5052-0
		24 V	24 V	2 MW	–	5TT5032-2	–	–
				3 MW	–	–	5TT5042-2	5TT5052-2
3 NO + 1 NC	400 V	230 V	220 V	2 MW	–	5TT5031-0	–	–
				3 MW	–	–	5TT5041-0	5TT5051-0
		24 V	24 V	2 MW	–	5TT5031-2	–	–
				3 MW	–	–	5TT5041-2	5TT5051-2
Insta contactors with O/I/Automatic								
2 NO	230 V	230 V	220 V	1 MW	5TT5000-6	–	–	–
		24 V	24 V	1 MW	5TT5000-8	–	–	–
4 NO	400 V	230 V	220 V	2 MW	–	5TT5030-6	–	–
		24 V	24 V	2 MW	–	5TT5030-8	–	–
1 NO + 1 NC	230 V	230 V	220 V	1 MW	5TT5001-6	–	–	–
		24 V	24 V	1 MW	5TT5001-8	–	–	–
3 NO + 1 NC	400 V	230 V	220 V	2 MW	–	5TT5031-6	–	–
		24 V	24 V	2 MW	–	5TT5031-8	–	–

Note:
Provision must be made for spacers to ensure heat dissipation.
See Configuration Manual – Switching Devices www.siemens.com/lowvoltage/manuals (45315361).

Accessories

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

System overview, page 5/4

© Siemens 2022

Further technical specifications

		5TT500	5TT503	5TT504	5TT505
Standards					
Standards		EN 60947-4-1; EN 60947-5-1; EN 61095			
Approvals		UL 508; UL File No. E303328			
Supply					
Rated operational current I_e	AC-1/AC-7a, NO contacts/NC contacts	20 A/20 A	25 A/25 A	40 A/40 A	63 A/63 A
	AC-3/AC-7b, NO contacts/NC contacts	9 A/6 A	8.5 A/8.5 A	22 A/22 A	30 A/30 A
Primary operating range		0.85 ... 1.1 × U_c			
Rated frequency f_c at AC		50/60 Hz			
Rated power dissipation P_v	Pick-up power (without manual switch or with manual switch in "I" position)	2.1 VA/2.1 W	2.6 VA/2.6 W	5 VA/5 W	
	Pick-up power (with manual switch in "AUTO" position)	2.1 VA/4.1 W	2.6 VA/2.6 W	5 VA/5 W	
	Holding power	2.1 VA/2.1 W	2.6 VA/2.6 W	5 VA/5 W	
	Per contact AC-1/AC-7a	1.7 VA	2.2 VA	4 VA	8 VA
Contacts					
Contact gap (NO contacts)	Min.	3.6 mm			
Minimum switching capacity	(= minimum contact load)	≥17 V; 50 mA			
Electrical endurance at I_e and load	AC-1/AC-7a operating cycles	200000		100000	
	AC-3/AC-7b operating cycles	300000	500000		150000
Mechanical service life	Operating cycles	3 million			
Switching of resistive loads AC-1 at rated operational power P_s	1-phase (NO contacts)	4 kW (230 V)	5.4 kW (400 V)	8.7 kW (400 V)	13.3 kW (400 V)
	3-phase (NO contacts)	–	16 kW (400 V)	26 kW (400 V)	40 kW (400 V)
Switching of 3-phase asynchronous motors AC-3 at rated operational power P_s	1-phase (NO contacts)	1.3 kW/0.75 kW	1.3 kW/1.3 kW	3.7 kW/3.7 kW	5/5 kW
	3-phase (NO contacts)	–	4 kW	11 kW	15 kW
Maximum switching frequency at load	AC-1/AC-7a/AC-3/AC-7b	600 h^{-1}			
Safety					
Rated impulse withstand voltage U_{imp}		≤4 kV			
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	20 A	25 A	63 A	80 A
Overload withstand capability at 10 s	Per conducting path (NO contacts only)	72 A	68 A	176 A	240 A
Function					
Switching times	Closing (NO contacts)	15 ... 45 ms		15 ... 20 ms	
	Opening (NO contacts)	20 ... 50 ms	20 ... 70 ms	35 ... 45 ms	
Connections					
Coil/main connection terminals	± Screw (Pozidriv)	PZ1/PZ1	PZ1/PZ2		
Coil connection conductor cross-section	Solid	1.0 ... 2.5 mm^2			
	Stranded, with end sleeve	1.0 ... 2.5 mm^2			
	AWG cables	16 ... 10			
Main connection conductor cross-section	Solid	1.0 ... 10 mm^2	1.5 ... 25 mm^2		
	Stranded, with end sleeve	1.0 ... 6 mm^2	1.5 ... 16 mm^2		
	AWG cables	16 ... 8	16 ... 4		
Tightening torque	Coil connection	0.6 Nm/8 lbs/in.			
	Main connection	1.2 Nm/9 lbs/in.	3.5 Nm/20 lbs/in.		
Ambient conditions					
Permissible ambient temperature	For operation [1]/For storage	–15 ... +55 °C/–50 ... +80 °C			
Degree of protection	Acc. to EN 60529	IP20, with connected conductors			
Characteristics according to UL 508					
Rated operational current I_n		20 A	25 A	40 A	63 A
UL 508 General Use 240 V/480 V	FLA	20 A	25 A	40 A	63 A
UL 508 AC discharge lamps		20 A	25 A	30 A	40 A
UL 508 motor load	Power 240 V/480 V	1 hp/–	3 hp/5 hp	7.5 hp/15 hp	10 hp/20 hp
UL 508 short-circuit at 480 V	K5 fuses	20 A	25 A	60 A	70 A

[1] Contactors can be operated at ambient temperatures of between -25 °C and +70 °C, but only under special conditions.
For more information, please contact Siemens Support. For questions concerning heat dissipation, please refer to the instructions in the Configuration Manual "Switching Devices".

Accessories

Auxiliary switches



- For right-hand-side retrofitting
- Max. one auxiliary switch per Insta contactor

Contacts	Mounting width	Article No.
2 NO	0.5 MW	5TT5910-0
1 NO + 1 NC	0.5 MW	5TT5910-1

Sealable terminal covers



For Insta contactor	Mounting width	Article No.
20 A	1 MW	5TT5910-5
25 A	2 MW	5TT5910-6
40 A and 63 A	3 MW	5TT5910-7

System overview, page 5/4

© Siemens 2022

5TT58 Insta contactors

AC technology

	Rated operational current I_e				
	20 A	25 A	32 A	40 A	63 A
Main connection conductor cross-section, rigid	1.0 ... 10 mm²	1.0 ... 10 mm²	1,0 ... 10 mm²	1 ... 25 mm²	1 ... 25 mm²
Main connection conductor cross-section, flexible with end sleeve	1.0 ... 6 mm²	1.0 ... 6 mm²	1,0 ... 6 mm²	1 ... 16 mm²	1 ... 16 mm²
					

Contacts	U_e	U_c AC		Mounting width				
Insta contactors without manual switch								
2 NO	230 V	230 V		1 MW	5TT5800-0	5TT5810-0 new	5TT5860-0 new	–	–
		24 V		1 MW	5TT5800-2	–	–	–	–
4 NO	400 V	230 V	Standard	2 MW	–	5TT5830-0	–	–	–
				3 MW	–	–	–	5TT5840-0	5TT5850-0
			Capacitive loads up to 150 µF	2 MW	–	5TT5820-0	–	–	–
		115 V		2 MW	–	5TT5830-1	–	–	–
		24 V		2 MW	–	5TT5830-2	–	–	–
				3 MW	–	–	–	5TT5840-2	5TT5850-2
2 NC	230 V	230 V		1 MW	5TT5802-0	–	–	–	–
		24 V		1 MW	5TT5802-2	–	–	–	–
4 NC	400 V	230 V		2 MW	–	5TT5833-0	–	–	–
				3 MW	–	–	–	5TT5843-0	5TT5853-0
		24 V		2 MW	–	5TT5833-2	–	–	–
				3 MW	–	–	–	5TT5843-2	5TT5853-2
1 NO + 1 NC	230 V	230 V		1 MW	5TT5801-0	–	–	–	–
		24 V		1 MW	5TT5801-2	–	–	–	–
2 NO + 2 NC	400 V	230 V		2 MW	–	5TT5832-0	–	–	–
				3 MW	–	–	–	5TT5842-0	5TT5852-0
		24 V		2 MW	–	5TT5832-2	–	–	–
				3 MW	–	–	–	5TT5842-2	5TT5852-2
3 NO + 1 NC	400 V	230 V		2 MW	–	5TT5831-0	–	–	–
				3 MW	–	–	–	5TT5841-0	5TT5851-0
		115 V		2 MW	–	5TT5831-1	–	–	–
		24 V		2 MW	–	5TT5831-2	–	–	–
				3 MW	–	–	–	5TT5841-2	5TT5851-2
Insta contactors with manual switch O/I/Automatic									
2 NO	230 V	230 V		1 MW	5TT5800-6	–	–	–	–
		24 V		1 MW	5TT5800-8	–	–	–	–
4 NO	400 V	230 V		2 MW	–	5TT5830-6	–	–	–
				3 MW	–	–	–	5TT5840-6	5TT5850-6
		24 V		2 MW	–	5TT5830-8	–	–	–
				3 MW	–	–	–	5TT5840-8	–
1 NO + 1 NC	230 V	230 V		1 MW	5TT5801-6	–	–	–	–
		24 V		1 MW	5TT5801-8	–	–	–	–
3 NO + 1 NC	400 V	230 V		2 MW	–	5TT5831-6	–	–	–
				3 MW	–	–	–	5TT5841-6	–
		24 V		2 MW	–	5TT5831-8	–	–	–
				3 MW	–	–	–	5TT5841-8	–

Note:
Provision must be made for spacers to ensure heat dissipation.
See Configuration Manual – Switching Devices www.siemens.com/lowvoltage/manuals (45315361).

System overview, page 5/4

© Siemens 2022

Further technical specifications

		5TT580.	5TT581.	5TT582. 5TT583.	5TT584.	5TT585.	5TT586.
Standards							
Standards		IEC 60947-4-1, IEC 60947-5-1, IEC 61095; EN 60947-4-1, EN 60947-5-1, EN 61095, VDE 0660					
Supply							
Number of poles		2		4			2
Rated operational current I_e		20 A	25 A		40 A	63 A	32 A
Primary operating range		0.85 ... 1.1 × U_c					
Rated frequency f_c at AC		50/60 Hz					
Rated power dissipation P_v	Pick-up power (without manual switch or manual switch in "I" position)	6 VA/3.8 W	12 VA /10 W	10 VA/5 W	15.4 VA/4.6 W		12 VA /10 W
	Pick-up power (with manual switch in "AUTO" position)	12 VA/10 W	–	33 VA/25 W	62 VA/50 W		–
	Holding power	2.8 VA/1.2 W		5.5 VA/1.6 W	7.7 VA/3 W		2.8 VA/1.2 W
	Per contact AC-1/AC-7a	1.7 VA	2.0 VA	2.2 VA	4 VA	8 VA	2.5 VA
Contacts							
Contact gap	Minimum	3.6 mm			3.4 mm		3.6 mm
Minimum switching capacity	(= minimum contact load)	≥17 V; 50 mA					
Electrical endurance at I_e and load	AC-1/AC-7a operating cycles	200000			100000		150000
	AC-3/AC-7b operating cycles	300000		500000	150000		300000
Mechanical service life	Operating cycles	3 million					
Switching of resistive loads AC-1/AC-7a for rated operational power P_s	1-phase (230 V) (NO contacts)	4 kW	5.4 kW		8.7 kW	13.3 kW	5.9 kW
	3-phase (400 V) (NO contacts)	–		16 kW	26 kW	40 kW	–
Switching of 3-phase asynchronous motors AC-3/AC-7b for rated operational power P_s	1-phase (230 V) (NO contacts)	1.3 kW [1]	1.3 kW		3.7 kW	5 kW	1.3 kW
	3-phase (400 V) (NO contacts)	–		4 kW	11 kW	15 kW	–
Maximum switching frequency at load		600 h^{-1}					
Safety							
Rated insulation voltage U_i		440 V			500 V		440 V
Rated impulse withstand voltage U_{imp}		4 kV					
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	20 A	25 A		63 A	80 A	32 A
Overload withstand capability at 10 s	Per conducting path (NO contacts only)	72 A		68 A	176 A	240 A	72 A
Function							
Switching times	Closing (NO contacts)	15 ... 25 ms		10 ... 20 ms	15 ... 20 ms		15 ... 25 ms
	Opening (NO contacts)	20 ms	10 ... 30 ms	20 ms	10 ms		10 ... 30 ms
	Closing (NC contacts)	20 ... 30 ms	–	20 ... 30 ms	5 ... 10 ms		–
	Opening (NC contacts)	10 ms	–	10 ms	10 ... 15 ms		–
Connections							
Coil connection terminals	± Screw (Pozidriv)	PZ1					
Main connection terminals	± Screw (Pozidriv)	PZ1			PZ2		PZ1
Coil connection conductor cross-section	Rigid	1.0 ... 2.5 mm^2					
	Flexible, with end sleeve	1.0 ... 2.5 mm^2					
Main connection conductor cross-section	Rigid	1.0 ... 10 mm^2			1 ... 25 mm^2		1.0 ... 10 mm^2
	Flexible, with end sleeve	1.0 ... 6 mm^2			1 ... 16 mm^2		1.0 ... 6 mm^2
Tightening torque	Coil connection	0.6 Nm					
	Main connection	1.2 Nm			3.5 Nm		1.2 Nm
Ambient conditions							
Permissible ambient temperature	For operation/for storage	–5 ... +55 °C/–30 ... +80 °C					
Degree of protection	Acc. to EN 60529	IP20, with connected conductors					

[1] For NO contacts only.

Accessories

Auxiliary switches



- For right-hand-side retrofitting
- Max. one auxiliary switch per Insta contactor

Contacts	Mounting width	Article No.
2 NO	0.5 MW	5TT5910-0
1 NO + 1 NC	0.5 MW	5TT5910-1

Sealable terminal covers



For Insta contactor	Mounting width	Article No.
20 A	1 MW	5TT5910-5
25 A	2 MW	5TT5910-6
40 A and 63 A	3 MW	5TT5910-7

Spacer



- Contour for modular devices with a mounting depth of 70 mm
- Can be snapped onto either side of the busbar for convenient cable routing
- Spacer is recommended for better heat dissipation

Article No.
5TG8240

System overview, page 5/4

© Siemens 2022

5TT5 auxiliary switches

For 5TT5 Insta contactor

Rigid conductor cross-section	1 ... 2.5 mm²
Flexible conductor cross-section, with end sleeve	1 ... 2.5 mm²



Contacts	U_e AC	Mounting width	
2 NO	230 V/400 V	0.5 MW	5TT5910-0
1 NO + 1 NC	230 V/400 V	0.5 MW	5TT5910-1

5

Further technical specifications

		5TT5910
Standards		
Standards		IEC 60947-5-1
Approvals		CCC
Supply		
Number of poles		2
Rated operational current I_e	230 V	6 A
	400 V	4 A
Rated frequency f_c at AC		50/60 Hz
Contacts		
Contact gap	Minimum	4 mm
Minimum switching capacity	(= minimum contact load)	≥12 V; 5 mA
Mechanical service life	Operating cycles	3 million
Maximum switching frequency at load		600 h^{-1}
Safety		
Rated insulation voltage U_i		500 V
Rated impulse withstand voltage U_{imp}		4 kV
Short-circuit protection, according to coordination type 1	Back-up fuse characteristic gL/gG	6 A
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-section	Rigid	1 ... 2.5 mm²
	Flexible, with end sleeve	1 ... 2.5 mm²
Tightening torque		0.8 Nm
Ambient conditions		
Permissible ambient temperature	For operation/for storage	–5 ... +55 °C/–30 ... +80 °C
Degree of protection	Acc. to EN 60529	IP20, with connected conductors

System overview, page 5/4

© Siemens 2022

5TT3 soft-starting devices

For 2-phase motor control

Rigid conductor cross-section	Max. 2× 2.5 mm²
Flexible conductor cross-section, with end sleeve	Min. 1× 0.5 mm²



Version	U_e AC	Mounting width	
3-phase	400 V	6 MW	5TT3440

Further technical specifications

		5TT3440
Standards		
Standards		EN 60947-4-2 (VDE 0660-117)
Supply		
Line/motor voltage		400 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency f_c at AC		50/60 Hz
Rated power		3.5 VA
Rated power dissipation P_v at rated operational current	Coil/drive	3.5 VA
	Per contact	4.6 VA
Rated output of motor at 400 V	Max.	5500 VA
	Min.	300 VA
Startup voltage		30 ... 70%
Starting ramp		0.1 ... 10 s
Safety		
Quick-acting semiconductor fuse		35 A
Function		
Switching frequency 3× I_N, T_{AN} = 10 s, v_u = 20%	Operating cycles (up to 3 kW)	36 h^{-1}
	Operating cycles (from 3 ... 5.5 kW)	20 h^{-1}
Recovery time		100 ms
Connections		
Conductor cross-section	Rigid	Max. 2× 2.5 mm²
	Flexible, with end sleeve	Min. 1× 0.5 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

System overview, page 5/4

© Siemens 2022

7LF4 digital time switches

Mini



- Weekly program
- 28 programs
- Automatic daylight-saving adjustment

Contacts	U_c	Channels	Mounting width	
1 NO	230 V AC	1	1 MW	7LF4501-5

Further technical specifications

		Mini
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		0.9 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	6000 (20 A)
Mechanical operating cycles		>5 million
Incandescent lamp load		5 A
Energy-saving lamp load		300 W
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA
	Uncorrected	2500 VA
Safety		
Different phases between operating mechanism and contact		Permissible
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±1 s/day
Power reserve storage	Battery	3 years
Make and break cycles		1 min
Minimum switching sequences		1 min
Control input	Terminal S	–
Programs [1]		28
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/ for storage	–10 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	10/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.

System overview, page 5/4

© Siemens 2022

Top



- Weekly program
- 28 programs
- Text-assisted programming concept
  - Language: English
- Manual daylight-saving adjustment

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4511-0
2 CO	230 V AC	2	2 MW	7LF4512-0

Further technical specifications

		Top
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	100000
Mechanical operating cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		60 VA
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA
	Uncorrected	2300 VA
Safety		
Different phases between operating mechanism and contact		Permissible [2]
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±1.5 s/day
Power reserve storage	Battery	3 years
Make and break cycles		1 min
Minimum switching sequences		1 min
Control input	Terminal S	No
Programs [1]		28 (14 per channel)
Program memory	Captive	No
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/ for storage	–20 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.
[2] The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

System overview, page 5/4

© Siemens 2022

7LF4 digital time switches

Profi



- Weekly program
- Vacation program
- Random program
- Expert mode
- Cycle function
- Text-assisted programming concept
  – 15 languages
- Simple program creation on a PC
  using the supplied software, with 7LF4941-0 USB adapter
- Automatic daylight-saving adjustment
- Operating hours counter, counting range: 65535 h
- Accurate to the second hh:mm:ss
- Synchronization 50/60 Hz

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4521-0
	24 V AC/DC	1	2 MW	7LF4521-2
2 CO	230 V AC	2	2 MW	7LF4522-0
	24 V AC/DC	2	2 MW	7LF4522-2

Further technical specifications

		Profi
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Approvals		UL File No. E301698
Supply		
Primary operating range	U_c 230 V	0.85 ... 1.1 × U_c
	U_c 24 V	0.9 ... 1.1 × U_c
Frequency range	U_c 230 V	50/60 Hz
	U_c 24 V	50/60 Hz
Rated power dissipation P_v	U_c 230 V	2 VA
	U_c 24 V	2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	100000
Mechanical operating cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		1000 W
Fluorescent lamp load	Parallel p.f. correction 70 µF	600 VA
	Uncorrected	2000 VA
Safety		
Different phases between operating mechanism and contact		Permissible [2]
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±0.1 s/day
Power reserve storage	Battery	5 years
Make and break cycles		1 s
Minimum switching sequences		1 s
Control input	Terminal S	No
Programs [1]		28
Program memory	Captive	Yes
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/for storage	–20 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.
[2] The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

System overview, page 5/4

© Siemens 2022

Astro



- Weekly program
- Vacation program
- Random program
- Expert mode
- Astro function
- Text-assisted programming concept
  – 15 languages
- Simple program creation on a PC using the supplied software, with 7LF4941-0 USB adapter
- Automatic daylight-saving adjustment
- Operating hours counter, counting range: 65535 h
- Accurate to the second hh:mm:ss
- Synchronization 50/60 Hz
- Input disable via PIN code
- Daylight-saving correction
- 1 h test

Contacts	U_c	Channels	Mounting width	
1 CO	230 V AC	1	2 MW	7LF4531-0
2 CO	230 V AC	2	2 MW	7LF4532-0

Further technical specifications

		Astro
Standards		
Standards		EN 60730-1, -2-7; VDE 0631-1, -2-7
Approvals		UL File No. E301698
Supply		
Primary operating range		0.85 ... 1.1 × U_c
Frequency range		50/60 Hz
Rated power dissipation P_v		2 VA
Channels		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	At p.f. = 1	16 A
	At p.f. = 0.6	10 A
Contacts		
Minimum contact load		12 V/100 mA
Electrical operating cycles	At p.f. = 1	100000
Mechanical operating cycles		10 million
Incandescent lamp load		8 A
Energy-saving lamp load		1000 W
Fluorescent lamp load	Parallel p.f. correction 70 µF	600 VA
	Uncorrected	2000 VA
Safety		
Different phases between operating mechanism and contact		Permissible [2]
Rated impulse withstand voltage U_{imp}		4 kV
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV
Overvoltage category	Acc. to EN 61010-1	III
Function		
Clock errors per day	Typical	±0.1 s/day
Power reserve storage	Battery	5 years
Make and break cycles		1 s
Minimum switching sequences		1 s
Control input	Terminal S	Yes (with 1K clock)
Programs [1]		56 (2 × 28)
Program memory	Captive	Yes
Battery type		Li primary cell
Connections		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm²
	Flexible, with end sleeve	Max. 2.5 mm²
Ambient conditions		
Permissible ambient temperature	For operation/ for storage	–20 ... +55 °C/ –20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/055/21
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

[1] A program consists of an ON time, an OFF time and assigned ON and OFF days or day blocks.
[2] The combination of line voltage (230 V) and SELV is not permissible in conjunction with a 2-channel time switch. This requirement is, however, admissible in the case of 1-channel time switch.

System overview, page 5/4

© Siemens 2022

7LF4 digital time switches

Accessories

		Mini	Top	Profi	Astro
Data keys					
 • For Profi and Astro digital time switches • Programming at the PC (7LF4941-0 USB adapter and software required) • Read-in of programs to the time switch • Writing of programs from the time switch • Transfer of programs – From PC to time switch and vice versa – From time switch to time switch					
	Article No.				
	7LF4941-1	–	–	■	■
USB adapter and software					
 • For Profi and Astro digital time switches • For the reading and writing of data keys at the PC • Including programming software • Including 7LF4941-1 data key for Profi and Astro • Compatible with 7LF4940-1 data key (predecessor model) and 7LF4940-2 data key • Can be connected via USB interface • System requirements: – Windows 7, Windows Vista, Windows 2000, Windows ME, Windows XP or Windows 98 Second Edition – USB connection – 40 MB free disk space					
	Article No.				
	7LF4941-0	–	–	■	■
Holders for front panel installation					
 • Universal application for devices from 1 MW ... 6 MW • Cutout dimensions: – Height $45^{+0.5}$ mm – Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm					
	Article No.				
	7LF9006	■	■	■	■

System overview, page 5/4

© Siemens 2022

System overview, page 5/4

© Siemens 2022

7LF5 mechanical time switches

Time switches without power reserve

		For DIN rail		For wall mounting (surface mounting)
				
Contacts	**Mounting width**			
With day disk				
1 NO	1 MW	7LF5300-1	–	–
1 CO	3 MW	–	7LF5300-5	–
	–	–	–	7LF5301-0
With week disk				
1 CO	3 MW	–	7LF5300-6	–

5

System overview, page 5/4

© Siemens 2022

Further technical specifications

		7LF5300-1	7LF5300-5	7LF5300-6	7LF5301-0
Standards					
Standards		EN 60730-1, -2-7, UL 917, UL 917, CSA C22.2 No. 14 and 177			
Approvals		VDE, UL file: E301698			
Supply					
Rated control supply voltage U_c		230 V AC			
Primary operating range	U_c 230 V AC	0.85 ... 1.1 × U_c			
Rated frequency		50 Hz			
Frequency range		50 Hz			
Rated power dissipation P_v		1 VA			
Channels					
Rated operational voltage U_e		250 V AC			
Rated operational current I_e	At p.f. = 1	16 A			
	At p.f. = 0.6	4 A			
Contacts					
Minimum contact load		4 V/1 mA			
Electrical operating cycles	At p.f. = 1	100000			
Mechanical operating cycles		20 million			
Incandescent lamp load		5 A			
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA			
	Uncorrected	1400 VA			
Safety					
Different phases between operating mechanism and contact		Permissible			
Electrical isolation, creepage distances and clearances	Operating mechanism	8 mm			
	Contact	6 mm			
Rated impulse withstand voltage U_{imp}		4 kV			
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV			
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV			
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV			
Overvoltage category	Acc. to EN 61010-1	III			
Function					
Switching accuracy		±5 min		±30 min	±5 min
Clock errors		System-synchronized			
Make and break cycles		15 min		120 min	10 min
Minimum switching sequences		30 min		240 min	30 min
Connections					
Terminals	± Screw (Pozidriv)	PZ1			
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm²			
	Flexible, with end sleeve	Max. 2.5 mm²			
	Flexible, without end sleeve	Max. 4 mm²			
Ambient conditions					
Permissible ambient temperature	For operation/for storage	–10 ... +55 °C/–10 ... +60 °C			
Resistance to climate	Acc. to EN 60068-1	10/055/21			
Degree of protection	Acc. to EN 60529	IP20, with connected conductors			
Protection class	Acc. to EN 61140	II			

Accessories

Holders for front panel installation



- Universal application for devices from 1 MW ... 6 MW
- Cutout dimensions:
  - Height $45^{+0.5}$ mm
  - Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm

	Article No.
	7LF9006

System overview, page 5/4

© Siemens 2022

7LF5 mechanical time switches

Time switches with power reserve

	For DIN rail			For wall mounting (surface mounting)
Time buffering in the event of a power failure	–	–	■	–
Automatic daylight-saving adjustment	–	–	■	–
Automatic time setting for Central European time zone during commissioning	–	–	■	–
				

Contacts	Mounting width				
With day disk					
1 NO	1 MW	7LF5301-1	–	–	–
1 CO	3 MW	–	7LF5301-6	7LF5301-4	–
	–	–	–	–	7LF5305-0
With week disk					
1 CO	3 MW	–	7LF5301-7	7LF5301-5	–

System overview, page 5/4

© Siemens 2022

Further technical specifications

		7LF5301-1	7LF5301-4	7LF5301-5	7LF5301-6	7LF5301-7	7LF5305-0
Standards							
Standards		EN 60730-1, -2-7, UL 917, UL 917, CSA C22.2 No. 14 and 177					
Approvals		VDE, UL file: E301698					
Supply							
Rated control supply voltage U_c		230 V AC					
Primary operating range		0.85 ... 1.1 × U_c					
Rated frequency		50 Hz					
Frequency range		50/60 Hz					
Rated power dissipation P_v		1 VA	0.2 VA		1 VA		
Channels							
Rated operational voltage U_e		250 V AC					
Rated operational current I_e	At p.f. = 1	16 A					
	At p.f. = 0.6	4 A					
Contacts							
Minimum contact load		4 V/1 mA					
Electrical operating cycles	At p.f. = 1	100000					
Mechanical operating cycles		20 million					
Incandescent lamp load		5 A					
Fluorescent lamp load	Parallel p.f. correction 70 µF	60 VA					
	Uncorrected	1400 VA					
Safety							
Different phases between operating mechanism and contact		Permissible					
Electrical isolation, creepage distances and clearances	Operating mechanism	8 mm					
	Contact	6 mm					
Rated impulse withstand voltage U_{imp}		4 kV					
Electrostatic discharge	Acc. to IEC 61000-4-2	>8.0 kV					
EMC: Burst	Acc. to IEC 61000-4-4	>4.4 kV					
EMC: Surge	Acc. to IEC 61000-4-5	>2.0 kV					
Overvoltage category	Acc. to EN 61010-1	III					
Function							
Switching accuracy		±5 min		±30 min	±5 min	±30 min	±5 min
Clock errors		±2.5 s/day	±0.2 s/day	±60 s/day	±2.5 s/day		
Power reserve storage		100 h	6 years		100 h		
Make and break cycles		15 min		120 min	15 min	120 min	15 min
Minimum switching sequences		30 min		240 min	30 min	240 min	30 min
Battery type		NiMH cell	Li primary cell		NiMH cell		
Minimum loading time		48 h	–		48 h		
Service life of battery	At 20 °C	6 years	10 years		6 years		
	At 40 °C	5 years					
Connections							
Terminals	± Screw (Pozidriv)	PZ1					
Conductor cross-sections of main current path	Rigid	1.5 ... 4 mm²					
	Flexible, with end sleeve	Max. 2.5 mm²					
	Flexible, without end sleeve	Max. 4 mm²					
Ambient conditions							
Permissible ambient temperature	Storage/operation	–10 ... +60 °C/–10 ... +55 °C					
Resistance to climate	Acc. to EN 60068-1	10/055/21					
Degree of protection	Acc. to EN 60529	IP20, with connected conductors					
Protection class	Acc. to EN 61140	II					

Accessories

Holders for front panel installation



- Universal application for devices from 1 MW ... 6 MW
- Cutout dimensions:
  - Height $45^{+0.5}$ mm
  - Width 23 mm, 41 mm, 59 mm, 77 mm, 95 mm or 113 mm

Article No.
7LF9006

System overview, page 5/4

© Siemens 2022

7LF6 timers for buildings

	Stairwell lighting timers	
	Standard	Multi
3-wire circuit	■	■
4-wire circuit	■	■
Zero crossing circuit	■	■
Operation	Resettable	Resettable
		

Contacts	Warning of impending switch-off	Mounting width		
1 NO	–	1 MW	7LF6310	–
	Flickering	1 MW	–	7LF6311

Further technical specifications

		7LF6310	7LF6311
Supply			
Rated operational current I_e	At p.f. = 1	16 A	
Rated operational voltage U_e		250 V AC	
Rated control supply voltage U_c		230 V AC	
Frequency range		50/60 Hz	
Rated power dissipation P_v		1 W	
Rated impulse withstand voltage		4 kV	
Contacts			
Channels		1	
Max. glow lamp load		25 mA	50 mA
Separate multi-voltage input		–	8 ... 230 V AC/DC
Switching capacity	Inductive p.f. = 0.6	2000 VA	
Incandescent lamp load	Max.	3680 W	
Fluorescent lamp load	Series p.f. correction	2000 VA	
	Parallel p.f. correction at 70 µF	1000 W	
Compact fluorescent lamp load		1000 W	
LED		1000 W	
Electronic transformers		2000 VA	
Conventional transformers		2000 VA	
Function			
Setting range		0.5 ... 10 min	0.5 ... 12 min
Manual switches		Yes	
Programs		–	7 [1]
Ambient conditions			
Permissible ambient temperature	For operation	–20 ... +55 °C	
	For storage	–20 ... +60 °C	
Degree of protection	Installed	IP30	
Pollution degree		2	

[1] 7 functions, can be selected using selector switch on the device

System overview, page 5/4

© Siemens 2022

5TT3 timers for industrial applications

		Multifunction timers	Delay timers
Programmable for:		• Response delay • Passing make contact function • Pulse generator, delayed • Clock generator, starting with impulse • OFF-delay • Pulse converter • Passing break contact function • Response delay/OFF-delay	–
			
Contacts	**Mounting width**		
1 CO	1 MW	5TT3185	5TT3181

Further technical specifications

		5TT3185	5TT3181
Standards			
Standards		EN 60255; DIN VDE 0435-110	
Supply			
Rated operational current I_e		4 A	8 A
Rated operational voltage U_e		250 V AC	
Rated control supply voltage U_c		12 ... 240 V AC	220 ... 240 V AC
		12 ... 240 V DC	–
Primary operating range	U_c 230 V AC, 50/60 Hz	0.8 ... 1.1 × U_c	
Rated frequency f_n		45 ... 400 Hz	50/60 Hz
Rated power dissipation P_v		Approx. 3 VA	Approx. 5 VA
Contacts			
Contact gap		µm contact	
Minimum contact load		10 V/300 mA	
Electrical service life	Switching cycles	1.5×10^5	–
	At AC-15	–	1.5×10^5
Safety			
Rated impulse withstand voltage U_{imp}	Input/output	>4 kV	
Function			
Setting range		1 s ... 300 h	
Recovery time		15 ... 80 ms	Approx. 40 ms
Connections			
Terminals	± Screw (Pozidriv)	PZ2	
Conductor cross-sections of main current path	Rigid	Max. 2× 2.5 mm²	
	Flexible, with end sleeve	Min. 2× 1.5 mm²	
Ambient conditions			
Permissible ambient temperature		–40 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	40/60/4	

System overview, page 5/4

© Siemens 2022



Overvoltage protection devices


The more than one million lightning strikes in Germany every year pose a considerable risk for buildings and systems that can be damaged due to the unhindered effect of lightning currents, overvoltage and power surges. In many cases however, it is not apparent that such damage has been caused by lightning currents, overvoltage and power surges.

Overvoltage results in considerable damage to electrical and electronic equipment.
Even brief transients in power supply lines or between electrical lines and other conductive parts (e.g. grounded metallic parts, ground) are sufficient to cause such damage. The damage patterns of destroyed lines, circuit boards or switchgear demonstrate this. Such damage can be prevented employing suitable overvoltage protection means.

Reliably protected by Siemens lightning and surge arresters!

© Siemens 2022

Overvoltage Protection Devices

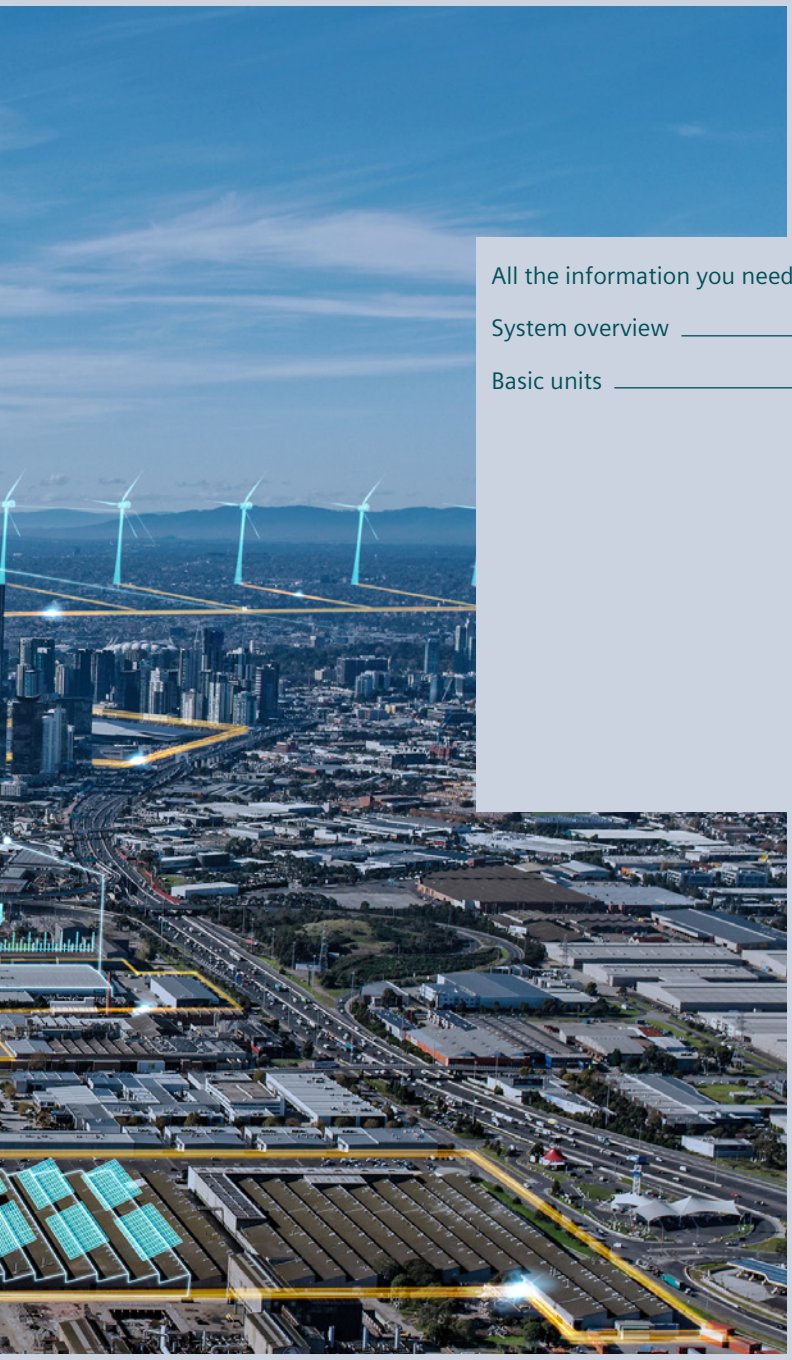

All the information you need 6/2

System overview 6/4

Basic units 6/6

5SD74 lightning arresters, type 1 6/6

5SD74 combination surge arresters, type 1 + type 2 6/8

5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system 6/10

5SD74 combination surge arresters, type 1/type 2 6/12

5SD74 surge arresters, type 2 6/14

5SD74 surge arresters, type 3 6/18

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about overvoltage protection devices, please visit our website
www.siemens.com/overvoltage-protection

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technology primer
  - Overvoltage protection devices **(109756965)**

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Overvoltage protection devices **sie.ag/2kTfytV**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)
- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Overvoltage protection devices **(45315289)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- Basic principles of electrical engineering (WT-LVBGET)
- Protection concept (WT-LVBPC)

Technical overview – Overvoltage protection devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on overvoltage protection devices
www.siemens.com/lowvoltage/product-support (109769084)

© Siemens 2022

System overview

Basic units



5SD74 lightning arresters, type 1



5SD74 combination surge arresters, type 1 + type 2



5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system



5SD74 combination surge arresters, type 1/type 2



5SD74 surge arresters, type 2 (standard design)



5SD74 surge arresters, type 3

Spare part plugs



N-PE



L-N, L-PEN (type 1)




L-PEN

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Installation locations for surge protection devices (SPDs)

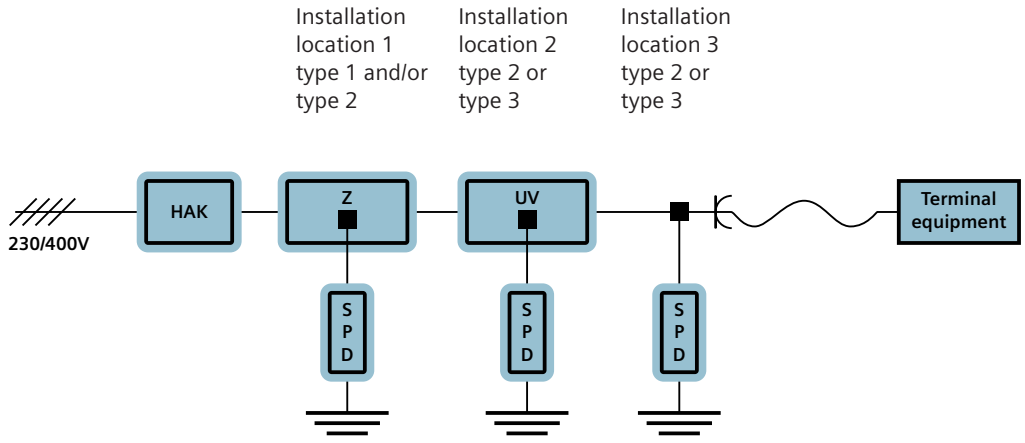

HAK: Main terminal box Z/HV: In or close to the central meter system/main distribution board UV: Subdistribution board

Installation location 1 must be as close as possible to the supply point for the electrical system, so that the downstream installations are protected. The SPDs at installation locations 2 and 3 shall not be used without SPDs at installation location 1, and they must be coordinated with these SPDs (i.e. SPDs all from the same manufacturer).

© Siemens 2022

5SD74 lightning arresters, type 1

	For TN-C and IT systems	For TN-C systems	For TN-S and TT systems	
Protection paths	L-PE	L-PEN	L-N, L-PE and N-PE	L-N, L-PE and N-PE
Rated voltage U_n	690 V AC	240/415 V AC	240 V AC	240/415 V AC
Maximum continuous voltage U_c	800 V AC	350 V AC	350 V AC	350 V AC
				

Circuit	Mounting width				
With remote signaling					
1 + 0	–[1]	5SD7411-2	–	–	–
1 + 1	4 MW	–	–	5SD7412-1	–
3 + 0	6 MW	–	5SD7413-1	–	–
3 + 1	8 MW	–	–	–	5SD7414-1

[1] No modular installation device.

6

Further technical specifications

		5SD7411-2	5SD7412-1	5SD7413-1	5SD7414-1
Standards					
Standards		IEC 61643-11, EN 61643-11			
Approvals		–	KEMA, UL/cUL		
Voltage					
Protection level U_p	L-N and L-PEN	≤4.50 kV	≤1.50 kV		
	L-PE	–	≤2.50 kV	–	≤2.50 kV
	N-PE	–	≤1.50 kV	–	≤1.50 kV
Current					
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-PEN, 1P/3P	35 kA	25 kA	25/75 kA	
	N-PE	–	100 kA	–	100 kA
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN, 1P/3P	35 kA	25 kA	25/75 kA	
	N-PE	–	100 kA	–	100 kA
Follow current discharge capacity I_{fi} (AC)	L-N and L-PEN for 264/350 V	–	50/25 kA		
	N-PE	–	100 A	–	100 A
Function					
Response time t_A	L-N and L-PEN	≤100 ns			
	L-N and N-PE	–	≤100 ns	–	≤100 ns
Connections					
Conductor cross-section	Finely stranded	16 ... 50 mm²	2.5 ... 25 mm²		
	Solid	16 ... 50 mm²	2.5 ... 35 mm²		
Protection devices					
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	400 A	315 A		
	For V wiring (gL/gG)	125 A	125 A		
Short-circuit withstand current	With max. back-up fuse	50 kA	50 kA		
Ambient conditions					
Degree of protection		IP20, with connected conductors			
Temperature range		–40 ... +80 °C			

System overview, page 6/4

© Siemens 2022

Accessories

Spare part plugs





Protection paths	Basic units	Article No.
N-PE	5SD7412-1 and 5SD7414-1	5SD7418-0
L-N and L-PEN	For 5SD7412-1, 5SD7413-1 and 5SD7414-1	5SD7418-1

System overview, page 6/4

© Siemens 2022

5SD74 combination surge arresters, type 1 + type 2

	For TN-C systems	For TN-S and TT systems	
Protection paths	L-PEN	L-N, L-PE and N-PE	L-N, L-PE and N-PE
Rated voltage U_n	240/415 V AC	240 V AC	240 V AC
Maximum continuous voltage U_c	350 V AC	350 V AC	350 V AC
			

Circuit	Mounting width			
With remote signaling				
1 + 1	4 MW	–	5SD7442-1	–
3 + 0	6 MW	5SD7443-1	–	–
3 + 1	8 MW	–	–	5SD7444-1

6

Further technical specifications

		5SD7442-1	5SD7443-1	5SD7444-1
Standards				
Standards		IEC 61643-11; EN 61643-11		
Approvals		KEMA, UL/cUL		
Voltage				
Protection level U_p	L-N and L-PEN	≤1.50 kV		
	L-PE	≤2.20 kV	–	≤2.20 kV
	N-PE	≤1.50 kV	–	≤1.50 kV
Current				
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-PEN	25 kA		
	N-PE	100 kA	–	100 kA
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	25 kA		
	N-PE	100 kA	–	100 kA
Follow current discharge capacity I_{fi} (AC)	L-N and L-PEN	25 kA		
	N-PE	100 A	–	100 A
Function				
Response time t_A	L-N and L-PEN	≤25 ns		
	L-N and N-PE	≤100 ns	–	≤100 ns
Connections				
Conductor cross-section	Finely stranded	2.5 … 25 mm²		
	Solid	2.5 … 35 mm²		
Protection devices				
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	315 A		
	For V wiring (gL/gG)	125 A		
Short-circuit withstand current	With max. back-up fuse	25 kA		
Ambient conditions				
Degree of protection		IP20, with connected conductors		
Temperature range		–40 … +80 °C		
Display				
Visual function/fault indication		Yes		

System overview, page 6/4

© Siemens 2022

Accessories

Spare part plugs







Protection paths	Type	Basic units	Article No.
N-PE	–	5SD7442-1 and 5SD7444-1	5SD7418-0
L-N and L-PEN	1	5SD7442-1, 5SD7443-1 and 5SD7444-1	5SD7448-1
	2	5SD7442-1, 5SD7443-1 and 5SD7444-1	5SD7428-1

System overview, page 6/4

© Siemens 2022

5SD74 surge arresters, type 1 + type 2 + type 3 for 40 mm busbar system

	For TN-C systems			
Protection paths	L-PEN			
Rated voltage U_n	240/415 V AC	240/415 V AC	240/415 V AC	240/415 V AC
Maximum continuous voltage U_c	300 V AC	300 V AC	300 V AC	300 V AC
				
Circuit / **Mounting width**				
With remote signaling				
3 + 0 / 47 mm	5SD7443-8KK21	–	5SD7443-8KK11	–
3 + 1 / 47 mm	–	–	–	–
With remote signaling and phase tap				
3 + 0 / 47 mm	–	5SD7443-8KK22	–	5SD7443-8KK12
3 + 1 / 47 mm	–	–	–	–

6

Further technical specifications

Standards				
Standards		IEC 61643-11		
Approvals		VDE		
Voltage				
Protection level U_p	L-N and L-PEN	≤1.50 kV		
	L-N/N-PE	–		≤1,5/1.5 kV
Current				
Lightning impulse current I_{imp} (10/350 µs)	L-N/N-PEN and N-PE	12.5 kA	7.5 kA	12.5/50 kA
Rated discharge surge current I_n (8/20 µs)	L-N/L-PEN and N-PE	20 kA		20/80 kA
Follow current discharge capacity I_{fi} (AC)	N-PE	–		100 A RMS
Connections				
Conductor cross-section	Finely stranded	25 mm²		
	Solid	35 mm²		
Type of mounting				
40 mm busbar system		5 and 10 mm		
Protection devices				
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	315 A		
Short-circuit withstand current	With max. back-up fuse	25 kA		
Ambient conditions				
Degree of protection		IP20		
Temperature range		–40 ... +80 °C		
Display				
Visual function/fault indication		Yes		

System overview, page 6/4

© Siemens 2022

For TN-S and TT systems			
L-N, L-PE and N-PE			
240/415 V AC	240/415 V AC	240/415 V AC	240/415 V AC
300 V AC	300 V AC	300 V AC	300 V AC
			
–	–	–	–
5SD7444-8KK21	–	5SD7444-8KK11	–
–	–	–	–
–	5SD7444-8KK22	–	5SD7444-8KK12

System overview, page 6/4

© Siemens 2022

5SD74 combination surge arresters, type 1/type 2

	For TN-C and IT systems	For TN-C systems	For TN-S and TT systems		For photovoltaic systems
Protection paths	L-PE	L-PEN	L-N, L-PE and N-PE	L-N, L-PE and N-PE	(L+) – (L–)
Rated voltage U_n	690 V AC	240/415 V AC	240 V AC	240/415 V AC	–
Maximum continuous voltage U_c	800 V AC	335 V AC	335 V AC	335 V AC	1000 V DC
					

Circuit	Mounting width					Plug-in
With remote signaling						
1 + 0	–[1]	5SD7411-2	–	–	–	–
3 + 0	3 MW	–	5SD7413-3	–	–	
3 + 1	4 MW	–	–	–	5SD7414-3	–
Without remote signaling						
1 + 1	2 MW	–	–	5SD7412-2	–	–
3 + 0	3 MW	–	5SD7413-2	–	–	5SD7483-6
3 + 1	4 MW	–	–	–	5SD7414-2	–

[1] No modular installation device.

Further technical specifications

		5SD7411-2	5SD7412-2	5SD7413-2 5SD7413-3	5SD7414-2 5SD7414-3	5SD7483-6
Standards						
Standards		IEC 61643-11				EN 50539
Approvals		–	KEMA			
Voltage						
Protection level U_p	L-N and L-PEN	≤4.50 kV	≤1.20 kV			≤3.50 kV
	L-PE	–			≤2.0 kV	–
	N-PE	–	≤1.70 kV	–	≤1.70 kV	–
Current						
Lightning impulse current I_{imp} (10/350 µs)	L-N and L-PEN	35 kA	12.5 kA			≤5 kA
	N-PE	–	50 kA	–	50 kA	–
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	35 kA	12.5 kA			15 kA
	N-PE	–	50 kA	–		
Max. discharge surge current $I_{max.}$ (8/20 µs)	L-N	100 kA	12.5 kA	50 kA		40 kA
	N-PE	–	50 kA	–	50 kA	–
Function						
Response time t_A	L-N and L-PEN	<100 ns	≤25 ns			
	L-N and N-PE	–	≤100 ns	–	≤100 ns	≤25 ns
Connections						
Conductor cross-section	Finely stranded	16 … 50 mm²	1.5 … 25 mm²			
	Solid	16 … 50 mm²	1.5 … 35 mm²			
Protection devices						
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	400 A	160 A			–
	For V wiring (gL/gG)	125 A	80 A			–
Short-circuit withstand current	With max. back-up fuse	50 kA	25 kA			–
Ambient conditions						
Degree of protection		IP20, with connected conductors				
Temperature range		–40 … +80 °C				

System overview, page 6/4

© Siemens 2022

Accessories

Spare part plugs

	Protection paths	Type	Basic units	Article No.
	N-PE	–	5SD7412-2, 5SD7412-3, 5SD7414-2 and 5SD7414-3	5SD7418-2
	L-N and L-PEN	1	5SD7412-2, 5SD7412-3, 5SD7413-2, 5SD7413-3, 5SD7414-2 and 5SD7414-3	5SD7418-3
	L-PE (PV)	2	5SD7483-6	5SD7498-3

System overview, page 6/4

© Siemens 2022

5SD74 surge arresters, type 2

Standard design

	For TN and TT systems		For TN-C and IT systems	For TN-C systems	For IT systems		For TN-S and TT systems
Protection paths	N-PE	L-PEN and L-N	L-PEN and L-N	L-PEN	L-PEN and L-PE	L-PEN and L-PE	L-N, L-PE and N-PE
Rated voltage U_n	240/415 V AC	240/415 V AC	400/690 V AC	240/415 V AC	400/690 V AC	554/960 V AC	240/415 V AC
Maximum continuous voltage U_c	260 V AC	350 V AC	800 V AC	350 V AC	580 V AC	760 V AC	350 V AC (L-N, L-PE) 260 V AC (N-PE)
							

Circuit	Mounting width							
With remote signaling								
1 + 0	1 MW	–	5SD7461-1	–	–	–	–	–
	2 MW	–	–	5SD7481-1	–	–	–	–
3 + 0	3 MW	–	–	–	5SD7463-1	5SD7473-1	5SD7483-5	–
3 + 1	4 MW	–	–	–	–	–	–	5SD7464-1
Without remote signaling								
1 + 0	1 MW	5SD7481-0	5SD7461-0	–	–	–	–	–
3 + 0	3 MW	–	–	–	5SD7463-0	–	–	–
3 + 1	4 MW	–	–	–	–	–	–	5SD7464-0

Further technical specifications

		5SD7481-0	5SD7461-0 5SD7461-1	5SD7481-1	5SD7463-0 5SD7463-1	5SD7464-0 5SD7464-1	5SD7473-1	5SD7483-5
Standards								
Standards		IEC 61643-11; EN 61643-11						
Approvals		KEMA					–	KEMA, UL/cUL
Voltage								
Protection level U_p	L-N and L-PEN	–	≤1.50 kV	≤5 kV	≤1.50 kV	≤1.60 kV	≤2.50 kV	≤2.90 kV
	L-PE	–				≤1.90 kV	–	
	N-PE	≤1.50 kV	–			≤1.50 kV	–	
Current								
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	–	20 kA	15 kA	20 kA		15 kA	
	N-PE	20 kA	–			20 kA	–	
Max. discharge surge current $I_{max.}$ (8/20 µs)	L-N	–	40 kA	30 kA	40 kA		30 kA	
	N-PE	40 kA	–			40 kA	–	
Function								
Response time t_A	L-N and L-PEN	–	≤25 ns	≤100 ns	≤25 ns			
	L-N and N-PE	≤100 ns	–			≤100 ns	–	
Connections								
Conductor cross-section	Finely stranded	1.5 ... 25 mm²						
	Solid	1.5 ... 35 mm²						
Protection devices								
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	–	125 A	100 A	125 A			100 A
	For V wiring (gL/gG)	–		80 A				
Short-circuit withstand current	With max. back-up fuse	25 kA						
Ambient conditions								
Degree of protection		IP20, with connected conductors						
Temperature range		–40 ... +80 °C						

System overview, page 6/4

© Siemens 2022

Accessories

Spare part plugs

	Protection paths	Basic units	Article No.
	N-PE	5SD7481-0, 5SD7464-0 and 5SD7464-1	5SD7488-0
	L-N and L-PEN	5SD7461-0, 5SD7461-1, 5SD7463-0, 5SD7463-1, 5SD7464-0 and 5SD7464-1	5SD7468-1
	L-PEN	5SD7481-1 and 5SD7483-5	5SD7488-2
		5SD7481-1	5SD7488-4

6

System overview, page 6/4

© Siemens 2022

5SD74 surge arresters, type 2

Narrow design

	For TN-S and TT systems	
Protection paths	L-N and N-PE	L-N and N-PE
Rated voltage U_n	240 V AC	240/415 V AC
Rated arrester voltage U_C; L-N, N-PE, L-(PE)N	350 V AC	350 V AC
Rated arrester voltage U_C; N-PE	264 V AC	264 V AC
		

Circuit	Mounting width	Rated discharge surge current I_n (8/20 µs)			
		L-N or L-(PE)N	N-PE		
With remote signaling					
1 + 1	24 mm (1 1/3 MW)	20 kA	20 kA	5SD7422-1	–
3 + 1	48 mm (2 2/3 MW)	20 kA	20 kA	–	5SD7424-1
		20 kA	40 kA	–	–
Without remote signaling					
1 + 1	24 mm (1 1/3 MW)	20 kA	20 kA	5SD7422-0	–
3 + 1	48 mm (2 2/3 MW)	20 kA	20 kA	–	5SD7424-0
		20 kA	40 kA	–	–

Further technical specifications

		5SD7422-0 5SD7422-1	5SD7424-0 5SD7424-1
Standards			
Standards		IEC 61643-11, EN 61643-11	
Approvals		KEMA/UL/cUL	
Voltage			
Protection level U_p	L-N and L-PEN	≤1.50 kV	
	L-PE	≤1.90 kV	
	N-PE	≤1.50 kV	
Current			
Rated discharge surge current I_n (8/20 µs)	L-N and L-PEN	20 kA	
	N-PE	20 kA	
Max. discharge surge current $I_{max.}$ (8/20 µs)	L-N	40 kA	
	N-PE	40 kA	
Function			
Response time t_A	L-N and L-PEN	≤25 ns	
	L-N and N-PE	≤100 ns	
Connections			
Conductor cross-section	Finely stranded	2.5 ... 16 mm²	
	Solid	2.5 ... 25 mm²	
Protection devices			
Max. back-up fuse acc. to IEC 61643-1	For stub wiring (gL/gG)	315 A	
	For V wiring (gL/gG)	63 A	
Short-circuit withstand current	With max. back-up fuse	25 kA	
Ambient conditions			
Degree of protection		IP20, with connected conductors	
Temperature range		–40 ... +80 °C	

System overview, page 6/4

© Siemens 2022

Accessories

Spare part plugs

	Protection paths	Basic units	Article No.
	N-PE	5SD7422-0, 5SD7422-1, 5SD7424-0 and 5SD7424-1	5SD7428-0
	L-N and L-PEN	5SD7422-0, 5SD7422-1, 5SD7424-0 and 5SD7424-1	5SD7428-1

System overview, page 6/4

© Siemens 2022

5SD74 surge arresters, type 3

		For TN-S and TT systems		
Protection paths		L-N, L-PE, N-PE, (L+) – (L–) and (L+/L–) – PE	L-N, L-PE, N-PE, (L+) – (L–) and (L+/L–) – PE	L-N, L-PE, N-PE, (L+) – (L–) and (L+/L–) – PE
Rated voltage U_n		24 V AC	120 V AC	230 V AC
Rated arrester voltage U_C		34 V AC	150 V AC	264 V AC
				
Circuit	**Mounting width**			
With remote signaling				
1 + 0	1 MW	5SD7432-5	5SD7432-6	5SD7432-7

6

Further technical specifications

		5SD7432-5	5SD7432-6	5SD7432-7
Standards				
Standards		IEC 61643-11; EN 61643-11		
Approvals		KEMA/UL/cUL		
Voltage				
Protection level U_p	L-N, L-PE and N-PE	≤200/≤600 V	≤750/≤850 V	≤1250/≤1400 V
Current				
Rated load current I_L (at 30 °C)		26 A		
Rated discharge surge current I_n (8/20 µs)		1 kA	5 kA	
Combined surge $U_{open\ collector}$		2 kV	6 kV	
Function				
Response time t_A		≤100 ns		
Connections				
Conductor cross-section	Finely stranded	0.2 ... 2.5 mm²		
	Solid	0.2 ... 4 mm²		
Protection devices				
Required back-up fuse, max.	(gG/B/C)	25 A		
Ambient conditions				
Degree of protection		IP20, with connected conductors		
Temperature range		–40 ... +80 °C		
Display				
Visual function/fault indication		Yes		

System overview, page 6/4

© Siemens 2022

System overview, page 6/4

© Siemens 2022



Mandatory basic protection in electrical installations

Overcurrents in electrical installations occur as a result of excessive load or short-circuits and can cause serious accidents, fires and financial damage. Appropriate protection devices have therefore been mandatory ever since electricity was first harnessed to power equipment. As a pioneer in fuse systems, we offer you the complete range of devices for the protection of cables as well as electrical devices and installations in the event of overloads and short-circuits.

Fuses are capable of safely switching off circuits as soon as an overload or short-circuit occurs. This prevents damage to electrical equipment or extended power failures. Specific variants of fuse systems are used for different applications.

Among other things, our fuses are used for protecting cables and lines, switching devices and semiconductors as well as in photovoltaics and wind power.

© Siemens 2022

Fuse Systems



All the information you need 7/2

System overview 7/4

Overview of fuse systems according to IEC 7/6

Fuse holders and bases 7/8

- Quick selection guide 7/8
- MINIZED fuse switch disconnectors 7/12
- MINIZED switch disconnectors with fuses 7/13
- NEOZED bus-mounting switch disconnectors with fuses 7/14
- NEOZED fuse bases 7/16
- DIAZED fuse bases 7/18
- Bus-mounting bases for 8US busbar systems 7/20
- LV HRC fuse bases 7/22
- Cylindrical fuse holders 7/24
- Fuse holders and bases for SITOR semiconductor fuses 7/25
- Photovoltaic cylindrical fuse holders 7/26
- Photovoltaic cumulative fuse bases 7/27
- Class J fuse holders 7/28
- Class CC fuse holders 7/29

Fuse links 7/30

- Quick selection guide 7/30
- NEOZED fuse links 7/32
- DIAZED fuse links 7/33
- SILIZED fuse links 7/34
- LV HRC fuse links 7/36
- 3NA COM LV HRC fuse links with communication and measuring function 7/50
- Cylindrical fuse links 7/52
- SITOR semiconductor fuse links (LV HRC design) 7/54
- SITOR semiconductor fuses (cylindrical fuse design) 7/71
- Photovoltaic cylindrical fuse links 7/78
- Photovoltaic cumulative fuse links 7/79
- Class CC fuse links 7/80

Accessories 7/82

- Busbars 7/82
- LV HRC signal detectors, electronic fuse monitoring 7/88

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about fuse systems, please visit our website
www.siemens.com/fuses

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technology primer
  - Fuse systems (109482303)

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products www.siemens.com/conversion-tool

Siemens YouTube channel

- Siemens fuse systems bit.ly/2kWaepz

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Fuse systems sie.ag/2kW3pnU

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number www.siemens.com/product?Article No.

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your SITOR semiconductor fuse at
www.siemens.com/lowvoltage/sitor-configurator

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  - Fuse systems **(45314810)**
  - Planning with SIVACON 8PS **(109478425)**
- Installation manual
  - Circuit protection devices with communication and measuring function **(109791805)**
- System manual
  - Circuit protection devices with communication and measuring function **(109791806)**

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)

Technical overview – Fuse systems

The fast way to get you to our online services

This page provides you with comprehensive information and links on fuse systems
www.siemens.com/lowvoltage/product-support (109769085)

© Siemens 2022

System overview

Fuse holders and bases

IEC fuse holders and bases


MINIZED


NEOZED


DIAZED


Bus-mounting bases for busbars


Photovoltaic cumulative fuses

IEC/UL fuse holders and bases


LV HRC fuses


Cylindrical fuses


SITOR semiconductor fuses (LV HRC design)


SITOR semiconductor fuses (cylindrical fuse design)



Photovoltaic cylindrical fuses

UL fuse holders and bases


Class CC


Class J

Accessories for fuse holders and bases


Covers


Screw caps


Adapter sleeves


Isolating blades



LV HRC signal detectors

Busbars and accessories


Can be cut


Terminals


Touch protection


End caps

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Fuse links

IEC fuse links



NEOZED



DIAZED



LV HRC



LV HRC
(3NA COM)



Cylindrical fuses



SILIZED



Photovoltaic cumulative fuses



Photovoltaic cylindrical fuses

IEC/UL fuse links



SITOR semiconductor fuses
(LV HRC design)



SITOR semiconductor fuses
(cylindrical fuse design)

UL fuse links



Class CC

Note:
You will find a detailed range of accessories with the basic units.

7

© Siemens 2022

Overview of fuse systems according to IEC

Fuse links





Standard	IEC	IEC
Rated current I_n	2 ... 100 A	2 ... 100 A
Rated voltage U_n (AC)	400 V	500 ... 750 V
Rated voltage U_n (DC)	250 V	500 ... 750 V
Design/application	NEOZED/SILIZED	DIAZED/SILIZED

Selection according to protection task

Cables and conductors, general (gG, gFF)	■	■
Motor protection (aM)	–	–
Power semiconductor (aR, gR, gS)	■	■
Photovoltaic protection (gPV)	–	–
Battery protection (aR, gR, gBAT)	–	–
Type	5SE	5SA, 5SB, 5SC, 5SD
More information	See page 7/32 See page 7/34	See page 7/33 See page 7/34

Fuse holders and bases

For protection tasks

Overview, see page 7/8

	Floor mounting	DIN rail	Busbar	Type	Standard	More information		
Fuse bases	–	■	■	5SG	IEC	See page 7/12	■	–
	■	■	■	5SF	IEC	See page 7/18	–	■
	■	–	–	3NH	IEC/UL	See page 7/22	–	–
	■	–	–	3NH7	IEC	See page 7/22	–	–
	–	■	■	3NW7	IEC/UL	See page 7/24	–	–
	–	■	–	3NC..	IEC/UL	See page 7/25	–	–
	–	■	–	3NW7...-4	IEC	See page 7/26	–	–



For protection and switching tasks

System overview, see page 8/94, 8/126

	Floor mounting	DIN rail	Busbar	Type	Standard	More information		
Fuse switch disconnectors	■	■	■	3NP1	IEC/UL	See page 8/94	–	–
	■	–	■	3NP5	IEC/UL	See page 8/96	–	–
	–	■	■	5SG76	IEC	See page 8/112	■	–
	–	–	■	3NJ4	IEC	See page 8/100	–	–
Switch disconnector with fuse	■	■	–	3KF LV HRC	IEC	See page 8/126	–	–
	■	■	–	3KF SITOR	IEC/UL	See page 8/128	–	–
	–	–	■	3NJ63	IEC	See page 8/134	–	–
	–	■	■	5SG71	IEC	See page 8/142	■	–





System overview, page 7/4

© Siemens 2022

Overview, see page 7/30

						
IEC	IEC	IEC	IEC/UL	IEC/UL	IEC	UL
2 ... 1250 A	80 ... 315 A	0.5 ... 100 A	2 ... 2400 A	1 ... 125 A	2 ... 630 A	0.5 ... 30 A
400 ... 690 V	400 V	400 ... 690 V	500 ... 2500 V	600 ... 1500 V	–	600 V
250 ... 400 V	250 V	–	440 ... 3000 V	250 ... 1000 V	1000 ... 1500 V	150 ... 300 V
LV HRC	LV HRC	Cylindrical	SITOR LV HRC	SITOR cylindrical	Photovoltaic	Class CC
■	■	■	–	–	–	■
■	–	■	–	–	–	■
–	–	–	■	■	–	–
–	–	–	–	–	■	–
–	–	–	■	■	–	–
3NA, 3ND	3NA COM	3NW6, 3NW8	3NE, 3NC	3NC10	3NE..., 3NW...	3NW1, 3NW2, 3NW3
See page 7/36	See page 7/50	See page 7/52	See page 7/54	See page 7/71	See page 7/79 See page 7/78	See page 7/80
–	–	–	–	–	–	–
–	–	–	–	–	–	–
■	■	–	■	–	–	–
–	–	–	–	–	■	–
–	–	■	–	–	–	■
–	–	–	–	■	–	–
–	–	–	–	–	■	–
■	■	–	■	–	–	–
■	■	–	■	–	–	–
–	–	–	–	–	–	–
■	■	–	–	–	–	–
■	■	–	(■)	–	–	–
–	–	–	■	–	–	–
■	■	–	–	–	–	–
–	–	–	–	–	–	–


7

System overview, page 7/4

© Siemens 2022

Quick selection guide of fuse holders, bases and D0 fuse switching devices

IEC

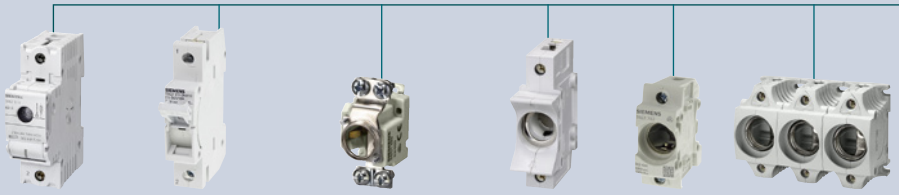

			MINIZED switch disconnectors with fuses	MINIZED fuse switch disconnectors	NEOZED fuse bases			NEOZED comfort bases	NEOZED fuse bases	DIAZED fuse bases
Basic data										
Size/for fuses of size			D02	D01	D01	D02	D03	D01, D02	D01, D02	NDz, DII, DIII
Type			5SG71	5SG76	5SG15 5SG55	5SG16 5SG56	5SG18	5SG1301 5SG1701 5SG5301 5SG5701	5SG1302 5SG1702 5SG5302 5SG5702	5SF
Standards										
Standards			DIN VDE 0638; EN 60947-3 (VDE 0660-107) EC/EN 60947-3	DIN VDE 0638; EN 60947-3 (VDE 0660-107) EC/EN 60947-3	IEC 60269-3; DIN VDE 0636-3			IEC 60269-3; DIN VDE 0636-3	IEC 60269-3; DIN VDE 0636-3	IEC 60269-3; DIN VDE 0635; DIN VDE 0636-3; CEE 16
Approvals			–	–	–			–	–	–
Certifications			–	–	–			–	–	–
Technical specifications AC										
Rated voltage	U_n	V AC	230/400, 240/415	230/400, 240/415	400	400	400	–	–	500, 690, 750
Rated insulation voltage		V AC	500	690	–	–	–	–	–	–
Short-circuit strength		kA AC	50	50	50	50	50	50	50	50
Rated current	I_n	A	63	16	16	63	100	16/63	16/63	2 ... 100
Rated impulse withstand voltage		kV AC	6	6	–	–	–	–	–	–
Utilization category	Acc. to VDE 0638	A	AC-22	AC-22	–	–	–	–	–	–
	Acc. to EN 60947-3	A	AC-22B, AC-23B (35A)	AC-22A	–	–	–	–	–	–
Technical specifications DC										
Rated voltage	U_n	V DC	65 (1P), 130 (2P)	48 (1P), 110 (2P)	250	250	250	–	–	500, 600, 750
	U_n acc. to UL	V DC	–	–	–	–	–	–	–	–
Short-circuit strength		kA DC	–	–	8	8	8	8	8	–
Utilization category	Acc. to EN 60947-3	A	DC-22B	–	–	–	–	–	–	–
Further technical specifications										
Overvoltage category			IV	IV		–		–	–	III; II (DIAZED fuse bases made of molded plastic for use at 690 V AC/ 600 V DC)
Max. power dissipation of fuse links (conductor cross-section used)		W	–	–		–		–	–	–
Pollution degree			–	–		–		–	–	–
Further information										
			See page 7/13	See page 7/12	See page 7/16					See page 7/18

[1] Extended rated voltage up to 1000 V

7

System overview, page 7/4

© Siemens 2022

IEC








Cylindrical fuse holders		LV HRC fuse bases						Photovoltaic cumulative fuse bases						NEOZED bus-mounting bases for 8US 60 mm compact busbar systems	NEOZED bus-mounting bases for 8US 60 mm bus-bar systems	DIAZED bus-mounting bases for 8US 60 mm busbar systems	
8×32 mm	22×58 mm	000/ 00	0	1	2	3	4	1	1L	2L	3L	1XL	2XL	D02	D02	DII	DII
3NW73..	3NW72..	–	–	–	–	–	–	3NH7...-4						5SG6208	5SG6202 5SG6206 5SG6207	5SF6014 5SF6015 5SF6020	5SF6214 5SF6215 5SF6220
IEC 60269-1, -2, -3; NF C 60-200, NF C 63-210, -211; NBN C 63269-2-1; CEI 32-4, -12; UL 4248-1		IEC 60269-1, -2; EN 60269-1; DIN VDE 0636-2, UL 4248-1 (only downstream from the branch protection)						IEC 60269, IEC 60269-2, IEC 60947						IEC 60269-3, DIN VDE 0636-3	IEC 60269-3, DIN VDE 0636-3	IEC 60269-3, DIN VDE 0636-3	IEC 60269-3, DIN VDE 0636-3
UL File number E171267		KEMA; UL file number E171267-IZLT2						–	–	–	–	–	–	–	–	–	–
–	–	–						–	–	–	–	–	–	–	–	–	–
400	690	690 [1]	690 [1]	690 [1]	690 [1]	690 [1]	690	–	–	–	–	–	–	400	400	500	690
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
20	100	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
20	100	160	160	250	400	630	1250	160	250	400	630	250	400	63	63	25	63
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
AC-20B (switching without load)		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	250	440	440	440	440	440	1000	1000	1000	1000	1500	1500	250	250	–	600
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	25	25	25	25	25	25	–	–	–	–	–	–	8	8	8	8
DC-20B (switching without load)		–	–	–	–	–	–	DC-20B (switching without load)						–	–	–	–
–		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–		12	25	32	45	60	90	40	90	110	130	90	110	–	–	–	–
–		–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
See page 7/22		See page 7/22						See page 7/21						See page 7/20			

System overview, page 7/4

© Siemens 2022

Quick selection guide of fuse holders, bases and D0 fuse switching devices

IEC/UL





			LV HRC fuse bases					Fuse holders for SITOR semiconductor fuses (cylindrical fuse design)			
Basic data											
Size/for fuses of size			000/00	0	1	2	3	10 × 38 mm	14 × 51 mm	22 × 58 mm	22 × 127 mm
Type [2]			3NH3030 3NH4030	3NH3120	3NH3220 3NH3230 3NH4230	3NH3320 3NH3330	3NH3420 3NH3430	3NC10	3NC14	3NC22	3NC23
Standards											
Standards			IEC 60269-1, -2; EN 60269-1; DIN VDE 0636-2, UL 4248-1 (only downstream from the branch protection)					UL 4248-1; CSA C22.2; IEC 60269-2, IEC 60947-3	UL 4248-1; CSA C22.2; IEC 60269-2, IEC 60947-3	UL 4248-1; CSA C22.2; IEC 60269-2, IEC 60947-3	IEC 60269-2, IEC 60947-3
Approvals			KEMA, UL file number E171267-IZLT2					UL 4248-1; UL File number E171267; CSA C22.2 No. 39-M			–
Certifications			–					㊊, ㊎	㊊, ㊎	㊊, ㊎	–
Technical specifications AC											
Rated voltage	U_n	V AC	690 [1]	690 [1]	690 [1]	690 [1]	690 [1]	690	690	690	1500
	U_n acc. to UL	V AC	690	690	1000	1000	1000	600	600	600	–
	U_n acc. to CSA	V AC	600	600	600	600	600	–	–	–	–
Rated insulation voltage		V AC	–	–	–	–	–	–	–	–	–
Short-circuit strength		kA AC	–	–	–	–	–	50	50 (100 at 400 V)	50 (100 at 500 V)	30
Rated current	I_n	A	160	160	250	400	630	32	50	100	63
	I_n acc. to UL	A	160	160	250	–	500	30	50	80	–
	I_n acc. to CSA	A	160	160	250	–	850	30	40	80	–
Rated impulse withstand voltage		kV AC	–	–	–	–	–	6	6	6	–
Utilization category	Acc. to VDE 0638	A	–	–	–	–	–	–	–	–	–
	Acc. to EN 60947-3	A	–	–	–	–	–	AC-22B (400 V)	AC-22B (400 V)	AC-20B (690 V)	AC-20B
Technical specifications DC											
Rated voltage	U_n	V DC	250	440	440	440	440	800			1000
	U_n acc. to UL	V DC	–	–	–	–	–	–	–	–	–
Short-circuit strength		kA DC	25	25	25	25	25	–	–	–	50
Utilization category	Acc. to EN 60947-3	A	–	–	–	–	–	–	–	–	DC-20B
Further technical specifications											
Overvoltage category			–	–	–	–	–	–	–	–	–
Max. power dissipation of fuse links (conductor cross-section used)		W	12	25	32	45	60	3 (6 mm²), 4.3 (10 mm²)	5 (10 mm²), 6.5 (25 mm²)	9.5 (35 mm²), 11 (50 mm²)	15 (1 ... 50 mm²)
Pollution degree			–	–	–	–	–	2	2	2	–
Further information											
			See page 7/22					See page 7/72			

[1] Extended rated voltage up to 1000 V
[2] Types with UL approval and types with CSA approval may differ

7

System overview, page 7/4

© Siemens 2022

IEC/UL

UL









Cylindrical fuse holders		Photovoltaic cylindrical fuse holders		Class CC fuse holders	Class J fuse holders				
10 × 38 mm	14 × 51 mm	10 x 38 mm	10 x 85 mm	–	–				
3NW70.. 3NW703.-1	3NW71..	3NW70..-4	3NW76..-4	3NW75.3-0HG 3NW753.-1HG	3NW75.3-3HG, 3NW75.3-5HG, 3NW75.3-6HG, 3NW75.3-7HG, 3NW75.3-8HG, 3NW7431-6HG, 3NW7431-7HG, 3NW7431-8HG				
IEC 60269-1, -2, -3; NF C 60-200, NF C 63-210, -211; NBN C 63269-2-1; CEI 32-4, -12; UL 4248-1		IEC 60269, IEC 60269-2, IEC 60947, UL 4248-1, -18	IEC 60269, IEC 60269-2, IEC 60947, UL 4248-1, -18	UL 4248-1; CSA C22.2	UL 4248-1 Ed.1, UL 4248-8 Ed.1				
UL File number E171267		(File number E469670, CCC) (types without signal detector)	(E355487)	UL 4248-1; UL File number E171267; CSA C22.2	UL File number E171267; CSA File number 233322; Class number 6225-01				
,		–	–	–	,	,	c us	c us	, Busbar device: c us
690	690	–	–	–	–	–	–	–	–
600	700	–	–	600	600	600	600	600	600
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
100	100	–	–	200	200	200	200	200	200
32	50	30	32	30	30	60	100	200	400
–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	6	–	6	No information as the devices are only tested and certified to UL/CSA and not to IEC				
–	–	–	–	–	–				
AC-20B (switching without load)		–	–	AC-20B (switching without load)	AC-20B (switching without load)				
–	–	1000	1500	300	–	–	–	–	–
–	–	–	–	–	600	600	600	600	600
–	–	–	–	–	–	–	–	–	–
DC-20B (switching without load)		–	–	DC-20B (switching without load)	DC-20B (switching without load)				
–		II	–	II	No information as the devices are only tested and certified to UL/CSA and not to IEC				
–		4	6	3 (6 mm²), 4.3 (10 mm²)	–				
–		2	–	2	No information as the devices are only tested and certified to UL/CSA and not to IEC				
See page 7/24		See page 7/26		See page 7/28	See page 7/27				

System overview, page 7/4

© Siemens 2022

MINIZED fuse switch disconnectors

Number of poles		1P	1P+N	2P	3P	3P+N
						
Size	I_n					
D01	2 ... 6 A	5SG7611-0KK06	–	–	5SG7631-0KK06	–
	10 A	5SG7611-0KK10	–	–	5SG7631-0KK10	–
	16 A	5SG7611-0KK16	5SG7651-0KK16	5SG7621-0KK16	5SG7631-0KK16	5SG7661-0KK16

Note:
NEOZED adapter sleeves are not required for these devices

Accessories

Electronic fuse monitor



- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2022

MINIZED switch disconnectors with fuses

Number of poles	1P	1P+N	2P	3P	3P+N
					
Size	**I_n**					
D02	25 A	–	–	–	5SG7133-8BA25 [1]	–
	35 A	–	–	–	5SG7133-8BA35 [1]	–
	50 A	–		–	5SG7133-8BA50 [1]	–
	63 A	5SG7113	5SG7153	5SG7123	5SG7133	5SG7163

[1] Versions for Austria only, with permanently fitted adapter sleeves and incl. fuse link

Note:
NEOZED adapter sleeves are required for these devices, see page 7/16

Accessories

Reducers



Use	Article No.
For D01 fuse links in MINIZED switch disconnectors with fuses D02	5SH5527

Auxiliary switches (AS)



Version	Article No.
1 NO + 1 NC	5ST3010
2 NO	5ST3011
2 NC	5ST3012

Auxiliary switches (AS) with TEST button



Version	Article No.
1 NO + 1 NC	5ST3010-2
2 NO	5ST3011-2
2 NC	5ST3012-2

5ST3 COM auxiliary switches and fault signal contacts (AS+FC) with communication and measuring function



- Wireless information about manual ON/OFF, temperature, operating cycles, operating hours, warnings

Article No.
5ST3062-0MC

Electronic fuse monitor



- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2022

NEOZED bus-mounting switch disconnectors with fuses

For 8US 60 mm busbar systems

							Size D02		
						Mounting width	1.5 MW	1.5 MW	1.5 MW
									
For flat copper profiles	I_n IEC	UL 508	U_n IEC AC	IEC DC	UL 508	Standard	Without LED signal detector		With LED signal detector
Box terminals									
5 mm and 10 mm	63 A [1]	–	400 V AC	–	–	IEC	5SG7234-1	–	5SG7234-2
	63 A [2]	–	400 V AC	110 V DC	–	IEC	–	5SG7230	–

[1] In the case of permanent load over 35 A, we recommend the use of lateral module 5SH5533. Please observe EN 60439-1, Table 1.
[2] In the case of permanent load over 35 A, we recommend the use of lateral module 5SH5526. Please observe EN 60439-1, Table 1.

7

Suitable accessories

Auxiliary switches



- For signaling the switching state for bus-mounting switch disconnectors

Contacts	Mounting width	Article No.	Article No.	Article No.
1 CO	0.5 MW	–	5SH5525	–

Lateral modules



- For greater heat dissipation for loads from 35 A

Mounting width	Article No.	Article No.	Article No.
0.5 MW	5SH5533	5SH5526	5SH5533

Reducers



Use	Article No.	Article No.	Article No.
For NEOZED D01 fuse links in SR60 bus-mounting switch disconnectors	5SH5527	5SH5527	5SH5527

Electronic fuse monitor



- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.	Article No.	Article No.
230 V	4 A	3 AC 380 ... 415 V AC	5TT3170	5TT3170	5TT3170

See SITOR semiconductor fuse links (cylindrical fuse design), **from page 13/1 onwards**

System overview, page 7/4

© Siemens 2022

System overview, page 7/4

© Siemens 2022

NEOZED fuse bases

		Comfort bases made of molded plastic		Fuse bases made of molded plastic			
				Without LED signal detector		With LED signal detector	
Number of poles		1P	3P	1P	3P	1P	3P
							
Size	I_n						
D01	16 A	5SG1301	5SG5301	5SG1302	5SG5302	5SG1302-1	5SG5302-1
D02	63 A	5SG1701	5SG5701	5SG1702	5SG5702	5SG1702-1	5SG5702-1
D03	100 A	–	–	–	–	–	–

Accessories

NEOZED screw caps

	Material	Version	Fuse size	Article No.
	Molded plastic	With inspection hole	D01	5SH4116
			D02	5SH4163
	Ceramic	Without inspection hole, sealable	D01	5SH4316
			D02	5SH4363
		Without inspection hole	D03	5SH4100
		With inspection hole	D01	5SH4317
			D02	5SH4362

NEOZED adapter sleeves

	Fuse size	I_n	Color	Article No.
	D01	2 A	Pink	5SH5002
		4 A	Brown	5SH5004
		6 A	Green	5SH5006
		10/13 A	Red	5SH5010
	D02	20 A	Blue	5SH5020
		25 A	Yellow	5SH5025
		32 A	Violet	5SH5032
		35/40 A	Black	5SH5035
		50 A	White	5SH5050
	D03	80 A	Silver	5SH5080
	D01 fuse links in D02 base or MINIZED switch disconnectors with fuses D02	2 A	Pink	5SH5402
		4 A	Brown	5SH5404
		6 A	Green	5SH5406
		10/13 A	Red	5SH5410
		16 A	Gray	5SH5416

7

Quick selection guide, page 7/8

© Siemens 2022

Fuse bases made of ceramic					
With clamp-type terminal, on both sides		With saddle terminal, on both sides		With screw head contact at incoming feeder, clamp-type terminal at outgoing feeder	
1P	3P	1P	3P	1P	3P
					
5SG1553	5SG5553	–	–	–	–
–	–	5SG1653	5SG5653	5SG1693	5SG5693
–	–	–	–	5SG1812	–

NEOZED covers



Fuse size	Article No.
D03	5SH5233

NEOZED adapter sleeve fitters



	Article No.
	5SH5100

NEOZED retaining springs



Use	Article No.
For D01 fuse links in D02 screw caps, 2 ... 16 A	5SH5400

Electronic fuse monitor



- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

7

Quick selection guide, page 7/8

© Siemens 2022

DIAZED fuse bases

			Fuse bases made of molded plastic With box terminal		Fuse bases made of ceramic With clamp-type terminal, on both sides
		Number of poles	1P	3P	1P
					
Size	I_n	U_n AC/DC			
DII	25 A	500 V/500 V	5SF1060	5SF5068	5SF1005
DIII	63 A	500 V/500 V	5SF1260 [1]	5SF5268 [1]	–
		750 V/750 V	–	–	–

[1] Can also be used for 690 V AC/600 V DC.

7

Accessories

DIAZED screw caps

	Material	Version	Fuse size	Rated voltage AC/DC	Article No.
	Molded plastic	With inspection hole	NDz	500 V/500 V	5SH1112
			DII	500 V/500 V	5SH1221
			DIII	500 V/500 V	5SH1231
	Ceramic	Without inspection hole	DII	500 V/500 V	5SH112
			DIII	500 V/500 V	5SH113
		With inspection hole, sealable	DII	500 V/500 V	5SH122
			DIII	500 V/500 V	5SH123
		Extended version	DIII	690 V/600 V	5SH1170
		With fine thread	DIII	750 V/750 V	5SH1161

DIAZED screw adapters

- Also for 5SF230 up to 750 V

	Fuse size	I_n	Article No.
	DII	2 A	5SH310
		4 A	5SH311
		6 A	5SH312
		10 A	5SH313
		16 A	5SH314
		20 A	5SH315
		25 A	5SH316
	DIII	32 A	5SH327
		35 A	5SH317
		50 A	5SH318
		63 A	5SH320

Quick selection guide, page 7/8

© Siemens 2022

With clamp-type terminal at incoming feeder, saddle terminal at outgoing feeder	With screw head contact, on both sides
1P	1P
	
–	–
5SF1205 [1]	–
–	5SF4230

DIAZED reduction sleeves for screw caps



Use	Article No.
For DII fuse links in DIII base	5SH302

DIAZED adapter sleeve fitters



Use	Article No.
For DII/DIII screw adapters	5SH3703

DIAZED cover rings



Fuse size	Material	Article No.
DII	Molded plastic	5SH3401
DIII	Molded plastic	5SH3411

DIAZED caps



Fuse size	Material	Article No.
DII	Molded plastic	5SH202
DIII	Molded plastic	5SH222

Electronic fuse monitor



- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Quick selection guide, page 7/8

© Siemens 2022

Bus-mounting bases

For 8US busbar systems

				60 mm compact busbar systems	60 mm busbar systems			
				NEOZED design	NEOZED design		DIAZED design	
			Number of poles	3P	3P		3P	
								
Size	**I_n**	**Mounting width**	**U_n AC/DC**	**With touch protection cover**	**Standard**	**With touch protection cover**	**Standard**	**With touch protection cover**
D02	63 A	1.5 MW	–	–	5SG6202	5SG6206	–	–
		2 MW	–	5SG6208	–	5SG6207	–	–
DII	25 A	–	500 V/500 V	–	–	–	5SF6015	5SF6020
DIII	63 A	–	500 V/500 V [1]	–	–	–	5SF6215	5SF6220

[1] Can also be used for 690 V AC/ 600 V DC.

Note:
NEOZED adapter sleeves and DIAZED screw adapters as well as the respective screw caps are required, see page 7/16 and 7/18

7

Accessories

Covers for bus-mounting base standard version for 60 mm busbar systems					
	Design	**Fuse size**	**Version**	**Mounting width (1 MW = 18 mm)**	**Article No.**
	NEOZED	D02	Standard	1.5 MW	5SH5241
			Extra wide	2 MW	5SH5242
			Double width	3 MW	5SH5243
	DIAZED	DII			5SH2042
		DIII			5SH2242

Electronic fuse monitor			
	• For all low-voltage fuse systems • For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact • Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors • Signal also for disconnected loads		
U_e AC	**I_n**	**U_c**	**Article No.**
230 V	4 A	3 AC 380 ... 415 V	5TT3170

See Busbar systems, from page 13/1 onwards


Quick selection guide, page 7/8

© Siemens 2022

Quick selection guide, page 7/8

© Siemens 2022

LV HRC fuse bases

	Ceramic			
Number of poles	1P			
				

Size	I_n	Flat terminals	Plug-in terminal	Saddle-type terminal	Double busbar terminal
000/00	160 A	3NH3030	3NH3031	3NH3032	–
0 [1]	160 A	3NH3120	–	–	–
1	250 A	3NH3230	–	–	3NH3220
2	400 A	3NH3330	–	–	3NH3320
3	630 A	3NH3430	–	–	3NH3420
4	1250 A	3NH3530	–	–	–
4a	1250 A	–	–	–	–

[1] No longer to be used for new installations!

7

Accessories

LV HRC protective covers for LV HRC fuse bases



- As touch protection for contact pieces

Size	Article No.
000/00	3NX3105
0	3NX3114
1	3NX3106
2	3NX3107
3	3NX3108

LV HRC partitions for LV HRC fuse bases



- As intermediate phase and end barrier

Size	Type	Article No.
000/00	3NH30/3NH40	3NX2023
0	3NH31	3NX2030
1	3NH32	3NX2024
2	3NH33	3NX2025
3	3NH34	3NX2026

LV HRC protective covers



Size	Number of poles	Article No.
000/00	1P and 3P	3NX3115

Grip lug cover for plugging into the LV HRC protective cover



Size	Use	Article No.
000/00	When using fuse links with non-insulated grip lugs	3NX3116

Quick selection guide, page 7/8 and 7/10

© Siemens 2022

		Molded plastic	With swivel device
3P		1P	1P
			
Flat terminals	**Saddle-type terminal**	**Flat terminals**	**Flat terminals**
3NH4030	3NH4032	3NH3051	–
–	–	–	–
3NH4230	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	3NH7520

7

Blanking covers for LV HRC fuse bases (instead of LV HRC fuse link)



- Red color
- With inscription "Isolating point"
- Observe width 60 mm of the blank insert when using for size 1

Size	Article No.
000/00	3NX1003
1, 2, 3	3NX1004

Fuse pullers for LV HRC fuse links

Size	Version	Article No.
000 ... 3	Without sleeve	3NX1013
	With sleeve	3NX1014





Isolating blades for LV HRC fuse bases and fuse switch disconnectors

Version	Contacts	Size	Article No.
With insulated grip lugs	Silver-plated	000/00	3NG1002
		0	3NG1102
		1	3NG1202
		2	3NG1302
		3	3NG1402
With non-insulated grip lugs	Tin-coated	4	3NG1503
	Nickel-plated	4a	3NG1505





Quick selection guide, page 7/8 and 7/10

© Siemens 2022

Cylindrical fuse holders

Number of poles		1P	1P+N	2P	3P			3P+N
								
For fuses of size	**I_n**	**Standard**	**Standard**	**Standard**	**Standard**	**Compact**	**Bus-mounting fuse holders**	**Standard**
Without LED signal detector								
8 × 32 mm	20 A	3NW7313	3NW7353	3NW7323	3NW7333	–	–	3NW7363
10 × 38 mm	30 A	–	–	–	–	–	3NW7431	–
	32 A	3NW7013	3NW7053	3NW7023	3NW7033	3NW7033-1	–	3NW7063
14 × 51 mm	50 A	3NW7111	3NW7151	3NW7121	3NW7131	–	–	3NW7161
22 × 58 mm	100 A	3NW7211	3NW7251	3NW7221	3NW7231	–	–	3NW7261
With LED signal detector								
8 × 32 mm	20 A	3NW7314	3NW7354	3NW7324	3NW7334	–	–	3NW7364
10 × 38 mm	32 A	3NW7014	3NW7054	3NW7024	3NW7034	3NW7034-1	–	3NW7064
14 × 51 mm	50 A	3NW7112	3NW7152	3NW7122	3NW7132	–	–	3NW7162
22 × 58 mm	100 A	3NW7212	3NW7252	3NW7222	3NW7232	–	–	3NW7262

Note:
Semiconductor fuses heat up substantially more than standard fuses of operational classes gG and aM.
We therefore recommend only using SITOR cylindrical fuses in the intended SITOR fuse holders and complying with the maximum permissible current-carrying capacity.

Accessories

Auxiliary switches for cylindrical fuse holders, standard



- For retrofitting using the factory-fitted brackets

Display	Fuse link size	Article No.
Disconnection of fuse link, for striker fuse links	14 × 51 mm	3NW7901
	22 × 58 mm	3NW7902
Switching state of fuse holder	8 × 32 mm and 10 × 38 mm	3NW7903

Auxiliary switches for cylindrical fuse holders, compact




In/AC-12	U_n	Contacts	Article No.
5 A	Max. 250 V	1 NO + 1 NC	3NW7903-1

Busbars for cylindrical fuse holders, compact



Number of poles	I_n	Pin spacing	Length	Article No.
2× 3P	63 A	15 mm	45 mm	5ST2601
3× 3P	63 A	15 mm	90 mm	5ST2602
4× 3P	63 A	15 mm	135 mm	5ST2603
5× 3P	63 A	15 mm	180 mm	5ST2604

Terminals for cylindrical fuse holders, compact



Version	Article No.
For conductor cross-sections 2.5 ... 35 mm²	5ST2600

See Busbar systems, from page 13/1 onwards

Quick selection guide, page 7/8 and 7/10

© Siemens 2022

Fuse holders and bases for SITOR semiconductor fuses

For SITOR fuses with bolt-on links or blade contacts

				Ceramic	Metal
					
I_n	U_n AC/DC	For fuse series	Mounting dimensions		
50 A	690 V	3NC18	75 mm	3NH5723	–
315 A	690 V	3NE87, 3NC26	80 mm	3NH5023	–
400 A	690 V	3NE80..-3MK	80 mm	3NH5323	–
630 A	1800 V	3NE53, 3NE56	170 mm	–	3NH5473
1250 A	1250 V	3NC24, 3NC33..-1U, 3NC34..-1U, 3NC84, 3NE1..-3, NE32, 3NE33	110 mm	–	3NH5463
1600 A	690 V	3NE82..-3MK	80 mm	–	3NH5423

7

For cylindrical fuses

		Cylindrical fuse holders, can be used as fuse switch disconnectors			
	Number of poles	1P		2P	3P
					
For fuses of size	U_n AC/DC		With signaling switch		
10 × 38 mm	600 V/–	–	–	–	–
	690 V/800 V	3NC1091	–	3NC1092	3NC1093
14 × 51 mm	690 V/800 V	3NC1491	3NC1491-5	3NC1492	3NC1493
22 × 58 mm	690 V/800 V	3NC2291	3NC2291-5	3NC2292	3NC2293
22 × 127 mm	1500 V/1000 V	3NC2391-0MK	–	3NC2392-0MK	3NC2393-0MK

Note:
Please comply with the maximum permissible current-carrying capacity.

Accessories

Fuse tongs



For fuses of size	Article No.
10 × 38 mm 14 × 51 mm 22 × 58 mm	3NC1000

Quick selection guide, page 7/10

© Siemens 2022

Photovoltaic cylindrical fuse holders

			Without signal detector			With signal detector	
		Number of poles	1P	1P	2P	1P	2P
							
For fuses of size	**I_n**	**U_n DC**					
10 × 38 mm	30 A	1000 V	3NW7013-4	–	3NW7023-4	3NW7014-4	3NW7024-4
10 × 85 mm	32 A	1500 V	–	3NW7613-4	–	–	–

7

Quick selection guide, page 7/10

© Siemens 2022

Photovoltaic cumulative fuse bases

			With flat terminals, ceramic	With swiveling mechanism	With swiveling mechanism and microswitch for tripped signaling
					
Size	**I_n**	**U_n DC**			
1	250 A	1000 V	3NH3230	–	3NH7262-4KK01
1L	250 A	1000 V	–	3NH7260-4	–
2L	400 A	1000 V	–	3NH7360-4	3NH7360-4KK01
3L	630 A	1000 V/1500 V	–	3NH7460-4	–
1XL	250 A	1500 V	–	3NH7261-4	–
2XL	400 A	1500 V	–	3NH7361-4	–

Accessories

Terminal covers for PV fuse bases with swiveling mechanism



Fuse link size	Article No.
1, 1L, 1XL	3NX3121
2L, 2XL	3NX3122
3L	3NX3123

7

Quick selection guide, page 7/10

© Siemens 2022

Class J fuse holders

			For mounting on DIN mounting rail			For screwing onto mounting plate	Bus-mounting fuse holders for 8US 60 mm busbar systems		
Number of poles			1P	2P	3P	3P	3P	3P	3P
									
For fuses of size	I_n	U_n							
21 × 57 mm	30 A	600 V	3NW7511-3HG	3NW7521-3HG	3NW7531-3HG	–	–	–	–
27 × 60 mm	60 A	600 V	3NW7511-5HG	3NW7521-5HG	3NW7531-5HG	–	–	–	–
28 × 118 mm	100 A	600 V	–	–	–	3NW7531-6HG	3NW7431-6HG	–	–
41 × 146 mm	200 A	600 V	–	–	–	3NW7531-7HG	–	3NW7431-7HG	–
54 × 181 mm	400 A	600 V	–	–	–	3NW7531-8HG	–	–	3NW7431-8HG

7

Quick selection guide, page 7/10

© Siemens 2022

Class CC fuse holders

		Standard			Compact		Bus-mounting fuse holders for 8US 60 mm busbar systems
Number of poles		1P	2P	3P	3P		3P
							
I_n	U_n				Signal detector without	with	
30 A	600 V	3NW7513-0HG	3NW7523-0HG	3NW7533-0HG	3NW7533-1HG	3NW7534-1HG	3NW7431-0HG

Accessories for standard Class CC fuse holders, see Busbar systems, from page 13/1 onwards

Accessories

Auxiliary switches for cylindrical fuse holders, compact




In/AC-12	U_n	Contacts	Article No.
5 A	Max. 250 V	1 NO + 1 NC	3NW7903-1

Busbars for Class CC fuse holders, compact



Number of poles	I_n	Pin spacing	Length	Article No.
2× 3P	63 A	15 mm	45 mm	5ST2601
3× 3P	63 A	15 mm	90 mm	5ST2602
4× 3P	63 A	15 mm	135 mm	5ST2603
5× 3P	63 A	15 mm	180 mm	5ST2604

Terminals for Class CC fuse holders, compact



Version	Article No.
For conductor cross-sections 2.5 ... 35 mm²	5ST2600

Quick selection guide, page 7/10

© Siemens 2022

Quick selection guide of fuse links

IEC



		NEOZED fuse links	DIAZED fuse links	SILIZED fuse links	LV HRC fuse links	3NA COM LV HRC fuse links [1]
Basic data						
Design		NEOZED	DIAZED	NEOZED, DIAZED	LV HRC	LV HRC
Size/for fuses of size		D01, D02, D03	NDz, DII, DIII	D01, D02, DII, DIII, DIV	000/00, 0, 1, 2, 3, 4, 4a	2
Operational class		gG	gG	gR	gG, aM	gG, gFF
Rated current	A	2 ... 100	2 ... 100	10 ... 100	2 ... 1250	80 ... 315
Standards						
Standard		IEC 60269-3 DIN VDE 0636-3	IEC 60269-3 DIN VDE 0635 DIN VDE 0636-3 CEE 16	IEC 60269-3/-4 DIN VDE 0636-3 DIN EN 60269-4 (VDE 0636-4)	IEC 60269-1/-2 EN 60269-1/-2 DIN VDE 0636-1/-2	IEC 60269-1/-2 EN 60269-1/-2 DIN VDE 0636-1/-2
Approvals		VDE	VDE	–	CSA 22.2, VDE	VDE, KEMA
Technical specifications AC						
Rated voltage AC	V	400	500 ... 750	400 ... 500	400 ... 690 600 (CSA)	400
Rated breaking capacity AC	kA	50	50	50	120	100
Technical specifications DC						
Rated voltage DC	V	250	500 ... 750	250 ... 500	250 ... 440	–
Rated breaking capacity DC	kA	8	8	8	25	–
Further information						
		See page 7/33	See page 7/33	See page 7/34	See page 7/42	See page 7/42

[1] With current measuring function and wireless communication

System overview, page 7/4

© Siemens 2022

IEC			IEC/UL		UL
					
Cylindrical fuse links	**Photovoltaic cylindrical fuse links**	**Photovoltaic cumulative fuse links**	**SITOR LV HRC semiconductor fuse links**	**SITOR cylindrical semiconductor fuse links**	**Class CC fuse links**
Cylindrical	Cylindrical	LV HRC	LV HRC	Cylindrical	Cylindrical
8 × 32 mm, 10 × 38 mm, 14 × 51 mm, 22 × 58 mm	10 × 38 mm, 10 × 85 mm	1, 1L, 2L, 3L, 1XL, 2XL	000, 00, 1, 2, 3	10 × 38 mm, 14 × 51 mm, 22 × 58 mm	–
gG, aM	gPV	gPV	gS, gR, aR	gS, gR, aR	–
0,5 ... 100	2 ... 20	63 ... 630	6 ... 2400	1 ... 125	0.6 ... 30
IEC 60269-1/-2 NF C 60-200 NF C 63-210/-211 NBN C 63269-2 IEC 32-4/-12	IEC 60269-6	IEC 60269-6	IEC 60269-4	IEC 60269-2	–
UL 4248-1; CSA	–	–	UL 4248-1 UL 4248-13	UL 4248-1 UL 4248-13	UL 4248-1 CSA C22.2
400 ... 690 400 ... 600 (UL/CSA)	–	–	500 ... 2500	690 ... 1500 600 ... 1500 (UL/CSA)	600
20 ... 120	–	–	100 ... 150	100	200
–	1000 ... 1500	1000 ... 1500	400 ... 1500	250 ... 1000	150 ... 300
–	30	30	–	–	–
See page 7/42	See page 7/42	See page 7/42	See page 7/42	See page 7/42	See page 7/42

System overview, page 7/4

© Siemens 2022

NEOZED fuse links

Operational class gG

				Size D01	Size D02	Size D03
						
I_n	Identification color	Contacts	U_n AC/DC			
2 A	Pink	–	400 V/250 V	5SE2302	–	–
4 A	Brown	–	400 V/250 V	5SE2304	–	–
6 A	Green	–	400 V/250 V	5SE2306	–	–
10 A	Red	–	400 V/250 V	5SE2310	–	–
13 A	Black	–	400 V/250 V	5SE2013-2A	–	–
16 A	Gray	–	400 V/250 V	5SE2316	–	–
20 A	Blue	Tin-coated	400 V/250 V	–	5SE2320	–
25 A	Yellow	Tin-coated	400 V/250 V	–	5SE2325	–
32 A	Violet	Tin-coated	400 V/250 V	–	5SE2332	–
35 A	Black	Tin-coated	400 V/250 V	–	5SE2335	–
40 A	Black	Silver-plated	400 V/250 V	–	5SE2340	–
50 A	White	Silver-plated	400 V/250 V	–	5SE2350	–
63 A	Copper	Silver-plated	400 V/250 V	–	5SE2363	–
80 A	Blue	–	400 V/250 V	–	–	5SE2280
100 A	Red	–	400 V/250 V	–	–	5SE2300

Quick selection guide, page 7/30

© Siemens 2022

DIAZED fuse links

			Size DII E27	Size DIII [1] E33		Size DIV R 1¼"	Size TNDz E16
		Operational class	gG	gG	quick	gG	slow
							
I_n	Identification color	U_n AC/DC					
2 A	Pink	500 V/500 V	5SB211	–	–	–	5SA211
		690 V/600 V	–	5SD8002	–	–	–
		750 V/750 V	–	–	5SD601	–	–
4 A	Brown	500 V/500 V	5SB221	–	–	–	5SA221
		690 V/600 V	–	5SD8004	–	–	–
		750 V/750 V	–	–	5SD602	–	–
6 A	Green	500 V/500 V	5SB231	–	–	–	5SA231
		690 V/600 V	–	5SD8006	–	–	–
		750 V/750 V	–	–	5SD603	–	–
10 A	Red	500 V/500 V	5SB251	–	–	–	5SA251
		690 V/600 V	–	5SD8010	–	–	–
		750 V/750 V	–	–	5SD604	–	–
16 A	Gray	500 V/440 V	5SB2611	–	–	–	5SA2611
		690 V/600 V	–	5SD8016	–	–	–
		750 V/750 V	–	–	5SD605	–	–
20 A	Blue	500 V/440 V	5SB2711	–	–	–	5SA2711
		690 V/600 V	–	5SD8020	–	–	–
		750 V/750 V	–	–	5SD606	–	–
25 A	Yellow	500 V/440 V	5SB2811	–	–	–	5SA2811
		690 V/600 V	–	5SD8025	–	–	–
		750 V/750 V	–	–	5SD607	–	–
32 A	Violet	500 V/440 V	–	5SB4011	–	–	–
35 A	Black	500 V/440 V	–	5SB4111	–	–	–
		690 V/600 V	–	5SD8035	–	–	–
		750 V/750 V	–	–	5SD608	–	–
50 A	White	500 V/440 V	–	5SB4211	–	–	–
		690 V/600 V	–	5SD8050	–	–	–
		750 V/750 V	–	–	5SD610	–	–
63 A	Copper	500 V/440 V	–	5SB4311	–	–	–
		690 V/600 V	–	5SD8063	–	–	–
		750 V/750 V	–	–	5SD611	–	–
80 A	Silver	500 V/400 V	–	–	–	5SC211	–
100 A	Red	500 V/400 V	–	–	–	5SC221	–

[1] For 2 ... 25 A use screw adaptor DII

Quick selection guide, page 7/30

© Siemens 2022

SILIZED fuse links

Operational class gR

				NEOZED design		DIAZED design		
				Size D01	Size D02	Size DII	Size DIII	Size DIV
								
I_n	Switch-off I²t value	Power loss P_v	U_n AC/DC					
10 A	73 A²s	6,9 W	400 V/250 V	5SE1310	–	–	–	–
16 A	60 A²s	12,1 W	500 V/500 V	–	–	5SD420	–	–
	120 A²s	6,2 W	400 V/250 V	5SE1316	–	–	–	–
20 A	139 A²s	12,3 W	500 V/500 V	–	–	5SD430	–	–
	190 A²s	8,1 W	400 V/250 V	–	5SE1320	–	–	–
25 A	205 A²s	12,5 W	500 V/500 V	–	–	5SD440	–	–
	215 A²s	8,2 W	400 V/250 V	–	5SE1325	–	–	–
30 A	310 A²s	13,5 W	500 V/500 V	–	–	5SD480	–	–
35 A	470 A²s	16,7 W	400 V/250 V	–	5SE1335	–	–	–
	539 A²s	14,8 W	500 V/500 V	–	–	–	5SD450	–
50 A	1250 A²s	18,5 W	500 V/500 V	–	–	–	5SD460	–
	1960 A²s	12,0 W	400 V/250 V	–	5SE1350	–	–	–
63 A	1890 A²s	28 W	500 V/500 V	–	–	–	5SD470	–
	4230 A²s	15,5 W	400 V/250 V	–	5SE1363	–	–	–
80 A	4200 A²s	34,3 W	500 V/500 V	–	–	–	–	5SD510
100 A	8450 A²s	41,5 W	500 V/500 V	–	–	–	–	5SD520

Quick selection guide, page 7/30


© Siemens 2022

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class gG, with combination alarm

	Size 000	Size 00	Size 1
Mounting width	21 mm	30 mm	30 mm
			

I_n	U_n AC/DC			
Insulated grip lugs				
2 A	500 V/250 V	3NA6802	–	–
	690 V [1]/250 V	3NA6802-6	–	–
4 A	500 V/250 V	3NA6804	–	–
	690 V [1]/250 V	3NA6804-6	–	–
6 A	500 V/250 V	3NA6801	–	–
	690 V [1]/250 V	3NA6801-6	–	–
10 A	400 V/–	3NA6803-4	–	–
	500 V/250 V	3NA6803	–	–
	690 V [1]/250 V	3NA6803-6	–	–
16 A	400 V/–	3NA6805-4	–	–
	500 V/250 V	3NA6805	–	–
	690 V [1]/250 V	3NA6805-6	–	–
	500 V/440 V	–	–	3NA6105
20 A	400 V/–	3NA6807-4	–	–
	500 V/250 V	3NA6807	–	–
	690 V [1]/250 V	3NA6807-6	–	–
	500 V/440 V	–	–	3NA6107
25 A	400 V/–	3NA6810-4	–	–
	500 V/250 V	3NA6810	–	–
	690 V [1]/250 V	3NA6810-6	–	–
	500 V/440 V	–	–	3NA6110
32 A	400 V/–	3NA6812-4	–	3NA6114-4
	500 V/250 V	3NA6812	–	–
	690 V [1]/250 V	3NA6812-6	–	–
35 A	400 V/–	3NA6814-4	–	–
	500 V/250 V	3NA6814	–	–
	690 V [1]/250 V	3NA6814-6	–	–
	500 V/440 V	–	–	3NA6114
40 A	400 V/–	3NA6817-4	–	3NA6117-4
	500 V/250 V	3NA6817	–	–
	690 V [1]/250 V	3NA6817-6KJ	3NA6817-6	–
	500 V/440 V	–	–	3NA6117
50 A	400 V/–	3NA6820-4	–	3NA6120-4
	500 V/250 V	3NA6820	–	–
	690 V [1]/250 V	3NA6820-6KJ	3NA6820-6	–
	500 V/440 V	–	–	3NA6120
	690 V [1]/440 V	–	–	3NA6120-6

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/30

© Siemens 2022

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
		
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA6214	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA6220-4	–
–	–	–
–	–	–
–	3NA6220	–
–	–	–


7

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class gG, with combination alarm

	Size 000	Size 00	Size 1
Mounting width	21 mm	30 mm	30 mm
			

I_n	U_n AC/DC			
Insulated grip lugs				
63 A	400 V/–	3NA6822-4	–	3NA6122-4
	500 V/250 V	3NA6822	–	–
	690 V [1]/250 V	–	3NA6822-6	–
	500 V/440 V	–	–	3NA6122
	690 V [1]/440 V	–	–	3NA6122-6
80 A	400 V/–	3NA6824-4	3NA6824-4KK	3NA6124-4
	500 V/250 V	3NA6824	3NA6824-7	–
	690 V [1]/250 V	–	3NA6824-6	–
	500 V/440 V	–	–	3NA6124
	690 V [1]/440 V	–	–	3NA6124-6
100 A	400 V/–	3NA6830-4	3NA6830-4KK	3NA6130-4
	500 V/250 V	3NA6830	3NA6830-7	–
	690 V [1]/250 V	–	3NA6830-6	–
	500 V/440 V	–	–	3NA6130
	690 V [1]/440 V	–	–	3NA6130-6
125 A	400 V/–	–	3NA6832-4	–
	500 V/250 V	–	3NA6832	–
	500 V/440 V	–	–	3NA6132
	690 V [1]/440 V	–	–	3NA6132-6
160 A	400 V/–	–	3NA6836-4	3NA6136-4
	500 V/250 V	–	3NA6836	–
	500 V/440 V	–	–	3NA6136
	690 V [1]/440 V	–	–	3NA6136-6
200 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
224 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
250 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
300 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
315 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
355 A	400 V/–	–	–	–
	500 V/440 V	–	–	–
400 A	400 V/–	–	–	–
	500 V/440 V	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

7

Quick selection guide, page 7/30

© Siemens 2022


Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
		
–	3NA6222-4	–
–	–	–
–	–	–
–	3NA6222	–
–	–	–
–	3NA6224-4	–
–	–	–
–	–	–
–	3NA6224	–
–	3NA6224-6	–
–	3NA6230-4	–
–	–	–
–	–	–
–	3NA6230	–
–	3NA6230-6	–
–	3NA6232-4	–
–	–	–
–	3NA6232	–
–	3NA6232-6	–
–	3NA6236-4	–
–	–	–
–	3NA6236	–
–	3NA6236-6	–
3NA6140-4	3NA6240-4	–
3NA6140	3NA6240	–
3NA6140-6	3NA6240-6	–
3NA6142-4	3NA6242-4	–
3NA6142	3NA6242	–
–	–	3NA6242-6
3NA6144-4	3NA6244-4	–
3NA6144	3NA6244	–
–	–	3NA6244-6
–	–	3NA6250-4
–	–	3NA6250
–	–	3NA6250-6
–	–	3NA6252-4
–	–	3NA6252
–	–	3NA6252-6
–	–	3NA6254-4
–	–	3NA6254
–	–	3NA6260-4
–	–	–

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class gG, with combination alarm

		Size 000	Size 00	Size 1
	Mounting width	21 mm	30 mm	30 mm
				
I_n	U_n AC/DC			
Non-insulated grip lugs				
2 A	500 V/250 V	3NA7802	–	–
	690 V [1]/250 V	3NA7802-6	–	–
4 A	500 V/250 V	3NA7804	–	–
	690 V [1]/250 V	3NA7804-6	–	–
6 A	500 V/250 V	3NA7801	–	–
	690 V [1]/250 V	3NA7801-6	–	–
10 A	500 V/250 V	3NA7803	–	–
	690 V [1]/250 V	3NA7803-6	–	–
16 A	500 V/250 V	3NA7805	–	–
	690 V [1]/250 V	3NA7805-6	–	–
	500 V/440 V	–	–	3NA7105
20 A	500 V/250 V	3NA7807	–	–
	690 V [1]/250 V	3NA7807-6	–	–
	500 V/440 V	–	–	3NA7107
25 A	500 V/250 V	3NA7810	–	–
	690 V [1]/250 V	3NA7810-6	–	–
	500 V/440 V	–	–	3NA7110
32 A	500 V/250 V	3NA7812	–	–
	690 V [1]/250 V	3NA7812-6	–	–
35 A	500 V/250 V	3NA7814	–	–
	690 V [1]/250 V	3NA7814-6	–	–
	500 V/440 V	–	–	3NA7114
40 A	500 V/250 V	3NA7817	–	–
	690 V [1]/250 V	3NA7817-6KJ	3NA7817-6	–
	500 V/440 V	–	–	3NA7117
50 A	500 V/250 V	3NA7820	–	–
	690 V [1]/250 V	3NA7820-6KJ	3NA7820-6	–
	500 V/440 V	–	–	3NA7120
	690 V [1]/440 V	–	–	3NA7120-6
63 A	500 V/250 V	3NA7822	–	–
	690 V [1]/250 V	–	3NA7822-6	–
	500 V/440 V	–	–	3NA7122
	690 V [1]/440 V	–	–	3NA7122-6
80 A	500 V/250 V	3NA7824	3NA7824-7	–
	690 V [1]/250 V	–	3NA7824-6	–
	500 V/440 V	–	–	3NA7124
	690 V [1]/440 V	–	–	3NA7124-6
100 A	500 V/250 V	3NA7830	3NA7830-7	–
	690 V [1]/250 V	–	3NA7830-6	–
	500 V/440 V	–	–	3NA7130
	690 V [1]/440 V	–	–	3NA7130-6
125 A	500 V/250 V	–	3NA7832	–
	500 V/440 V	–	–	3NA7132
	690 V [1]/440 V	–	–	3NA7132-6

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

7

Quick selection guide, page 7/30

© Siemens 2022

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
		
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA7214	–
–	–	–
–	–	–
–	–	–
–	–	–
–	–	–
–	3NA7220	–
–	–	–
–	–	–
–	–	–
–	3NA7222	–
–	–	–
–	–	–
–	–	–
–	3NA7224	–
–	3NA7224-6	–
–	–	–
–	–	–
–	3NA7230	–
–	3NA7230-6	–
–	–	–
–	3NA7232	–
–	3NA7232-6	–


7

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class gG, with combination alarm

	Size 000	Size 00	Size 1
Mounting width	21 mm	30 mm	30 mm
			

I_n	U_n AC/DC			
Non-insulated grip lugs				
160 A	500 V/250 V	–	3NA7836	–
	500 V/440 V	–	–	3NA7136
	690 V [1]/440 V	–	–	3NA7136-6
200 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
224 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
250 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
300 A	690 V [1]/440 V	–	–	–
315 A	500 V/440 V	–	–	–
	690 V [1]/440 V	–	–	–
355 A	–	–	–	–
400 A	500 V/440 V	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/30

© Siemens 2022

Size 1	Size 2	Size 2
47.2 mm	47.2 mm	57.8 mm
		
–	–	–
–	3NA7236	–
–	3NA7236-6	–
3NA7140	3NA7240	–
3NA7140-6	3NA7240-6	–
3NA7142	3NA7242	–
–	–	3NA7242-6
3NA7144	3NA7244	–
–	–	3NA7244-6
–	–	3NA7250-6
–	–	3NA7252
–	–	3NA7252-6
–	–	–
–	–	3NA7260

7

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class gG, with front indicator

		Size 000	Size 00	Size 0	Size 1	
Mounting width		21 mm	30 mm	30 mm	30 mm	47.2 mm
						
I_n	U_n AC/DC					
Non-insulated grip lugs						
2 A	500 V/250 V	3NA3802	–	–	–	–
	690 V [1]/250 V	3NA3802-6	–	–	–	–
4 A	500 V/250 V	3NA3804	–	–	–	–
	690 V [1]/250 V	3NA3804-6	–	–	–	–
6 A	500 V/250 V	3NA3801	–	–	–	–
	690 V [1]/250 V	3NA3801-6	–	–	–	–
	500 V/440 V	–	–	3NA3001	–	–
10 A	500 V/250 V	3NA3803	–	–	–	–
	690 V [1]/250 V	3NA3803-6	–	–	–	–
	500 V/440 V	–	–	3NA3003	–	–
16 A	500 V/250 V	3NA3805	–	–	–	–
	690 V [1]/250 V	3NA3805-6	–	–	–	–
	500 V/440 V	–	–	3NA3005	3NA3105	–
20 A	500 V/250 V	3NA3807	–	–	–	–
	690 V [1]/250 V	3NA3807-6	–	–	–	–
	500 V/440 V	–	–	3NA3007	3NA3107	–
25 A	500 V/250 V	3NA3810	–	–	–	–
	690 V [1]/250 V	3NA3810-6	–	–	–	–
	500 V/440 V	–	–	3NA3010	3NA3110	–
32 A	500 V/250 V	3NA3812	–	–	–	–
	690 V [1]/250 V	3NA3812-6	–	–	–	–
	500 V/440 V	–	–	3NA3012	–	–
35 A	500 V/250 V	3NA3814	3NA3814-7	–	–	–
	690 V [1]/250 V	–	–	–	–	–
	500 V/440 V	–	–	3NA3014	3NA3114	–
40 A	500 V/250 V	3NA3817	–	–	–	–
	690 V [1]/250 V	3NA3817-6KJ	3NA3817-6	–	–	–
	500 V/440 V	–	–	3NA3017	3NA3117	–
50 A	500 V/250 V	3NA3820	3NA3820-7	–	–	–
	690 V [1]/250 V	3NA3820-6KJ	3NA3820-6	–	–	–
	500 V/440 V	–	–	3NA3020	3NA3120	–
	690 V [1]/440 V	–	–	–	3NA3120-6	–
63 A	500 V/250 V	3NA3822	3NA3822-7	–	–	–
	690 V [1]/250 V	–	3NA3822-6	–	–	–
	500 V/440 V	–	–	3NA3022	3NA3122	–
	690 V [1]/440 V	–	–	–	3NA3122-6	–
80 A	500 V/250 V	3NA3824	3NA3824-7	–	–	–
	690 V [1]/250 V	–	3NA3824-6	–	–	–
	500 V/440 V	–	–	3NA3024	3NA3124	–
	690 V [1]/440 V	–	–	–	3NA3124-6	–
100 A	500 V/250 V	3NA3830	3NA3830-7	–	–	–
	690 V [1]/250 V	–	3NA3830-6	–	–	–
	500 V/440 V	–	–	3NA3030	3NA3130	–
	690 V [1]/440 V	–	–	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/30

© Siemens 2022

Size 2		Size 3		Size 4 (IEC design)	Size 4a
47.2 mm	57.8 mm	57.8 mm	71.2 mm	101.8 mm	101.8 mm
					
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3214	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3220	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3224	–	–	–	–	–
3NA3224-6	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3230	–	–	–	–	–
–	–	–	–	–	–

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class gG, with front indicator

		Size 000	Size 00	Size 0	Size 1	
Mounting width		21 mm	30 mm	30 mm	30 mm	47.2 mm
						
I_n	U_n AC/DC					
Non-insulated grip lugs						
125 A	400 V/250 V	3NA3832-8	–	–	–	–
	500 V/250 V	–	3NA3832	–	–	–
	500 V/440 V	–	–	3NA3032	3NA3132	–
	690 V [1]/440 V	–	–	–	3NA3132-6	–
160 A	400 V/250 V	3NA3836-8	–	–	–	–
	500 V/250 V	–	3NA3836	–	–	–
	500 V/440 V	–	–	3NA3036	3NA3136	–
	690 V [1]/440 V	–	–	–	3NA3136-6	–
200 A	500 V/440 V	–	–	–	–	3NA3140
	690 V [1]/440 V	–	–	–	–	3NA3140-6
224 A	500 V/440 V	–	–	–	–	3NA3142
	690 V [1]/440 V	–	–	–	–	–
250 A	500 V/440 V	–	–	–	–	3NA3144
	690 V [1]/440 V	–	–	–	–	3NA3144-6
300 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
315 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
355 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
400 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
425 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
500 A	500 V/440 V	–	–	–	–	–
	690 V [1]/440 V	–	–	–	–	–
630 A	500 V/440 V	–	–	–	–	–
800 A	500 V/440 V	–	–	–	–	–
1000 A	500 V/440 V	–	–	–	–	–
1250 A	500 V/440 V	–	–	–	–	–

[1] Manufacturer's confirmation for 690 V +10% rated voltage available on request.

Quick selection guide, page 7/30

© Siemens 2022

Size 2		Size 3		Size 4 (IEC design)	Size 4a
47.2 mm	57.8 mm	57.8 mm	71.2 mm	101.8 mm	101.8 mm
					
–	–	–	–	–	–
–	–	–	–	–	–
3NA3232	–	–	–	–	–
3NA3232-6	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3NA3236	–	–	–	–	–
3NA3236-6	–	–	–	–	–
3NA3240	–	3NA3340	–	–	–
3NA3240-6	–	–	–	–	–
3NA3242	–	3NA3342	–	–	–
–	3NA3242-6	–	–	–	–
3NA3244	–	3NA3344	–	–	–
–	3NA3244-6	3NA3344-6	–	–	–
–	3NA3250	3NA3350	–	–	–
–	3NA3250-6	–	–	–	–
–	3NA3252	3NA3352	–	–	–
–	3NA3252-6	3NA3352-6	–	–	–
–	3NA3254	3NA3354	–	–	–
–	–	–	3NA3354-6	–	–
–	3NA3260	3NA3360	–	–	–
–	–	–	3NA3360-6	–	–
–	–	–	3NA3362	–	–
–	–	–	3NA3362-6	–	–
–	–	–	3NA3365	–	3NA3665
–	–	–	3NA3365-6	–	–
–	–	–	3NA3372	3NA3472	3NA3672
–	–	–	–	3NA3475	3NA3675
–	–	–	–	3NA3480	3NA3680
–	–	–	–	3NA3482	3NA3682

Quick selection guide, page 7/30

© Siemens 2022

LV HRC fuse links

Operational class aM, with front indicator

		Size 000	Size 00	Size 1		Size 2		Size 3	
Mounting width		21 mm	30 mm	30 mm	47.2 mm	47.2 mm	57.8 mm	57.8 mm	71.2 mm
									
I_n	U_n AC								
Non-insulated grip lugs									
6 A	500 V	3ND1801	–	–	–	–	–	–	–
10 A	500 V	3ND1803	–	–	–	–	–	–	–
16 A	500 V	3ND1805	–	–	–	–	–	–	–
20 A	500 V	3ND1807	–	–	–	–	–	–	–
25 A	500 V	3ND1810	–	–	–	–	–	–	–
32 A	500 V	3ND1812	–	–	–	–	–	–	–
35 A	500 V	3ND1814	–	–	–	–	–	–	–
40 A	500 V	3ND1817	–	–	–	–	–	–	–
50 A	500 V	3ND1820	–	–	–	–	–	–	–
63 A	500 V	3ND1822	–	–	–	–	–	–	–
	690 V	–	–	3ND2122	–	–	–	–	–
80 A	500 V	3ND1824	–	–	–	–	–	–	–
	690 V	–	–	3ND2124	–	–	–	–	–
100 A	500 V	3ND1830-8	3ND1830	–	–	–	–	–	–
	690 V	–	–	3ND2130	–	–	–	–	–
125 A	500 V	–	3ND1832	–	–	–	–	–	–
	690 V	–	–	–	3ND2132	3ND2232	–	–	–
160 A	500 V	–	3ND1836	–	–	–	–	–	–
	690 V	–	–	–	3ND2136	3ND2236	–	–	–
200 A	690 V	–	–	–	3ND2140	3ND2240	–	–	–
250 A	690 V	–	–	–	3ND2144	3ND2244	–	–	–
315 A	690 V	–	–	–	–	–	3ND2252	3ND2352	–
355 A	690 V	–	–	–	–	–	3ND2254	3ND2354	–
400 A	690 V	–	–	–	–	–	3ND2260	3ND2360	–
500 A	690 V	–	–	–	–	–	–	–	3ND1365
630 A	690 V	–	–	–	–	–	–	–	3ND1372

Quick selection guide, page 7/30

© Siemens 2022

Quick selection guide, page 7/30

© Siemens 2022

3NA COM LV HRC fuse links with communication and measuring function


With front indicator and non-insulated grip lugs

		Size 2, with electronic module [1]		Size 2, without electronic module [2]	
		Operational class gG	Operational class gFF (for the Netherlands)	Operational class gG	Operational class gFF (for the Netherlands)
Mounting width		59 mm	59 mm	59 mm	59 mm
					
I_n	U_n AC				
80 A	400 V	–	3NA3224-4KK03	–	3NA3224-4KK04
100 A	400 V	3NA3230-4KK01	3NA3230-4KK03	3NA3230-4KK02	3NA3230-4KK04
125 A	400 V	3NA3232-4KK01	3NA3232-4KK03	3NA3232-4KK02	3NA3232-4KK04
160 A	400 V	3NA3236-4KK01	3NA3236-4KK03	3NA3236-4KK02	3NA3236-4KK04
200 A	400 V	3NA3240-4KK01	3NA3240-4KK03	3NA3240-4KK02	3NA3240-4KK04
224 A	400 V	3NA3242-4KK01	–	3NA3242-4KK02	–
250 A	400 V	3NA3244-4KK01	3NA3244-4KK03	3NA3244-4KK02	3NA3244-4KK04
315 A	400 V	3NA3252-4KK01	–	3NA3252-4KK02	–

[1] Electronic module is mounted by simple insertion

[2] For spare part purposes (electronic module can be reused after the fuse has been replaced!)

7KN Powercenter 1000 data transceiver

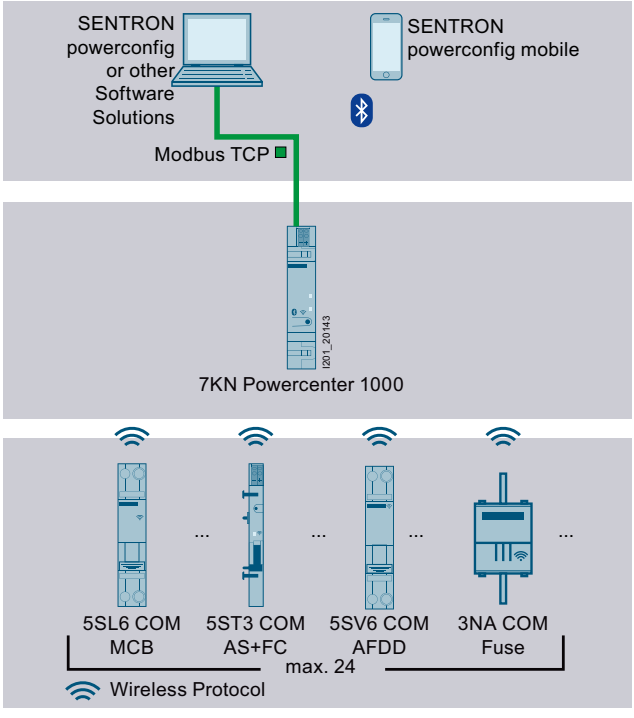

- Wireless radio transmission of measured values and data to the 7KN Powercenter 1000 data transceiver
- Commissioning, parameter assignment, firmware updates and further processing of the data via the 7KN Powercenter 1000 data transceiver



7KN Powercenter 1000	Article No.
	7KN1110-0MC00

See page 10/19

You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation manual – Circuit protection devices with communication and measuring function (109791805)

System manual – Circuit protection devices with communication and measuring function (109791806)

Quick selection guide, page 7/30

© Siemens 2022

Measurement functions

- Rms value of the current (average 10 s)
- Temperature (measured in electronic module)

Monitoring functions (alarm) with limit monitoring

- Limit values can be set for:
  - Current/overcurrent > Limit value 1
  - Current/overcurrent > Limit value 2
  - Overtemperature
  - Operating hours counter
  - Operating hours counter with load current > Limit value
  - Values

Technical specifications

	Electronic module for 3NA COM
Current measuring range	2.5 ... 440 A (rms value)
Measuring accuracy of current measurement/5-minute average of rms value	
• At reference temperature 25 °C	± 1 % (8 A ... 440 A), ± 2 % (2.5 A ... 8 A)
• In the range -10 °C ... +70 °C	± 2.2 % (8 A ... 440 A), ± 3,2 % (2.5 A ... 8 A)
Minimum current	5 A (to maintain the radio connection)
Temperature measuring range	+20 ... +120 °C
Measuring accuracy of temperature measurement	± 2.5 °C
Active power input per phase during current measurement	50 mW
Maximum transmit power	8 dBm
Minimum/maximum ambient temperature during operation	–10 °C/+55 °C
Minimum/maximum ambient temperature during storage	–10 °C/+70 °C
Relative humidity at 25 °C without condensation	Max. 95 %
Degree of protection IP	IP20
Pollution degree	2
Reference condition for measuring accuracy	IEC 61557-12
Measuring method	TRMS
Power supply	CT Harvesting
European standards	
RED Safety	EN 60669-2-5
RED Health	EN 62479
RED EMV	EN 63044-3/-5-3, EN 301489-17, EN 300480-17
RED Radio Spec	EN 300328
International standards	
For EMC	EN 63044-5-3, IEC 61000-6-2, IEC 61000-4-2/-3/-4/-5/-6/-8/-11
For shocks, bumps, free fall, environmental tests	IEC 60068-2-1/-2/-6/-27/-29/-30/-32
Approvals	VDE, KEMA KEUR

Measured values

		Measuring interval	Storage time
Current			
Current (rms value)	A	10 s	1 h
Average current (rms value)	A	15 min	7 d
Minimum current	A	1 d	10 d
Maximum current	A	1 d	10 d
Temperature			
Temperature	°C	1 min	1 h
Average temperature	°C	15 min	7 d
Minimum temperature	°C	1 d	10 d
Maximum temperature	°C	1 d	10 d
Operating hours counter			
Operating hours counter	h	Unlimited	Unlimited
Operating hours counter with load current > Limit value	h	Unlimited	Unlimited

Quick selection guide, page 7/30

© Siemens 2022

Cylindrical fuse links

Operational class gG

		Size 8 × 32 mm	Size 10 × 38 mm	Size 14 × 51 mm	Size 22 × 58 mm
					
I_n	U_n AC				
0.5 A	500 V	–	3NW6000-1	–	–
1 A	500 V	–	3NW6011-1	–	–
2 A	400 V	3NW6302-1	–	–	–
	500 V	–	3NW6002-1	–	–
4 A	400 V	3NW6304-1	–	–	–
	500 V	–	3NW6004-1	–	–
	690 V	–	–	3NW6104-1	–
6 A	400 V	3NW6301-1	–	–	–
	500 V	–	3NW6001-1	–	–
	690 V	–	–	3NW6101-1	–
8 A	500 V	–	3NW6008-1	–	–
	690 V	–	–	3NW6108-1	–
10 A	400 V	3NW6303-1	–	–	–
	500 V	–	3NW6003-1	–	–
	690 V	–	–	3NW6103-1	–
12 A	500 V	–	3NW6006-1	–	–
	690 V	–	–	3NW6106-1	–
16 A	400 V	3NW6305-1	–	–	–
	500 V	–	3NW6005-1	–	–
	690 V	–	–	3NW6105-1	3NW6205-1
20 A	400 V	3NW6307-1	–	–	–
	500 V	–	3NW6007-1	–	–
	690 V	–	–	3NW6107-1	3NW6207-1
25 A	500 V	–	3NW6010-1	–	–
	690 V	–	–	3NW6110-1	3NW6210-1
32 A	400 V	–	3NW6012-1	–	–
	690 V	–	–	3NW6112-1	3NW6212-1
40 A	500 V	–	–	3NW6117-1	–
	690 V	–	–	–	3NW6217-1
50 A	500 V	–	–	3NW6120-1	–
	690 V	–	–	–	3NW6220-1
63 A	500 V	–	–	–	3NW6222-1
80 A	500 V	–	–	–	3NW6224-1
100 A	500 V	–	–	–	3NW6230-1

7

Quick selection guide, page 7/30

© Siemens 2022

Operational class aM

		Size 10 × 38 mm	Size 14 × 51 mm	Size 22 × 58 mm
				
I_n	U_n AC			
0.5 A	500 V	3NW8000-1	–	–
1 A	500 V	3NW8011-1	–	–
2 A	500 V	3NW8002-1	–	–
	690 V	–	3NW8102-1	–
4 A	500 V	3NW8004-1	–	–
	690 V	–	3NW8104-1	–
6 A	500 V	3NW8001-1	–	–
	690 V	–	3NW8101-1	–
8 A	500 V	3NW8008-1	–	–
	690 V	–	3NW8108-1	–
10 A	500 V	3NW8003-1	–	–
	690 V	–	3NW8103-1	–
12 A	500 V	3NW8006-1	–	–
	690 V	–	3NW8106-1	–
16 A	500 V	3NW8005-1	3NW8105-1	–
	690 V	–	–	3NW8205-1
20 A	400 V	3NW8007-1	–	–
	500 V	–	3NW8107-1	–
	690 V	–	–	3NW8207-1
25 A	400 V	3NW8010-1	–	–
	500 V	–	3NW8110-1	–
	690 V	–	–	3NW8210-1
32 A	400 V	3NW8012-1	–	–
	500 V	–	3NW8112-1	–
	690 V	–	–	3NW8212-1
40 A	500 V	–	3NW8117-1	–
	690 V	–	–	3NW8217-1
50 A	400 V	–	3NW8120-1	–
	690 V	–	–	3NW8220-1
63 A	500 V	–	–	3NW8222-1
80 A	500 V	–	–	3NW8224-1
100 A	500 V	–	–	3NW8230-1

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class gS, with blade contacts without slots

					Size 000	Size 00	Size 1	Size 2	Size 3
									
I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n AC					
16 A	200 A²s	4 W	1.00	690 V [1]	3NE1813-0	–	–	–	–
20 A	430 A²s	5 W	1.00	690 V [1]	3NE1814-0	–	–	–	–
25 A	780 A²s	5 W	1.00	690 V [1]	3NE1815-0	–	–	–	–
35 A	1700 A²s	3.5 W	1.00	690 V [1]	3NE1803-0	–	–	–	–
40 A	3000 A²s	3 W	1.00	690 V [1]	3NE1802-0	–	–	–	–
50 A	4400 A²s	6 W	1.00	690 V [1]	3NE1817-0	–	–	–	–
63 A	9000 A²s	7 W	1.00	690 V [1]	3NE1818-0	–	–	–	–
80 A	18000 A²s	8 W	1.00	690 V [1]	3NE1820-0	–	–	–	–
100 A	33000 A²s	10 W	1.00	690 V [1]	–	3NE1021-0	–	–	–
125 A	63000 A²s	11 W	1.00	690 V [1]	–	3NE1022-0	–	–	–
160 A	60000 A²s	24 W	1.00	690 V [1]	–	–	3NE1224-0	–	–
200 A	100000 A²s	27 W	1.00	690 V [1]	–	–	3NE1225-0	–	–
250 A	200000 A²s	30 W	1.00	690 V [1]	–	–	3NE1227-0	–	–
315 A	310000 A²s	38 W	1.00	690 V [1]	–	–	3NE1230-0	–	–
350 A	430000 A²s	42 W	1.00	690 V [1]	–	–	–	3NE1331-0	–
400 A	590000 A²s	45 W	1.00	690 V [1]	–	–	–	3NE1332-0	–
450 A	750000 A²s	53 W	1.00	690 V [1]	–	–	–	3NE1333-0	–
500 A	950000 A²s	56 W	1.00	690 V [1]	–	–	–	3NE1334-0	–
560 A	1700000 A²s	50 W	1.00	690 V [1]	–	–	–	–	3NE1435-0
630 A	2350000 A²s	55 W	1.00	690 V [1]	–	–	–	–	3NE1436-0
710 A	3400000 A²s	58 W	1.00	690 V [1]	–	–	–	–	3NE1437-0
800 A	5000000 A²s	58 W	1.00	690 V [1]	–	–	–	–	3NE1438-0
Further information									
Installation in 3NH LV HRC fuse bases					■	■	■	■	■
Installation in 3NP and 3KF fuse switching devices					■	■	■	■	■

[1] For the max. DC voltage, see the Configuration Manual "Fuse Systems", chapter "Configuration", "Use with direct current"

7

Quick selection guide, page 7/30

© Siemens 2022

Operational class gR, with bolt-on links

						Size 000	Size 00
					Screw fixing, mounting dimension	M8, 80 mm	M10, 80 mm
							
I_n	**Switch-off I²t value**	**Power loss P_v**	**Varying load factor WL**	**U_n AC/DC (IEC)**	**U_n DC (UL)**		
20 A	83 A²s	7 W	0.90	690 V/600 V	700 V	3NE8714-1	–
25 A	140 A²s	9 W	0.90	690 V/600 V	700 V	3NE8715-1	–
32 A	285 A²s	10 W	0.90	690 V/600 V	700 V	3NE8701-1	–
40 A	490 A²s	12 W	0.90	690 V/600 V	700 V	3NE8702-1	–
50 A	815 A²s	15 W	0.90	690 V/600 V	700 V	3NE8717-1	–
63 A	1550 A²s	16 W	0.95	690 V/700 V	700 V	3NE8718-1	–
80 A	3200 A²s	23 W	on req.	690 V/440 V	–	–	3NE8020-3MK
100 A	5200 A²s	29 W	on req.	690 V/440 V	–	–	3NE8021-3MK
Further information							
Screw fixing						■	■
Installation in SITOR fuse bases						2× 3NH5023	2× 3NH5023
Further currents, operational class aR						See page 7/52	See page 7/52

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class gR, with blade contacts without slots

					Size 000	Size 00
						
I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n AC/DC		
6 A	37 A²s	2.7 W	on req.	690 V/400 V	3NE8810-0MK	–
10 A	50 A²s	4.5 W	on req.	690 V/400 V	3NE8812-0MK	–
16 A	73 A²s	6.7 W	on req.	690 V/400 V	3NE8813-0MK	–
20 A	90 A²s	8 W	on req.	690 V/400 V	3NE8814-0MK	–
25 A	150 A²s	8.1 W	on req.	690 V/400 V	3NE8815-0MK	–
	180 A²s	7 W	0.95	690 V [1]/–	–	3NE8015-1
32 A	280 A²s	12 W	0.90	1000 V [1]/–	–	–
	350 A²s	10.5 W	on req.	690 V/400 V	3NE8801-0MK	–
35 A	400 A²s	9 W	0.95	690 V [1]/–	–	3NE8003-1
40 A	480 A²s	12 W	on req.	690 V/400 V	3NE8802-0MK	–
	500 A²s	13 W	0.90	1000 V [1]/–	–	–
50 A	700 A²s	14 W	0.90	690 V [1]/–	–	3NE8017-1
	800 A²s	16 W	0.90	1000 V [1]/–	–	–
	1050 A²s	14.5 W	on req.	690 V/400 V	3NE8817-0MK	–
63 A	1400 A²s	16 W	0.95	690 V [1]/–	–	3NE8018-1
	1960 A²s	23 W	on req.	690 V/400 V	3NE8818-0MK	–
80 A	5800 A²s	10.5 W	1.00	690 V [1]/–	–	3NE1020-2
100 A	11000 A²s	12 W	1.00	690 V [1]/–	–	3NE1021-2
125 A	23000 A²s	13.5 W	1.00	690 V [1]/–	–	3NE1022-2
160 A	18600 A²s	32 W	1.00	690 V [1]/–	–	–
200 A	51800 A²s	35 W	1.00	690 V [1]/–	–	–
250 A	80900 A²s	37 W	1.00	690 V [1]/–	–	–
315 A	168000 A²s	40 W	1.00	690 V [1]/–	–	–
350 A	177000 A²s	43 W	1.00	690 V [1]/–	–	–
400 A	224000 A²s	50 W	1.00	690 V [1]/–	–	–
450 A	276500 A²s	58 W	1.00	690 V [1]/–	–	–
500 A	398000 A²s	64 W	1.00	690 V [1]/–	–	–
560 A	890000 A²s	60 W	1.00	690 V [1]/–	–	–
630 A	1390000 A²s	60 W	1.00	690 V [1]/–	–	–
670 A	1640000 A²s	64 W	1.00	690 V [1]/–	–	–
710 A	1818000 A²s	72 W	1.00	690 V [1]/–	–	–
	2460000 A²s	65 W	1.00	690 V [1]/–	–	–
800 A	2475000 A²s	84 W	1.00	690 V [1]/–	–	–
	3350000 A²s	72 W	1.00	690 V [1]/–	–	–
850 A	3640000 A²s	76 W	1.00	690 V [1]/–	–	–
Further information						
Installation in 3NH LV HRC fuse bases					■	■
Installation in 3NP and 3KF fuse switching devices					■	■
Further currents, operational class aR					See page 7/53	–

[1] For the max. DC voltage, see the Configuration Manual "Fuse Systems", chapter "Configuration", "Use with direct current"

Quick selection guide, page 7/30

© Siemens 2022

Size 0	Size 1	Size 2	Size 3	
				
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3NE4101	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3NE4102	–	–	–	–
–	–	–	–	–
3NE4117	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	3NE1224-2	–	–	–
–	3NE1225-2	–	–	–
–	3NE1227-2	–	–	–
–	3NE1230-2	–	–	–
–	–	3NE1331-2	–	–
–	–	3NE1332-2	–	–
–	–	3NE1333-2	–	–
–	–	3NE1334-2	–	–
–	–	–	–	3NE1435-2
–	–	–	–	3NE1436-2
–	–	–	–	3NE1447-2
–	–	–	–	3NE1437-2
–	–	–	3NE1437-1	–
–	–	–	–	3NE1438-2
–	–	–	3NE1438-1	–
–	–	–	–	3NE1448-2
■	■	■	■	■
■	■	■	■	■
See page 7/53	–	–	–	–

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class gR, with slotted blade contacts

	With 2 oblong slots		With oblong and transverse slots	
Screw fixing, mounting dimension (lateral)	Size 3 M10, 110 mm		Size 1 M10, 110 mm	
				

I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n AC/DC				
32 A	4500 A²s	9 W	on req.	1000 V/600 V	–	–	–	3NE3201-0MK
40 A	900 A²s	26 W	on req.	1500 V/1000 V	–	–	–	–
	6000 A²s	13 W	on req.	1000 V/600 V	–	–	–	3NE3202-0MK
50 A	1800 A²s	27 W	on req.	1500 V/1000 V	–	–	–	–
	8000 A²s	18 W	on req.	1000 V/600 V	–	–	–	3NE3217-0MK
63 A	3100 A²s	34 W	on req.	1500 V/1000 V	–	–	–	–
	9000 A²s	25 W	on req.	1000 V/600 V	–	–	–	3NE3218-0MK
150 A	17600 A²s	40 W	0.85	690 V [1]/–	–	3NC8423-0C	–	–
	33000 A²s	35 W	0.85	500 V/–	3NC2423-0C	–	–	–
160 A	18600 A²s	32 W	1.00	690 V [1]/–	–	–	3NE1224-3	–
200 A	38400 A²s	55 W	0.85	690 V [1]/–	–	3NC8425-0C	–	–
	51800 A²s	35 W	1.00	690 V [1]/–	–	–	3NE1225-3	–
	64000 A²s	40 W	0.85	500 V/–	3NC2425-0C	–	–	–
250 A	70400 A²s	72 W	0.85	690 V [1]/–	–	3NC8427-0C	–	–
	80900 A²s	37 W	1.00	690 V [1]/–	–	–	3NE1227-3	–
	99000 A²s	50 W	0.85	500 V/–	3NC2427-0C	–	–	–
300 A	132000 A²s	65 W	0.85	500 V/–	3NC2428-0C	–	–	–
315 A	168000 A²s	40 W	1.00	690 V [1]/–	–	–	3NE1230-3	–
350 A	176000 A²s	95 W	0.85	690 V [1]/–	–	3NC8431-0C	–	–
	177000 A²s	43 W	1.00	690 V [1]/–	–	–	–	–
	249000 A²s	60 W	0.85	500 V/–	3NC2431-0C	–	–	–
400 A	224000 A²s	50 W	1.00	690 V [1]/–	–	–	–	–
450 A	276500 A²s	58 W	1.00	690 V [1]/–	–	–	–	–
500 A	398000 A²s	64 W	1.00	690 V [1]/–	–	–	–	–
	448000 A²s	130 W	0.85	690 V [1]/–	–	3NC8434-0C	–	–
560 A	890000 A²s	60 W	1.00	690 V [1]/–	–	–	–	–
630 A	1390000 A²s	60 W	1.00	690 V [1]/–	–	–	–	–
670 A	1640000 A²s	64 W	1.00	690 V [1]/–	–	–	–	–
710 A	1818000 A²s	72 W	1.00	690 V [1]/–	–	–	–	–
800 A	2475000 A²s	84 W	1.00	690 V [1]/–	–	–	–	–
850 A	3640000 A²s	76 W	1.00	690 V [1]/–	–	–	–	–
1000 A	1400000 A²s	138 W	1.00	690 V [1]/–	–	–	–	–
1100 A	3000000 A²s	110 W	1.00	690 V [1]/–	–	–	–	–
1250 A	4100000 A²s	104 W	1.00	690 V [1]/–	–	–	–	–
1350 A	4800000 A²s	126 W	1.00	690 V [1]/–	–	–	–	–
1400 A	5200000 A²s	127 W	1.00	690 V [1]/–	–	–	–	–
1600 A	6900000 A²s	152 W	1.00	690 V [1]/–	–	–	–	–
1700 A	6400000 A²s	179 W	1.00	690 V [1]/–	–	–	–	–
1700 A	10000000 A²s	143 W	1.00	690 V [1]/–	–	–	–	–
1900 A	8200000 A²s	196 W	1.00	690 V [1]/–	–	–	–	–
Further information								
Screw fixing					■	■	■	■
Installation in SITOR fuse bases					3NH5463	3NH5463	3NH5463	3NH5463
Installation in LV HRC fuse bases					■	■	■	■
Installation in fuse switching devices					■	■	■	■
Further currents, operational class aR					See page 7/56	–	–	–

[1] For the max. DC voltage, see the Configuration Manual "Fuse Systems", chapter "Configuration", "Use with direct current"

[2] Minimum clearance 90 mm

7

Quick selection guide, page 7/30

© Siemens 2022

Size 2		Size 3		Size 3	Size 2 × 3	Size 3 × 3
M10, 110 mm	M10, 170 mm	M10, 110 mm		M12, 110 mm	M12, 110 mm [2]	M12, 110 mm [2]
						
–	–	–	–	–	–	–
–	3NE5302-0MK06	–	–	–	–	–
–	–	–	–	–	–	–
–	3NE5317-0MK06	–	–	–	–	–
–	–	–	–	–	–	–
–	3NE5318-0MK06	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	3NC8423-3C	–	–	–
–	–	3NC2423-3C	–	–	–	–
–	–	–	–	–	–	–
–	–	–	3NC8425-3C	–	–	–
–	–	–	–	–	–	–
–	–	3NC2425-3C	–	–	–	–
–	–	–	3NC8427-3C	–	–	–
–	–	–	–	–	–	–
–	–	3NC2427-3C	–	–	–	–
–	–	3NC2428-3C	–	–	–	–
–	–	–	–	–	–	–
–	–	–	3NC8431-3C	–	–	–
3NE1331-3	–	–	–	–	–	–
–	–	3NC2431-3C	–	–	–	–
3NE1332-3	–	–	–	–	–	–
3NE1333-3	–	–	–	–	–	–
3NE1334-3	–	–	–	–	–	–
–	–	–	3NC8434-3C	–	–	–
–	–	–	–	3NE1435-3	–	–
–	–	–	–	3NE1436-3	–	–
–	–	–	–	3NE1447-3	–	–
–	–	–	–	3NE1437-3	–	–
–	–	–	–	3NE1438-3	–	–
–	–	–	–	3NE1448-3	–	–
–	–	–	–	–	3NB3350-1KK26	–
–	–	–	–	–	3NB3351-1KK26	–
–	–	–	–	–	3NB3352-1KK26	–
–	–	–	–	–	3NB3354-1KK26	–
–	–	–	–	–	3NB3355-1KK26	–
–	–	–	–	–	3NB3357-1KK26	–
–	–	–	–	–	–	3NB3358-1KK27
–	–	–	–	–	3NB3358-1KK26	–
–	–	–	–	–	–	3NB3362-1KK27
■	■	■	■	■	■	■
3NH5463	3NH5473	3NH5463	3NH5463	3NH5463	–	–
■	■	■	■	■	–	–
■	■	■	■	■	–	–
–	–	See page 7/56	See page 7/56	See page 7/56	–	–

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class aR, with bolt-on links

						Size 000	
					Screw fixing, mounting dimension	M8, 80 mm	M10, 80 mm
							
I_n	**Switch-off I^2t value**	**Power loss P_v**	**Varying load factor WL**	**U_n AC/DC (IEC)**	**U_n DC (UL)**		
80 A	2700 A^2s	18 W	0.90	690 V/600 V	700 V	3NE8720-1	–
100 A	4950 A^2s	19 W	0.95	690 V/600 V	700 V	3NE8721-1	–
125 A	9100 A^2s	23 W	0.95	690 V/600 V	700 V	3NE8722-1	–
160 A	17000 A^2s	31 W	0.90	690 V/600 V	700 V	3NE8724-1	–
200 A	30000 A^2s	36 W	0.90	690 V/600 V	700 V	3NE8725-1	–
250 A	55000 A^2s	42 W	0.90	690 V/600 V	700 V	3NE8727-1	–
315 A	85500 A^2s	54 W	0.85	690 V/600 V	700 V	3NE8731-1	–
350 A	135000 A^2s	58.8 W	on req.	690 V/440 V	–	–	3NE8031-3MK
400 A	170000 A^2s	74.5 W	on req.	690 V/440 V	–	–	3NE8032-3MK
Further information							
Screw fixing						■	■
Installation in SITOR fuse bases						3NH5023	3NH5023
Further currents, operational class gR						See page 7/56	See page 7/56

Quick selection guide, page 7/30

© Siemens 2022

Operational class aR, with blade contacts without slots

					Size 000	Size 00	Size 0	Size 1	Size 2
									
I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n AC/DC					
63 A	1500 A²s	20 W	0.90	1000 V [1]/–	–	–	3NE4118	–	–
80 A	2200 A²s	23.3 W	on req.	690 V/440 V	3NE8820-0MK	–	–	–	–
	2400 A²s	19 W	0.95	690 V [1]/–	–	3NE8020-1	–	–	–
	3000 A²s	22 W	0.90	1000 V [1]/–	–	–	3NE4120	–	–
100 A	3650 A²s	27 W	on req.	690 V/440 V	3NE8821-0MK	–	–	–	–
	6050 A²s	25.5 W	on req.	690 V/440 V	–	–	–	3NE8221-0MK	–
	4200 A²s	22 W	0.95	690 V [1]/–	–	3NE8021-1	–	–	–
	6000 A²s	24 W	0.90	1000 V [1]/–	–	–	3NE4121	–	–
125 A	7800 A²s	30 W	on req.	690 V/440 V	3NE8822-0MK	–	–	–	–
	8900 A²s	28.5 W	on req.	690 V/440 V	–	–	–	3NE8222-0MK	–
	6500 A²s	28 W	0.95	690 V [1]/–	–	3NE8022-1	–	–	–
	14000 A²s	30 W	0.90	1000 V [1]/–	–	–	3NE4122	–	–
160 A	14000 A²s	34 W	on req.	500 V/440 V	3NE8824-0MK	–	–	–	–
	16200 A²s	37 W	on req.	690 V/440 V	–	–	–	3NE8224-0MK	–
	13000 A²s	38 W	0.95	690 V [1]/–	–	3NE8024-1	–	–	–
	29000 A²s	35 W	0.90	1000 V [1]/–	–	–	3NE4124	–	–
200 A	26000 A²s	49 W	on req.	690 V/440 V	–	–	–	3NE8225-0MK	–
250 A	59000 A²s	52 W	on req.	690 V/440 V	–	–	–	3NE8227-0MK	–
315 A	120000 A²s	68 W	on req.	690 V/440 V	–	–	–	3NE8230-0MK	–
350 A	83500 A²s	68.6 W	on req.	690 V/440 V	–	–	–	–	3NE8331-0MK
400 A	136000 A²s	72.8 W	on req.	690 V/440 V	–	–	–	–	3NE8332-0MK
450 A	207000 A²s	80.1 W	on req.	690 V/440 V	–	–	–	–	3NE8333-0MK
500 A	318000 A²s	77.5 W	on req.	690 V/440 V	–	–	–	–	3NE8334-0MK
550 A	399000 A²s	86.4 W	on req.	690 V/440 V	–	–	–	–	3NE8335-0MK
630 A	740000 A²s	90.7 W	on req.	690 V/440 V	–	–	–	–	3NE8336-0MK
Further information									
Installation in 3NH LV HRC fuse bases					■	■	■	■	■
Installation in 3NP and 3KF fuse switching devices					■	■	■	■	■
Further currents, operational class gR					See page 7/48	–	See page 7/48	–	–

[1] For the max. DC voltage, see the Configuration Manual "Fuse Systems", chapter "Configuration", "Use with direct current"

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class aR, with slotted blade contacts

					With 2 oblong slots Size 3	With oblong and transverse slots Size 1	
				Screw fixing, mounting dimension	M10, 110 mm	M8, 80 mm	M10, 110 mm
							
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC/DC			
80 A	3900 A^2s	42 W	on req.	1500 V/1000 V	–	–	–
100 A	4800 A^2s	28 W	0.95	1000 V [1]/–	–	–	3NE3221
	3200 A^2s	25 W	on req.	690 V/440 V	–	3NE8221-3MK	–
	8700 A^2s	45 W	on req.	1500 V/1000 V	–	–	–
125 A	7200 A^2s	36 W	0.95	1000 V [1]/–	–	–	3NE3222
	6000 A^2s	28 W	on req.	690 V/440 V	–	3NE8222-3MK	–
	11800 A^2s	59 W	on req.	1500 V/1000 V	–	–	–
160 A	13000 A^2s	42 W	1.00	1000 V [1]/–	–	–	3NE3224
	10500 A^2s	35 W	on req.	690 V/440 V	–	3NE8224-3MK	–
	37000 A^2s	54 W	on req.	1500 V/1000 V	–	–	–
200 A	30000 A^2s	42 W	1.00	1000 V [1]/–	–	–	3NE3225
	17500 A^2s	42 W	on req.	690 V/440 V	–	3NE8225-3MK	–
	70000 A^2s	56 W	on req.	1500 V/1000 V	–	–	–
250 A	29700 A^2s	105 W	0.85	800 V [1]/–	–	–	–
	48000 A^2s	50 W	1.00	1000 V [1]/–	–	–	3NE3227
	28500 A^2s	53.5 W	on req.	690 V/440 V	–	3NE8227-3MK	–
	165000 A^2s	59 W	on req.	1500 V/1000 V	–	–	–
315 A	60700 A^2s	120 W	0.85	800 V [1]/–	–	–	–
	80000 A^2s	60 W	0.95	1000 V [1]/–	–	–	3NE3230-0B
	300000 A^2s	245 W	on req.	–/3000 V	–	–	–
	53500 A^2s	61 W	on req.	690 V/440 V	–	3NE8230-3MK	–
	250000 A^2s	76 W	on req.	1500 V/1000 V	–	–	–
350 A	100000 A^2s	75 W	0.95	1000 V [1]/–	–	–	3NE3231
	66000 A^2s	69 W	on req.	690 V/440 V	–	3NE8231-3MK	–
400 A	390000 A^2s	50 W	0.85	500 V [1]/–	3NC2432-0C	–	–
	135000 A^2s	80 W	1.00	1000 V [1]/–	–	–	–
		85 W	0.90	1000 V [1]/–	–	–	3NE3232-0B
	110000 A^2s	70.5 W	on req.	690 V/440 V	–	3NE8232-3MK	–
	470000 A^2s	89 W	on req.	1500 V/1000 V	–	–	–
450 A	191000 A^2s	140 W	0.85	800 V [1]/–	–	–	–
	175000 A^2s	90 W	1.00	1000 V [1]/–	–	–	–
		95 W	0.90	1000 V [1]/–	–	–	3NE3233
	180000 A^2s	71 W	on req.	690 V/440 V	–	3NE8233-3MK	–
500 A	276000 A^2s	155 W	0.85	800 V [1]/–	–	–	–
	260000 A^2s	90 W	1.00	1000 V [1]/–	–	–	–
	215000 A^2s	84 W	on req.	690 V/440 V	–	3NE8234-3MK	–
	500000 A^2s	105 W	on req.	1000 V/600 V	–	–	–3NE3234-0MK08
	800000 A^2s	109 W	on req.	1500 V/1000 V	–	–	–
550 A	290000 A^2s	87 W	on req.	690 V/440 V	–	3NE8235-3MK	–
	700000 A^2s	110 W	on req.	1000 V/600 V	–	–	3NE3235-0MK08
560 A	360000 A^2s	95 W	1.00	1000 V [1]/–	–	–	–
630 A	600000 A^2s	100 W	1.00	1000 V [1]/–	–	–	–
	440000 A^2s	96 W	on req.	690 V/440 V	–	3NE8236-3MK	–
	850000 A^2s	127 W	on req.	1000 V/600 V	–	–	3NE3236-0MK08
	1100000 A^2s	163 W	on req.	1500 V/1000 V	–	–	–
710 A	923000 A^2s	155 W	0.95	800 V [1]/–	–	–	–
	800000 A^2s	105 W	1.00	900 V [1]/–	–	–	–
800 A	850000 A^2s	130 W	0.95	800 V [1]/–	–	–	–
900 A	920000 A^2s	165 W	0.95	690 V [1]/–	–	–	–
Further information							
Screw fixing					■	■	■
Installation in SITOR fuse bases					3NH5463	3NH5423	3NH5463
Installation in 3NH LV HRC fuse bases					■	–	■
Installation in 3NP and 3KF fuse switching devices					■	–	■
Further currents, operational class gR					See page 7/46	–	–

[1] For the max. DC voltage, see the Configuration Manual "Fuse Systems", chapter "Configuration", "Use with direct current"

7

Quick selection guide, page 7/30

© Siemens 2022

Size 2			
M10, 110 mm	M10, 170 mm	M10, 190 mm	M12, 260 mm
			
–	3NE5320-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5321-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5322-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5324-0MK06	–	–
–	–	–	–
–	–	–	–
–	3NE5325-0MK06	–	–
3NE4327-0B	–	–	–
–	–	–	–
–	–	–	–
–	3NE5327-0MK06	–	–
3NE4330-0B	–	–	–
–	–	–	–
–	–	–	3NE9330-0MK07
–	–	–	–
–	3NE5330-0MK06	–	–
–	–	–	–
–	–	–	–
–	–	–	–
3NE3332-0B	–	–	–
–	–	–	–
–	–	–	–
–	3NE5332-0MK06	–	–
3NE4333-0B	–	–	–
3NE3333	–	–	–
–	–	–	–
–	–	–	–
3NE4334-0B	–	–	–
3NE3334-0B	–	–	–
–	–	–	–
–	–	–	–
–	3NE5334-0MK06	–	–
–	–	–	–
–	–	–	–
3NE3335	–	–	–
3NE3336	–	–	–
–	–	–	–
–	–	–	–
–	3NE5336-0MK06	3NE5336-0MK66	–
3NE4337	–	–	–
3NE3337-8	–	–	–
3NE3338-8	–	–	–
3NE3340-8	–	–	–
■	■	■	■
3NH5463	3NH5473	3NH5473	–
■	–	–	–
■	–	–	–
–	See page 7/46	–	–

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class aR, with slotted blade contacts

					With oblong and transverse slots Size 3			
				Screw fixing, mounting dimension	M10, 110 mm	M10, 130 mm	M10, 170 mm	M10, 210 mm
								
I_n	Switch-off I^2t value	Power loss P_v	Varying load factor WL	U_n AC [1]				
100 A	13500 A^2s	25 W	1.00	1000 V	–	3NE3421-0C	–	–
125 A	34500 A^2s	78 W	1.00	2500 V	–	–	–	–
160 A	54000 A^2s	56 W	1.00	1500 V	–	–	–	3NE5424-0C
200 A	138000 A^2s	75 W	1.00	2000 V	–	–	–	3NE7425-0U
224 A	54000 A^2s	85 W	1.00	1000 V	–	3NE3626-0C	–	–
	138000 A^2s	80 W	1.00	1500 V	–	–	–	3NE5426-0C
250 A	84000 A^2s	130 W	1.00	1500 V	–	–	3NE5627-0C	–
	218000 A^2s	110 W	1.00	2000 V	–	–	–	3NE7427-0U
315 A	218000 A^2s	80 W	1.00	1000 V	–	3NE3430-0C	–	–
	72500 A^2s	80 W	0.95	1250 V	–	–	–	–
	311000 A^2s	115 W	1.00	1500 V	–	–	–	3NE5430-0C
350 A	428000 A^2s	135 W	1.00	1500 V	–	–	–	3NE5431-0C
	555000 A^2s	120 W	1.00	2000 V	–	–	–	3NE7431-0U
400 A	390000 A^2s	50 W	0.85	500 V	3NC2432-3C	–	–	–
	364000 A^2s	110 W	1.00	1000 V	–	3NE3432-0C	–	–
	163000 A^2s	95 W	0.95	1250 V	–	–	–	–
	620000 A^2s	205 W	1.00	2500 V	–	–	–	–
	870000 A^2s	150 W	1.00	2000 V	–	–	–	3NE7432-0U
450 A	488000 A^2s	110 W	1.00	1000 V	–	3NE3635-0C	–	–
	590000 A^2s	160 W	1.00	1500 V	–	–	3NE5633-0C	–
	870000 A^2s	145 W	0.95	1500 V	–	–	–	3NE5433-0C
	960000 A^2s	160 W	1.00	2000 V	–	–	–	3NE7633-0U
500 A	870000 A^2s	95 W	1.00	1000 V	–	3NE3434-0C	–	–
	290000 A^2s	115 W	0.90	1250 V	–	–	–	–
	1270000 A^2s	235 W	1.00	2500 V	–	–	–	–
525 A	1120000 A^2s	210 W	1.00	2000 V	–	–	–	–
600 A	1950000 A^2s	145 W	1.00	1500 V	–	–	3NE5643-0C	–
630 A	244000 A^2s	120 W	0.85	690 V	–	–	–	–
	418000 A^2s	145 W	0.85	1000 V	–	–	–	–
	1280000 A^2s	132 W	1.00	1000 V	–	3NE3636-0C	–	–
	650000 A^2s	120 W	0.95	1250 V	–	–	–	–
	1950000 A^2s	220 W	1.00	2000 V	–	–	–	3NE7636-0U
	2800000 A^2s	275 W	1.00	2500 V	–	–	–	–
710 A	346000 A^2s	130 W	0.85	690 V	–	–	–	–
	569000 A^2s	150 W	0.85	1000 V	–	–	–	–
	1950000 A^2s	145 W	1.00	1000 V	–	3NE3637-0C	–	–
	3110000 A^2s	275 W	1.00	2000 V	–	–	–	–
800 A	498000 A^2s	135 W	0.90	690 V	–	–	–	–
	819000 A^2s	155 W	0.85	1000 V	–	–	–	–
	985000 A^2s	145 W	0.90	1100 V	–	–	–	–
900 A	677000 A^2s	145 W	0.90	690 V	–	–	–	–
	1160000 A^2s	165 W	0.90	1000 V	–	–	–	–
1000 A	2480000 A^2s	140 W	0.85	600 V	3NC8444-3C	–	–	–
	975000 A^2s	155 W	0.95	690 V	–	–	–	–
	1670000 A^2s	170 W	0.90	1000 V	–	–	–	–
1100 A	1382000 A^2s	165 W	0.95	690 V	–	–	–	–
	1910000 A^2s	185 W	0.90	800 V	–	–	–	–
1250 A	1990000 A^2s	175 W	0.95	690 V	–	–	–	–
	2600000 A^2s	210 W	0.90	800 V	–	–	–	–
1400 A	2100000 A^2s	200 W	0.95	500 V	–	–	–	–
1600 A	2860000 A^2s	240 W	0.90	500 V	–	–	–	–
Further information								
Screw fixing					■	■	■	■
Installation in SITOR fuse bases					3NH5463	–	3NH5473	–
Installation in 3NH LV HRC fuse bases					■	–	–	–
Installation in 3NP and 3KF fuse switching devices					■	–	–	–
Further currents, operational class gR					See page 7/50	–	–	–

[1] For the max. DC voltage, see the Configuration Manual „Fuse Systems", chapter "Configuration", "Use with direct current"

7

Quick selection guide, page 7/30

© Siemens 2022

M12, 80 mm	M12, 110 mm	M12, 140 mm	M12, 210 mm	M12, 260 mm
				
–	–	–	–	–
–	–	–	–	3NE9622-1C
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	3NC3430-1U	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	3NC3432-1U	–	–	–
–	–	–	–	3NE9632-1C
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	3NE5433-1C	–
–	–	–	3NE7633-1U	–
–	–	–	–	–
–	3NC3434-1U	–	–	–
–	–	–	–	3NE9634-1C
–	–	–	3NE7648-1U	–
–	–	–	–	–
3NC3236-1U	–	–	–	–
–	3NC3336-1U	–	–	–
–	–	–	–	–
–	3NC3436-1U	–	–	–
–	–	–	3NE7636-1U	–
–	–	–	–	3NE9636-1C
3NC3237-1U	–	–	–	–
–	3NC3337-1U	–	–	–
–	–	3NE3637-1C	–	–
–	–	–	3NE7637-1U	–
3NC3238-1U	–	–	–	–
–	3NC3338-1U	–	–	–
–	3NC3438-1U	–	–	–
3NC3240-1U	–	–	–	–
–	3NC3340-1U	–	–	–
–	–	–	–	–
3NC3241-1U	–	–	–	–
–	3NC3341-1U	–	–	–
3NC3242-1U	–	–	–	–
–	3NC3342-1U	–	–	–
3NC3243-1U	–	–	–	–
–	3NC3343-1U	–	–	–
3NC3244-1U	–	–	–	–
3NC3245-1U	–	–	–	–
■	■	■	■	■
–	3NH5463	–	–	–
–	■	–	–	–
–	■	–	–	–
–	–	–	–	–

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class aR, with female thread at both ends

					Size 3	
				Screw fixing, flange dimension	M10, 109 mm	M12, 52 mm
						
I_n	**Operating value I^2t**	**Power loss P_v**	**Varying load factor WL**	**U_n AC [1)]**		
315 A	72500 A²s	80 W	0.95	1250 V	–	–
400 A	163000 A²s	95 W	0.95	1250 V	–	–
450 A	488000 A²s	110 W	1.00	1000 V	3NE3635-6	–
500 A	290000 A²s	115 W	0.90	1250 V	–	–
630 A	244000 A²s	125 W	0.90	690 V	–	3NC3236-6U
	418000 A²s	130 W	0.90	1000 V	–	–
	650000 A²s	120 W	0.95	1250 V	–	–
710 A	346000 A²s	130 W	0.90	690 V	–	3NC3237-6U
	569000 A²s	140 W	0.90	1000 V	–	–
800 A	498000 A²s	135 W	0.95	690 V	–	3NC3238-6U
	819000 A²s	150 W	0.90	1000 V	–	–
	985000 A²s	145 W	0.95	1100 V	–	–
900 A	677000 A²s	140 W	0.95	690 V	–	3NC3240-6U
	1160000 A²s	160 W	0.95	1000 V	–	–
1000 A	975000 A²s	145 W	1.00	690 V	–	3NC3241-6U
	1670000 A²s	165 W	0.95	1000 V	–	–
1100 A	1382000 A²s	150 W	1.00	690 V	–	3NC3242-6U
	1910000 A²s	175 W	0.95	800 V	–	–
1250 A	1990000 A²s	155 W	1.00	690 V	–	3NC3243-6U
	2600000 A²s	185 W	0.95	800 V	–	–
1400 A	2100000 A²s	175 W	1.00	500 V	–	3NC3244-6U
1600 A	2860000 A²s	195 W	0.95	500 V	–	3NC3245-6U
Further information						
Screw fixing					■	■

[1)] For the max. DC voltage, see the Configuration Manual "Fuse Systems", chapter "Configuration", "Use with direct current"

7

Quick selection guide, page 7/30

© Siemens 2022

M12, 73 mm	M12, 73 mm
	
–	3NC3430-6U
–	3NC3432-6U
–	–
–	3NC3434-6U
–	–
3NC3336-6U	–
–	3NC3436-6U
–	–
3NC3337-6U	–
–	–
3NC3338-6U	–
–	3NC3438-6U
–	–
3NC3340-6U	–
–	–
3NC3341-6U	–
–	–
3NC3342-6U	–
–	–
3NC3343-6U	–
–	–
–	–
■	■

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

Operational class gR, special designs

					Without installation bracket	With installation bracket For SITOR 6QG11 thyristor sets
				Screw fixing, flange dimension	M10, 89 mm	
						
I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n AC		
50 A	1100 A²s	20 W	0.85	600 V	–	3NE4117-5
850 A	2480000 A²s	85 W	1.00	1000 V	3NE9440-6	–
Further information						
Screw fixing					■	■

7

Operational class aR, special designs

					Without installation bracket	
					For screwing onto water-cooled busbars	For air-cooled rectifiers in electrolysis systems
				Flange dimension	83 mm	89 mm
						
I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n AC		
100 A	7400 A²s	35 W	0.85	1000 V	–	–
170 A	60500 A²s	43 W	0.85	1000 V	–	–
200 A	44000 A²s	50 W	0.85	1000 V	–	–
250 A	635000 A²s	25 W	0.90	680 V	–	–
	29700 A²s	105 W	0.85	800 V	–	–
315 A	60700 A²s	120 W	0.85	800 V	–	–
350 A	1430000 A²s	32 W	0.90	680 V	–	–
	260000 A²s	80 W	0.90	800 V	3NC5531	–
350 A	1430000 A²s	32 W	0.90	680 V	–	–
450 A	191000 A²s	140 W	0.85	800 V	–	–
	395000 A²s	90 W	0.85	1000 V	–	–
500 A	276000 A²s	155 W	0.85	800 V	–	–
600 A	888000 A²s	150 W	0.90	1000 V	3NC5840	–
630 A	888000 A²s	145 W	0.90	800 V	3NC5841	–
710 A	923000 A²s	155 W	0.95	800 V	–	–
	620000 A²s	150 W	0.90	900 V	3NE6437-7	3NE6437
800 A	1728000 A²s	170 W	0.90	1000 V	3NC5838	–
900 A	1920000 A²s	170 W	0.90	900 V	–	3NE6444
1250 A	2480000 A²s	210 W	0.90	600 V	3NE9450-7	3NE9450
Further information						
Screw fixing					■	■

Quick selection guide, page 7/30

© Siemens 2022

For mounting directly in the railway supply rectifier	For SITOR 6QG12 thyristor sets	With installation bracket For SITOR 6QG10 thyristor sets	For SITOR 6QG11 thyristor sets
	77 mm		
			
–	–	–	3NE4121-5
–	–	–	3NE4146-5
–	–	3NE3525-5	–
3NC7327-2	–	–	–
–	3NE4327-6B	–	–
–	3NE4330-6B	–	–
3NC7331-2	–	–	–
–	–	–	–
3NC7331-2	–	–	–
–	3NE4333-6B	–	–
–	–	3NE3535-5	–
–	3NE4334-6B	–	–
–	–	–	–
–	–	–	–
–	3NE4337-6	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
■	■	■	■

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (LV HRC design)

DC fuses, operational class gR, with slotted blade contacts

					Size 2L
				Screw fixing	M12
					
I_n	Switch-off I²t value	Power loss P_v	Varying load factor WL	U_n DC	
400 A	180000 A²s [1]	75 W	–	900 V	3NB1234-3KK20
Further information					
Screw fixing					■

[1] I^2t at U_{VSI} 1400 V is 240000 A²s

7

DC fuses, operational class aR, with slotted blade contacts

					Size 1L	Size 2L	Size 3L	Size 2 × 3L	Size 3 × 3L
				Screw fixing	M12	M12	M12	M12	M12
									
I_n	Switch-off I²t value at U_{VSI} 1500 V [2]	Power loss P_v	Varying load factor WL	U_n DC/U_{VSI}					
200 A	39000 A²s	50 W	–	1250 V/1500 V	3NB1126-4KK11	–	–	–	–
250 A	80500 A²s	51 W	–	1250 V/1500 V	3NB1128-4KK11	–	–	–	–
315 A	129000 A²s	63 W	–	1250 V/1500 V	–	3NB1231-4KK11	–	–	–
400 A	290000 A²s	68 W	–	1250 V/1500 V	–	3NB1234-4KK11	–	–	–
500 A	600000 A²s	89 W	–	1250 V/1500 V	–	–	3NB1337-4KK11	–	–
800 A	1910000 A²s	135 W	–	1250 V/1500 V	–	–	3NB1345-4KK11	–	–
800 A	1150000 A²s	160 W	–	1250 V/1500 V	–	–	–	3NB2345-4KK16	–
1000 A	2250000 A²s	195 W	–	1250 V/1500 V	–	–	–	3NB2350-4KK16	–
1400 A	5100000 A²s	250 W	–	1250 V/1500 V	–	–	–	3NB2355-4KK16	–
1600 A	7450000 A²s	275 W	–	1250 V/1500 V	–	–	–	3NB2357-4KK16	–
2100 A	1195000 A²s	365 W	–	1250 V/1500 V	–	–	–	–	3NB2364-4KK17
2400 A	18100000 A²s	445 W	–	1250 V/1500 V	–	–	–	–	3NB2366-4KK17
Further information									
Screw fixing					■	■	■	■	■

[2] I^2t at U_n 1250 V is reduced by the factor k = 0.79.

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (cylindrical fuse design)

Cylindrical fuses, operational class gS

				Size 22 × 127 mm
				
I_n	Switch-off I²t value	Power loss P_v	U_n AC/DC	
1 A	2 A²s	2 W	1500 V/1000 V	3NC2301-0MK
2 A	4.4 A²s	2.5 W	1500 V/1000 V	3NC2302-0MK
4 A	55 A²s	5.3 W	1500 V/1000 V	3NC2304-0MK
6 A	150 A²s	6.4 W	1500 V/1000 V	3NC2306-0MK
10 A	540 A²s	3.1 W	1500 V/1000 V	3NC2310-0MK
16 A	1120 A²s	4.7 W	1500 V/1000 V	3NC2316-0MK
20 A	2850 A²s	5.4 W	1500 V/1000 V	3NC2320-0MK
25 A	3300 A²s	6.9 W	1500 V/1000 V	3NC2325-0MK
32 A	9050 A²s	6.7 W	1500 V/1000 V	3NC2332-0MK
Further information				
Installation in SITOR fuse holders				3NC23
Further currents, operational class gR				See page 7/64
Further currents, operational class aR				See page 7/66

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (cylindrical fuse design)

Operational class gR

I_n	Switch-off I²t value	Power loss P_v	U_n AC/DC	Size 10 × 38 mm	Size 14 × 51 mm	Size 22 × 58 mm	Size 22 × 127 mm
							
6 A	3.5 A²s	3.1 W	690 V/700 V [1]	–	3NC1406-0MK	–	–
	6.5 A²s	2.5 W	690 V/440 V	3NC1006-0MK	–	–	–
10 A	15 A²s	4.6 W	690 V/700 V [1]	–	3NC1410-0MK	–	–
	17 A²s	4.3 W	690 V/440 V	–	–	–	–
	18 A²s	3.3 W	690 V/440 V	3NC1010-0MK	–	–	–
12 A	35 A²s	4 W	690 V/440 V	3NC1012-0MK	–	–	–
16 A	32 A²s	6.7 W	690 V/600 V	–	3NC1416-0MK	–	–
	45 A²s	6 W	690 V/440 V	3NC1016-0MK	–	–	–
	52 A²s	4.4 W	690 V/440 V	–	–	–	–
20 A	68 A²s	7.4 W	690 V/600 V	–	3NC1420-0MK	–	–
	90 A²s	6.5 W	690 V/440 V	–	–	–	–
	110 A²s	7.8 W	690 V/250 V	3NC1020-0MK	–	–	–
25 A	108 A²s	8.4 W	690 V/600 V	–	3NC1425-0MK	–	–
	120 A²s	9.5 W	690 V/440 V	–	–	–	–
	140 A²s	8.7 W	690 V/250 V	3NC1020-0MK	–	–	–
	160 A²s	8.5 W	690 V/440 V	–	–	–	–
	180 A²s	8.1 W	690 V/700 V [1]	–	–	3NC2225-0MK	–
32 A	175 A²s	12.3 W	690 V/600 V	–	3NC1432-0MK	–	–
	220 A²s	12.3 W	690 V/440 V	–	–	–	–
	400 A²s	8.9 W	690 V/440 V	–	–	–	–
	420 A²s	9 W	690 V/600 V	–	–	3NC2232-0MK	–
	450 A²s	12 W	690 V/250 V	3NC1020-0MK	–	–	–
40 A	400 A²s	14.8 W	690 V/440 V	–	–	–	–
	470 A²s	11.7 W	690 V/440 V	–	3NC1440-0MK	–	–
	600 A²s	11 W	690 V/440 V	–	–	–	–
	700 A²s	12.5 W	690 V/440 V	–	–	3NC2240-0MK	–
	18500 A²s	9.4 W	1500 V/1000 V	–	–	–	3NC2340-0MK
50 A	830 A²s	16.3 W	690 V/250 V	–	–	–	–
	980 A²s	17.5 W	690 V/440 V	–	–	–	–
	1250 A²s	13.8 W	690 V/440 V	–	–	–	–
	1250 A²s	15.2 W	690 V/250 V	–	–	–	–
63 A	2050 A²s	18.8 W	690 V/440 V	–	–	–	–
	2400 A²s	17.5 W	690 V/250 V	–	–	–	–
80 A	4400 A²s	23 W	690 V/250 V	–	–	–	–
100 A	11500 A²s	28.7 W	690 V/250 V	–	–	–	–
Further information							
Screw fixing				–	–	–	–
Installation in SITOR fuse holders				3NC109.	3NC149.	3NC229.	3NC23
Installation in SITOR fuse bases				–	–	–	–
Further currents, operational class gS				–	–	–	See page 7/63
Further currents, operational class aR				–	–	–	See page 7/66

[1] Observe 600 V DC voltage according to IEC, 700 V according to UL, time constant and minimum breaking current MBC.

Quick selection guide, page 7/30

© Siemens 2022

With M8 bolt-on links Size 18 × 88 mm	Size 26 × 103 mm
	
–	–
–	–
–	–
3NC1810-0MK	–
–	–
–	–
–	–
–	–
3NC1816-0MK	–
–	–
3NC1820-0MK	–
–	–
–	–
–	3NC2625-0MK
–	–
3NC1825-0MK	–
–	–
–	–
–	3NC2632-0MK
3NC1832-0MK	–
–	–
–	–
–	3NC2640-0MK
–	–
3NC1840-0MK	–
–	–
–	–
–	–
–	3NC2650-0MK
3NC1850-0MK	–
–	–
–	3NC2663-0MK
–	–
–	–
–	–
■	■
–	–
3NH5723	3NH5023
–	–
–	–

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (cylindrical fuse design)

Operational class aR

				Size 10 × 38 mm [1]	Size 14 × 51 mm	
					Standard	With striking pin
						
I_n	Switch-off I²t value	Power loss P_v	U_n AC/DC			
1 A	1.2 A²s	5 W	660 V/–	–	3NC1401	–
2 A	10 A²s	3 W	660 V/–	–	3NC1402	–
3 A	8 A²s	1.2 W	600/700 V [1]	3NC1003	–	–
	15 A²s	2.5 W	660 V/–	–	3NC1403	–
4 A	25 A²s	3 W	660 V/–	–	3NC1404	–
5 A	11 A²s	1.5 W	690/700 V [1]	–	3NC1405	–
6 A	11 A²s	1.5 W	690/700 V [1]	–	3NC1406	–
	20 A²s	1.5 W	600/700 V [1]	3NC1006	–	–
8 A	30 A²s	2 W	600/700 V [1]	3NC1008	–	–
10 A	22 A²s	4 W	690/700 V [1]	–	3NC1410	–
	32 A²s	4 W	690/600 V [1]	–	–	3NC1410-5
	60 A²s	2.5 W	600/700 V [1]	3NC1010	–	–
12 A	110 A²s	3 W	600/700 V [1]	3NC1012	–	–
15 A	63 A²s	5.5 W	690/600 V [1]	–	–	3NC1415-5
	70 A²s	5.5 W	690/700 V [1]	–	3NC1415	–
16 A	150 A²s	3.5 W	600/700 V [1]	3NC1016	–	–
20 A	100 A²s	6 W	690/700 V [1]	–	3NC1420	–
	200 A²s	4.8 W	600/700 V [1]	3NC1020	–	–
	220 A²s	4.6 W	690/700 V [1]	–	–	–
	234 A²s	6 W	690/600 V [1]	–	–	3NC1420-5
	240 A²s	5 W	690/500 V [1]	–	–	–
25 A	250 A²s	6 W	600/700 V [1]	3NC1025	–	–
	300 A²s	5.6 W	690/700 V [1]	–	–	–
	320 A²s	7 W	690/700 V [1]	–	3NC1425	–
	350 A²s	6 W	690/500 V [1]	–	–	–
	378 A²s	7 W	690/600 V [1]	–	–	3NC1425-5
30 A	400 A²s	9 W	690/700 V [1]	–	3NC1430	–
	466 A²s	9 W	690/600 V [1]	–	–	3NC1430-5
32 A	450 A²s	7 W	690/700 V [1]	–	–	–
	500 A²s	7.5 W	660 V/–	3NC1032	–	–
	500 A²s	8 W	690/500 V [1]	–	–	–
	600 A²s	7.6 W	690/700 V [1]	–	3NC1432	
	600 A²s	7.6 W	690/600 V [1]			3NC1432-5
40 A	700 A²s	8.5 W	690/700 V [1]	–	–	–
	750 A²s	8 W	690/600 V [1]			3NC1440-5
	750 A²s	8 W	690/700 V [1]	–	3NC1440	
	800 A²s	9 W	690/500 V [1]	–	–	–
Further information						
Screw fixing				–	–	–
Installation in SITOR fuse holders				3NC109.	3NC149.	3NC149.-5
Installation in SITOR fuse bases				–	–	–
Further currents, operational class gS				–	–	–
Further currents, operational class aR				–	–	–

[1] Observe DC voltage acc. to UL, time constant and minimum breaking current MBC

7

Quick selection guide, page 7/30

© Siemens 2022

Size 22 × 58 mm		Size 22 × 127 mm	Size 26 × 103 mm
Standard	With striking pin		With M8 bolt-on links
			
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
3NC2220	–	–	–
–	–	–	–
–	3NC2220-5	–	–
–	–	–	–
3NC2225	–	–	–
–	–	–	–
–	3NC2225-5	–	–
–	–	–	–
–	–	–	–
–	–	–	–
3NC2232	–	–	–
–	–	–	–
–	3NC2232-5	–	–
–	–	–	–
3NC2240	–	–	–
–	–	–	–
–	3NC2240-5	–	–
–	–	–	■
3NC229.	3NC229.-5	3NC23	–
–	–	–	3NH5023
–	–	See page 7/64	–
–	–	See page 7/63	–

7

Quick selection guide, page 7/30

© Siemens 2022

SITOR semiconductor fuse links (cylindrical fuse design)

Operational class aR

				Size 10 × 38 mm [1]	Size 14 × 51 mm	
					Standard	With striking pin
						
I_n	Switch-off I^2t value	Power loss P_v	U_n AC/DC			
50 A	1350 A^2s	9.5 W	690/700 V [1]	–	–	–
	1500 A^2s	9.5 W	690/500 V [1]	–	–	–
	1800 A^2s	9 W	690/600 V [1]			3NC1450-5
	1800 A^2s	9 W	690/700 V [1]	–	3NC1450	
	26000 A^2s	11.6 W	1500/1000 V	–	–	–
63 A	2100 A^2s	16.7 W	690/250 V	–	3NC1463-0MK	–
	2600 A^2s	11 W	690/700 V [1]	–	–	–
	3000 A^2s	11 W	690/500 V [1]	–	–	–
80 A	3500 A^2s	22.5 W	690/440 V	–	–	–
	5500 A^2s	13.5 W	690/700 V [1]	–	–	–
	6000 A^2s	13.5 W	690/500 V [1]	–	–	–
100 A	5400 A^2s	31.5 W	690/440 V	–	–	–
	8000 A^2s	16 W	690/700 V [1]	–	–	–
	8500 A^2s	16 W	600/500 V [1]	–	–	–
125 A	11800 A^2s	39 W	690/440 V	–	–	–
	29000 A^2s	35.3 W	690/250 V	–	–	–
Further information						
Screw fixing				–	–	–
Installation in SITOR fuse holders				3NC109.	3NC149.	3NC149.-5
Installation in SITOR fuse bases				–	–	–
Further currents, operational class gS				–	–	–
Further currents, operational class aR				–	–	–

[1] Observe DC voltage acc. to UL, time constant and minimum breaking current MBC

Quick selection guide, page 7/30

© Siemens 2022

Size 22 × 58 mm		Size 22 × 127 mm	Size 26 × 103 mm
Standard	With striking pin		With M8 bolt-on links
			
3NC2250	–	–	–
–	3NC2250-5	–	–
–	–	–	–
–	–	3NC2350-0MK	–
–	–	–	–
3NC2263	–	–	–
–	3NC2263-5	–	–
–	–	–	3NC2680-0MK
3NC2280	–	–	–
–	3NC2280-5	–	–
–	–	–	3NC2600-0MK
3NC2200	–	–	–
–	3NC2200-5	–	–
–	–	–	3NC2611-0MK
3NC2211-0MK	–	–	–
–	–	–	■
3NC229.	3NC229.-5	3NC23	–
–	–	–	3NH5023
–	–	See page 7/64	–
–	–	See page 7/63	–

7

Quick selection guide, page 7/30

© Siemens 2022

Photovoltaic cylindrical fuse links

Operational class gPV

				Size 10 × 38 mm	Size 10 × 85 mm
					
I_n DC	Power loss P_v	Power loss P_v at 70% [1]	U_n DC		
2 A	1.4 W	0.6 W	1000 V	3NW6002-4	–
4 A	1.6 W	0.7 W	1000 V	3NW6004-4	–
	2.7 W	1.1 W	1500 V	–	3NW6604-4
6 A	1.7 W	0.7 W	1000 V	3NW6001-4	–
	3.0 W	1.2 W	1500 V	–	3NW6601-4
8 A	1.9 W	0.8 W	1000 V	3NW6008-4	–
	3.6 W	1.5 W	1500 V	–	3NW6608-4
10 A	2.3 W	1.0 W	1000 V	3NW6003-4	–
	3.7 W	1.6 W	1500 V	–	3NW6603-4
12 A	2.7 W	1.1 W	1000 V	3NW6006-4	–
	3.3 W	1.4 W	1500 V	–	3NW6606-4
16 A	3.2 W	1.3 W	1000 V	3NW6005-4	–
	3.7 W	1.6 W	1500 V	–	3NW6605-4
20 A	3.4 W	1.4 W	1000 V	3NW6007-4	–
	4.0 W	1.7 W	1200 V	–	3NW6607-4
Further information					
Installation in fuse holders				3NW70..-4	3NW76..-4

[1] Tested in fuse holders 3NW7013-4 and 3NW7613-4.

7

Quick selection guide, page 7/30

© Siemens 2022

Photovoltaic cumulative fuse links

Operational class gPV

			Size 1	Size 1L	Size 2L	Size 3L	Size 1XL	Size 2XL
								
I_n DC	Power loss P_v	U_n DC						
63 A	19 W	1000 V	3NE1218-4	–	–	–	–	–
	20 W	1500 V	–	–	–	–	3NE1218-5E	–
80 A	20 W	1000 V	3NE1220-4	–	–	–	–	–
	25 W	1500 V	–	–	–	–	3NE1220-5E	–
100 A	24 W	1000 V	3NE1221-4	–	–	–	–	–
	30 W	1500 V	–	–	–	–	3NE1221-5E	–
125 A	26 W	1000 V	3NE1222-4	–	–	–	–	–
	29 W	1500 V	–	–	–	–	3NE1222-5E	–
160 A	32 W	1000 V	3NE1224-4	–	–	–	–	–
	34 W	1500 V	–	–	–	–	3NE1224-5E	–
200 A	41 W	1500 V	–	–	–	–	3NE1225-5E	–
	51 W	1000 V	–	3NE1225-4D	–	–	–	–
250 A	53 W	1500 V	–	–	–	–	–	3NE1327-5E
	54 W	1000 V	–	3NE1227-4D	–	–	–	–
315 A	63 W	1500 V	–	–	–	–	–	3NE1330-5E
	73 W	1000 V	–	–	3NE1330-4D	–	–	–
400 A	82 W	1000 V	–	–	3NE1332-4D	–	–	–
500 A	100 W	1000 V	–	–	–	3NE1434-4E	–	–
630 A	110 W	1000 V	–	–	–	3NE1436-4E	–	–

Quick selection guide, page 7/30

© Siemens 2022

Class CC fuse links

Acc. to UL

		Characteristic: Slow	Characteristic: Slow, current-limiting	Characteristic: Quick
				
I_n	I_n [1]			
0.6 A	6/10 A	3NW1006-0HG	–	–
0.8 A	8/10 A	3NW1008-0HG	–	–
1 A	–	3NW1010-0HG	3NW3010-0HG	3NW2010-0HG
1.5 A	1.5 A	3NW1015-0HG	–	–
2 A	–	3NW1020-0HG	3NW3020-0HG	3NW2020-0HG
2.5 A	–	3NW1025-0HG	–	–
3 A	–	3NW1030-0HG	3NW3030-0HG	3NW2030-0HG
4 A	–	3NW1040-0HG	3NW3040-0HG	3NW2040-0HG
5 A	–	3NW1050-0HG	3NW3050-0HG	3NW2050-0HG
6 A	–	3NW1060-0HG	3NW3060-0HG	3NW2060-0HG
7.5 A	–	3NW1075-0HG	–	–
8 A	–	3NW1080-0HG	3NW3080-0HG	3NW2080-0HG
10 A	–	3NW1100-0HG	3NW3100-0HG	3NW2100-0HG
12 A	–	–	3NW3120-0HG	3NW2120-0HG
15 A	–	3NW1150-0HG	3NW3150-0HG	3NW2150-0HG
20 A	–	3NW1200-0HG	3NW3200-0HG	3NW2200-0HG
25 A	–	3NW1250-0HG	3NW3250-0HG	3NW2250-0HG
30 A	–	3NW1300-0HG	3NW3300-0HG	3NW2300-0HG
Further information				
Installation in fuse holders		3NW75.3-0HG, 3NW753.-1HG, 3NW7431-0HG	3NW75.3-0HG, 3NW753.-1HG, 3NW7431-0HG	3NW75.3-0HG, 3NW753.-1HG, 3NW7431-0HG

[1] American English wording

Quick selection guide, page 7/30

© Siemens 2022


Quick selection guide, page 7/30

© Siemens 2022




Busbars

According to IEC, can be cut

Pin spacing 1 MW

Pin spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase, angled					**Article No.**
	For cylindrical fuse holders 8 × 32 mm and 10 × 38 mm For SITOR cylindrical fuse holders 10 × 38 mm	214 mm	With end caps	16 mm²	5ST3700
		1016 mm	Without end caps	16 mm²	5ST3701
2-phase					**Article No.**
	For cylindrical fuse holders 8 × 32 mm and 10 × 38 mm For SITOR cylindrical fuse holders 10 × 38 mm	214 mm	With end caps	16 mm²	5ST3704
		1016 mm	Without end caps	16 mm²	5ST3705
3-phase					**Article No.**
	For cylindrical fuse holders 8 × 32 mm and 10 × 38 mm For SITOR cylindrical fuse holders 10 × 38 mm	214 mm	With end caps	16 mm²	5ST3708
		1016 mm	Without end caps	16 mm²	5ST3710

Fork spacing 1 MW

Fork spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For MINIZED D01 fuse switch disconnectors	1000 mm	Without end caps	16 mm²	5ST2190
2-phase					**Article No.**
	For MINIZED D01 fuse switch disconnectors	1000 mm	Without end caps	16 mm²	5ST2191
3-phase					**Article No.**
	For MINIZED D01 fuse switch disconnectors	1000 mm	Without end caps	16 mm²	5ST2192


7

System overview, page 7/4



© Siemens 2022

According to IEC, can be cut

Pin spacing 1.5 MW

Pin spacing in MW (1.5 MW = 27 mm)	Application	Length	Version	Conductor cross-section	
1-phase, angled					**Article No.**
	For 5SG71.3 MINIZED D02 switch disconnectors with fuses For NEOZED D01/D02 fuse bases made of molded plastic 5SG1301, 5SG1701, 5SG1302, 5SG1702 For NEOZED D01/D02 fuse bases made of ceramic with saddle terminals For cylindrical fuse holders 14 × 51 mm, 3NW7111 For SITOR cylindrical fuse holders 14 × 51 mm, 3NC1491	1016 mm	Without end caps	16 mm²	5ST3703
3-phase					**Article No.**
	For 5SG71.3 MINIZED D02 switch disconnectors with fuses For NEOZED D01/D02 fuse bases made of molded plastic 5SG5301, 5SG5701, 5SG5302, 5SG5702 For NEOZED D01/D02 fuse bases made of ceramic with saddle terminals For cylindrical fuse holders 14 × 51 mm, 3NW7131 For SITOR cylindrical fuse holders 14 × 51 mm, 3NC1493	1016 mm	Without end caps	16 mm²	5ST3714

Fork spacing 1.5 MW

Fork spacing in MW (1.5 MW = 27 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For NEOZED D01/D02 fuse bases made of ceramic with clamp-type terminal and screw head contacts	1000 mm	Without end caps, non-insulated	36 mm²	5SH5322
3-phase					**Article No.**
	For NEOZED D01/D02 fuse bases made of ceramic with clamp-type terminals and screw head contacts	1000 mm	Without end caps	16 mm²	5SH5320

7


System overview, page 7/4

© Siemens 2022

Busbars

According to UL 508, can be cut

Pin spacing 1 MW

Pin spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For Class CC fuse holders 10 × 38 mm (3NC1091, 3NW7513-0HG)	1000 mm	Without end caps	18 mm²	5ST3701-0HG
2-phase					**Article No.**
	For Class CC fuse holders 10 × 38 mm (3NC1092, 3NW7523-0HG)	1000 mm	Without end caps	18 mm²	5ST3705-0HG
3-phase					**Article No.**
	For Class CC fuse holders 10 × 38 mm (3NC1093, 3NW7533-0HG)	1000 mm	Without end caps	18 mm²	5ST3710-0HG


7

System overview, page 7/4

© Siemens 2022

According to UL 508, can be cut

Pin spacing 1.5 MW

Pin spacing in MW (1 MW = 18 mm)	Application	Length	Version	Conductor cross-section	
1-phase					**Article No.**
	For fuse holders 14 × 51 mm (3NC1491, 3NW7111)	1000 mm	Without end caps	18 mm²	5ST3703-0HG
				25 mm²	5ST3701-2HG
2-phase					
	For fuse holders 14 × 51 mm (3NC1492, 3NW7121)	1000 mm	Without end caps	25 mm²	5ST3705-2HG
3-phase					**Article No.**
	For fuse holders 14 × 51 mm (3NC1493, 3NW7131)	1000 mm	Without end caps	18 mm²	5ST3714-0HG
				25 mm²	5ST3710-2HG

7

System overview, page 7/4

© Siemens 2022

Busbars

Accessories

For busbars according to IEC

Terminals

- For NEOZED D01/D02 fuse bases made of ceramic
- For DIAZED DII/DIII fuse bases made of ceramic

	Terminal version	Conductor cross-section	Article No.
	Terminal version S	2 ... 25 mm²	5SH5327
	Terminal versions B and K	6 ... 25 mm²	5SH5328

Touch protection



- For free connections, yellow (RAL 1004) 5 × 1 pin

Article No.
5ST3655

End caps

	Version	For busbar type	Article No.
	For 1-phase busbars	5ST2190	5ST2196
		5ST37 and 5SH55	5ST3748
	For 2-phase and 3-phase busbars	5ST2191 and 5ST2192	5ST2197
		5ST37 and 5SH5320	5ST3750

7

System overview, page 7/4

© Siemens 2022

For busbars according to UL 508

Terminals according to UL 508

	Version	Infeed	Article No.
	For busbars 35 mm²	Device	5ST3770-0HG
	For busbars 30 mm²	Busbar	5ST3770-1HG

Busbar touch protection according to UL 508



- For free connections, yellow (RAL 1004) 5 × 1 pin

Article No.
5ST3655-0HG

End caps for 5ST37. .-.HG

	Version	Article No.
	For 1-phase busbars	5ST3748-0HG
	For 2 and 3-phase busbars	5ST3750-0HG

7

System overview, page 7/4

© Siemens 2022

LV HRC signal detectors, electronic fuse monitoring

LV HRC signal detectors



- Only for SIEMENS LV 3NA3, 3NA7, 3ND HRC fuse links with non-insulated grip lugs
- Rated voltage of up to 690 V AC/600 V DC
- Contact: Microswitches 250 V AC, 6 A
- Connection: flat connector 2.3 mm

Fuse size	Article No.
000 ... 4	3NX1021

Signal detector links



- Rated voltage of up to 690 V AC/600 V DC

Fuse size	Response value	Application	Article No.
000 ... 4	>9 V/2.5 A	For standard applications	3NX1022
	>2 V/7 A	Only for meshed networks	3NX1023

Signal detector tops



- Only for SIEMENS LV 3NA3, 3NA7, 3ND HRC fuse links with non-insulated grip lugs
- Rated voltage of up to 690 V AC/600 V DC
- Contact: Microswitch 230 V AC, 5 A, 1 CO
- Connection: flat connector 2.3 mm

Fuse size	Article No.
000, 00, 1, 2	3NX1024

7

Electronic fuse monitor



- For all low-voltage fuse systems
- For monitoring all types and versions of melting fuses that cannot be equipped with a fault signal contact
- Can be used in asymmetric systems afflicted with harmonics and regenerative feedback motors
- Signal also for disconnected loads

U_e AC	I_n	U_c	Article No.
230 V	4 A	3 AC 380 ... 415 V	5TT3170

Electronic fuse monitoring for remote display of tripped fuses



- Remote display by auxiliary contact (1 CO)
- Local detection by integrated LED
- For all sizes
- For 3KF LV HRC and 3KF SITOR


U_e AC	I_n	U_c	Article No.
230 V	1.5 A	3 AC 690 V	3KF9010-1AA00

System overview, page 7/4

© Siemens 2022

System overview, page 7/4

© Siemens 2022

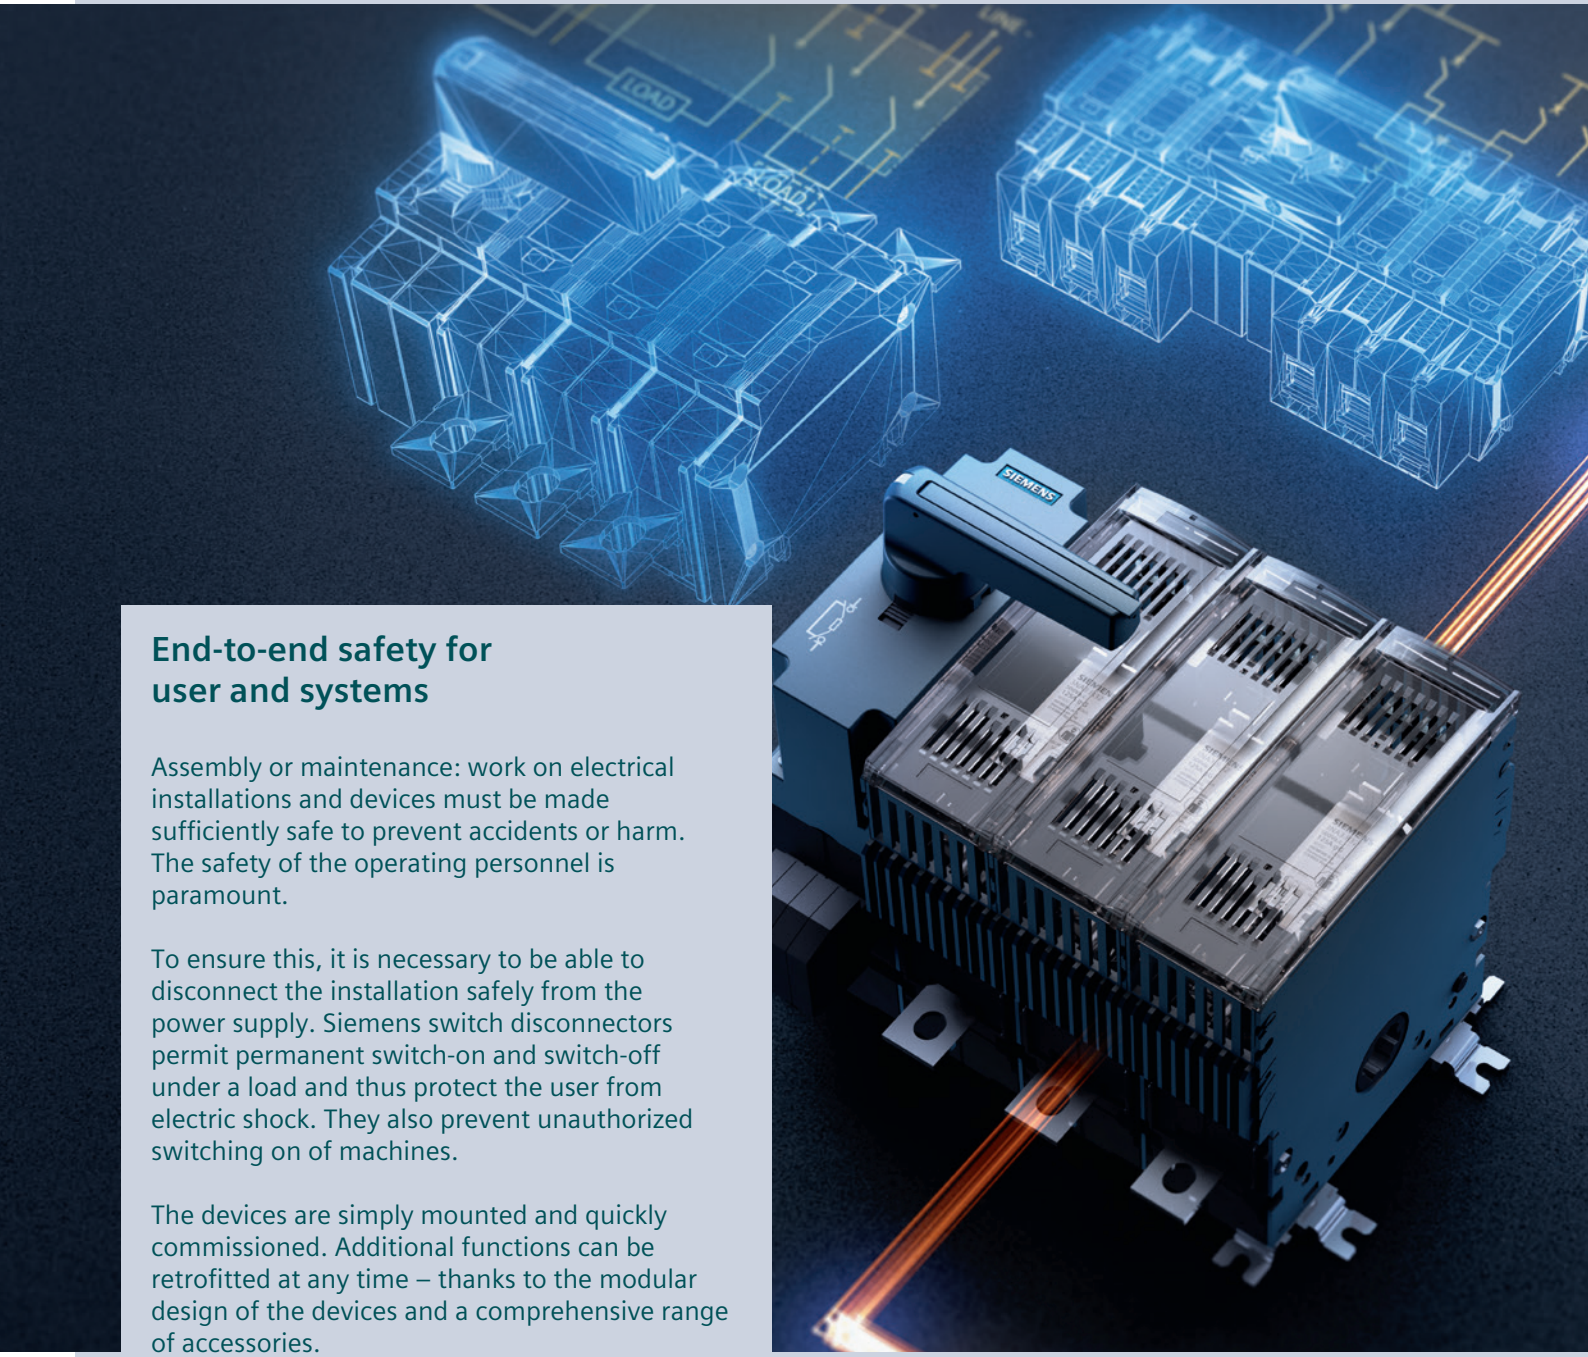

End-to-end safety for user and systems

Assembly or maintenance: work on electrical installations and devices must be made sufficiently safe to prevent accidents or harm. The safety of the operating personnel is paramount.


To ensure this, it is necessary to be able to disconnect the installation safely from the power supply. Siemens switch disconnectors permit permanent switch-on and switch-off under a load and thus protect the user from electric shock. They also prevent unauthorized switching on of machines.

The devices are simply mounted and quickly commissioned. Additional functions can be retrofitted at any time – thanks to the modular design of the devices and a comprehensive range of accessories.

Convenient ordering processes and fast delivery optimize stock management and reduce the time and money expended. You can also make use of our CAx data for automated, simplified planning and configuring.

© Siemens 2022

Switch Disconnectors

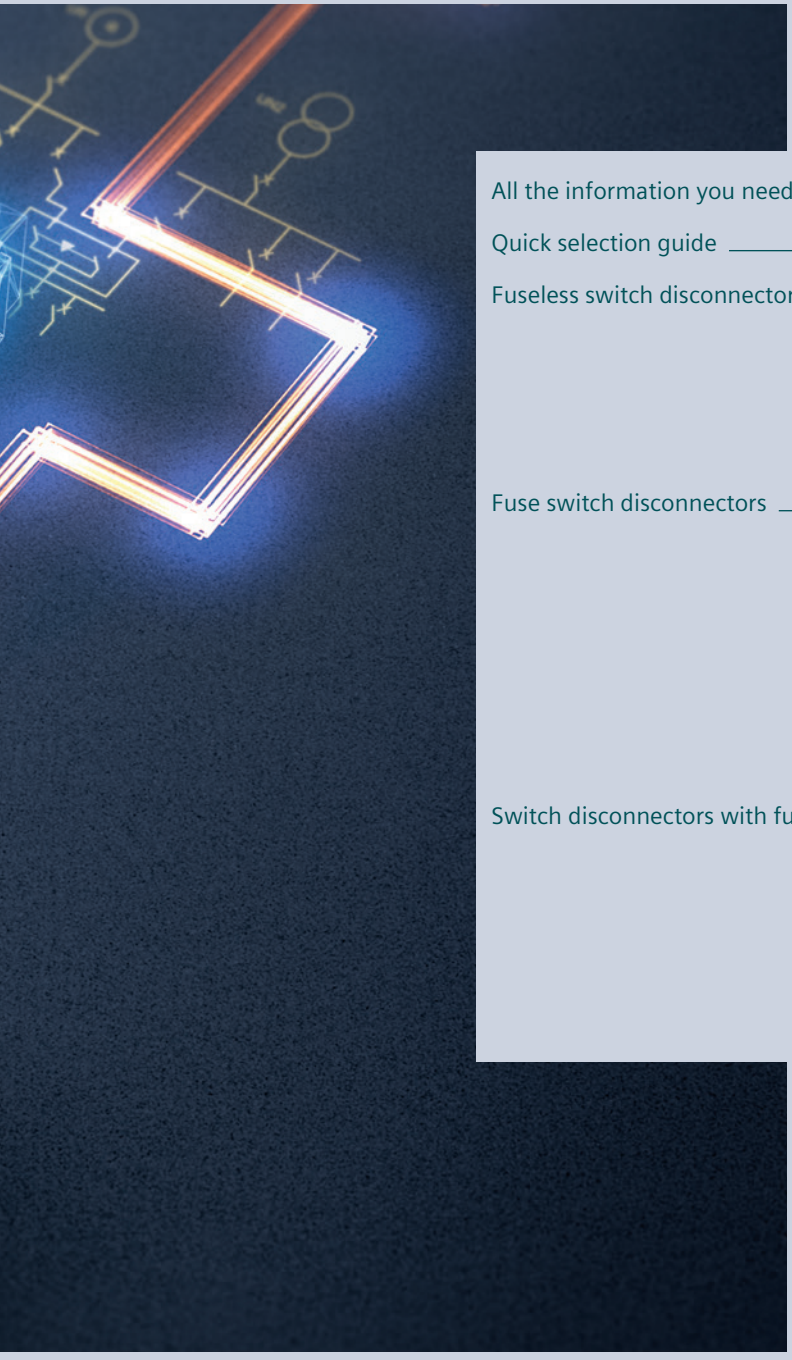

All the information you need 8/2

Quick selection guide 8/4

Fuseless switch disconnectors 8/6

- Quick selection guide 8/6
- 3LD switch disconnectors 8/12
- 3KD switch disconnectors 8/64

Fuse switch disconnectors 8/80

- Quick selection guide 8/80
- 3NP1 fuse switch disconnectors 8/82
- 3NP5 fuse switch disconnectors 8/96
- 3NJ4 fuse switch disconnectors 8/100
- 5SG76 fuse switch disconnectors 8/112

Switch disconnectors with fuses 8/114

- Quick selection guide 8/114
- 3KF switch disconnectors with fuses 8/118
- 3NJ63 switch disconnectors with fuses 8/134
- 5SG switch disconnectors with fuses 8/142

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about switch disconnectors, please visit our website
www.siemens.com/switching-devices

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technical basic information
  - Switch disconnectors and transfer switching equipment **(109763354)**

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations.
Configure your 3NJ63 switch disconnector at
www.siemens.com/lowvoltage/3nj63-configurator
and your 3NP1 fuse switch disconnector at
www.siemens.com/lowvoltage/3np1-configurator

Choose the right SITOR semiconductor fuse for your application
www.siemens.com/lowvoltage/sitor-configurator

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Switch disconnectors **sie.ag/36HDiZp**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

You will find order support for the electrical wholesale trade carrying fast-selling items in the Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/product-support

- Order support
  - 3KD switch disconnectors – End-to-end safety for user and systems **(109750228)**
  - 3LD2 main control and EMERGENCY-STOP-switching equipment – End-to-end safety for user and systems **(109755626)**
  - 3NP1 fuse switch disconnectors – End-to-end safety for user and systems **(109755624)**
  - 3KF switch disconnectors with fuses – End-to-end safety for user and systems **(109750229)**
  - 3NJ63 switch disconnectors with fuses – End-to-end safety for user and systems **(109755619)**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  - Switch disconnectors **(109769744)**
  - Fuse systems **(45314810)**
  - Transfer switching equipment and load transfer switches **(109769745)**
  - Busbar systems **(109769746)**
- System manual
  - SENTRON 3NJ62 In-Line Plug-In switch disconnectors with fuses **(31753460)**
  - SENTRON 3NP1 fuse switch disconnector **(33515690)**
- Equipment manual
  - 3KD switch disconnector **(109758120)**

Technical overview – Switch disconnectors

The fast way to get you to our online services

This page provides you with comprehensive information and links on switch disconnectors
www.siemens.com/lowvoltage/product-support (109764946)

© Siemens 2022

Quick selection guide

Load switching devices for all applications

Fuseless switch disconnectors [3]



Functional switching [1]

						
	Type	3LD3	3LD2	3LD5 UL	3KD	3VA
	Uninterrupted current I_u	16 ... 63 A	16 ... 250 A	30 ... 160 A	16 ... 2000 A	63 ... 630 A
	Short-circuit current max.	10 kA	50 kA	50 kA	100 kA	110 kA [5]
Selection acc. to utilization category	**AC max.**	AC-3	AC-3	AC-3	AC-23A	AC-23A
	DC max.	–	DC-22A	–	DC-23A	DC-23A (up to 250 A)
	Suitable fuses	–	–	–	–	–
Types of mounting	**Floor mounting**	■	■	■	■	■
	Mounting on a DIN rail	■	■ (up to 125 A)	■ (up to 63 A)	■ (up to 250 A)	■ (up to 160 A)
	Front mounting	■	■	■	–	–
	Mounting on busbar systems (spacing of the busbars)	–	–	–	–	■
	Draw-out technology	–	–	–	–	■
Methods of operation	**Manual from the front**	■	■	■	■	■
	Manual from the side	–	–	–	■	■
	Remote-controllable	–	–	–	–	■
Number of poles	**1-pole**	–	–	–	–	–
	2-pole	–	–	–	–	–
	3-pole	■	■	■	■	■
	4-pole	■	■	■	■	■
	6-pole	–	■	–	■	–
Switching function	**All poles**	■	■	■	■	■
	Individual poles switchable	–	–	–	–	–

More information From page 8/6 From page 2/1

[1] According to DIN VDE 0100-200, functional switching is an operation intended to switch on or off or vary the supply of electric energy to an electrical installation or parts of it for normal operating purposes.

[2] Devices for occasional switching usually have a substantially lower electrical endurance and are switched no more than 1× per minute in the tests.

[3] Pure switching without protection function

© Siemens 2022

Fuse switch disconnectors [4]



Occasional switching [2]



	3NP1	3NP5	3NJ4	5SG76
	160 ... 630 A	160 ... 630 A	160 ... 1600 A	16 A
	120 kA	100 kA	120 kA	50 kA
	AC-23B	AC-23B	AC-23B	AC-22A
	DC-23B	DC-23B	–	–
	IEC NH	IEC NH	IEC NH	NEOZED
	■	■	–	–
	■	–	–	■
	–	–	–	–
	40/60 mm	40/60 mm	60/100/185 mm	–
	–	–	–	–
	■	■	■	■
	–	–	–	–
	–	–	–	–
	■	–	–	■
	■	–	–	■
	■	■	■	■
	■	–	–	■
	–	–	–	–
	■	■	■	■
	–	–	■	–

From page 8/80


Switch disconnectors with fuse [4]



Functional switching [1]



Occasional switching [2]



	3KF NH	3KF SITOR	3NJ62	5SG71/72
	32 ... 800 A	32 ... 800 A	63 ... 630 A	63 A
	100 kA	100 kA	100 kA	50 kA
	AC-23A	AC-23A	AC-23B	AC-23A
	DC-23A	DC-23A	DC-23B	DC-22B
	IEC NH	IEC LV HRC, optimized for semiconductor protection	IEC NH	NEOZED
	■	■	–	–
	■	■	–	–
	–	–	–	–
	–	–	185 mm	60 mm
	–	–	■	–
	■	■	■	■
	■	■	–	–
	–	–	■	–
	–	–	–	■
	–	–	■	■
	■	■	■	■
	■	■	■	■
	–	–	–	–
	■	■	■	■
	–	–	–	–

From page 8/114


[4] The suitable fuses protect persons, motors, installations and generators against short circuit and overload
[5] With a line-side fuse for 415 V

© Siemens 2022

Fuseless switch disconnectors

Quick selection guide







Type			3LD30	3LD31	3LD32	3LD33	3LD34	3LD20	3LD21	3LD22
General technical specifications acc. to IEC 60947-3										
General technical specifications										
Rated uninterrupted current I_u		A	16	25	32	40	63	16	25	32
Rated operational voltage U_e	At 50/60 Hz AC	V			690				690	
	At DC – 2 conducting paths in series	V			–				–	
	At DC – 3 conducting paths in series	V			–				–	
	At DC – 4 conducting paths in series	V			–				–	
Operating and short-circuit behavior										
Rated operational current I_e [1]	At AC-20A | AC-20B at 1000 V	A	–	–	–	–	–	–	–	–
	At AC-21A | AC-21B at 400 V	A	16	25	32	40	63	16	25	32
	At AC-21A | AC-21B at 690 V	A	16	25	32	40	63	16	25	32
	At AC-22A | AC-22B at 400 V	A	16	20	22	36	43	16	25	32
	At AC-22A | AC-22B at 690 V	A	9	11	13	17	22	16	25	32
	At AC-22A | AC-22B at 1000 V	A	–	–	–	–	–	–	–	–
	At AC-23A | AC-23B at 400 V	A	16	20	22	36	43	16	20	22
	At AC-23A | AC-23B at 690 V	A	9	11	13	17	22	9	11	13
	At DC-20A | DC-20B at 1000 V	A	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 110 V	A	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 220 V	A	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 440 V	A	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 220 V	A	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 440 V	A	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 220 V	A	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 440 V	A	–	–	–	–	–	–	–	–
Motor switching capacity	At AC-23A | AC-23B at 400 V	kW	7.5	9.5	11.5	18.5	22	7.5	9.5	11.5
	At AC-23A | AC-23B at 690 V	kW	7.5	9	11.5	15	18.5	7.5	9.5	11.5
	At AC-3 | at 400 V	kW	5.5	7.5	9.5	11.5	18.5	5.5	7.5	9.5
	At AC-3 | at 690 V	kW	5.5	7.5	9.5	11.5	15	5.5	7.5	9.5
Rated short-time withstand current I_{cw}	At 690 V AC (t=1 s)	kA	0.5	0.5	0.5	1	1	0.34	0.64	0.64
	At 1000 V AC (t=1 s)	kA	–	–	–	–	–	–	–	–
Rated conditional short-circuit current with upstream fuse	At 400/415 V AC	kA	10	10	10	10	10	50	50	50
	At 690 V AC	kA	6	6	6	6	6	50	50	50
Degree of protection										
Maximum achievable IP degree of protection (with a rotary operating mechanism)					IP65				IP65	
General technical specifications acc. to UL										
General technical specifications										
Certification according to UL standard					UL 508				UL 508	
I_n acc. to UL 508/UL60947-4-1 | UL489		A	16 | –	25 | –	32 | –	40 | –	63 | –	16 | –	25 | –	32 | –
U_e acc. to UL 508/UL60947-4-1 | UL489		V AC			600 | –				600 | –	
Operating and short-circuit behavior										
Operational power, 3-phase	At 480 V	hp	7.5	10	20	20	25	7.5	10	20
	At 600 V	hp	10	15	20	20	30	10	15	20
Short circuit current rating (SCCR)	At 480 V | at 600 V	kA			5 | 5			5 | 5	5 | 5	5 | 5
Upstream fuse according to UL					RK5				RK5	
More information										
					See page 8/12				See page 8/22	

© Siemens 2022

	3LD2					3LD5 UL				
										
	3LD25	3LD27	3LD28	3LD23	3LD24	3LD50	3LD52	3LD54	3LD56	3LD58
Rated operational current I_e	63	100	125	160	250	32	63	100	125	160
Rated operational voltage U_e			690					690		
Rated operational power at 50 Hz, 400 V, 3-phase			–					–		
Rated operational power at 60 Hz, 480 V, 3-phase			–					–		
Rated operational power at 60 Hz, 600 V, 3-phase			–					–		
Rated operational power at 50 Hz, 500 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational current at 50 Hz, 400 V, 3-phase	63	100	125	160	250	32	63	100	125	160
Rated operational current at 50 Hz, 500 V, 3-phase	63	100	125	160	250	32	63	100	125	160
Rated operational current at 60 Hz, 480 V, 3-phase	63	100	125	140	230	32	63	100	125	160
Rated operational current at 60 Hz, 600 V, 3-phase	63	100	125	140	230	32	63	100	125	160
Rated operational power at 50 Hz, 500 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 60 Hz, 480 V, 3-phase	43	70	80	132	224	32	63	100	125	160
Rated operational power at 60 Hz, 600 V, 3-phase	22	34	39	47	58	22	39	39	47	58
Rated operational power at 50 Hz, 400 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 50 Hz, 500 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 60 Hz, 480 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 60 Hz, 600 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 50 Hz, 400 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 50 Hz, 500 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 60 Hz, 480 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 60 Hz, 600 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 50 Hz, 400 V, 3-phase	22	37	45	75	132	15	30	45	55	75
Rated operational power at 50 Hz, 500 V, 3-phase	18.5	30	37	45	55	18.5	37	37	45	55
Rated operational power at 60 Hz, 480 V, 3-phase	18.5	30	37	50	110	15	30	45	55	75
Rated operational power at 60 Hz, 600 V, 3-phase	15	22	30	37	45	–	–	30	37	45
Rated operational power at 50 Hz, 500 V, 3-phase	1.26	2	2	4	4	1.26	2	4	4	4
Rated operational power at 60 Hz, 480 V, 3-phase	–	–	–	–	–	–	–	–	–	–
Rated operational power at 60 Hz, 600 V, 3-phase	50	50	25	50	50	50	50	50	50	50
Rated operational power at 50 Hz, 500 V, 3-phase	50	50	25	50	50	50	50	50	50	30
Degree of protection			IP65					IP65		
Standard			UL 508					UL60947-4-1/UL489		
Rated operational current I_e	63|–	100|–	125|–	160|–	250|–	30|30	60|60	100|100	125|125	150|150
Rated operational voltage U_e			600|–					480|480		
Rated operational power at 50 Hz, 400 V, 3-phase	40	60	75	75	100	20	30	60	75	100
Rated operational power at 50 Hz, 500 V, 3-phase	50	75	100	50	75	–	–	–	–	–
Rated operational power at 60 Hz, 480 V, 3-phase	5|5	10|10	10|10	10|10	10|10	50|–	65|–	65|–	65|–	50|–
Rated operational power at 60 Hz, 600 V, 3-phase			RK5			J|CC	J	J	J	J
			See page 8/22					See page 8/54		


© Siemens 2022

Fuseless switch disconnectors

Quick selection guide for AC and AC/DC applications



3KD




Type			3KD 01..–.K	3KD 02..–.K	3KD 03..–.K	3KD 03..–.L	3KD 04..–.L	3KD 05..–.L	3KD 06..–.L	3KD 16	3KD 22	3KD 26	3KD 28..–M.
General technical specifications acc. to IEC 60947-3													
General technical specifications													
Rated uninterrupted current I_u		A	16	32	63	63	80	100	125	16	32	63	80
Rated operational voltage U_e	At 50/60 Hz AC	V	690	690	415	690	690	690	690	1000	1000	1000	1000
	At DC – 2 conducting paths in series	V	–	–	–	–	–	–	–	220	220	220	220
	At DC – 3 conducting paths in series	V	–	–	–	–	–	–	–	440	440	440	440
	At DC – 4 conducting paths in series	V	–	–	–	–	–	–	–	–	–	–	–
Operating and short-circuit behavior													
Rated operational current I_e [1]	At AC-20A | AC-20B at 1000 V	A	–	–	–	–	–	–	–	16	32	63	80
	At AC-21A | AC-21B at 400 V	A	16	32	63	63	80	100	125	16	32	63	80
	At AC-21A | AC-21B at 690 V	A	16	32	–	63	80	100	125	16	32	63	80
	At AC-22A | AC-22B at 400 V	A	16	32	63	63	80	100	125	16	32	63	80
	At AC-22A | AC-22B at 690 V	A	16	32	–	63	80	100	125	16	32	63	80
	At AC-22A | AC-22B at 1000 V	A	–	–	–	–	–	–	–	16	32	63	80
	At AC-23A | AC-23B at 400 V	A	16	32	63	63	75	80	90	16	32	63	80
	At AC-23A | AC-23B at 690 V	A	14	17	–	22	30	35	39	16	32	63	80
	At DC-20A | DC-20B at 1000 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-21A | DC-21B at 110 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-21A | DC-21B at 220 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-21A | DC-21B at 440 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-22A | DC-22B at 220 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-22A | DC-22B at 440 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-23A | DC-23B at 220 V	A	–	–	–	–	–	–	–	16	32	63	80
	At DC-23A | DC-23B at 440 V	A	–	–	–	–	–	–	–	16	32	63	80
Motor switching capacity	At AC-23A | AC-23B at 400 V	kW	7,5	15	30	30	37	45	45	7,5	15	30	45
	At AC-23A | AC-23B at 690 V	kW	11	15	–	18,5	22	30	30	11	30	55	75
	At AC-3 | at 400 V	kW	–	–	–	–	–	–	–	–	–	–	–
	At AC-3 | at 690 V	kW	–	–	–	–	–	–	–	–	–	–	–
Rated short-time withstand current I_{cw}	At 690 V AC (t=1 s)	kA	1,26	1,26	1,26 [1]	2,5	2,5	2,5	2,5	3	3	3	3
	At 1000 V AC (t=1 s)	kA	–	–	–	–	–	–	–	3	3	3	3
Rated conditional short-circuit current with upstream fuse	At 400/415 V AC	kA	50	50	50	50	50	50	50	100	100	100	100
	At 690 V AC	kA	50	50	–	50	50	50	20	100	100	100	100
Degree of protection													
Maximum achievable IP degree of protection (with a rotary operating mechanism)			IP65										
General technical specifications acc. to UL													
General technical specifications													
Certification according to UL standard			–										
I_n acc. to UL 508/UL60947-4-1 | UL489		A	–										
U_e acc. to UL 508/UL60947-4-1 | UL489		AC V	–										
Operating and short-circuit behavior													
Operational power, 3-phase	At 480 V	hp	–										
	At 600 V	hp	–										
Short circuit current rating (SCCR)	At 480 V | at 600 V	kA	–										
Fuse type			–										
More information													
			See page 8/64										

[1] Applies to 415 V AC

© Siemens 2022

3KD



3KD 28..–N	3KD 30..–M.	3KD 30..–N.	3KD 32	3KD 34	3KD 36..–.N	3KD 36..–.P	3KD 38..–N.	3KD 38..–P.	3KD 40	3KD 42	3KD 44..–P.	3KD 44..–Q.	3KD 46	3KD 48	3KD 50..–Q.	3KD 50..–R.	3KD 52	3KD 54	3KD 56
80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220	220
440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440	440
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
80	100	100	125	160	200	200	200	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
80	100	100	125	160	160	200	200	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
80	80	100	125	160	160	200	200	250	315	400	400	500	630	800	800	1000	1250	1600	1600
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	1000	1000	1250	1600	2000
80	100	100	125	160	200	200	250	250	315	400	500	500	630	800	1000	1000	1250	1600	2000
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	1000	1250	1600	1600
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	1000	1250	1600	1600
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	1000	1250	1600	1600
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
80	80	100	125	160	160	200	160	250	315	400	400	500	630	800	800	–	–	–	–
45	45	55	55	90	90	110	90	132	160	200	200	250	355	400	560	560	710	900	1000
75	75	90	110	110	110	185	110	250	315	315	315	500	630	800	1000	1000	1000	1000	1000
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
4	3	4	4	4	4	13	4	13	13	13	13	30	30	30	30	55	55	55	55
4	3	4	4	4	4	13	4	13	13	13	13	30	30	30	30	55	55	55	55
100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	80	80	80
80	100	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	100	100	65
IP65																			
–																			
–																			
–																			
–																			
–																			
–																			
–																			

See page 8/64


© Siemens 2022

Fuseless switch disconnectors

Quick selection guide for DC applications



3KD




Type			3KD 16	3KD 22	3KD 26	3KD 28	3KD 30	3KD 32	3KD 34	3KD 36	3KD 38
General technical specifications acc. to IEC 60947-3											
General technical specifications											
Rated uninterrupted current I_u		A	16	32	63	80	100	125	160	200	250
Rated operational voltage U_e	At DC - at degree of pollution 2	V	1200	1200	1200	1200	1200	1200	1200	1200	1200
	At DC - at degree of pollution 3	V	1000	1000	1000	1000[1)]	1000[1)]	1000[1)]	1000[1)]	1200	1200
Operating and short-circuit behavior											
Rated operational current I_e	At DC-21A at 1200 V	A	16	32	63	80	100	125	160	–	–
	At DC-21B at 1200 V	A	16	32	63	80	100	125	160	200	250
Rated short-time withstand current I_{cw}	At DC 1200 V (t = 1 s)	kA	3	3	3	4	4	4	4	10	10
Degree of protection											
Maximum achievable IP degree of protection (with a rotary operating mechanism)			IP20								
General technical specifications acc. to UL											
General technical specifications											
Certification according to UL standard			–								
I_n acc. to UL 508/UL60947-4-1 | UL489		A	–								
U_e acc. to UL 508/UL60947-4-1 | UL489		AC V	–								
Operating and short-circuit behavior											
Operational power, 3-phase	At 480 V	hp	–								
	At 600 V	hp	–								
Short circuit current rating (SCCR)	At 480 V | at 600 V	kA	–								
Fuse type			–								
More information											
			See page 8/64								

[1)] Valid for version with box terminal, version with flat terminal max. 1200 V

© Siemens 2022

3KD



	3KD 40	3KD 42	3KD 44	3KD 46	3KD 48	3KD 50	3KD 52	3KD 54
	315	400	500	630	800	1000	1250	1600
	1200	1200	1200	1200	1200	1200	1200	1200
	1200	1200	1000	1000	1000	1200	1200	1200
	–	–	–	–	–	–	–	–
	315	400	500	630	800	800	1250	1600
	10	10	20	20	20	20	20	20
	IP20							
	–							
	–							
	–							
	–							
	–							
	–							
	–							

See page 8/64

© Siemens 2022

3LD switch disconnectors

System overview of 3LD3 main control and EMERGENCY-STOP switches

Basic units for front mounting


3P rotary operating mechanisms


3P knob-operated mechanisms


3P+N rotary operating mechanisms


3P+N knob-operated mechanisms

Basic units for floor mounting


3P rotary operating mechanisms


3P knob-operated mechanisms


3P+N rotary operating mechanisms


3P+N knob-operated mechanisms

8

Basic units for installation in distribution boards


3P knob-operated mechanisms


3P basic switches without knob-operated mechanism


3P+N knob-operated mechanisms


3P+N basic switches without knob-operated mechanism

Additional poles and auxiliary switches


N switching contacts


N/PE terminals


Auxiliary switches

Operating mechanisms



Rotary operating mechanisms for front or floor mounting (center hole)



Knob-operated mechanisms for front or floor mounting (center hole)


Door-coupling rotary operating mechanisms


Door-coupling knob-operated mechanisms

Other accessories



Terminal covers, 1 and 3-pole





Inscription labels

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Mounting concept and accessories

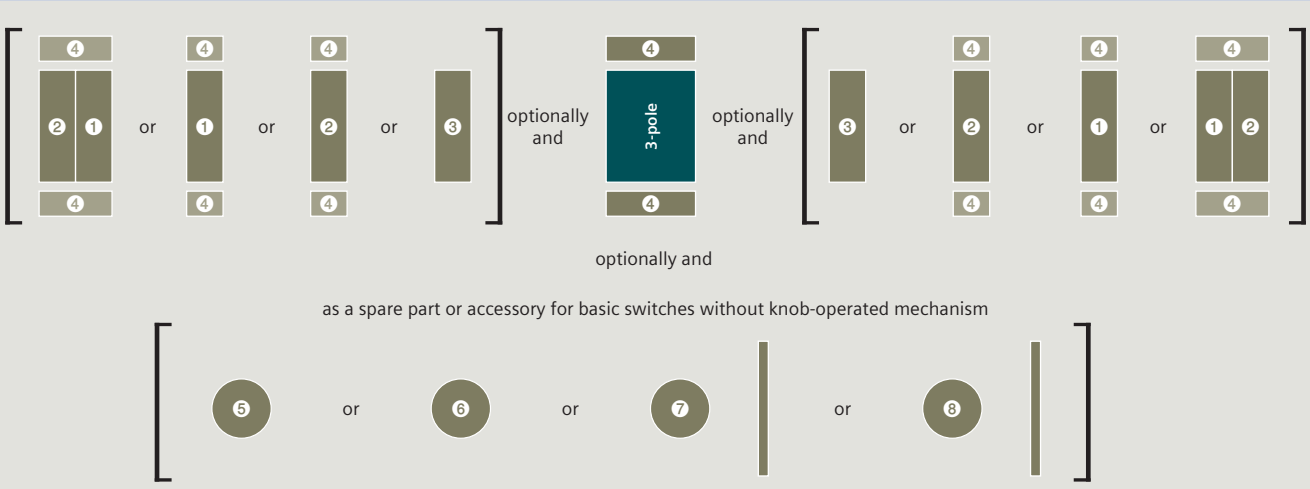

Legend

① N switching contact [1)]
② N/PE terminal
③ Auxiliary switch
④ Terminal cover
⑤ Rotary operating mechanism, center-hole mounting
⑥ Knob-operated mechanism, center-hole mounting
⑦ Door-coupling rotary operating mechanism, center-hole mounting
⑧ Door-coupling knob-operated mechanism, center-hole mounting

[1)] The N switching contact ① first has to be mounted on the basic unit

8

Mounting types

You will find further information under:
sie.ag/2UlrAvy

Front mounting



The switches for front mounting are mounted on the inside of covers, side panels or, if applicable, control cabinet doors (depending on the applicable standard and switching function). The switches are mounted via the 22.5 mm diameter center hole.

Floor mounting



The switches for floor mounting are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The actuators are connected to the lower section of the switch through a door coupling, which can be released in the 0 position, and a 300 mm long switch shaft. When the control cabinet door is open, the switch can be protected against inadvertent operation by removing the switch shaft from the lower section of the switch. The overall depth can be adapted to individual requirements by adjusting the switch shaft length.

Distribution board mounting



The switches for distribution board mounting are suited for operation in distribution boards and for switching inside control cabinets or distributors. They have cap and mounting dimensions acc. to DIN 43880 and can be fitted under the same cover together with miniature circuit breakers. The selector switches can be locked in their OFF position with no more than one padlock with a shackle thickness of 4 to 6 mm.

Basic switches without knob-operated mechanism





For the basic switch variant without knob-operated mechanism, the appropriate door-coupling rotary operating mechanism can be ordered separately.

© Siemens 2022

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, front mounting, 10 kA_{rms}





	Operating mechanisms, black	
Number of poles	3P	
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power *P* At AC-23A, 380 ... 440 V	Operational power *P* At AC-3, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC
Rotary operating mechanisms				
16 A	7.5 kW	5.5 kW	3LD3054-0TK51	3LD3054-1TK51
25 A	9 kW	7.5 kW	3LD3154-0TK51	3LD3154-1TK51
32 A	11.5 kW	9.5 kW	3LD3254-0TK51	3LD3254-1TK51
40 A	18.5 kW	11.5 kW	3LD3354-0TK51	3LD3354-1TK51
63 A	22 kW	18.5 kW	3LD3454-0TK51	3LD3454-1TK51
Knob-operated mechanisms				
16 A	7.5 kW	5.5 kW	3LD3050-0TK11	3LD3050-1TK11
25 A	9 kW	7.5 kW	3LD3150-0TK11	3LD3150-1TK11
32 A	11.5 kW	9.5 kW	3LD3250-0TK11	3LD3250-1TK11
40 A	18.5 kW	11.5 kW	3LD3350-0TK11	3LD3350-1TK11
63 A	22 kW	18.5 kW	3LD3450-0TK11	3LD3450-1TK11




Scope of supply:
- Including terminal covers for the infeed side







Accessories

				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Additional poles								
	Type	Contacts	Article No.					
	Switching contact for N conductor (4th contact)	Leading switch-on, lagging switch-off	3LD9340-0B	■	■	■	■	■
	N terminal	Through-type	3LD9340-2B	■	■	■	■	■
	PE terminal	Through-type	3LD9340-3B	■	■	■	■	■
Auxiliary switches								
		Contacts	Article No.					
		1 NO + 1 NC	3LD9340-6B	■	■	■	■	■
Rotary operating mechanisms								
		Color	Article No.					
		Black	3LD9344-4C	■	■	■	■	■
		Red/yellow	3LD9344-5C	■	■	■	■	■
Knob-operated mechanisms								
		Color	Article No.					
		Black	3LD9343-6C	■	■	■	■	■
		Red/yellow	3LD9343-7C	■	■	■	■	■


Quick selection guide, page 8/6

© Siemens 2022

Operating mechanisms, red/yellow					
3P+N		3P		3P+N	
					
Without auxiliary switch	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**
3LD3054-0TL51	3LD3054-1TL51	3LD3054-0TK53	3LD3054-1TK53	3LD3054-0TL53	3LD3054-1TL53
3LD3154-0TL51	3LD3154-1TL51	3LD3154-0TK53	3LD3154-1TK53	3LD3154-0TL53	3LD3154-1TL53
3LD3254-0TL51	3LD3254-1TL51	3LD3254-0TK53	3LD3254-1TK53	3LD3254-0TL53	3LD3254-1TL53
3LD3354-0TL51	3LD3354-1TL51	3LD3354-0TK53	3LD3354-1TK53	3LD3354-0TL53	3LD3354-1TL53
3LD3454-0TL51	3LD3454-1TL51	3LD3454-0TK53	3LD3454-1TK53	3LD3454-0TL53	3LD3454-1TL53
3LD3050-0TL11	3LD3050-1TL11	3LD3050-0TK13	3LD3050-1TK13	3LD3050-0TL13	3LD3050-1TL13
3LD3150-0TL11	3LD3150-1TL11	3LD3150-0TK13	3LD3150-1TK13	3LD3150-0TL13	3LD3150-1TL13
3LD3250-0TL11	3LD3250-1TL11	3LD3250-0TK13	3LD3250-1TK13	3LD3250-0TL13	3LD3250-1TL13
3LD3350-0TL11	3LD3350-1TL11	3LD3350-0TK13	3LD3350-1TK13	3LD3350-0TL13	3LD3350-1TL13
3LD3450-0TL11	3LD3450-1TL11	3LD3450-0TK13	3LD3450-1TK13	3LD3450-0TL13	3LD3450-1TL13

8


			3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Terminal covers							
	• Pack of 4 units						
	Version	**Article No.**					
	For N switching contacts, N terminals or PE terminals	3LD9341-2A	■	■	■	■	■
	For 3-pole 3LD3 switch disconnectors	3LD9341-0A	■	■	■	■	■
Inscription labels							
	• Pack of 10 units						
	Inscription	**Article No.**					
	German/English (Hauptschalter/Main Switch)	3LD9346-1A	■	■	■	■	■
	French/Spanish (Interrupteur Principal/Interruptor Principal)	3LD9346-2A	■	■	■	■	■
	Without inscription	3LD9346-3A	■	■	■	■	■


Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, floor mounting, 10 kA_{rms}





	Operating mechanisms, black	
Number of poles	3P	
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC
Rotary operating mechanisms				
16 A	7.5 kW	5.5 kW	3LD3048-0TK51	3LD3048-1TK51
25 A	9 kW	7.5 kW	3LD3148-0TK51	3LD3148-1TK51
32 A	11.5 kW	9.5 kW	3LD3248-0TK51	3LD3248-1TK51
40 A	18.5 kW	11.5 kW	3LD3348-0TK51	3LD3348-1TK51
63 A	22 kW	18.5 kW	3LD3448-0TK51	3LD3448-1TK51
Knob-operated mechanisms				
16 A	7.5 kW	5.5 kW	3LD3040-0TK11	3LD3040-1TK11
25 A	9 kW	7.5 kW	3LD3140-0TK11	3LD3140-1TK11
32 A	11.5 kW	9.5 kW	3LD3240-0TK11	3LD3240-1TK11
40 A	18.5 kW	11.5 kW	3LD3340-0TK11	3LD3340-1TK11
63 A	22 kW	18.5 kW	3LD3440-0TK11	3LD3440-1TK11

Scope of supply:
- Including terminal covers for the infeed side


Mounting:
- Using screws- or snap-on mounting on 35 mm mounting rails

Accessories







				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Additional poles								
	Type	Contacts	Article No.					
	Switching contact for N conductor (4th contact)	Leading switch-on, lagging switch-off	3LD9340-0C	■	■	■	■	■
	N terminal	Through-type	3LD9340-2C	■	■	■	■	■
	PE terminal	Through-type	3LD9340-3C	■	■	■	■	■
Auxiliary switches								
		Contacts	Article No.					
		1 NO + 1 NC	3LD9340-6C	■	■	■	■	■
Rotary operating mechanisms								
	Version	Color	Article No.					
	Incl. funnel	Black	3LD9344-2C	■	■	■	■	■
		Red/yellow	3LD9344-3C	■	■	■	■	■
Knob-operated mechanisms								
	Version	Color	Article No.					
	Incl. funnel	Black	3LD9343-4C	■	■	■	■	■
		Red/yellow	3LD9343-5C	■	■	■	■	■
Switch shafts								
	Cross-section	Length	Article No.					
	6 × 6 mm	600 mm	3LD93451C	■	■	■	■	■

Quick selection guide, page 8/6


© Siemens 2022

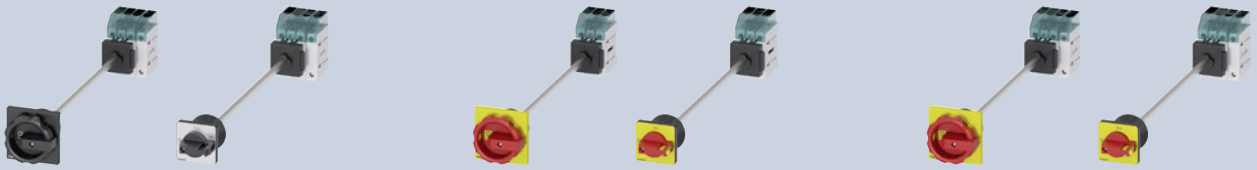

Operating mechanisms, red/yellow

3P+N		3P		3P+N	
					
Without auxiliary switch	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**
3LD3048-0TL51	3LD3048-1TL51	3LD3048-0TK53	3LD3048-1TK53	3LD3048-0TL53	3LD3048-1TL53
3LD3148-0TL51	3LD3148-1TL51	3LD3148-0TK53	3LD3148-1TK53	3LD3148-0TL53	3LD3148-1TL53
3LD3248-0TL51	3LD3248-1TL51	3LD3248-0TK53	3LD3248-1TK53	3LD3248-0TL53	3LD3248-1TL53
3LD3348-0TL51	3LD3348-1TL51	3LD3348-0TK53	3LD3348-1TK53	3LD3348-0TL53	3LD3348-1TL53
3LD3448-0TL51	3LD3448-1TL51	3LD3448-0TK53	3LD3448-1TK53	3LD3448-0TL53	3LD3448-1TL53
3LD3040-0TL11	3LD3040-1TL11	3LD3040-0TK13	3LD3040-1TK13	3LD3040-0TL13	3LD3040-1TL13
3LD3140-0TL11	3LD3140-1TL11	3LD3140-0TK13	3LD3140-1TK13	3LD3140-0TL13	3LD3140-1TL13
3LD3240-0TL11	3LD3240-1TL11	3LD3240-0TK13	3LD3240-1TK13	3LD3240-0TL13	3LD3240-1TL13
3LD3340-0TL11	3LD3340-1TL11	3LD3340-0TK13	3LD3340-1TK13	3LD3340-0TL13	3LD3340-1TL13
3LD3440-0TL11	3LD3440-1TL11	3LD3440-0TK13	3LD3440-1TK13	3LD3440-0TL13	3LD3440-1TL13

8

				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Door-coupling rotary operating mechanisms								
	**Type**	**Color**	**Article No.**					
	Rotary operating mechanisms 66 × 66 mm	Black	3LD9344-2CA	■	■	■	■	■
		Red/yellow	3LD9344-3CA	■	■	■	■	■
	Knob-operated mechanisms 48 × 48 mm	Black	3LD9343-4CA	■	■	■	■	■
		Red/yellow	3LD9343-5CA	■	■	■	■	■
Terminal covers								
	• Pack of 4 units							
	**Version**		**Article No.**					
	For N switching contacts, N terminals or PE terminals		3LD9341-2A	■	■	■	■	■
	For 3LD3 3-pole switch disconnectors		3LD9341-0A	■	■	■	■	■
Inscription labels								
	• Pack of 10 units							
	Inscription		**Article No.**					
	German/English (Hauptschalter/Main Switch)		3LD9346-1A	■	■	■	■	■
	French/Spanish (Interrupteur Principal/Interruptor Principal)		3LD9346-2A	■	■	■	■	■
	Without inscription		3LD9346-3A	■	■	■	■	■



Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors

3LD3 main control and EMERGENCY-STOP switches, installation in distribution boards and basic switches without direct operating mechanism, 10 kA_{rms}





	Operating mechanisms, black	
Number of poles	3P	
		
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC
Basic switch with masking plate and selector knob, standard rail mounting				
16 A	7.5 kW	5.5 kW	3LD3030-0TK11	3LD3030-1TK11
25 A	9 kW	7.5 kW	3LD3130-0TK11	3LD3130-1TK11
32 A	11.5 kW	9.5 kW	3LD3230-0TK11	3LD3230-1TK11
40 A	18.5 kW	11.5 kW	3LD3330-0TK11	3LD3330-1TK11
63 A	22 kW	18.5 kW	3LD3430-0TK11	3LD3430-1TK11
Basic switches without knob-operated mechanism				
16 A	7.5 kW	5.5 kW	3LD3010-0TK05	3LD3010-1TK05
25 A	9 kW	7.5 kW	3LD3110-0TK05	3LD3110-1TK05
32 A	11.5 kW	9.5 kW	3LD3210-0TK05	3LD3210-1TK05
40 A	18.5 kW	11.5 kW	3LD3310-0TK05	3LD3310-1TK05
63 A	22 kW	18.5 kW	3LD3410-0TK05	3LD3410-1TK05

Scope of supply:
- Basic switches without direct operating mechanism, incl. terminal covers for the infeed side

Mounting:
- Using screws or snap-on mounting on 35 mm mounting rails

Accessories for switches for installation in distribution boards and basic switches without knob-operated mechanism







				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Additional poles								
	Type	Contacts	Article No.					
	Switching contact for N conductor (4th contact)	Leading switch-on, lagging switch-off	3LD9340-0C	■	■	■	■	■
	N terminal	Through-type	3LD9340-2C	■	■	■	■	■
	PE terminal	Through-type	3LD9340-3C	■	■	■	■	■
Auxiliary switches								
		Contacts	Article No.					
		1 NO + 1 NC	3LD9340-6C	■	■	■	■	■
Terminal covers								
	• Pack of 4 units							
	Version		Article No.					
	For N switching contacts, N terminals or PE terminals		3LD9341-2A	■	■	■	■	■
	For 3LD3 3-pole switch disconnectors		3LD9341-0A	■	■	■	■	■
Switch shafts								
	Cross-section	Length	Article No.					
	6 × 6 mm	600 mm	3LD93451C	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2022





Operating mechanisms, red/yellow					
3P+N		3P		3P+N	
					
Without auxiliary switch	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**	**Without auxiliary switch**	**1 NO + 1 NC**
3LD3030-0TL11	3LD3030-1TL11	3LD3030-0TK13	3LD3030-1TK13	3LD3030-0TL13	3LD3030-1TL13
3LD3130-0TL11	3LD3130-1TL11	3LD3130-0TK13	3LD3130-1TK13	3LD3130-0TL13	3LD3130-1TL13
3LD3230-0TL11	3LD3230-1TL11	3LD3230-0TK13	3LD3230-1TK13	3LD3230-0TL13	3LD3230-1TL13
3LD3330-0TL11	3LD3330-1TL11	3LD3330-0TK13	3LD3330-1TK13	3LD3330-0TL13	3LD3330-1TL13
3LD3430-0TL11	3LD3430-1TL11	3LD3430-0TK13	3LD3430-1TK13	3LD3430-0TL13	3LD3430-1TL13
3LD3010-0TL05	3LD3010-1TL05	–	–	–	–
3LD3110-0TL05	3LD3110-1TL05	–	–	–	–
3LD3210-0TL05	3LD3210-1TL05	–	–	–	–
3LD3310-0TL05	3LD3310-1TL05	–	–	–	–
3LD3410-0TL05	3LD3410-1TL05	–	–	–	–

Accessories for basic switches without operating mechanism

				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Rotary operating mechanisms								
	**Version**	**Color**	**Article No.**					
	Incl. funnel	Black	3LD9344-2C	■	■	■	■	■
		Red/yellow	3LD9344-3C	■	■	■	■	■
Knob-operated mechanisms								
	**Version**	**Color**	**Article No.**					
	Incl. funnel	Black	3LD9343-4C	■	■	■	■	■
		Red/yellow	3LD9343-5C	■	■	■	■	■
Door-coupling rotary operating mechanisms								
	**Type**	**Color**	**Article No.**					
	Rotary operating mechanisms 66 × 66 mm	Black	3LD9344-2CA	■	■	■	■	■
		Red/yellow	3LD9344-3CA	■	■	■	■	■
	Knob-operated mechanisms 48 × 48 mm	Black	3LD9343-4CA	■	■	■	■	■
		Red/yellow	3LD9343-5CA	■	■	■	■	■
Switch shafts								
	**Cross-section**	**Length**	**Article No.**					
	6 × 6 mm	600 mm	3LD93451C	■	■	■	■	■
Inscription labels								
	• Pack of 10 units							
	Inscription		**Article No.**					
	German/English (Hauptschalter/Main Switch)		3LD9346-1A	■	■	■	■	■
	French/Spanish (Interrupteur Principal/Interruptor Principal)		3LD9346-2A	■	■	■	■	■
	Without inscription		3LD9346-3A	■	■	■	■	■

Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors


3LD3 main control and EMERGENCY-STOP switches, accessories

				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Switching contacts for N conductor (4th contact)								
	Version	**Contacts**	**Article No.**					
	For front mounting	Leading switch-on, lagging switch-off	3LD9340-0B	■	■	■	■	■
	For floor mounting, installation in distribution boards and basic switches without knob-operated mechanism	Leading switch-on, lagging switch-off	3LD9340-0C	■	■	■	■	■
N terminals								
	Version	**Contacts**	**Article No.**					
	For front mounting	Through-type	3LD9340-2B	■	■	■	■	■
	For floor mounting, installation in distribution boards and basic switches without knob-operated mechanism	Through-type	3LD9340-2C	■	■	■	■	■
PE terminals								
	Version	**Contacts**	**Article No.**					
	For front mounting	Through-type	3LD9340-3B	■	■	■	■	■
	For floor mounting, installation in distribution boards and basic switches without knob-operated mechanism	Through-type	3LD9340-3C	■	■	■	■	■
Auxiliary switches								
	Version	**Contacts**	**Article No.**					
	For front mounting	1 NO + 1 NC	3LD9340-6B	■	■	■	■	■
	For floor mounting, installation in distribution boards and basic switches without knob-operated mechanism	1 NO + 1 NC	3LD9340-6C	■	■	■	■	■

8

System overview, page 8/12

© Siemens 2022

				3LD30 (16 A)	3LD31 (25 A)	3LD32 (32 A)	3LD33 (40 A)	3LD34 (63 A)
Rotary operating mechanisms								
	Version	**Color**	**Article No.**					
	For front mounting, without funnel	Black	3LD9344-4C	■	■	■	■	■
		Red/yellow	3LD9344-5C	■	■	■	■	■
	For floor mounting and basic switches without knob-operated mechanism, with funnel	Black	3LD9344-2C	■	■	■	■	■
		Red/yellow	3LD9344-3C	■	■	■	■	■
Knob-operated mechanisms								
	Version	**Color**	**Article No.**					
	For front mounting, without funnel	Black	3LD9343-6C	■	■	■	■	■
		Red/yellow	3LD9343-7C	■	■	■	■	■
	For floor mounting and basic switches without knob-operated mechanism, with funnel	Black	3LD9343-4C	■	■	■	■	■
		Red/yellow	3LD9343-5C	■	■	■	■	■
Door-coupling rotary operating mechanisms								
	Version	**Type**	**Color**	**Article No.**				
	For floor mounting and basic switches without knob-operated mechanism	Rotary operating mechanisms 66 × 66 mm	Black	3LD9344-2CA	■	■	■	■	■
			Red/yellow	3LD9344-3CA	■	■	■	■	■
		Knob-operated mechanisms 48 × 48 mm	Black	3LD9343-4CA	■	■	■	■	■
			Red/yellow	3LD9343-5CA	■	■	■	■	■
Terminal covers								
	• For front mounting, floor mounting, installation in distribution boards and basic switches without knob-operated mechanism • Pack of 4 units							
	Number of poles		**Article No.**					
	1-pole		3LD9341-2A	■	■	■	■	■
	3-pole		3LD9341-0A	■	■	■	■	■
Switch shafts								
	**Cross-section**	**Length**	**Article No.**					
	6 × 6 mm	600 mm	3LD93451C	■	■	■	■	■
Inscription labels								
	• Pack of 10 units • Not for installation in distribution boards							
	Inscription		**Article No.**					
	German/English (Hauptschalter/Main Switch)		3LD9346-1A	■	■	■	■	■
	French/Spanish (Interrupteur Principal/Interruptor Principal)		3LD9346-2A	■	■	■	■	■
	Without inscription		3LD9346-3A	■	■	■	■	■

8

System overview, page 8/12

© Siemens 2022


3LD switch disconnectors

System overview of 3LD2 switch disconnectors

Basic units for front mounting


3P rotary operating mechanisms



3P knob-operated mechanisms (3LD23/3LD24)


3P knob-operated mechanisms


3P+N rotary operating mechanisms


3P+N knob-operated mechanisms (3LD23/3LD24)


3P+N knob-operated mechanisms


6P rotary operating mechanisms

Basic units for floor mounting


3P rotary operating mechanisms


3P knob-operated mechanisms (3LD23/3LD24)


3P knob-operated mechanisms, defeatable


3P+N rotary operating mechanisms


3P+N knob-operated mechanisms (3LD23/3LD24)


3P+N knob-operated mechanisms, defeatable


6P rotary operating mechanisms

Basic units for installation in distribution boards/enclosures, DC


3P knob-operated mechanisms


3P+N knob-operated mechanisms


8P DC isolators

Additional poles and auxiliary switches


N switching contacts


N/PE terminals (through-type)


Auxiliary switches (standard version)


Auxiliary switch for mounting on the front

Operating mechanisms


Rotary operating mechanisms for 4-hole and center-hole mounting




Knob-operated mechanisms (3LD23/3LD24)


Switch shafts


Coupling pieces without ON-lock


Assembly tools for center-hole mounting

Other accessories


Terminal covers, 1-pole


Terminal covers, 3 and 4-pole




Inscription labels (with and without inscription)

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Mounting concept and accessories

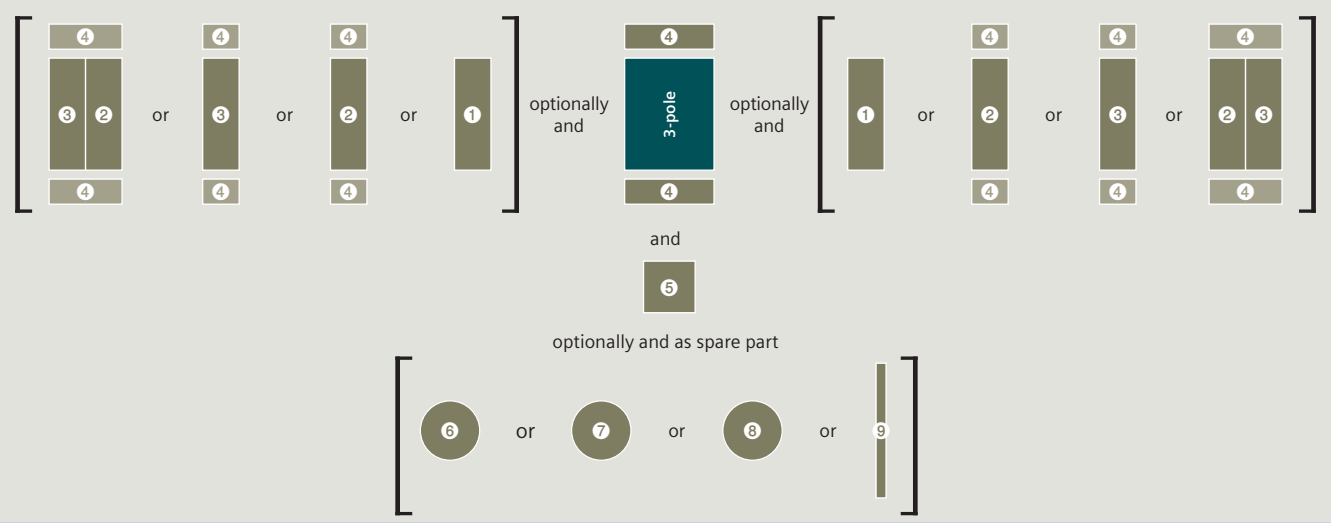

Legend

① Auxiliary switch
② N switching contact [1)]
③ N/PE terminal
④ Terminal cover
⑤ Auxiliary switch for mounting on the front [2)]
⑥ Rotary operating mechanism, center-hole mounting
⑦ Rotary operating mechanism, four-hole mounting
⑧ Knob-operated mechanism, four-hole mounting
⑨ Switch shaft (300 or 600)

[1)] The N switching contact ② first has to be mounted on the basic unit
[2)] Can only be used with four-hole front mounting and floor mounting

8

Mounting types

You will find further information under:
sie.ag/2UlrAvy

Front mounting



The switches for front mounting are mounted on the inside of covers, side panels or, if applicable, control cabinet doors (depending on the applicable standard and switching function). In addition to the 4-hole fastening of the handle, up to 63 A (3LD25) fastening with the 22.5 mm diameter center hole can also be chosen.

Floor mounting



The switches for floor mounting up to 125 A (3LD28) are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The switches for 160 and 250 A (3LD23/3LD24) are exclusively screwed onto mounting panels.
The actuators are connected to the lower section of the switch through a door coupling,which can be released in the 0 position, and a 300 mm long switch shaft. When the control cabinet door is open, the switch can be protected against inadvertent operation by removing the switch shaft from the lower section of the switch. The overall depth can be adapted to individual requirements by adjusting the switch shaft length.

Distribution board mounting



The switches for distribution board mounting are suited for operation in distribution boards and for switching inside control cabinets or distributors. Up to 125 A (3LD28), they have cap and mounting dimensions acc. to DIN 43880 and can be fitted under the same cover together with miniature circuit breakers.

DC isolators




The DC isolators in the enclosure are suitable for disconnecting loads of up to 800 V DC due to their 8-pole design. To provide additional safety, the isolators can be locked in the 0 position.

© Siemens 2022


3LD switch disconnectors

3LD2 main control switches, front mounting, 25 ... 50 kA_{eff}

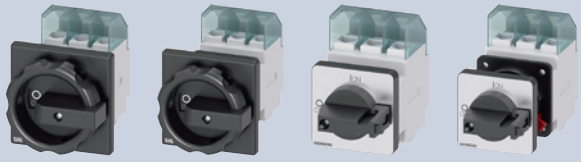

Operating mechanisms, black

Number of poles 3P




Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Rotary operating mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2003-0TK51	3LD2003-1TP51
25 A	9.5 kW	7.5 kW	3LD2103-0TK51	3LD2103-1TP51
32 A	11.5 kW	9.5 kW	3LD2203-0TK51	3LD2203-1TP51
63 A	22 kW	18.5 kW	3LD2504-0TK51	3LD2504-1TP51
100 A	37 kW	30 kW	3LD2704-0TK51	3LD2704-1TP51
125 A	45 kW	37 kW	3LD2804-0TK51	3LD2804-1TP51
160 A	75 kW	50 kW	3LD2305-0TK11	3LD2305-0TK11 + 3LD9200-5B
250 A	132 kW	110 kW	3LD2405-0TK11	3LD2405-0TK11 + 3LD9200-5B
Rotary operating mechanism, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD2054-0TK51	3LD2054-1TP51
25 A	9.5 kW	7.5 kW	3LD2154-0TK51	3LD2154-1TP51
32 A	11.5 kW	9.5 kW	3LD2254-0TK51	3LD2254-0TK51 + 3LD9200-5B
63 A	22 kW	18.5 kW	3LD2555-0TK51	3LD2555-0TK51 + 3LD9200-5B
Knob-operated mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2022-0TK11	3LD2022-0TK11 + 3LD9200-5B
25 A	9.5 kW	7.5 kW	3LD2122-0TK11	3LD2122-0TK11 + 3LD9200-5B
32 A	11.5 kW	9.5 kW	3LD2222-0TK11	3LD2222-0TK11 + 3LD9200-5B
Knob-operated mechanism, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD2050-0TK11	3LD2050-0TK11 + 3LD9200-5B
25 A	9.5 kW	7.5 kW	3LD2150-0TK11	3LD2150-0TK11 + 3LD9200-5B
32 A	11.5 kW	9.5 kW	3LD2250-0TK11	3LD2250-0TK11 + 3LD9200-5B





Scope of supply:
- Including terminal covers for the infeed side

Accessories, see page 8/28

Quick selection guide, page 8/6

© Siemens 2022

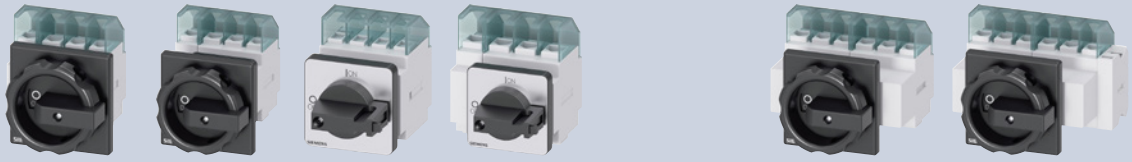


3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2003-1TL51	3LD2003-2EP51	–	–
3LD2103-1TL51	3LD2103-2EP51	3LD2103-3VK51	3LD2103-4VP51
3LD2203-1TL51	3LD2203-1TL51 + 3LD9200-5B	3LD2203-3VK51	3LD2203-3VK51 + 3LD9200-5B
3LD2504-1TL51	3LD2504-1TP51 + 3LD9250-0BA	3LD2504-3VK51	3LD2504-3VK51 + 3LD9200-5B
3LD2704-0TK51 + 3LD9280-0B	3LD2704-0TK51 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2804-0TK51 + 3LD9280-0B	3LD2804-0TK51 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2305-1TL11	3LD2305-1TL11 + 3LD9200-5B	3LD2305-3VK11	3LD2305-3VK11 + 3LD9200-5B
3LD2405-1TL11	3LD2405-1TL11 + 3LD9200-5B	3LD2405-3VK11	3LD2405-3VK11 + 3LD9200-5B
3LD2054-1TL51	3LD2054-2EP51	–	–
3LD2154-1TL51	3LD2154-2EP51	–	–
3LD2254-1TL51	3LD2254-1TL51 + 3LD9200-5B	–	–
3LD2555-0TK51 + 3LD9250-0BA	3LD2555-0TK51 + 3LD9250-0BA + 3LD9200-5B	–	–
3LD2022-1TL11	3LD2022-1TL11 + 3LD9200-5B	–	–
3LD2122-1TL11	3LD2122-1TL11 + 3LD9200-5B	–	–
3LD2222-0TK11 + 3LD9220-0B	3LD2222-0TK11 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2050-1TL11	3LD2050-1TL11 + 3LD9200-5B	–	–
3LD2150-0TK11 + 3LD9220-0B	3LD2150-0TK11 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2250-0TK11 + 3LD9220-0B	3LD2250-0TK11 + 3LD9220-0B + 3LD9200-5B	–	–

Quick selection guide, page 8/6

© Siemens 2022


3LD switch disconnectors

3LD2 EMERGENCY-STOP switches, front mounting, 25 ... 50 kA_{eff}

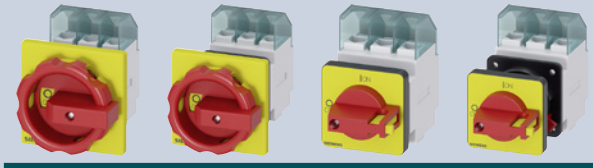

Operating mechanisms, red/yellow

Number of poles 3P




Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Rotary operating mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2003-0TK53	3LD2003-1TP53
25 A	9.5 kW	7.5 kW	3LD2103-0TK53	3LD2103-1TP53
32 A	11.5 kW	9.5 kW	3LD2203-0TK53	3LD2203-1TP53
63 A	22 kW	18.5 kW	3LD2504-0TK53	3LD2504-1TP53
100 A	37 kW	30 kW	3LD2704-0TK53	3LD2704-1TP53
125 A	45 kW	37 kW	3LD2804-0TK53	3LD2804-1TP53
160 A	75 kW	50 kW	3LD2305-0TK13	3LD2305-0TK13 + 3LD9200-5B
250 A	132 kW	110 kW	3LD2405-0TK13	3LD2405-0TK13 + 3LD9200-5B
Rotary operating mechanism, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD2054-0TK53	3LD2054-1TP53
25 A	9.5 kW	7.5 kW	3LD2154-0TK53	3LD2154-1TP53
32 A	11.5 kW	9.5 kW	3LD2254-0TK53	3LD2254-0TK53 + 3LD9200-5B
63 A	22 kW	18.5 kW	3LD2555-0TK53	3LD2555-0TK53 + 3LD9200-5B
Knob-operated mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2022-0TK13	3LD2022-0TK13 + 3LD9200-5B
25 A	9.5 kW	7.5 kW	3LD2122-0TK13	3LD2122-0TK13 + 3LD9200-5B
32 A	11.5 kW	9.5 kW	3LD2222-0TK13	3LD2222-0TK13 + 3LD9200-5B
Knob-operated mechanism, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD2050-0TK13	3LD2050-0TK13 + 3LD9200-5B
25 A	9.5 kW	7.5 kW	3LD2150-0TK13	3LD2150-0TK13 + 3LD9200-5B
32 A	11.5 kW	9.5 kW	3LD2250-0TK13	3LD2250-0TK13 + 3LD9200-5B


Scope of supply:
- Including terminal covers for the infeed side





Accessories, see page 8/28

Quick selection guide, page 8/6

© Siemens 2022

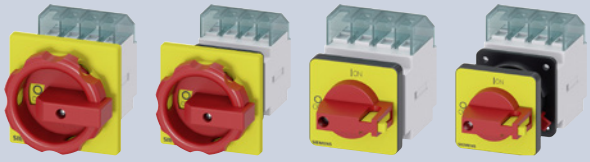

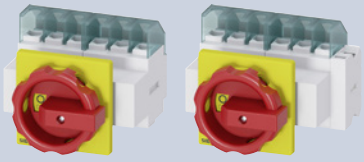

3+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2003-1TL53	3LD2003-2EP53	–	–
3LD2103-1TL53	3LD2103-2EP53	3LD2103-3VK53	3LD2103-4VP53
3LD2203-1TL53	3LD2203-1TL53 + 3LD9200-5B	3LD2203-3VK53	3LD2203-3VK53 + 3LD9200-5B
3LD2504-1TL53	3LD2504-1TP53 + 3LD9250-0BA	3LD2504-3VK53	3LD2504-3VK53 + 3LD9200-5B
3LD2704-0TK53 + 3LD9280-0B	3LD2704-0TK53 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2804-0TK53 + 3LD9280-0B	3LD2804-0TK53 + 3LD9280-0B + 3LD9200-5B	–	–
3LD2305-1TL13	3LD2305-1TL13 + 3LD9200-5B	3LD2305-3VK13	3LD2305-3VK13 + 3LD9200-5B
3LD2405-1TL13	3LD2405-1TL13 + 3LD9200-5B	3LD2405-3VK13	3LD2405-3VK13 + 3LD9200-5B
3LD2054-1TL53	3LD2054-2EP53	–	–
3LD2154-1TL53	3LD2154-2EP53	–	–
3LD2254-1TL53	3LD2254-1TL53 + 3LD9200-5B	–	–
3LD2555-0TK53 + 3LD9250-0BA	3LD2555-0TK53 + 3LD9250-0BA + 3LD9200-5B	–	–
3LD2022-1TL13	3LD2022-1TL13 + 3LD9200-5B	–	–
3LD2122-1TL13	3LD2122-1TL13 + 3LD9200-5B	–	–
3LD2222-0TK13 + 3LD9220-0B	3LD2222-0TK13 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2050-1TL13	3LD2050-1TL13 + 3LD9200-5B	–	–
3LD2150-0TK13 + 3LD9220-0B	3LD2150-0TK13 + 3LD9220-0B + 3LD9200-5B	–	–
3LD2250-0TK13 + 3LD9220-0B	3LD2250-0TK13 + 3LD9220-0B + 3LD9200-5B	–	–

8

Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors




Accessories for front mounting

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Switching contacts for N conductor (4th contact)										
	**Contacts**	**Article No.**								
	Leading switch-on, lagging switch-off	3LD9220-0B		■	■					
		3LD9250-0BA				■				
		3LD9280-0B					■	■		
		3LD9240-0B							■	■
N/PE terminals										
	**Contacts**	**Article No.**								
	Through-type	3LD9200-2B	■							
		3LD9220-2B		■	■					
		3LD9250-2BA				■				
		3LD9280-2B					■	■		
		3LD9240-2B							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5BF	■	■	■	■	■	■	■	■
Auxiliary switch for mounting on the front										
	• Mounted on the switch shaft • For four-hole front mounting and floor mounting only • For long leading times (20 ... 150 m) • Not for 6-pole 3LD23 (160 A) and 3LD24 (250 A)									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■		
			3LD9240-5D							■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■		
			3LD9240-5DF							■	■
Rotary operating mechanisms										
	• Lockable in 0 position with up to 3 padlocks									
	Version	**Mounting**	**Article No.**							
	For main control switches	Center-hole mounting	3LD9224-1D	■	■	■					
			3LD9284-1D				■				
		Four-hole mounting	3LD9224-1B	■	■	■					
			3LD9284-1B				■	■	■		
	For EMERGENCY-STOP switches	Center-hole mounting	3LD9224-3D	■	■	■					
			3LD9284-3D				■				
		Four-hole mounting	3LD9224-3B	■	■	■					
			3LD9284-3B				■	■	■		
Knob-operated mechanisms										
	• Lockable in 0 position with up to 3 padlocks									
	Version	**Mounting**	**Article No.**							
	For main control switches	Four-hole mounting	3LD9243-1B						■	■
	For EMERGENCY-STOP switches	Four-hole mounting	3LD9243-3B						■	■

8

System overview, page 8/22

© Siemens 2022

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Terminal covers										
	• Pack of 4 units									
	Number of poles	**Article No.**								
	1-pole	3LD9201-2A	■							
		3LD9221-2A		■	■					
		3LD9251-2A				■				
		3LD9281-2A					■	■		
		3LD9241-2A							■	■
	3-pole	3LD9221-0A		■	■					
		3LD9251-0A				■				
	4-pole	3LD9201-1A	■							
Inscription labels										
	• Pack of 10 units									
	Inscription	**Article No.**								
	German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■	■		
	Without inscription	3LD9286-4A	■	■	■	■	■	■		
Assembly tools										
	• For center-hole mounting with nut • Pack of 5 units									
	Version	**Article No.**								
	For main control switches and EMERGENCY-STOP switches	3LD9256-0A	■	■	■	■				

8

System overview, page 8/22

© Siemens 2022


3LD switch disconnectors

3LD2 main control switches, floor mounting, 25 ... 50 kA_{eff}



Operating mechanisms, black

Number of poles 3P



Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power *P* At AC-23A, 380 ... 440 V	Operational power *P* At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Door-coupling rotary operating mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2013-0TK51	3LD2013-0TK51 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2113-0TK51	3LD2113-0TK51 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2213-0TK51	3LD2213-0TK51 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2514-0TK51	3LD2514-0TK51 + 3LD9200-5C
100 A	37 kW	30 kW	3LD2714-0TK51	3LD2714-0TK51 + 3LD9200-5C
125 A	45 kW	37 kW	3LD2814-0TK51	3LD2814-0TK51 + 3LD9200-5C
160 A	75 kW	50 kW	3LD2318-0TK11	3LD2318-0TK11 + 3LD9200-5C
250 A	132 kW	110 kW	3LD2418-0TK11	3LD2418-0TK11 + 3LD9200-5C
Door-coupling rotary operating mechanism, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD2044-0TK51	3LD2044-0TK51 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2144-0TK51	3LD2144-0TK51 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2244-0TK51	3LD2244-0TK51 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2545-0TK51	3LD2545-0TK51 + 3LD9200-5C
Defeatable door-coupling knob-operated mechanism, four-hole mounting				
16 A	7,5 kW	5,5 kW	3LD2017-0TK11	3LD2017-0TK11 + 3LD9200-5C
32 A	11,5 kW	9,5 kW	3LD2217-0TK11	3LD2217-0TK11 + 3LD9200-5C
63 A	22 kW	18,5 kW	3LD2517-0TK11	3LD2517-0TK11 + 3LD9200-5C

Scope of supply:
- Including terminal covers for the infeed side
- Up to 125 A with integrated tolerance compensation





Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails

Accessories, see page 8/34

Quick selection guide, page 8/6

© Siemens 2022



3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2013-1TL51	3LD2013-1TL51 + 3LD9200-5C	–	–
3LD2113-1TL51	3LD2113-1TL51 + 3LD9200-5C	3LD2113-3VK51	3LD2113-4VP51
3LD2213-1TL51	3LD2213-1TL51 + 3LD9200-5C	–	–
3LD2514-1TL51	3LD2514-1TL51 + 3LD9200-5C	–	–
3LD2714-0TK51 + 3LD9280-0C	3LD2714-0TK51 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2814-0TK51 + 3LD9280-0C	3LD2814-0TK51 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2318-1TL11	3LD2318-1TL11 + 3LD9200-5C	3LD2318-3VK11	3LD2318-3VK11 + 3LD9200-5C
3LD2418-1TL11	3LD2418-1TL11 + 3LD9200-5C	3LD2418-3VK11	3LD2418-3VK11 + 3LD9200-5C
3LD2044-1TL51	3LD2044-1TL51 + 3LD9200-5C	–	–
3LD2144-1TL51	3LD2144-1TL51 + 3LD9200-5C	–	–
3LD2244-1TL51	3LD2244-1TL51 + 3LD9200-5C	–	–
3LD2545-0TK51 + 3LD9250-0CA	3LD2545-0TK51 + 3LD9250-0CA + 3LD9200-5C	–	–
3LD2017-1TL11	3LD2017-1TL11 + 3LD9200-5C	–	–
3LD2217-1TL11	3LD2217-1TL11 + 3LD9200-5C	–	–
3LD2517-1TL11	3LD2517-1TL11 + 3LD9200-5C	–	–

Quick selection guide, page 8/6

© Siemens 2022


3LD switch disconnectors

3LD2 EMERGENCY-STOP switches, floor mounting, 25 ... 50 kA_{eff}



Operating mechanisms, red/yellow

Number of poles 3P



Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power *P* At AC-23A, 380 ... 440 V	Operational power *P* At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Door-coupling rotary operating mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2013-0TK53	3LD2013-0TK53 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2113-0TK53	3LD2113-0TK53 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2213-0TK53	3LD2213-0TK53 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2514-0TK53	3LD2514-0TK53 + 3LD9200-5C
100 A	37 kW	30 kW	3LD2714-0TK53	3LD2714-0TK53 + 3LD9200-5C
125 A	45 kW	37 kW	3LD2814-0TK53	3LD2814-0TK53 + 3LD9200-5C
160 A	75 kW	50 kW	3LD2318-0TK13	3LD2318-0TK13 + 3LD9200-5C
250 A	132 kW	110 kW	3LD2418-0TK13	3LD2418-0TK13 + 3LD9200-5C
Door-coupling rotary operating mechanism, center-hole mounting Ø 22.5 mm				
16 A	7.5 kW	5.5 kW	3LD2044-0TK53	3LD2044-0TK53 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2144-0TK53	3LD2144-0TK53 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2244-0TK53	3LD2244-0TK53 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2545-0TK53	3LD2545-0TK53 + 3LD9200-5C
Defeatable door-coupling knob-operated mechanism, four-hole mounting				
16 A	7.5 kW	5.5 kW	3LD2017-0TK13	3LD2017-0TK13 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2217-0TK13	3LD2217-0TK13 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2517-0TK13	3LD2517-1TL13 + 3LD9200-5C

Scope of supply:
- Including terminal covers for the infeed side
- Up to 125 A with integrated tolerance compensation





Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails

Accessories, see page 8/34

Quick selection guide, page 8/6

© Siemens 2022



3P+N		6P	
			
Without auxiliary switch	**1 NO + 1 NC (standard version)**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
3LD2013-1TL53	3LD2013-1TL53 + 3LD9200-5C	–	–
3LD2113-1TL53	3LD2113-1TL53 + 3LD9200-5C	3LD2113-3VK53	3LD2113-4VP53
3LD2213-1TL53	3LD2213-1TL53 + 3LD9200-5C	–	–
3LD2514-1TL53	3LD2514-1TL53 + 3LD9200-5C	–	–
3LD2714-0TK53 + 3LD9280-0C	3LD2714-0TK53 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2814-0TK53 + 3LD9280-0C	3LD2814-0TK53 + 3LD9280-0C + 3LD9200-5C	–	–
3LD2318-1TL13	3LD2318-1TL13 + 3LD9200-5C	3LD2318-3VK13	3LD2318-3VK13 + 3LD9200-5C
3LD2418-1TL13	3LD2418-1TL13 + 3LD9200-5C	3LD2418-3VK13	3LD2418-3VK13 + 3LD9200-5C
3LD2044-1TL53	3LD2044-1TL53 + 3LD9200-5C	–	–
3LD2144-1TL53	3LD2144-1TL53 + 3LD9200-5C	–	–
3LD2244-1TL53	3LD2244-1TL53 + 3LD9200-5C	–	–
3LD2545-0TK53 + 3LD9250-0CA	3LD2545-0TK53 + 3LD9250-0CA + 3LD9200-5C	–	–
3LD2017-1TL13	3LD2017-1TL13 + 3LD9200-5C	–	–
3LD2217-1TL13	3LD2217-0TK13 + 3LD9200-5C	–	–
3LD2517-1TL13	3LD2517-1TL13 + 3LD9200-5C	–	–

Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors


Accessories for floor mounting

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Switching contacts for N conductor (4th contact)										
	**Contacts**	**Article No.**								
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■					
		3LD9250-0CA				■				
		3LD9280-0C					■	■		
		3LD9240-0C							■	■
N/PE terminals										
	**Contacts**	**Article No.**								
	Through-type	3LD9200-2C	■							
		3LD9220-2C		■	■					
		3LD9250-2CA				■				
		3LD9280-2C					■	■		
		3LD9240-2C							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■	■	■
Auxiliary switch for mounting on the front										
	• Mounted on the switch shaft • For long leading times (20 ... 150 ms)									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■		
			3LD9240-5D							■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■		
			3LD9240-5DF							■	■
Rotary operating mechanisms										
	• Lockable in 0 position with up to 3 padlocks									
	Version	**Mounting**	**Article No.**							
	For main control switches	Center-hole mounting	3LD9224-1D	■	■	■					
			3LD9284-1D				■				
		Four-hole mounting	3LD9224-1B	■	■	■					
			3LD9284-1B				■	■	■		
	For EMERGENCY-STOP switches	Center-hole mounting	3LD9224-3D	■	■	■					
			3LD9284-3D				■				
		Four-hole mounting	3LD9224-3B	■	■	■					
			3LD9284-3B				■	■	■		
Knob-operated mechanisms										
	• Lockable in 0 position with up to 3 padlocks									
	Version	**Mounting**	**Article No.**							
	For main control switches	Four-hole mounting	3LD9243-1B						■	■
	For EMERGENCY-STOP switches	Four-hole mounting	3LD9243-3B						■	■
8UC7.. door-coupling rotary operating mechanisms										
	• To achieve defeatability from 3LD27 (100 A) to 3LD24 (250 A)									
	Type	**Version**	**Article No.**							
	8UC71	Standard	8UC7110-1BB					■	■		
		EMERGENCY-STOP	8UC7120-3BB					■	■		
	8UC72	Standard	8UC7210-1BB							■	■
		EMERGENCY-STOP	8UC7220-3BB							■	■

8

System overview, page 8/22

© Siemens 2022

				3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Coupling drivers											
	**Version**		**Article No.**								
	For 8UC71 door-coupling rotary operating mechanisms		8UC6011					■	■		
	For 8UC72 door-coupling rotary operating mechanisms		8UC6012							■	■
Switch shafts											
	**Cross-section**	**Length**	**Article No.**								
	6 × 6 mm	300 mm	3LD9205-0C	■	■	■	■	■	■		
		600 mm	3LD9205-2C	■	■	■	■	■	■		
	8 × 8 mm	300 mm	3LD9245-0C							■	■
		600 mm	3LD9245-2C							■	■
Coupling pieces											
	• Without ON-lock										
	Article No.										
	3LD9242-4F									■	■
Terminal covers											
	• Pack of 4 units										
	Number of poles		**Article No.**								
	1-pole		3LD9201-2A	■							
			3LD9221-2A		■	■					
			3LD9251-2A				■				
			3LD9281-2A					■	■		
			3LD9241-2A							■	■
	3-pole		3LD9221-0A		■	■					
			3LD9251-0A				■				
	4-pole		3LD9201-1A	■							
Inscription labels											
	• Pack of 10 units • Cannot be used with defeatable 3LD2.17 door-coupling rotary operating mechanisms										
	Inscription		**Article No.**								
	German/English (Hauptschalter/Main Switch)		3LD9286-1A	■	■	■	■	■	■		
	Without inscription		3LD9286-4A	■	■	■	■	■	■		
Assembly tools											
	• For center-hole mounting with nut • Pack of 5 units										
	Version		**Article No.**								
	For main control switches and EMERGENCY-STOP switches		3LD9256-0A	■	■	■	■				

8



System overview, page 8/22

© Siemens 2022

3LD switch disconnectors

3LD2 main control switches, installation in distribution boards, 25 ... 50 kA_{eff}



	Operating mechanisms, black	
Number of poles	3P	
		
Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power *P* At AC-23A, 380 ... 440 V	Operational power *P* At AC-3A, 380 ... 440 V	Without auxiliary switch	1 NO + 1 NC (standard version)
Knob-operated mechanisms with masking plate				
16 A	7.5 kW	5.5 kW	3LD2030-0TK11	3LD2030-0TK11 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2130-0TK11	3LD2130-0TK11 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2230-0TK11	3LD2230-0TK11 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2530-0TK11	3LD2530-0TK11 + 3LD9200-5C
100 A	37 kW	30 kW	3LD2730-0TK11	3LD2730-0TK11 + 3LD9200-5C
125 A	45 kW	37 kW	3LD2830-0TK11	3LD2830-0TK11 + 3LD9200-5C
160 A	75 kW	50 kW	3LD2330-0TK11	3LD2330-0TK11 + 3LD9200-5C
250 A	132 kW	110 kW	3LD2430-0TK11	3LD2430-0TK11 + 3LD9200-5C

Scope of supply:
- 3LD23/3LD24 including terminal covers for the infeed side

Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails
- Up to 125 A cap and mounting dimensions acc. to DIN 43880

Accessories


			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Switching contacts for N conductor (4th contact)										
	Contacts	Article No.								
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■					
		3LD9250-0CA				■				
		3LD9280-0C					■	■		
		3LD9240-0C							■	■
N/PE terminals										
	Contacts	Article No.								
	Through-type	3LD9200-2C	■							
		3LD9220-2C		■	■					
		3LD9250-2CA				■				
		3LD9280-2C					■	■		
		3LD9240-2C							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off									
	Contacts	Contact surface	Article No.							
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■	■	■


Quick selection guide, page 8/6

© Siemens 2022



3P+N






Without auxiliary switch	1 NO + 1 NC (standard version)
3LD2030-1TL11	3LD2030-1TL11 + 3LD9200-5C
3LD2130-0TK11 + 3LD9220-0C	3LD2130-0TK11 + 3LD9220-0C + 3LD9200-5C
3LD2230-0TK11 + 3LD9220-0C	3LD2230-0TK11 + 3LD9220-0C + 3LD9200-5C
3LD2530-0TK11 + 3LD9250-0CA	3LD2530-0TK11 + 3LD9250-0CA + 3LD9200-5C
3LD2730-0TK11 + 3LD9280-0C	3LD2730-0TK11 + 3LD9280-0C + 3LD9200-5C
3LD2830-0TK11 + 3LD9280-0C	3LD2830-0TK11 + 3LD9280-0C + 3LD9200-5C
3LD2330-0TK11 + 3LD9240-0C	3LD2330-0TK11 + 3LD9240-0C + 3LD9200-5C
3LD2430-0TK11 + 3LD9240-0C	3LD2430-0TK11 + 3LD9240-0C + 3LD9200-5C


8

Terminal covers

- Pack of 4 units







Number of poles	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
1-pole	3LD9201-2A	■							
	3LD9221-2A		■	■					
	3LD9251-2A				■				
	3LD9281-2A					■	■		
	3LD9241-2A							■	■
3-pole	3LD9221-0A		■	■					
	3LD9251-0A				■				
4-pole	3LD9201-1A	■							



Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors

3LD2 EMERGENCY-STOP switches, installation in distribution boards, 25 ... 50 kA_{eff}



	Operating mechanisms, red/yellow	
Number of poles	3P	
		
Uninterrupted current I_u At AC-21A, 380 ... 440 V	**Operational power *P* At AC-23A, 380 ... 440 V**	**Operational power *P* At AC-3A, 380 ... 440 V**	**Without auxiliary switch**	**1 NO + 1 NC (standard version)**
Knob-operated mechanisms with masking plate				
16 A	7.5 kW	5.5 kW	3LD2030-0TK13	3LD2030-0TK13 + 3LD9200-5C
25 A	9.5 kW	7.5 kW	3LD2130-0TK13	3LD2130-0TK13 + 3LD9200-5C
32 A	11.5 kW	9.5 kW	3LD2230-0TK13	3LD2230-0TK13 + 3LD9200-5C
63 A	22 kW	18.5 kW	3LD2530-0TK13	3LD2530-0TK13 + 3LD9200-5C
100 A	37 kW	30 kW	3LD2730-0TK13	3LD2730-0TK13 + 3LD9200-5C
125 A	45 kW	37 kW	3LD2830-0TK13	3LD2830-0TK13 + 3LD9200-5C
160 A	75 kW	50 kW	3LD2330-0TK13	3LD2330-0TK13 + 3LD9200-5C
250 A	132 kW	110 kW	3LD2430-0TK13	3LD2430-0TK13 + 3LD9200-5C

Scope of supply:
- 3LD23/3LD24 including terminal covers for the infeed side

Mounting:
- Up to 125 A using screws or snap-on mounting on 35 mm mounting rails
- Up to 125 A cap and mounting dimensions acc. to DIN 43880

Accessories


			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Switching contacts for N conductor (4th contact)										
	**Contacts**	**Article No.**								
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■					
		3LD9250-0CA				■				
		3LD9280-0C					■	■		
		3LD9240-0C							■	■
N/PE terminals										
	**Contacts**	**Article No.**								
	Through-type	3LD9200-2C	■							
		3LD9220-2C		■	■					
		3LD9250-2CA				■				
		3LD9280-2C					■	■		
		3LD9240-2C							■	■
Auxiliary switches (standard version)										
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off									
	Contacts	**Contact surface**	**Article No.**							
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■	■	■


Quick selection guide, page 8/6

© Siemens 2022





3+N





Without auxiliary switch	1 NO + 1 NC (standard version)
3LD2030-1TL13	3LD2030-1TL13 + 3LD9200-5C
3LD2130-0TK13 + 3LD9220-0C	3LD2130-0TK13 + 3LD9220-0C + 3LD9200-5C
3LD2230-0TK13 + 3LD9220-0C	3LD2230-0TK13 + 3LD9220-0C + 3LD9200-5C
3LD2530-0TK13 + 3LD9250-0CA	3LD2530-0TK13 + 3LD9250-0CA + 3LD9200-5C
3LD2730-0TK13 + 3LD9280-0C	3LD2730-0TK13 + 3LD9280-0C + 3LD9200-5C
3LD2830-0TK13 + 3LD9280-0C	3LD2830-0TK13 + 3LD9280-0C + 3LD9200-5C
3LD2330-0TK13 + 3LD9240-0C	3LD2330-0TK13 + 3LD9240-0C + 3LD9200-5C
3LD2430-0TK13 + 3LD9240-0C	3LD2430-0TK13 + 3LD9240-0C + 3LD9200-5C

8

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Terminal covers										
	• Pack of 4 units									
	Number of poles	**Article No.**								
	1-pole	3LD9201-2A	■							
		3LD9221-2A		■	■					
		3LD9251-2A				■				
		3LD9281-2A					■	■		
		3LD9241-2A							■	■
	3-pole	3LD9221-0A		■	■					
		3LD9251-0A				■				
	4-pole	3LD9201-1A	■							

Quick selection guide, page 8/6


© Siemens 2022

3LD switch disconnectors

DC isolators, 50 kA_{rms}



	Operating mechanisms, black
Number of poles	8P



Mains voltage	Rated operational current I_e At DC-21A, 800 V DC	Rated operational current I_e At DC-22A, 800 V DC	Without auxiliary switch
Knob-operated mechanisms			
800 V DC	32 A	16 A	3LD2230-8VQ11-0AF6

Quick selection guide, page 8/6

© Siemens 2022

Accessories for 3LD2 main control and EMERGENCY-STOP switches

Additional poles

				3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Switching contacts for N conductor (4th contact)											
	**Version**	**Contacts**	**Article No.**								
	For front mounting	Leading switch-on, lagging switch-off	3LD9220-0B		■	■					
			3LD9250-0BA				■				
			3LD9280-0B					■	■		
			3LD9240-0B							■	■
	For floor mounting, installation in distribution boards	Leading switch-on, lagging switch-off	3LD9220-0C		■	■					
			3LD9250-0CA				■				
			3LD9280-0C					■	■		
			3LD9240-0C							■	■
N/PE terminals											
	**Version**	**Contacts**	**Article No.**								
	For front mounting	Through-type	3LD9200-2B	■							
			3LD9220-2B		■	■					
			3LD9250-2BA				■				
			3LD9280-2B					■	■		
			3LD9240-2B							■	■
	For floor mounting, installation in distribution boards	Through-type	3LD9200-2C	■							
			3LD9220-2C		■	■					
			3LD9250-2CA				■				
			3LD9280-2C					■	■		
			3LD9240-2C							■	■
Auxiliary switches (standard version)											
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off										
	**Version**	**Contacts**	**Article No.**								
	For front mounting	1 NO + 1 NC, standard	3LD9200-5B	■	■	■	■	■	■	■	■
		1 NO + 1 NC, gold-plated	3LD9200-5BF	■	■	■	■	■	■	■	■
	For floor mounting, installation in distribution boards	1 NO + 1 NC, standard	3LD9200-5C	■	■	■	■	■	■	■	■
		1 NO + 1 NC, gold-plated	3LD9200-5CF	■	■	■	■	■	■	■	■
		2 NO, standard	3LD9200-6C	■	■	■	■	■	■	■	■
Auxiliary switch for mounting on the front											
	• Mounted on the front of the switch shaft • For four-hole front mounting and floor mounting only • For long leading times (20 ... 150 ms)										
	Contacts	**Contact surface**	**Article No.**								
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■		
			3LD9240-5D							■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■		
			3LD9240-5DF							■	■

8

System overview, page 8/22

© Siemens 2022

3LD switch disconnectors

Accessories for 3LD2 main control and EMERGENCY-STOP switches

Operating mechanisms

Rotary operating mechanisms





- Lockable in 0 position with up to 3 padlocks
- Center-hole mounting, including seal and nut
- Four-hole mounting, including seal

Switch	Mounting	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For main control switches	Center-hole mounting	3LD9224-1D	■	■	■					
		3LD9284-1D				■	■	■		
	Four-hole mounting	3LD9224-1B	■	■	■					
		3LD9284-1B				■	■	■		
For EMERGENCY-STOP switches	Center-hole mounting	3LD9224-3D	■	■	■					
		3LD9284-3D				■	■	■		
	Four-hole mounting	3LD9224-3B	■	■	■					
		3LD9284-3B				■	■	■		

Knob-operated mechanisms



- Lockable in 0 position with up to 3 padlocks
- Including seal

Switch	Mounting	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For main control switches	Four-hole mounting	3LD9243-1B							■	■
For EMERGENCY-STOP switches	Four-hole mounting	3LD9243-3B							■	■

Supplementary handles for door-coupling rotary operating mechanism



- For requirements according to UL508A/NFPA79
- Can be locked with up to 1 padlocks in 0 position
- Can only be switched on by deliberate action

Labeling	Color	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
O-I	Gray	3LD9287-1C	■	■	■	■	■	■		
		3LD9247-1C							■	■
	Red/yellow	3LD9287-3C	■	■	■	■	■	■		
		3LD9247-3C							■	■

Switch shafts



Version	Cross-section	Length	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For floor mounting	6 × 6 mm	300 mm	3LD9205-0C	■	■	■	■	■	■		
		600 mm	3LD9205-2C	■	■	■	■	■	■		
	8 × 8 mm	300 mm	3LD9245-0C							■	■
		600 mm	3LD9245-2C							■	■

Coupling pieces






- Without ON-lock

Version	Article No.	3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
For floor mounting	3LD9242-4F							■	■

System overview, page 8/22

© Siemens 2022

Other accessories

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
Terminal covers										
	• Pack of 4 units									
	Number of poles	**Article No.**								
	1-pole	3LD9201-2A	■							
		3LD9221-2A		■	■					
		3LD9251-2A				■				
		3LD9281-2A					■	■		
		3LD9241-2A							■	■
	3-pole	3LD9221-0A		■	■					
		3LD9251-0A				■				
	4-pole	3LD9201-1A	■							
Inscription labels										
	• Pack of 10 units									
	Inscription	**Article No.**								
	German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■	■		
	Without inscription	3LD9286-4A	■	■	■	■	■	■		
Assembly tools										
	• For center-hole mounting with nut • Pack of 5 units									
	Switch	**Article No.**								
	For main control switches and EMERGENCY-STOP switches	3LD9256-0A	■	■	■	■				

8

System overview, page 8/22

© Siemens 2022

3LD switch disconnectors

System overview of 3LD2 switch disconnectors in enclosure

3LD2 main control and EMERGENCY-STOP switches in enclosure



3P/3P+N
molded-plastic enclosures



3P/6P
molded-plastic enclosures



3P/3p+N/6P
molded-plastic enclosures

3LD2 maintenance and repair switches with EMC shield plate



3P
molded-plastic enclosures



3P/6P
molded-plastic enclosures



3P/6P
molded-plastic enclosures

DC isolators in enclosure



8P DC isolators in a molded-plastic enclosure

Additional poles and auxiliary switch modules



N switching
contact



N/PE terminals
(through-type)



Auxiliary switches
(standard version)



Auxiliary switch for mounting on
the front

Operating mechanisms




Rotary operating mechanisms for center-hole mounting

Other accessories



Shield terminal




Through-type terminal

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Mounting concept and accessories

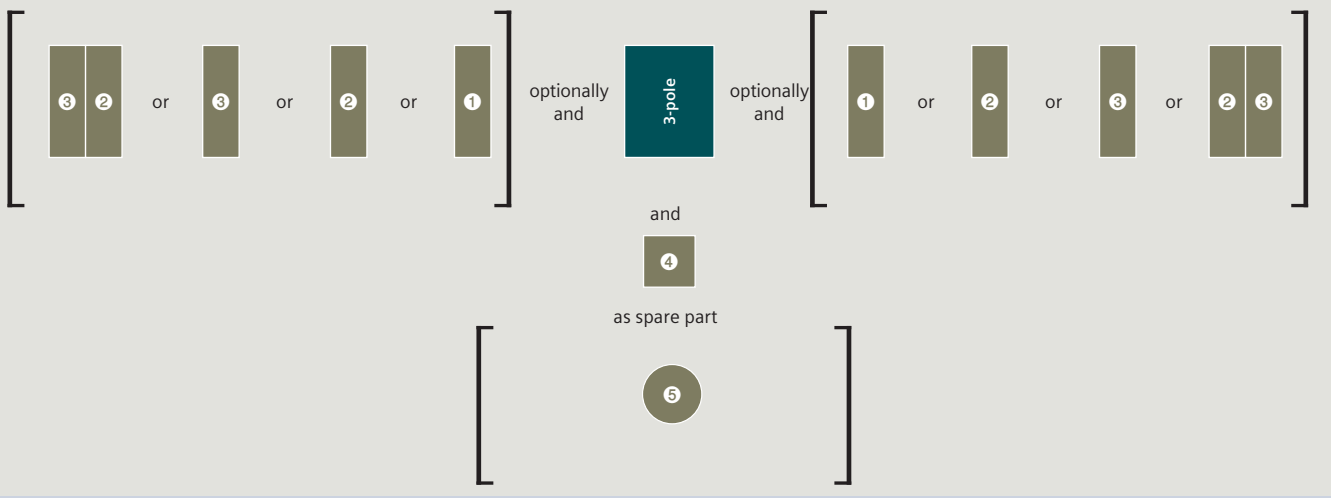

Legend

① Auxiliary switch
② N switching contact [1)]
③ N/PE terminal
④ Auxiliary switch for mounting on the front
⑤ Rotary operating mechanism, center-hole mounting

[1)] The N switching contact ② first has to be mounted on the basic unit
Note: Depending on the enclosure size, not all accessories can be used in combination

8

Mounting types

3LD2 main control and EMERGENCY-STOP switches in enclosure



For surface mounting of individual main control and EMERGENCY-STOP switches, molded plastic-enclosed switches with degree of protection IP65 are used. The molded-plastic enclosures each contain an N and/or a PE terminal. As the switches can be locked in the 0 position, they can also be used as maintenance and repair switches.

DC isolators in enclosure



As the switches can be locked in the 0 position, they can also be used as maintenance and repair switches. The DC isolators in the enclosure are suitable for disconnecting loads of up to 800 V DC due to their 8-pole design.

3LD2 maintenance and repair switches with EMC shield plate



The 3LD2 maintenance and repair switch with EMC shield plate is ideal for use between converter and motor. A long leading (20-150 ms) NO contact switches the converter group off before the main contacts of the switch open. This produces an AC20 state. The cable shield can be contacted over a large area inside the enclosure using the shield clamps or hose clips included in the scope of delivery.
The switch series provides the greatest possible safety for the user and can be locked in the 0 or I position. Tests have been performed in connection with SINAMICS-converters and ratings are available for use at frequencies between 0 and 550 Hz.




© Siemens 2022

3LD switch disconnectors

3LD2 main control switches in enclosure, 25 ... 50 kA_{eff}





	Operating mechanisms, black		
Number of poles	3P		3P+N
			

Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch		1 NO + 1 NC (standard version)		Without auxiliary switch	
Rotary operating mechanisms with masking plate			Base terminal		Base terminal		Base terminal	
16 A	7.5 kW	5.5 kW	PE+N	3LD2064-0TB51	N	3LD2064-1GP51	PE	3LD2064-1TC51
25 A	9.5 kW	7.5 kW	PE+N	3LD2164-0TB51	N	3LD2164-1GP51	PE	3LD2164-1TC51
32 A	11.5 kW	9.5 kW	PE+N	3LD2264-0TB51	N	3LD2264-1GP51	PE	3LD2264-1TC51
63 A	22 kW	18.5 kW	PE+N	3LD2565-0TB51	N	3LD2565-1GP51	PE	3LD2565-1TC51
100 A	37 kW	30 kW	PE+N	3LD2766-0TB51	N	3LD2766-1GP51	PE+N	3LD2766-0TB51 + 3LD9280-0C
125 A	45 kW	37 kW	PE+N	3LD2866-0TB51	N	3LD2866-1GP51	PE+N	3LD2866-0TB51 + 3LD9280-0C

Accessories


			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
Switching contacts for N conductor (4th contact)								
	Contacts	Article No.						
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■			
		3LD9250-0CA				■		
		3LD9280-0C					■	■
N/PE terminals								
	Contacts	Article No.						
	Through-type	3LD9200-2C	■					
		3LD9220-2C		■	■			
		3LD9250-2CA				■		
		3LD9280-2C					■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts / Contact surface	Article No.						
	1 NO + 1 NC / Standard	3LD9200-5C	■	■	■	■	■	■
	Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO / Standard	3LD9200-6C	■	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts / Contact surface	Article No.						
	1 NO + 1 NC / Standard	3LD9280-5D	■	■	■	■	■	■
	Gold-plated	3LD9280-5DF	■	■	■	■	■	■
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks							
		Article No.						
		3LD9224-1G	■	■	■			
		3LD9284-1G				■	■	■

Quick selection guide, page 8/6


© Siemens 2022




6P



1 NO + 1 NC (standard version)



Without auxiliary switch



1 NO + 1 NC (standard version)

Base terminal			Base terminal		Base terminal	
PE	3LD2064-1TC51	+ 3LD9200-5C		–		–
PE	3LD2164-1TC51	+ 3LD9200-5C	PE+N	3LD2165-3VB51	N	3LD2165-4VD51
PE	3LD2264-1TC51	+ 3LD9200-5C	PE+N	3LD2265-3VB51	N	3LD2265-4VD51
PE	3LD2565-1TC51	+ 3LD9200-5C	PE+N	3LD2566-3VB51	PE+N	3LD2566-4VD51
N	3LD2766-1GP51	+ 3LD9280-0C		–		–
N	3LD2866-1GP51	+ 3LD9280-0C		–		–

8

Quick selection guide, page 8/6




© Siemens 2022

3LD switch disconnectors

3LD2 EMERGENCY-STOP switches in enclosure, 25 ... 50 kA_{eff}





Number of poles	Operating mechanisms, red/yellow		
	3P		3P+N
			

Uninterrupted current I_u At AC-21A, 380 ... 440 V	Operational power P At AC-23A, 380 ... 440 V	Operational power P At AC-3A, 380 ... 440 V	Without auxiliary switch		1 NO + 1 NC (standard version)		Without auxiliary switch	
Rotary operating mechanisms with masking plate			Base terminal		Base terminal		Base terminal	
16 A	7.5 kW	5.5 kW	PE+N	3LD2064-0TB53	N	3LD2064-1GP53	PE	3LD2064-1TC53
25 A	9.5 kW	7.5 kW	PE+N	3LD2164-0TB53	N	3LD2164-1GP53	PE	3LD2164-1TC53
32 A	11.5 kW	9.5 kW	PE+N	3LD2264-0TB53	N	3LD2264-1GP53	PE	3LD2264-1TC53
63 A	22 kW	18,5 kW	PE+N	3LD2565-0TB53	N	3LD2565-1GP53	PE	3LD2565-1TC53
100 A	37 kW	30 kW	PE+N	3LD2766-0TB53	N	3LD2766-1GP53	PE+N	3LD2766-0TB53 + 3LD9280-0C
125 A	45 kW	37 kW	PE+N	3LD2866-0TB53	N	3LD2866-1GP53	PE+N	3LD2866-0TB53 + 3LD9280-0C

Accessories


			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
Switching contacts for N conductor (4th contact)								
	**Contacts**	**Article No.**						
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■			
		3LD9250-0CA				■		
		3LD9280-0C					■	■
N/PE terminals								
	**Contacts**	**Article No.**						
	Through-type	3LD9200-2C	■					
		3LD9220-2C		■	■			
		3LD9250-2CA				■		
		3LD9280-2C					■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks							
		Article No.						
		3LD9224-3G	■	■	■			
		3LD9284-3G				■	■	■

Quick selection guide, page 8/6


© Siemens 2022




6P



1 NO + 1 NC (standard version)



Without auxiliary switch



1 NO + 1 NC (standard version)

Base terminal			Base terminal		Base terminal	
PE	3LD2064-1TC53	+ 3LD9200-5C		–		–
PE	3LD2164-1TC53	+ 3LD9200-5C	PE+N	3LD2165-3VB53	N	3LD2165-4VD53
PE	3LD2264-1TC53	+ 3LD9200-5C	PE+N	3LD2265-3VB53	N	3LD2265-4VD53
PE	3LD2565-1TC53	+ 3LD9200-5C	PE+N	3LD2566-3VB53	PE+N	3LD2566-4VD53
N	3LD2766-1GP53 + 3LD9280-0C			–		–
N	3LD2866-1GP53 + 3LD9280-0C			–		–

8

Quick selection guide, page 8/6



© Siemens 2022

3LD switch disconnectors

3LD2 DC isolators in a molded-plastic enclosure





			Operating mechanisms, black	Operating mechanisms, red/yellow
		Number of poles	8P	8P
				
Mains voltage	**Rated operational current I_e At DC-21A, 800 V DC**	**Rated operational current I_e At DC-22A, 800 V DC**	**Without auxiliary switch**	
Rotary operating mechanisms				
800 V DC	32 A	16 A	3LD2265-8VQ51-0AF6	3LD2265-8VQ53-0AF6

8


Quick selection guide, page 8/6

© Siemens 2022

3LD2 maintenance and repair switches with EMC shield plate, 25 ... 50 kA_{eff}






	Operating mechanisms, black			
Number of poles	3P		6P	
				
Uninterrupted current I_u At AC-20, 0 ... 550 Hz, 380 ... 440 V	**Operational power P At AC-20, 0 ... 550 Hz, 380 ... 440 V**	**Uninterrupted current I_n At AC-21, 50/60 Hz, 380 ... 440 V**	**Operational power AC-23A, 50/60 Hz, 380 ... A440 V**	**1 NO + 1 NC (Auxiliary switch for mounting on the front)**		**1 NO + 1 NC (Auxiliary switch for mounting on the front)**	
Knob-operated mechanisms with masking plate				Base terminal		Base terminal	
10.2 A	4 kW	16 A	7.5 kW	PE	3LD2084-2GP21	2× PE	–
13.2 A	5.5 kW	25 A	9 kW	PE	3LD2184-2GP21	2× PE	3LD2185-5VD21
18 A	7.5 kW	32 A	11.5 kW	PE	3LD2284-2GP21	2× PE	3LD2285-5VD21
38 A	18.5 kW	63 A	22 kW	PE	3LD2585-2GP21	2× PE	3LD2586-5VD21
75 A	37 kW	100 A	37 kW	PE	3LD2786-2GP21	2× PE	–
90 A	45 kW	125 A	45 kW	PE	3LD2886-2GP21	2× PE	–


Scope of supply:
- Incl. shield clamps or hose clips for contacting the cable shield
- The PE terminal as a through-type terminal is insulated from the cable shield

3LD2 cable entries with EMC shield plate


3LD2.84



3LD2.85



3LD2.86




Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors

3LD2 maintenance and repair switches with EMC shield plate, 25 ... 50 kA_{eff}

Accessories

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
Switching contacts for N conductor (4th contact)								
	**Contacts**	**Article No.**						
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■			
		3LD9250-0CA				■		
		3LD9280-0C					■	■
N/PE terminals								
	**Contacts**	**Article No.**						
	Through-type	3LD9200-2C	■					
		3LD9220-2C		■	■			
		3LD9250-2CA				■		
		3LD9280-2C					■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts / **Contact surface**	**Article No.**						
	1 NO + 1 NC / Standard	3LD9200-5C	■	■	■	■	■	■
	Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO / Standard	3LD9200-6C	■	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts / **Contact surface**	**Article No.**						
	1 NO + 1 NC / Standard	3LD9280-5D	■	■	■	■	■	■
	Gold-plated	3LD9280-5DF	■	■	■	■	■	■
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks							
	Version	**Article No.**						
	Main control switches	3LD9224-1G	■	■	■			
		3LD9284-1G				■	■	■
	EMERGENCY-STOP switches	3LD9224-3G	■	■	■			
		3LD9284-3G				■	■	■
Terminal blocks								
	**Version**	**Article No.**						
	Through-type terminal with screw connection	8WH1000-0AF00	■	■	■	■	■	■
Shield terminal								
	**Terminal area**	**Article No.**						
	3 ...12 mm	3LD9228-1G	■	■	■	■	■	■

8

System overview, page 8/44

© Siemens 2022

Accessories for 3LD2 switch disconnectors in enclosure


Additional poles

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
Switching contacts for N conductor (4th contact)								
	**Contacts**	**Article No.**						
	Leading switch-on, lagging switch-off	3LD9220-0C		■	■			
		3LD9250-0CA				■		
		3LD9280-0C					■	■
N/PE terminals								
	**Contacts**	**Article No.**						
	Through-type	3LD9200-2C	■					
		3LD9220-2C		■	■			
		3LD9250-2CA				■		
		3LD9280-2C					■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■	■
	2 NO	Standard	3LD9200-6C	■	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■	■	■	■	■
		Gold-plated	3LD9280-5DF	■	■	■	■	■	■

Operating mechanisms

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks							
	Version	**Article No.**						
	Main control switches	3LD9224-1G	■	■	■			
		3LD9284-1G				■	■	■
	EMERGENCY-STOP switches	3LD9224-3G	■	■	■			
		3LD9284-3G				■	■	■

Connection parts

			3LD20 (16 A)	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)
Terminal block								
	**Version**	**Article No.**						
	Through-type terminal with screw connection	8WH1000-0AF00	■	■	■	■	■	■
Shield terminal								
	**Terminal area**	**Article No.**						
	3 ...12 mm	3LD9228-1G	■	■	■	■	■	■

8

System overview, page 8/44

© Siemens 2022

3LD switch disconnectors

System overview of 3LD5 UL main control and EMERGENCY-STOP switches

Basic units for front mounting


3LD5020 (3-pole)


3LD5020 (4-pole)


3LD5420 (3-pole)


3LD5420 (4-pole)

Basic units, floor mounting with direct operating mechanism


3LD5000 (3-pole)


3LD5000 (4-pole)


3LD5400 (3-pole)


3LD5400 (4-pole)

Basic units, floor mounting with door-coupling rotary operating mechanism


3LD5010 (3-pole)


3LD5010 (4-pole)


3LD5410 (3-pole)


3LD5410 (4-pole)

Additional poles and auxiliary switches


N switching contact


N/PE terminals (through-type)


Auxiliary switches (standard version)


Auxiliary switch for mounting on the front

Operating mechanisms


Rotary operating mechanisms for four-hole mounting


Coupling heads with and without tolerance compensation


Supplementary handles for UL508A/NFPA79


Switch shafts

Other accessories


Terminal covers, 1-pole


Terminal covers, 3 and 4-pole




Inscription labels (with and without inscription)

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Mounting concept and accessories

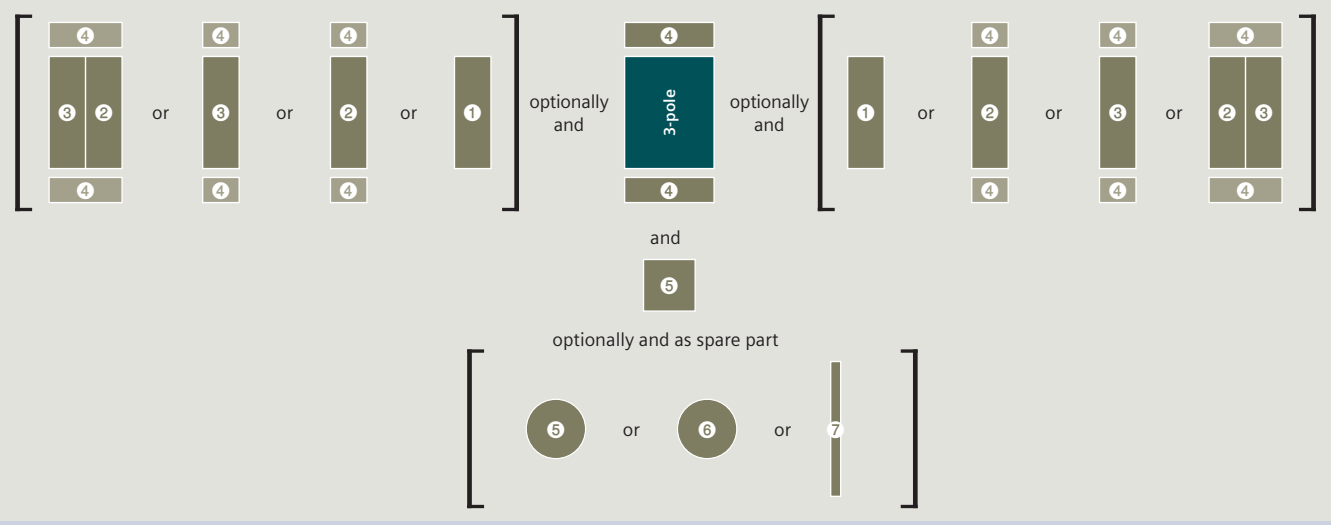

Legend

① Auxiliary switch
② N switching contact [1)]
③ N/PE terminal
④ Terminal cover
⑤ Rotary operating mechanism, four-hole mounting
⑥ Knob-operated mechanism, four-hole mounting
⑦ Switch shaft (300 or 600 mm)

[1)] The N switching contact ② first has to be mounted on the basic unit

8

Main control switches acc. to UL

The certification according to UL489 makes the 3LD5 UL ideal for use as a main control switch for machinery and plants for export to the NAFTA states. The variety of accessories makes it especially suitable as a main disconnect switch for industrial machinery. The switch is also certified according to UL508 and can also be used as a manual motor controller.

Mounting types

Front mounting of basic units



The switches for front mounting are mounted on the inside of covers, side panels or, if applicable, control cabinet doors (depending on the applicable standard and switching function). Installation is achieved by 4-hole mounting of the handle. This switch is especially suitable when door interlocking is not required or is implemented in a different way.

Floor mounting with direct operating mechanism



The switches for floor mounting with direct operating mechanism up to 30 A are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The switches for 100 to 160 A (3LD54 ... 3LD58) are exclusively screwed onto mounting panels.

Basic units, floor mounting with door-coupling rotary operating mechanism



The switches for floor mounting up to 30 A (3LD50) are snapped onto 35 mm DIN rails according to EN 60715 or screw-mounted on mounting panels. The switches for 100 to 160 A (3LD54 ... 3LD58) are exclusively screwed onto mounting panels. The actuators are connected to the lower section of the switch through a door coupling, which can be released in the 0 position, and a 300 mm long switch shaft. The rotary operating mechanisms are also defeatable, i.e. it is possible to open the control cabinet door with a deliberate action while the switch is in the ON position. To meet the requirement acc. to UL508A/NFPA79, a supplementary handle can be mounted on the switch. Combined with the intermediate handle, the shaft can no longer be removed.



© Siemens 2022

3LD switch disconnectors

3LD5 UL main control and EMERGENCY-STOP switches, front mounting, SCCR 50 - 65 kA





Number of poles	Operating mechanisms, black	
	3P	3P+N
		

Uninterrupted current I_u At AC-21A, 380 ... 440 V	General use acc. UL489/60947-4-1	Operational power *P* At AC-23A, 380 ... 440 V		
Rotary operating mechanism, four-hole mounting				
32	30	15	3LD5020-0TK11	3LD5020-0TL11
63	60	30	3LD5220-0TK11	3LD5220-0TL11
100	100	45	3LD5420-0TK11	3LD5420-0TL11
125	125	55	3LD5620-0TK11	3LD5620-0TL11
160	150	75	3LD5820-0TK11	3LD5820-0TL11

8

Scope of supply:
- Including terminal covers for the infeed side

Accessories for front mounting

				3LD50	3LD52	3LD54	3LD56	3LD58
Switching contacts for N conductor (4th contact)								
	**Contacts**		**Article No.**					
	Leading switch-on, lagging switch-off		3LD9250-0BA	■				
			3LD9280-0B		■			
			3LD9240-0B			■	■	■
N/PE terminals								
	**Contacts**		**Article No.**					
	Through-type		3LD9250-2BA	■				
			3LD9280-2B		■			
			3LD9240-2B			■	■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■
		Gold-plated	3LD9200-5BF	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■			
			3LD9240-5D			■	■	■
		Gold-plated	3LD9280-5DF	■	■			
			3LD9240-5DF			■	■	■
Rotary operating mechanisms								
	• Lockable in 0 position with up to 3 padlocks							
	Version		**Article No.**					
	For main control switches		3LD9284-1B	■	■			
	For EMERGENCY-STOP switches		3LD9284-3B	■	■			



Quick selection guide, page 8/6

© Siemens 2022






Operating mechanisms, red/yellow

3P	3P+N
	
3LD5020-0TK13	3LD5020-0TL13
3LD5220-0TK13	3LD5220-0TL13
3LD5420-0TK13	3LD5420-0TL13
3LD5620-0TK13	3LD5620-0TL13
3LD5820-0TK13	3LD5820-0TL13

8

			3LD50	3LD52	3LD54	3LD56	3LD58
Knob-operated mechanisms							
	• Lockable in 0 position with up to 3 padlocks						
	Version	**Article No.**					
	For main control switches	3LD9243-1B			■	■	■
	For EMERGENCY-STOP switches	3LD9284-3B			■	■	■
Terminal covers							
	• Pack of 4 units						
	Number of poles	**Article No.**					
	1-pole	3LD9251-2A	■				
		3LD9281-2A		■			
		3LD9241-2A			■	■	■
	3-pole	3LD9251-0A	■				
Inscription labels							
	• Pack of 10 units						
	Inscription	**Article No.**					
	German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■
	Without inscription	3LD9286-4A	■	■	■	■	■

Quick selection guide, page 8/6



© Siemens 2022

3LD switch disconnectors

3LD5 UL main control and EMERGENCY-STOP switches, floor mounting with direct operating mechanism, SCCR 50 ... 65 kA






Number of poles	Operating mechanisms, black	
	3P	3P+N
		

Uninterrupted current I_u At AC-21A, 380 ... 440 V	General use acc. UL489/508	Operational power P At AC-23A, 380 ... 440 V		
Rotary operating mechanism, four-hole mounting				
32	30	15	3LD5000-0TK11	3LD5000-0TL11
63	60	30	3LD5200-0TK11	3LD5200-0TL11
100	100	45	3LD5400-0TK11	3LD5400-0TL11
125	125	55	3LD5600-0TK11	3LD5600-0TL11
160	150	75	3LD5800-0TK11	3LD5800-0TL11

8

Scope of supply:
- Including terminal covers for the infeed side

Accessories for floor mounting with direct operating mechanisms

				3LD50	3LD52	3LD54	3LD56	3LD58
Switching contacts for N conductor (4th contact)								
	Contacts		Article No.					
	Leading switch-on, lagging switch-off		3LD9250-0CA	■				
			3LD9280-0C		■			
			3LD9240-0C			■	■	■
N/PE terminals								
	Contacts		Article No.					
	Through-type		3LD9250-2CA	■				
			3LD9280-2C		■			
			3LD9240-2C			■	■	■
Auxiliary switches								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	Contact surface	Article No.					
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■
Terminal covers								
	• Pack of 4 units							
	Number of poles		Article No.					
	1-pole		3LD9251-2A	■				
			3LD9281-2A		■			
			3LD9241-2A			■	■	■
	3-pole		3LD9251-0A	■				



Quick selection guide, page 8/6

© Siemens 2022





Operating mechanisms, red/yellow

3P	3P+N
	
3LD5000-0TK13	3LD5000-0TL13
3LD5200-0TK13	3LD5200-0TL13
3LD5400-0TK13	3LD5400-0TL13
3LD5600-0TK13	3LD5600-0TL13
3LD5800-0TK13	3LD5800-0TL13

8

Quick selection guide, page 8/6



© Siemens 2022

3LD switch disconnectors

3LD5 UL main control and EMERGENCY-STOP switches, floor mounting with door-coupling rotary operating mechanism, SCCR 50 ... 65 kA





	Operating mechanisms, black	
Number of poles	3P	3P+N
		

Uninterrupted current I_u At AC-21A, 380 ... 440 V	General use acc. UL489/508	Operational power P At AC-23A, 380 ... 440 V		
Rotary operating mechanism, four-hole mounting				
32	30	15	3LD5010-0TK11	3LD5010-0TL11
63	60	30	3LD5210-0TK11	3LD5210-0TL11
100	100	45	3LD5410-0TK11	3LD5410-0TL11
125	125	55	3LD5610-0TK11	3LD5610-0TL11
160	150	75	3LD5810-0TK11	3LD5810-0TL11

Scope of supply:
- Including terminal covers for the infeed side
- Defeatable door-coupling rotary operating mechanisms with shaft 300 mm
- Without tolerance compensation


8

Accessories for floor mounting with door-coupling rotary operating mechanism



				3LD50	3LD52	3LD54	3LD56	3LD58
Switching contacts for N conductor (4th contact)								
	Contacts		Article No.					
	Leading switch-on, lagging switch-off		3LD9250-0CA	■				
			3LD9280-0C		■			
			3LD9240-0C			■	■	■
N/PE terminals								
	Contacts		Article No.					
	Through-type		3LD9250-2CA	■				
			3LD9280-2C		■			
			3LD9240-2C			■	■	■
Auxiliary switches (standard version)								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	Contact surface	Article No.					
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts	Contact surface	Article No.					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■			
			3LD9240-5D			■	■	■
		Gold-plated	3LD9280-5DF	■	■			
			3LD9240-5DF			■	■	■
Handles								
	• Supplied with a masking frame, but without an extension shaft or coupling driver • Can be locked with up to 3 padlocks							
	Labeling	Color	Article No.					
	O-I	Gray	8UD1771-2AD01	■	■			
			8UD1731-2AD01			■	■	■
		Red/yellow	8UD1771-2AD05	■	■			
			8UD1731-2AD05			■	■	■

Quick selection guide, page 8/6




© Siemens 2022

Operating mechanisms, red/yellow

3P	3P+N
	
3LD5010-0TK13	3LD5010-0TL13
3LD5210-0TK13	3LD5210-0TL13
3LD5410-0TK13	3LD5410-0TL13
3LD5610-0TK13	3LD5610-0TL13
3LD5810-0TK13	3LD5810-0TL13

8

			3LD50	3LD52	3LD54	3LD56	3LD58
Supplementary handles for door-coupling rotary operating mechanism							
 • For requirements according to UL508A/NFPA79 • Can be locked with up to 1 padlocks in 0 position • Can only be switched on by deliberate action							
Labeling	**Color**	**Article No.**					
O-I	Gray	3LD9287-1C	■	■			
		3LD9247-1C			■	■	■
	Red/yellow	3LD9287-3C	■	■			
		3LD9247-3C			■	■	■
Coupling drivers							
	**Version**	**Article No.**					
	With tolerance compensation	8UD1900-1GA00	■	■			
		8UD1900-2GA00			■	■	■
	Without tolerance compensation	8UD1900-1HA00	■	■			
		8UD1900-2HA00			■	■	■
Terminal covers							
	• Pack of 4 units						
	Number of poles	**Article No.**					
	1-pole	3LD9251-2A	■				
		3LD9281-2A		■			
		3LD9241-2A			■	■	■
	3-pole	3LD9251-0A	■				
Inscription labels							
	• Pack of 10 units						
	Inscription	**Article No.**					
	German/English (Hauptschalter/Main Switch)	3LD9286-1A	■	■	■	■	■
	Without inscription	3LD9286-4A	■	■	■	■	■
Switch shafts							
	**Cross-section**	**Length**	**Article No.**				
	6 × 6 mm	300 mm	3LD9205-0C	■	■		
		600 mm	3LD9205-2C	■	■		
	8 × 8 mm	300 mm	3LD9245-0C			■	■
		600 mm	3LD9245-2C			■	■

Quick selection guide, page 8/6

© Siemens 2022

3LD switch disconnectors

Accessories for 3LD5 UL main control and EMERGENCY-STOP switches

Additional poles


				3LD50	3LD52	3LD54	3LD56	3LD58
Switching contacts for N conductor (4th contact) for front mounting								
	**Contacts**		**Article No.**					
	Leading switch-on, lagging switch-off		3LD9250-0BA	■				
			3LD9280-0B		■			
			3LD9240-0B			■	■	■
Switching contacts for N conductor (4th contact) for floor mounting								
	**Contacts**		**Article No.**					
	Leading switch-on, lagging switch-off		3LD9250-0CA	■				
			3LD9280-0C		■			
			3LD9240-0C			■	■	■
N/PE terminals for front mounting								
	**Contacts**		**Article No.**					
	Through-type		3LD9250-2BA	■				
			3LD9280-2B		■			
			3LD9240-2B			■	■	■
N/PE terminals for floor mounting								
	**Contacts**		**Article No.**					
	Through-type		3LD9250-2CA	■				
			3LD9280-2C		■			
			3LD9240-2C			■	■	■
Auxiliary switches (standard version) for front mounting								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■
		Gold-plated	3LD9200-5BF	■	■	■	■	■
Auxiliary switches (standard version) for floor mounting								
	• For mounting on the left and/or right • Lagging switch-on, leading switch-off							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■
		Gold-plated	3LD9200-5CF	■	■	■	■	■
Auxiliary switch for mounting on the front								
	• Mounted on the front of the switch shaft • For long leading times (20 ... 150 ms)							
	Contacts	**Contact surface**	**Article No.**					
	1 NO + 1 NC	Standard	3LD9280-5D	■	■			
			3LD9240-5D			■	■	■
		Gold-plated	3LD9280-5DF	■	■			
			3LD9240-5DF			■	■	■

8



System overview, page 8/54

© Siemens 2022

Operating mechanisms

			3LD50	3LD52	3LD54	3LD56	3LD58
Rotary operating mechanism for front mounting							
 • Lockable in 0 position with up to 3 padlocks							
Version		**Article No.**					
For main control switches		3LD9284-1B	■	■			
For EMERGENCY-STOP switches		3LD9284-3B	■	■			
Knob-operated mechanism for front mounting							
 • Lockable in 0 position with up to 3 padlocks							
Version		**Article No.**					
For main control switches		3LD9243-1B			■	■	■
For EMERGENCY-STOP switches		3LD9284-3B			■	■	■
Handles for floor mounting							
 • Supplied with a masking frame, but without an extension shaft or coupling driver • Can be locked with up to 3 padlocks							
Labeling	**Color**	**Article No.**					
O-I	Gray	8UD1771-2AD01	■	■			
		8UD1731-2AD01			■	■	■
	Red/yellow	8UD1771-2AD05	■	■			
		8UD1731-2AD05			■	■	■
Supplementary handles for door-coupling rotary operating mechanism							
 • For requirements according to UL508A/NFPA79 • Can be locked with up to 1 padlock in 0 position • Can only be switched on by deliberate action							
Labeling	**Color**	**Article No.**					
O-I	Gray	3LD9287-1C	■	■			
		3LD9247-1C			■	■	■
	Red/yellow	3LD9287-3C	■	■			
		3LD9247-3C			■	■	■
Coupling drivers for floor mounting with door-coupling rotary operating mechanism							
							
Version		**Article No.**					
With tolerance compensation		8UD1900-1GA00	■	■			
		8UD1900-2GA00			■	■	■
Without tolerance compensation		8UD1900-1HA00	■	■			
		8UD1900-2HA00			■	■	■

Other accessories

			3LD50	3LD52	3LD54	3LD56	3LD58
Terminal covers							
• Pack of 4 units							
Number of poles		**Article No.**					
 1-pole		3LD9251-2A	■				
		3LD9281-2A		■			
		3LD9241-2A			■	■	■
 3-pole		3LD9251-0A	■				
Inscription labels							
 • Pack of 10 units							
Inscription		**Article No.**					
German/English (Hauptschalter/Main Switch)		3LD9286-1A	■	■	■	■	■
Without inscription		3LD9286-4A	■	■	■	■	■
Switch shafts							
							
Cross-section	**Length**	**Article No.**					
6 × 6 mm	300 mm	3LD9205-0C	■	■			
	600 mm	3LD9205-2C	■	■			
8 × 8 mm	300 mm	3LD9245-0C			■	■	■
	600 mm	3LD9245-2C			■	■	■

System overview, page 8/54

© Siemens 2022

3KD switch disconnectors

System overview

Complete units with direct operating mechanisms


Front operating mechanisms, 3-pole


Front operating mechanisms, 4-pole


Front operating mechanisms, 3-pole


Front operating mechanisms, 4-pole

Basic units


Front operating mechanisms, 3-pole


Front operating mechanisms, 4-pole


Lateral operating mechanisms, 3-pole


Lateral operating mechanisms, 4-pole


Front-mounted devices, 6-pole for DC applications


Front operating mechanisms, 3-pole

8

Additional poles and auxiliary switch modules


4th contact elements


N terminals


N/PE terminals


Auxiliary switch modules

Operating mechanisms


Direct operating mechanisms


Door-coupling rotary operating mechanisms


Handles for door-coupling rotary operating mechanisms


Other accessories for door-coupling rotary operating mechanisms

Other accessories and spare parts


Auxiliary switches


Terminal covers


Phase barriers


Blocking pin test function


Mounting elements


Accessories for DC applications


Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Types of mounting


You will find further information ander:
sie.ag/2UlrAvy

Floor mounting

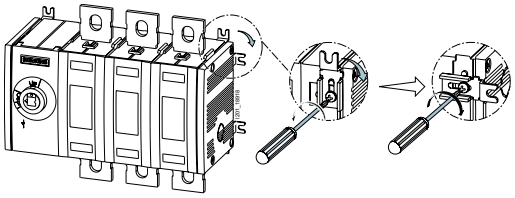

All 3KD switch disconnectors are designed for floor mounting. To ensure that the switch can be flexibly adapted to the relevant installation conditions, the mounting bracket can be rotated through 90° with size 3 or larger.

DIN rail




Sizes 01 and 02 of the 3KD0 and sizes 1 and 2 of the 3KD can be snapped onto a DIN rail (TH35 according to EN 60715) as an alternative mounting method.

© Siemens 2022

3KD switch disconnectors

Mounting concept and accessories

Front operating mechanism center, size 01 and 02

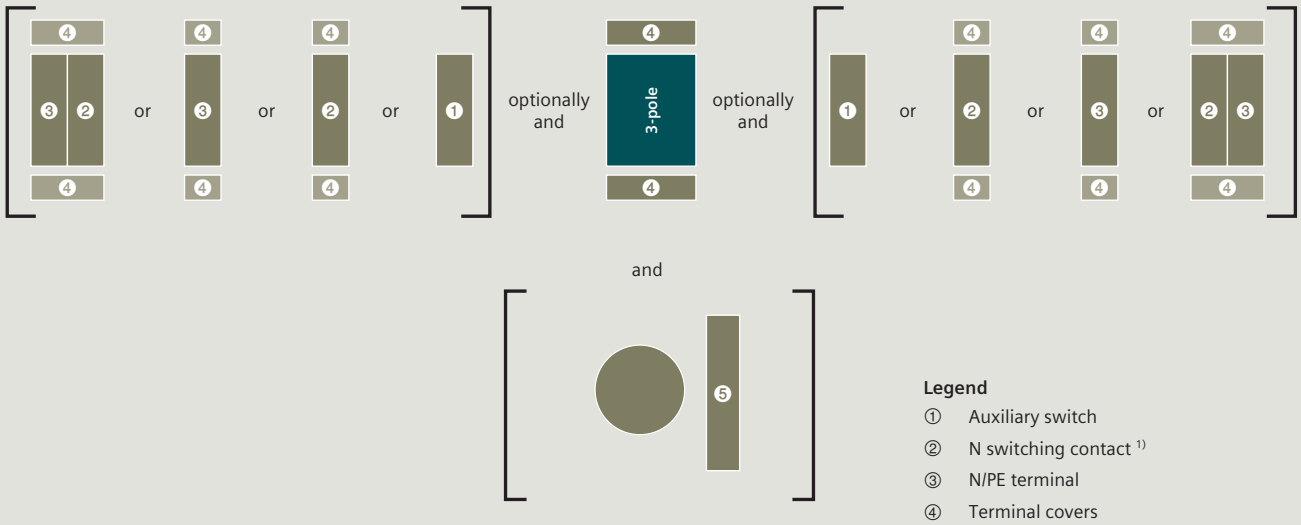


Legend

① Auxiliary switch
② N switching contact [1)]
③ N/PE terminal
④ Terminal covers
⑤ Direct operating mechanism

[1)] The N switching contact ② first has to be mounted on the basic unit
Note: Design with door-coupling rotary operating mechanism for sizes 01 and 02 only possible for basic unit without operating mechanism

Front operating mechanism left, sizes 1 and 2, 3/4-pole

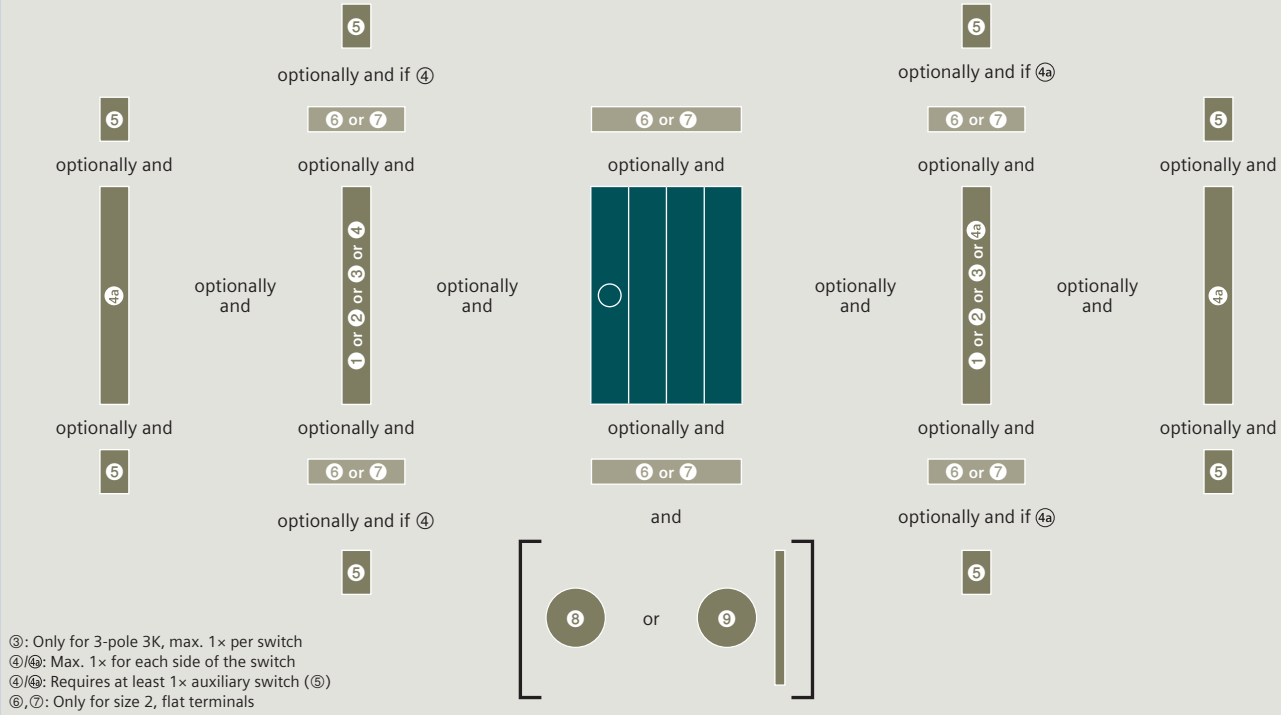


③: Only for 3-pole 3K, max. 1× per switch
④/④a: Max. 1× for each side of the switch
④/④a: Requires at least 1× auxiliary switch (⑤)
⑥,⑦: Only for size 2, flat terminals

System overview, page 8/64


© Siemens 2022

Front operating mechanism center, size 1 and 2, 3/4-pole

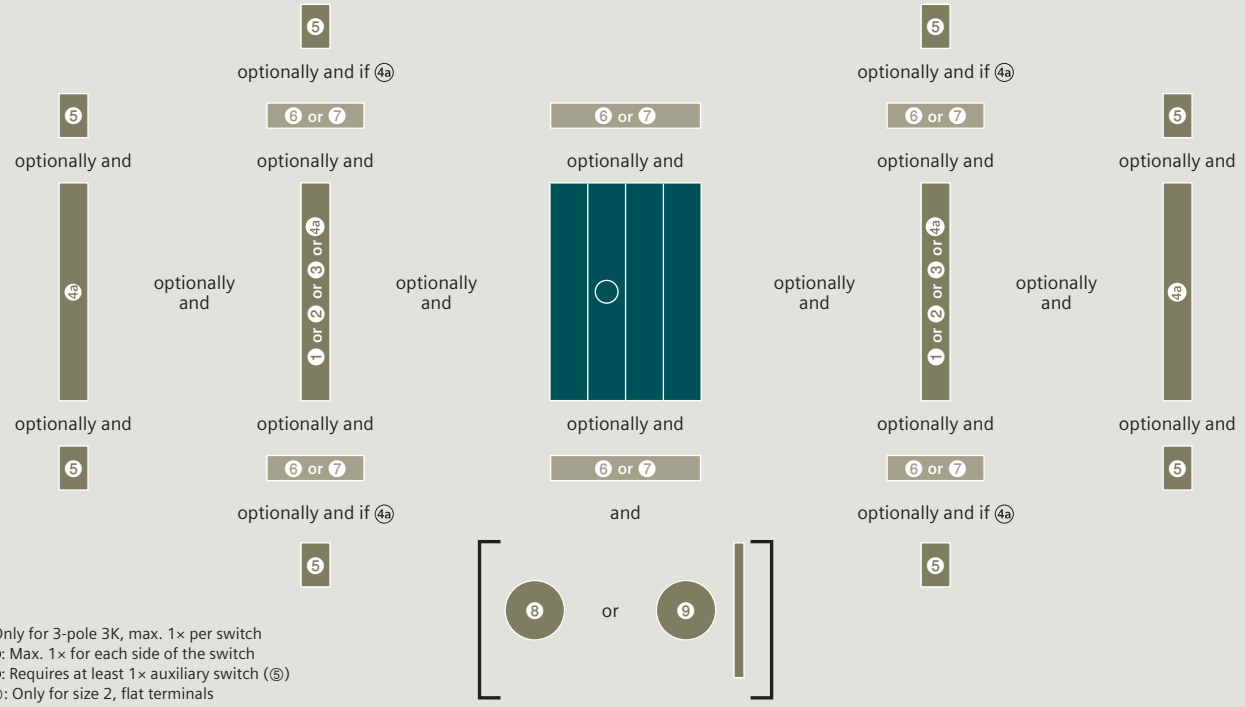

③: Only for 3-pole 3K, max. 1× per switch
④/④a: Max. 1× for each side of the switch
④/④a: Requires at least 1× auxiliary switch (⑤)
⑥,⑦: Only for size 2, flat terminals

Front operating mechanism center or left, sizes 3 to 5, 3/4-pole

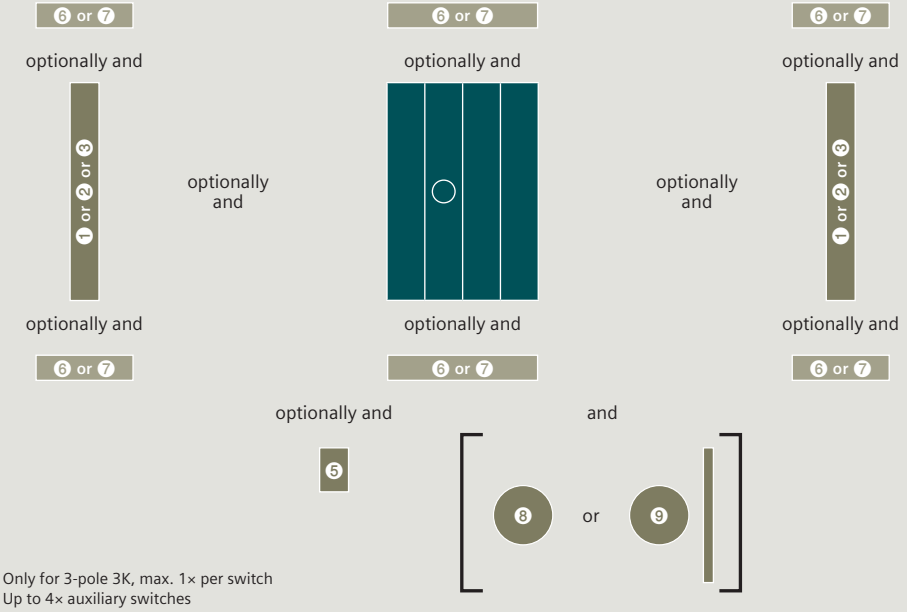

③: Only for 3-pole 3K, max. 1× per switch
⑤: Up to 4× auxiliary switches

Legend

①	Neutral conductor terminal
②	N/PE terminal
③	4th contact element
④	Auxiliary switch module, version with test function and version with leading NO contact and test function
④a	Auxiliary switch module for auxiliary switches, standard version
⑤	Auxiliary switch
⑥	Phase barrier
⑦	Terminal cover
⑧	Direct operating mechanism
⑨	Door-coupling rotary operating mechanism


System overview, page 8/64

© Siemens 2022

3KD switch disconnectors

Mounting concept and accessories

Lateral operating mechanism left, sizes 1 and 2, 3/4-pole

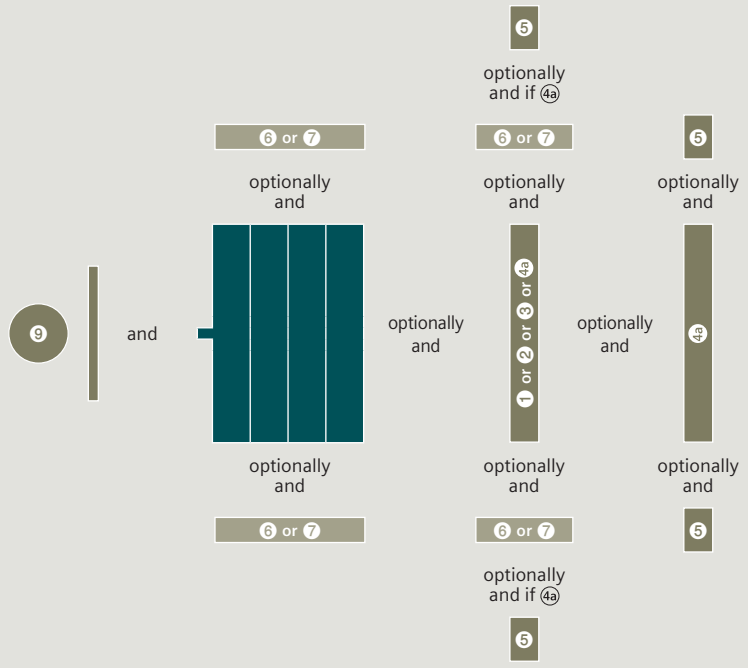


③: Only for 3-pole 3K
④a: Max. 1× per switch
④a: Requires at least 1× auxiliary switch (⑤)
⑥,⑦: Only for size 2, flat terminals

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
④a Auxiliary switch module for auxiliary switches, standard version
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑨ Door-coupling rotary operating mechanism

Lateral operating mechanism left, sizes 3 to 5, 3/4-pole

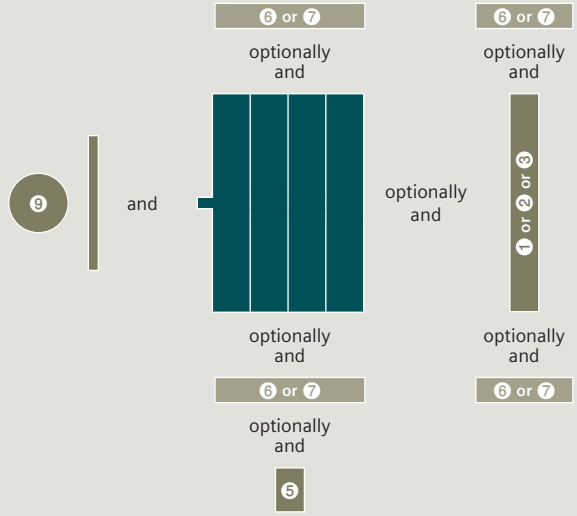

③: Only for 3-pole 3K
⑤: Up to 4× auxiliary switches


Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑨ Door-coupling rotary operating mechanism

System overview, page 8/64

© Siemens 2022

Lateral operating mechanism right, sizes 1 and 2, 3/4-pole

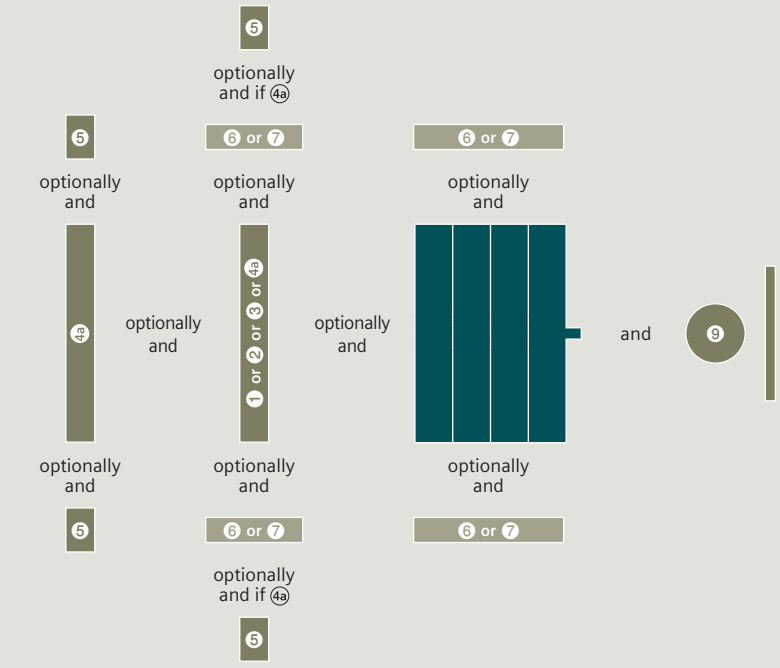


③: Only for 3-pole 3K
④a: Max. 1× per switch
④a: Requires at least 1× auxiliary switch (⑤)
⑥,⑦: Only for size 2, flat terminals

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
④a Auxiliary switch module for auxiliary switches, standard version
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑨ Door-coupling rotary operating mechanism

Lateral operating mechanism right, sizes 3 to 5, 3/4-pole

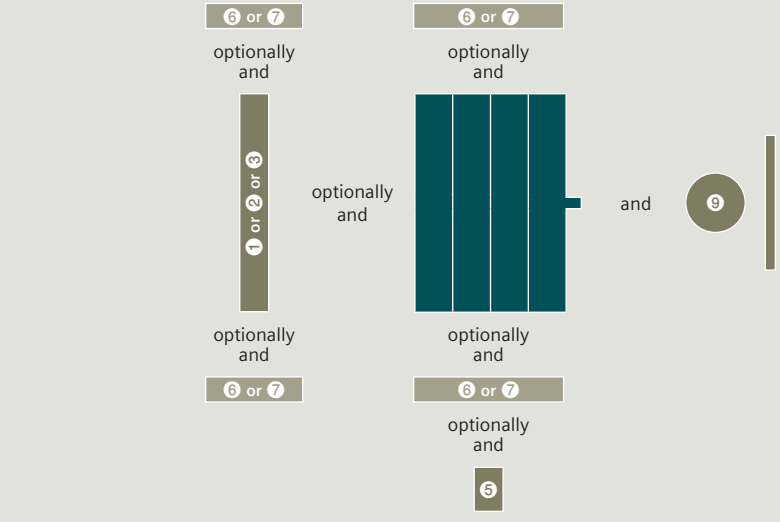

③: Only for 3-pole 3K
⑤: Up to 4× auxiliary switches

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑨ Door-coupling rotary operating mechanism





System overview, page 8/64

© Siemens 2022

3KD switch disconnectors

Complete units with direct operating mechanisms



		Drive, gray Front operating mechanism center		Drive, gray Front operating mechanism left	
Application		AC	AC	AC/DC	AC/DC
Number of poles		3P	4P	3P	4P
					
Size	**Uninterrupted current I_u**				
Box terminals					
01	16 A	3KD0132-2KG20-3	3KD0142-2KG20-3	–	–
	32 A	3KD0232-2KG20-3	3KD0242-2KG20-3	–	–
	63 A	3KD0332-2KG20-3	–	–	–
02	63 A	3KD0332-2LG20-3	3KD0342-2LG20-3	–	–
	80 A	3KD0432-2LG20-3	3KD0442-2LG20-3	–	–
	100 A	3KD0532-2LG20-3	3KD0542-2LG20-3	–	–
	125 A	3KD0632-2LG20-3	3KD0642-2LG20-3	–	–
1	16 A	–	–	3KD1632-2ME10-0	3KD1642-2ME10-0
	32 A	–	–	3KD2232-2ME10-0	3KD2242-2ME10-0
	63 A	–	–	3KD2632-2ME10-0	3KD2642-2ME10-0
	80 A	–	–	3KD2832-2ME10-0	3KD2842-2ME10-0
	100 A	–	–	3KD3032-2ME10-0	3KD3042-2ME10-0
2	80 A	–	–	3KD2832-2NE10-0	3KD2842-2NE10-0
	100 A	–	–	3KD3032-2NE10-0	3KD3042-2NE10-0
	125 A	–	–	3KD3232-2NE10-0	3KD3242-2NE10-0
	160 A	–	–	3KD3432-2NE10-0	3KD3442-2NE10-0
Flat terminals					
2	80 A	–	–	3KD2832-0NE10-0	3KD2842-0NE10-0
	100 A	–	–	3KD3032-0NE10-0	3KD3042-0NE10-0
	125 A	–	–	3KD3232-0NE10-0	3KD3242-0NE10-0
	160 A	–	–	3KD3432-0NE10-0	3KD3442-0NE10-0
	200 A	–	–	3KD3632-0NE10-0	3KD3642-0NE10-0
	250 A	–	–	3KD3832-0NE10-0	3KD3842-0NE10-0
3	200 A	–	–	3KD3632-0PE10-0	3KD3642-0PE10-0
	250 A	–	–	3KD3832-0PE10-0	3KD3842-0PE10-0
	315 A	–	–	3KD4032-0PE10-0	3KD4042-0PE10-0
	400 A	–	–	3KD4232-0PE10-0	3KD4242-0PE10-0
	500 A	–	–	3KD4432-0PE10-0	3KD4442-0PE10-0
4	500 A	–	–	3KD4432-0QE10-0	3KD4442-0QE10-0
	630 A	–	–	3KD4632-0QE10-0	3KD4642-0QE10-0
	800 A	–	–	3KD4832-0QE10-0	3KD4842-0QE10-0
	1000 A	–	–	3KD5032-0QE10-0	3KD5042-0QE10-0
5	1000 A	–	–	3KD5032-0RE10-0	3KD5042-0RE10-0
	1250 A	–	–	3KD5232-0RE10-0	3KD5242-0RE10-0
	1600 A	–	–	3KD5432-0RE10-0	3KD5442-0RE10-0
	2000 A	–	–	3KD5632-0RE10-0	3KD5642-0RE10-0



Scope of supply:
- Incl. terminal covers on input and output side for 3KD0 sizes 01 and 02
- Incl. phase barriers on the input and output side for size 2 with flat terminals
- Terminal covers must be ordered separately for switch disconnectors with flat terminals and direct operating mechanisms

Mounting:
- The switch disconnectors are designed for floor mounting and the sizes 01, 02, 1 and 2 can optionally also be mounted on DIN rails

Quick selection guide, page 8/8

© Siemens 2022




Drive, red/yellow Front operating mechanism center	
AC	AC
3P	4P
	
3KD0133-2KG20-3	3KD0143-2KG20-3
3KD0233-2KG20-3	3KD0243-2KG20-3
3KD0333-2KG20-3	–
3KD0333-2LG20-3	3KD0343-2LG20-3
3KD0433-2LG20-3	3KD0443-2LG20-3
3KD0533-2LG20-3	3KD0543-2LG20-3
3KD0633-2LG20-3	3KD0643-2LG20-3
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–
–	–

Note:
- The complete units with a direct operating mechanism are not suitable for conversion to door-coupling rotary operating mechanisms; the basic units are to be used for this purpose
- All basic units without handles are suitable for use with door-coupling rotary operating mechanisms, from size 1 to size 5 these can also be equipped with direct operating mechanisms
- The switch disconnectors with lateral operating mechanism are suitable for door-coupling rotary operating mechanisms
- For 3KD switch disconnectors and lateral operating mechanism (left or right), only 8UD door-coupling rotary operating mechanisms without the test function can be used

Quick selection guide, page 8/8

© Siemens 2022

3KD switch disconnectors






Basic units without handles







	Front operating mechanism Left		Front operating mechanism Center		
Application	AC/DC	AC/DC	AC	AC	AC/DC
Number of poles	3P	4P	3P	4P	3P

Size	Uninterrupted current I_u					
Box terminals						
01	16 A	–	–	3KD0130-2KG20-3	3KD0140-2KG20-3	–
	32 A	–	–	3KD0230-2KG20-3	3KD0240-2KG20-3	–
	63 A	–	–	3KD0330-2KG20-3	–	–
02	63 A	–	–	3KD0330-2LG20-3	3KD0340-2LG20-3	–
	80 A	–	–	3KD0430-2LG20-3	3KD0440-2LG20-3	–
	100 A	–	–	3KD0530-2LG20-3	3KD0540-2LG20-3	–
	125 A	–	–	3KD0630-2LG20-3	3KD0640-2LG20-3	–
1	16 A	3KD1630-2ME10-0	3KD1640-2ME10-0	–	–	3KD1630-2ME20-0
	32 A	3KD2230-2ME10-0	3KD2240-2ME10-0	–	–	3KD2230-2ME20-0
	63 A	3KD2630-2ME10-0	3KD2640-2ME10-0	–	–	3KD2630-2ME20-0
	80 A	3KD2830-2ME10-0	3KD2840-2ME10-0	–	–	3KD2830-2ME20-0
	100 A	3KD3030-2ME10-0	3KD3040-2ME10-0	–	–	3KD3030-2ME20-0
2	80 A	3KD2830-2NE10-0	3KD2840-2NE10-0	–	–	3KD2830-2NE20-0
	100 A	3KD3030-2NE10-0	3KD3040-2NE10-0	–	–	3KD3030-2NE20-0
	125 A	3KD3230-2NE10-0	3KD3240-2NE10-0	–	–	3KD3230-2NE20-0
	160 A	3KD3430-2NE10-0	3KD3440-2NE10-0	–	–	3KD3430-2NE20-0
Flat terminals						
2	80 A	3KD2830-0NE10-0	3KD2840-0NE10-0	–	–	3KD2830-0NE20-0
	100 A	3KD3030-0NE10-0	3KD3040-0NE10-0	–	–	3KD3030-0NE20-0
	125 A	3KD3230-0NE10-0	3KD3240-0NE10-0	–	–	3KD3230-0NE20-0
	160 A	3KD3430-0NE10-0	3KD3440-0NE10-0	–	–	3KD3430-0NE20-0
	200 A	3KD3630-0NE10-0	3KD3640-0NE10-0	–	–	3KD3630-0NE20-0
	250 A	3KD3830-0NE10-0	3KD3840-0NE10-0	–	–	3KD3830-0NE20-0
3	200 A	3KD3630-0PE10-0	3KD3640-0PE10-0	–	–	3KD3630-0PE20-0
	250 A	3KD3830-0PE10-0	3KD3840-0PE10-0	–	–	3KD3830-0PE20-0
	315 A	3KD4030-0PE10-0	3KD4040-0PE10-0	–	–	3KD4030-0PE20-0
	400 A	3KD4230-0PE10-0	3KD4240-0PE10-0	–	–	3KD4230-0PE20-0
	500 A	3KD4430-0PE10-0	3KD4440-0PE10-0	–	–	3KD4430-0PE20-0
4	500 A	3KD4430-0QE10-0	3KD4440-0QE10-0	–	–	3KD4430-0QE20-0
	630 A	3KD4630-0QE10-0	3KD4640-0QE10-0	–	–	3KD4630-0QE20-0
	800 A	3KD4830-0QE10-0	3KD4840-0QE10-0	–	–	3KD4830-0QE20-0
	1000 A	3KD5030-0QE10-0	3KD5040-0QE10-0	–	–	3KD5030-0QE20-0
5	1000 A	3KD5030-0RE10-0	3KD5040-0RE10-0	–	–	3KD5030-0RE20-0
	1250 A	3KD5230-0RE10-0	3KD5240-0RE10-0	–	–	3KD5230-0RE20-0
	1600 A	3KD5430-0RE10-0	3KD5440-0RE10-0	–	–	3KD5430-0RE20-0
	2000 A	3KD5630-0RE10-0	3KD5640-0RE10-0	–	–	3KD5630-0RE20-0

Scope of supply:
- Incl. terminal covers on input and output side for 3KD0 sizes 01 and 02
- Incl. phase barriers on the input and output side for size 2 with flat terminals
- Terminal covers must be ordered separately for switch disconnectors with flat terminals and direct operating mechanisms

Mounting:
- The switch disconnectors are designed for floor mounting and the sizes 01, 02, 1 and 2 can optionally also be mounted on DIN rails







Quick selection guide, page 8/8

© Siemens 2022








Front operating mechanism Center		Lateral operating mechanism Left		Right	
AC/DC	DC	AC/DC	AC/DC	AC/DC	AC/DC
4P	6P	3P	4P	3P	4P
					
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3KD1640-2ME20-0	3KD1660-2ME20-0	3KD1634-2ME10-0	3KD1644-2ME10-0	3KD1634-2ME40-0	3KD1644-2ME40-0
3KD2240-2ME20-0	3KD2260-2ME20-0	3KD2234-2ME10-0	3KD2244-2ME10-0	3KD2234-2ME40-0	3KD2244-2ME40-0
3KD2640-2ME20-0	3KD2660-2ME20-0	3KD2634-2ME10-0	3KD2644-2ME10-0	3KD2634-2ME40-0	3KD2644-2ME40-0
3KD2840-2ME20-0	–	3KD2834-2ME10-0	3KD2844-2ME10-0	3KD2834-2ME40-0	3KD2844-2ME40-0
3KD3040-2ME20-0	–	3KD3034-2ME10-0	3KD3044-2ME10-0	3KD3034-2ME40-0	3KD3044-2ME40-0
3KD2840-2NE20-0	3KD2860-2NE20-0	3KD2834-2NE10-0	3KD2844-2NE10-0	3KD2834-2NE40-0	3KD2844-2NE40-0
3KD3040-2NE20-0	3KD3060-2NE20-0	3KD3034-2NE10-0	3KD3044-2NE10-0	3KD3034-2NE40-0	3KD3044-2NE40-0
3KD3240-2NE20-0	3KD3260-2NE20-0	3KD3234-2NE10-0	3KD3244-2NE10-0	3KD3234-2NE40-0	3KD3244-2NE40-0
3KD3440-2NE20-0	3KD3460-2NE20-0	3KD3434-2NE10-0	3KD3444-2NE10-0	3KD3434-2NE40-0	3KD3444-2NE40-0
3KD2840-0NE20-0	3KD2860-0NE20-0	3KD2834-0NE10-0	3KD2844-0NE10-0	3KD2834-0NE40-0	3KD2844-0NE40-0
3KD3040-0NE20-0	3KD3060-0NE20-0	3KD3034-0NE10-0	3KD3044-0NE10-0	3KD3034-0NE40-0	3KD3044-0NE40-0
3KD3240-0NE20-0	3KD3260-0NE20-0	3KD3234-0NE10-0	3KD3244-0NE10-0	3KD3234-0NE40-0	3KD3244-0NE40-0
3KD3440-0NE20-0	3KD3460-0NE20-0	3KD3434-0NE10-0	3KD3444-0NE10-0	3KD3434-0NE40-0	3KD3444-0NE40-0
3KD3640-0NE20-0	–	3KD3634-0NE10-0	3KD3644-0NE10-0	3KD3634-0NE40-0	3KD3644-0NE40-0
3KD3840-0NE20-0	–	3KD3834-0NE10-0	3KD3844-0NE10-0	3KD3834-0NE40-0	3KD3844-0NE40-0
3KD3640-0PE20-0	3KD3660-0PE20-0	3KD3634-0PE10-0	3KD3644-0PE10-0	3KD3634-0PE40-0	3KD3644-0PE40-0
3KD3840-0PE20-0	3KD3860-0PE20-0	3KD3834-0PE10-0	3KD3844-0PE10-0	3KD3834-0PE40-0	3KD3844-0PE40-0
3KD4040-0PE20-0	3KD4060-0PE20-0	3KD4034-0PE10-0	3KD4044-0PE10-0	3KD4034-0PE40-0	3KD4044-0PE40-0
3KD4240-0PE20-0	3KD4260-0PE20-0	3KD4234-0PE10-0	3KD4244-0PE10-0	3KD4234-0PE40-0	3KD4244-0PE40-0
3KD4440-0PE20-0	–	3KD4434-0PE10-0	3KD4444-0PE10-0	3KD4434-0PE40-0	3KD4444-0PE40-0
3KD4440-0QE20-0	3KD4460-0QE20-0	3KD4434-0QE10-0	3KD4444-0QE10-0	3KD4434-0QE40-0	3KD4444-0QE40-0
3KD4640-0QE20-0	3KD4660-0QE20-0	3KD4634-0QE10-0	3KD4644-0QE10-0	3KD4634-0QE40-0	3KD4644-0QE40-0
3KD4840-0QE20-0	3KD4860-0QE20-0	3KD4834-0QE10-0	3KD4844-0QE10-0	3KD4834-0QE40-0	3KD4844-0QE40-0
3KD5040-0QE20-0	–	3KD5034-0QE10-0	3KD5044-0QE10-0	3KD5034-0QE40-0	3KD5044-0QE40-0
3KD5040-0RE20-0	3KD5060-0RE20-0	3KD5034-0RE10-0	3KD5044-0RE10-0	3KD5034-0RE40-0	3KD5044-0RE40-0
3KD5240-0RE20-0	3KD5260-0RE20-0	3KD5234-0RE10-0	3KD5244-0RE10-0	3KD5234-0RE40-0	3KD5244-0RE40-0
3KD5440-0RE20-0	3KD5460-0RE20-0	3KD5434-0RE10-0	3KD5444-0RE10-0	3KD5434-0RE40-0	3KD5444-0RE40-0
3KD5640-0RE20-0	–	3KD5634-0RE10-0	3KD5644-0RE10-0	3KD5634-0RE40-0	3KD5644-0RE40-0

Note:

- The complete units with a direct operating mechanism are not suitable for conversion to door-coupling rotary operating mechanisms; the basic units are to be used for this purpose
- All basic units without handles are suitable for use with door-coupling rotary operating mechanisms, from size 1 to size 5 these can also be equipped with direct operating mechanisms
- The switch disconnectors with lateral operating mechanism are suitable for door-coupling rotary operating mechanisms
- For 3KD switch disconnectors and lateral operating mechanism (left or right), only 8UD door-coupling rotary operating mechanisms without the test function can be used

Quick selection guide, page 8/8

© Siemens 2022

3KD switch disconnectors

Accessories

Additional poles

Note:

- Additional poles (4th contact element, N or N/PE terminal) must always be mounted directly adjacent to the switch disconnector on the left or right. Accordingly, an auxiliary switch module must not be mounted between the basic unit and an additional pole on sizes 1 and 2.
- For installation, it is important to note that only a 3-pole 3KD switch disconnector may be retrofitted with an additional switching pole with contact system (4th contact element).

4th contact elements (switching pole)

- For upgrading a 3-pole to a 4-pole switch disconnector
- For sizes 1 to 5, identical to the factory-fitted poles
- For sizes 01 and 02, leading switch-on, lagging switch-off
- Sizes 01 and 02 equipped at the factory with terminal covers for the input and output side.

Connection	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
 Box terminals N—N	3KD9015-2	■						
	3KD9025-2		■					
	3KD9105-2			■				
	3KD9205-2				■			
 Flat terminals N—N	3KD9205-0				■			
	3KD9305-0					■		
	3KD9405-0						■	
	3KD9505-0							■

N terminals (neutral conductor terminal) with removable jumper

- A jumper can be removed in order to interrupt the electrical connection between the terminals

Connection	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
 Box terminals	3KD9106-2			■				
	3KD9206-2				■			
 Flat terminals	3KD9206-0				■			
	3KD9306-0					■		
	3KD9406-0						■	
	3KD9506-0							■

N/PE terminals with permanent jumper

- Permanent electrical connection between the terminals, cannot be broken

Connection	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
 Box terminals	3KD9016-8	■						
	3KD9026-8		■					
	3KD9106-8			■				
	3KD9206-8				■			
 Flat terminals	3KD9206-7				■			
	3KD9306-7					■		
	3KD9406-7						■	
	3KD9506-7							■

System overview, page 8/64

© Siemens 2022

Operating mechanisms

Direct operating mechanisms, standard version

- Can be locked with up to 3 padlocks
- Requires additional mounting depth in locked state





Labeling	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Test – O – I	Gray	3KD9101-1			■				
		3KD9201-1				■			
		3KD9301-1					■		
		3KD9401-1						■	
		3KD9501-1							■
	Red/yellow	3KD9101-2			■				
		3KD9201-2				■			
		3KD9301-2					■		
		3KD9401-2						■	
		3KD9501-2							■

Direct operating mechanisms, flat version

- Suitable for distribution boards
- Can be locked with 1 padlock
- No additional mounting depth in locked state





Labeling	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Test – O – I	Gray	3KD9101-0			■				
		3KD9201-0				■			
	Red/yellow	3KD9101-8			■				
		3KD9201-8				■			


Direct operating mechanisms, distribution boards



Number of poles	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
3-pole	Gray	3KD9011-0C	■						
	Red/yellow	3KD9011-8C	■						
4-pole	Gray	3KD9011-0D	■						
	Red/yellow	3KD9011-8D	■						

Door-coupling rotary operating mechanisms, complete

- **Scope of supply:**
  - Handle with masking plate (sizes 01 and 02 without test function)
  - Coupling driver
  - Shaft 300 mm
- Can be locked with up to 3 padlocks







Labeling	Tolerance compensation	Defeat function	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
O – I	With	With	Gray	8UD1171-1AD21	■	■					
			Red/yellow	8UD1171-1AD25	■	■					
	Without	Without	Gray	3KD9001-5	■	■					
			Red/yellow	3KD9001-6	■	■					
		With	Gray	8UD1171-2AD11			■	■			
			Red/yellow	8UD1171-2AD15			■	■			
Test – O – I	With	With	Gray	8UD1171-2AF21			■	■			
				8UD1141-2AF21					■		
				8UD1151-3AF21						■	
				8UD1161-4AF21							■
			Red/yellow	8UD1171-2AF25			■	■			
				8UD1141-2AF25					■		
				8UD1151-3AF25						■	
				8UD1161-4AF25							■

Note:
- For 3KD switch disconnectors and lateral operating mechanism (left or right), only 8UD door-coupling rotary operating mechanisms without the test function can be used
- The door-coupling rotary operating mechanisms of the 3KD90 type are mounted on the inside of the door by means of center-hole mounting

System overview, page 8/64

© Siemens 2022

3KD switch disconnectors

Accessories

Accessories for door-coupling rotary operating mechanisms

Handles

- Supplied with a masking frame, but without an extension shaft and without coupling driver
- Can be locked with up to 3 padlocks


Labeling	Lighting	Color	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
 O – I	Without	Gray	8UD1771-2AD01	■	■	■	■			
			8UD1841-2AD01					■		
			8UD1851-3AD01						■	
			8UD1861-4AD01							■
		Red/yellow	8UD1771-2AD05	■	■	■	■			
			8UD1841-2AD05					■		
			8UD1851-3AD05						■	
			8UD1861-4AD05							■
	With	Gray	8UD1771-2CD01			■	■			
			8UD1841-2CD01					■		
			8UD1851-3CD01						■	
			8UD1861-4CD01							■
		Red/yellow	8UD1771-2CD05			■	■			
			8UD1841-2CD05					■		
			8UD1851-3CD05						■	
			8UD1861-4CD05							■
 Test – O – I	Without	Gray	8UD1771-2AF01			■	■			
			8UD1841-2AF01					■		
			8UD1851-3AF01						■	
			8UD1861-4AF01							■
		Red/yellow	8UD1771-2AF05			■	■			
			8UD1841-2AF05					■		
			8UD1851-3AF05						■	
			8UD1861-4AF05							■
	With	Gray	8UD1771-2CF01			■	■			
			8UD1841-2CF01					■		
			8UD1851-3CF01						■	
			8UD1861-4CF01							■
		Red/yellow	8UD1771-2CF05			■	■			
			8UD1841-2CF05					■		
			8UD1851-3CF05						■	
			8UD1861-4CF05							■

Extension shafts

- A shaft jack is required for the 8UD1 handle when the 600 mm long shaft is used and for sizes 01, 02, 1 and 2

Length	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
 300 mm	3KD9002-0	■	■					
	8UC6032			■	■	■		
	8UC6033						■	
	8UC6034							■
 600 mm	3KD9002-1	■	■					
	8UC6082			■	■	■		
	8UC6083						■	
	8UC6084							■

Shaft jack for 8UD1 handle


Version	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
 For shaft 600 mm	8UD1900-0FA00	■	■	■	■			

System overview, page 8/64

© Siemens 2022

Accessories for door-coupling rotary operating mechanisms

Coupling drivers

	Version	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
	With tolerance compensation	8UD1900-1GA00	■	■					
		8UD1900-2GA00			■	■			
		8UD1900-6GA00					■		
		8UD1900-3GA00						■	
		8UD1900-4GA00							■
	Without tolerance compensation	8UD1900-1HA00	■	■					
		8UD1900-2HA00			■	■			
		8UD1900-6HA00					■		
		8UD1900-3HA00						■	
		8UD1900-4HA00							■

Adapters for shafts

	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
	8UC6022			■	■	■		
	8UC6023						■	
	8UC6024							■

Other accessories and spare parts

Auxiliary switch modules




- Auxiliary switch modules are supplied without auxiliary switches. A maximum of 2 auxiliary switches can be installed per auxiliary module
- The 3KD9103-6 and 3KD9103-7 auxiliary switch modules can only be used with 3KD directly on the operating mechanism if the operating mechanism is on the front or on the left

Type	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Standard version	3KD9103-5			■	■			
With test function	3KD9103-6			■	■			
With leading NO contact and test function	3KD9103-7			■	■			

Auxiliary switches

- Auxiliary switches for sizes 01 and 02 are snapped onto the side of the switches
- Auxiliary switches for sizes 3 to 5 have screw terminals and are mounted on the operating mechanism module of the 3KD. Auxiliary switches with spring-type terminals from the 3SU1 range can also be used.
- All auxiliary switches for sizes 3 to 5 can be used as leading auxiliary switches, depending on the mounting position of the auxiliary switch (see operating instructions).

	Type	Contacts	Contact surface	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
	With connecting cables	1 CO	Standard	3KD9103-1			■	■			
			Solid-state compatible	3KD9103-3			■	■			
	Without connecting cables	1 NO + 1 NC	Standard	3KD9003-2	■	■					
			Solid-state compatible	3KD9003-4	■	■					
		1 CO	Standard	3KD9103-2			■	■			
			Solid-state compatible	3KD9103-4			■	■			
		1 NO	Standard	3SU1400-1AA10-1BA0					■	■	■
			Gold-plated	3SU1400-1AA10-1LA0					■	■	■
		1 NC	Standard	3SU1400-1AA10-1CA0					■	■	■
			Gold-plated	3SU1400-1AA10-1MA0					■	■	■
		1 NO + 1 NC	Standard	3SU1400-1AA10-1FA0					■	■	■
			Gold-plated	3SU1400-1AA10-1QA0					■	■	■
		2 NO	Standard	3SU1400-1AA10-1DA0					■	■	■
			Gold-plated	3SU1400-1AA10-1NA0					■	■	■
		2 NC	Standard	3SU1400-1AA10-1EA0					■	■	■
			Gold-plated	3SU1400-1AA10-1PA0					■	■	■

System overview, page 8/64

© Siemens 2022

3KD switch disconnectors

Accessories

Other accessories and spare parts

Phase barriers



- For 3KD with flat terminals
- For 3KD size 2 with flat terminals, phase barriers are already contained in the scope of supply

Version	Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
For 3-pole devices	6 units	3KD9108-6				■			
		3KD9308-6					■		
		3KD9408-6						■	
		3KD9508-6							■
For 4-pole devices	8 units	3KD9108-8				■			
		3KD9308-8					■		
		3KD9408-8						■	
		3KD9508-8							■

Terminal covers



- For sizes 01 and 02, terminal covers are already part of the scope of supply and must therefore only be used as spare parts
- For 3KD with flat terminals
- Not permissible for 2000 A devices

Version	Scope of supply	Type	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
For 1-pole devices	4 units		3KD9014-1B	■						
			3KD9024-1B		■					
For 3-pole devices	4 units		3KD9014-3B	■						
	6 units	Standard version	3KD9504-6							■
			3KD9204-6				■			
		Short version	3KD9204-7				■			
	8 units	Standard version	3KD9304-6					■		
			3KD9404-6						■	
		Short version	3KD9304-7					■		
			3KD9404-7						■	
For 4-pole devices	8 units	Standard version	3KD9504-8							■
			3KD9204-8				■			
		Short version	3KD9204-5				■			
	10 units	Standard version	3KD9304-8					■		
			3KD9404-8						■	
		Short version	3KD9304-5					■		
			3KD9404-5						■	


Spare part for terminal covers



- Not permissible for 2000 A devices

Scope of supply	Type	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	Standard version	3KD9504-1							■
	Short version	3KD9204-1				■			
		3KD9304-1					■		
		3KD9404-1						■	


Blocking pin test function



- Enables permanent deactivation of the test function for auxiliary switches
- It is installed in the operating mechanism module of the 3KD switch disconnector

Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
10 units	3KF9112-1AA00			■	■			
	3KF9412-1AA00					■	■	
	3KF9512-1AA00							■

Mounting brackets



- Spare part, included in the scope of supply of the 3KD

Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
4 units	3KD9120-1			■	■			
	3KF9212-0AA00					■		
	3KF9412-0AA00						■	
	3KF9512-0AA00							■

8

System overview, page 8/64

© Siemens 2022

Other accessories and spare parts

Slide for mounting on a DIN rail




- Spare part, included in the scope of supply of the 3KD

Scope of supply	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
5 units	3KF9112-0BA00			■	■			

Accessories for DC applications

Connecting bridges





- Suitable for connecting 2 poles
- For 3KD switch disconnectors with 400 A, 800 A, 1250 A and 1600 A, two units are required.

Connection	Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KD9118-1			■				
	3KD9218-1				■			
Flat terminals	3KD9218-0				■			
	3KD9318-0					■		
	3KD9418-0						■	
	3KD9518-0							■

Terminal covers for connecting bridges



- For 3KD with flat terminals

Article No.	Size 01	Size 02	Size 1	Size 2	Size 3	Size 4	Size 5
3KD9204-0				■			
3KD9304-0					■		
3KD9404-0						■	
3KD9504-0							■

8

System overview, page 8/64

© Siemens 2022

Fuse switch disconnectors

Quick selection guide





Size			000 narrow	000	00	1	2	3
General technical specifications acc. to IEC 60947-3								
Basic data								
Rated uninterrupted current I_u		A	125	125 [2]	160	250	400	630
For fuse links acc. to IEC 60269-2		Size	000	000	00 and 000	1 and 0	2 and 1	3 and 2
Rated operational voltage U_e	At 50/60 Hz AC	V	690	690	690			
	At DC (3 conducting paths in series)	V	–	440	440			
	At DC (2 conducting paths in series)	V	–	240	240			
	At DC	V	–	–	–			
	For utilization category AC-20B or DC-20B	V	–	690 [1]	690 [1]			
Operating and short-circuit behavior								
Rated operational current I_e	At AC-21B, 400 V AC	A	125	125 [2]	160	250	400	630
	At AC-22A, 400 V AC	A	–	–	–	–	–	–
	At AC-22B, 400 V AC	A	125	125 [2]	160	250	400	630
	At AC-23B, 400 V AC	A	63	125 [2]	160	250	400	630
	At AC-21B, 500 V AC	A	125	125 [2]	160	250	400	630
	At AC-22B, 500 V AC	A	125	125	160	250	400	630
	At AC-23B, 500 V AC	A	–	40	63	200	315	500
	At AC-21B, 690 V AC	A	80	125 [2]	160	250	400	630
	At AC-22B, 690 V AC	A	–	50	125	250	400	500
	At AC-23B, 690 V AC	A	–	25	35	100	125	200
	At DC-21B (2 conducting paths in series), 240 V DC	A	–	125 [2]	160	250	400	630
	At DC-22B (2 conducting paths in series), 240 V DC	A	–	100	160	250	400	630
	At DC-23B (2 conducting paths in series), 240 V DC	A	–	80	100	200	250	400
	At DC-21B (3 conducting paths in series), 440 V DC	A	–	100	160	250	400	630
	At DC-22B (3 conducting paths in series), 440 V DC	A	–	50	125	200	315	500
	At DC-23B (3 conducting paths in series), 440 V DC	A	–	25	63	100	160	250
Rated conditional short-circuit current with fuses (by fast switch on)	Rated current at 400 V/500 V/690 V	kA	80/80/80	80/80/80	80/80/80	80/80/50	80/80/50	50/50/50
	Permissible let-through current of the fuses, peak value	kA	10	10	15	25	40	50
Short-circuit strength with fuses (with closed disconnector)	Rated current at 500 V/690 V	kA	80/80	120/100	120/100	120/100	100/100	100/100
	Permissible let-through I^2t value of the fuses	kA^2s	59	223	223	780	2150	5400
	Permissible let-through current of the fuses, peak value	kA	10	15	23	32	40	60
Rated making capacity	With isolating blades at 500 V AC	kA	–	2	6	17	17	17
Rated short-time withstand current I_{cw}		kA	–	–	–	–	–	–
Rated insulation voltage U_i		V	690	690 [1]	690 [1]	690 [1]	690 [1]	690 [1]
Rated impulse withstand voltage U_{imp}		kV	6	8	8	8	8	8
Power loss per pole of the switch at I_{th} (without fuses)		W	4.6	5	5	8	14	30
Maximum power loss of the usable fuses (per fuse)		W	9	7.5 [3]	12	23	34	48
Mechanical endurance, operating cycles			2000	2000	2000	1600	1000	1000
Degree of protection, on the front								
Without masking plate or terminal cover – switch closed/open			IP30/IP10	IP30/IP20	IP30/IP20	IP30/IP20	IP30/IP20	IP30/IP20
With masking plate or terminal cover – switch closed/open			IP30/IP10	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20	IP40/IP20
Certifications and approvals								
					VDE, CCC, LR, cULus [4]			
More information								
					See page 8/94			

The technical specifications apply to the standard types stated below.
For the complete specifications for all versions, see the Online Support
3NP1: 3-pole and 4-pole devices without fuse monitoring
3NP5: Devices without fuse monitoring

3NJ4/5: Disconnectors for cable and line protection without fuse monitoring, not for transformer protection

© Siemens 2022

3NP5				3NJ4/3NJ5					5SG76
									
00	**1**	**2**	**3**	**00**	**1**	**2**	**3**	**4a**	**D01**
160	250	400	630	160	250	400	630	1250	16
00	1 and 0	2 and 1	3 and 2	00 and 000	1 and 0	2 and 1	3 and 2	4a	D01
690						690			400, 415
440						–			–
220						–			110
–						–			48
690						–			–
160	250	400	630	160	250	400	630	1250	16
–	–	–	–	–	–	–	–	–	16
160	250	400	630	160	250	400	630	1250	–
160	250	400	630	–	250	400	–	–	–
160	250	400	630	160	250	400	630	1250	–
160	250	400	630	160	250	400	630	1250	–
160	250	400	630	–	–	–	–	–	–
160	250	400	630	100	250	400	630	1250	–
160	250	400	630	100	250	–	–	–	–
100	160	315	400	–	–	–	–	–	–
160	250	400	630	–	–	–	–	–	–
160	250	400	630	–	–	–	–	–	–
160	250	400	630	–	–	–	–	–	–
160	250	400	630	–	–	–	–	–	–
160	250	400	630	–	–	–	–	–	–
160	250	400	630	–	–	–	–	–	–
50/50/–	50/50/–	50/50/–	50/50/–	–	–	–	–	–	50/–/–
15	25	40	50	–	–	–	–	–	–
100/–	100/–	50/–	50/–	80	120	120	120	80	–
223	780	2150	5400	–	–	–	–	–	–
23	32	40	60	–	–	–	–	–	–
6	17	17	17	–	–	–	–	–	–
–	–	–	–	–	14.5	14.5	14.5	35	–
690 [1]	690 [1]	690 [1]	690 [1]	800	1000	1000	1000	1000	400
6	6	6	6	8	12	12	12	12	2.5
7.8	7.5	15	39	18	23	54	115	190	–
12	23	34	48	12	32	45	48	110	2.5
1600	1600	1600	1600	1400	1400	800	800	500	–
IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP00/IP00	IP20/IP20
IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP30/IP10	IP10/IP00	IP20/IP20
CCC									
See page 8/96				See page 8/100					See page 8/112

[1] Applies to degree of pollution 3
(for degree of pollution 2, use up to U_i 1000 V possible)
[2] If optional infeed terminal is used max. 160 A
[3] Max. 9 W for operation up to 160 A
[4] 3NP1 NH000 in narrow design only has IEC approval

© Siemens 2022

3NP1 fuse switch disconnectors

System overview

Basic units



1, 3, 4-pole for floor mounting



3 and 4-pole mounting on busbar systems

Connection parts



Terminals for retrofitting to 3NP1



Auxiliary conductor connections




3-phase busbars

Assembly kits




DIN-rail mounting




Mechanical connection



1/4-pole busbar mounting



Locking function




Protection against power theft

Masking frames and covers



Masking frames and supports



Cable connection covers



Reach-around protection for busbar

Other accessories



Auxiliary switches



Isolating blades



Fuse carriers with and without fuse monitoring

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

General information

3NA COM LV HRC fuse link



The new the 3NA COM LV HRC fuse links with communication and measuring function make your products communication-capable.

See Fuse Systems, page 7/42

Modular design

Directly to 3NP1 configurator under: sie.ag/3IlXQZH




The 3NP1 fuse switch disconnector has a modular design.
A wide variety of switch combinations can be created by connecting two devices or by subsequently fitting accessories. All common switch combinations are available from the factory ready for installation and can be found on the following ordering overviews. An overview of the possibilities offered by the modular design is provided on these information pages.

The fastest and simplest way to find the right switch combination is to use our 3NP1 configurator in the Siemens Industry Mall.

Number of poles

You will find further information under: sie.ag/2UlrAvy




3NP1 fuse switch disconnectors are available from the factory in 1, 3 and 4-pole device versions.
4-pole types are available in all common versions from the factory ready for installation (without fuse monitoring, N-pole on the right-hand side).

All other conceivable device combinations, such as 2-pole 3NP1s, 4-pole with fuse monitoring or with a neutral conductor on the left-hand side can simply be put together on site by combining two 3NP1s.
All that is needed for this in addition to the two 3NP1 basic units is the matching connection assembly kit (see accessories).


Floor mounting and DIN rail

You will find further information under: sie.ag/2UlrAvy



All sizes of the 3NP1 fuse switch disconnectors are available in floor mounting versions.

The 3NP1 is mounted on a mounting panel with screws.



The devices for floor mounting of sizes 000, 00 and 1 can also be mounted on a DIN rail using accessories. For this purpose, the assembly kit for mounting on a DIN rail is simply mounted on the rear panel of the 3NP1.


© Siemens 2022

3NP1 fuse switch disconnectors


General information

Mounting on busbar systems

You will find further information under: sie.ag/2UlrAvy




3-pole and 4-pole 3NP1 are available for mounting on busbar systems. In the case of 4-pole devices, the infeed for the fourth pole is supplied by the neutral conductor bar located above the 3 phases.



1-pole 3NP1 devices for wall mounting in sizes 000 and 00 can be adapted to the 8US 60 mm busbar system using the assembly kit for 1-pole busbar mounting. Due to the modular design of the assembly kit, any phase can be selected for the infeed.

Fuse monitoring

You will find further information under: sie.ag/2UlrAvy



MFM EFM10/15 EFM20/25

The fuse monitoring is used to detect, indicate and signal that a fuse has tripped.

The fuse monitors are permanently installed on the handle of the 3NP1. They have floating contacts for remote signaling of a tripped fuse and also indicate this locally.

Various versions of fuse monitors are available, which can be selected to suit the requirements of the application (functionality, see table).

MFM electromechanical fuse monitoring with an installed SIRIUS circuit breaker

EFM electronic fuse monitoring with evaluation electronics
The EFM15 series is a cost-optimized version of the EFM10. EFM20/25 are versions with additional functions (display indication, detection and signaling of overvoltage/undervoltage with adjustable limits, phase failure detection).

Common combinations of the 3NP1 basic unit and fuse monitoring are available from the factory ready for installation. A fuse monitor can also be easily retrofitted by replacing the fuse carrier. (Fuse carriers for all fuse monitoring versions are available as accessories.)

Note:
Fuses with insulated grip lugs cannot be used for 3NP1 with fuse monitoring.


		MFM 3-pole	EFM10 3-pole	EFM15					EFM20 3-pole	EFM25 3-pole
				1-pole			3-pole			
				AC/DC	AC	DC	AC	DC		
Local indication	Toggle switch position	■	-	-	-	-	-	-	-	-
	Indication via LEDs for each phase	-	■	■	■	■	■	■	-	-
	Indication via display for each phase	-	-	-	-	-	-	-	■	■
External power supply required		-	-	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	-	-
Permissible operational voltage	AC	Max. 690 V	230 ... 690 V	24 ... 230 V	110 ... 690 V	-	190 ... 690 V	-	230 ... 690 V	-
	DC	Max. 440 V	-	24 ... 250 V	-	120 ... 440 V	-	220 ... 440 V	-	220 ... 440 V
Detection and indication of	Overvoltage	-	-	-	-	-	-	-	■	■
	Undervoltage	-	-	-	-	-	-	-	■	■
	Phase failure	-	-	-	-	-	-	-	■	-

System overview, page 8/82

© Siemens 2022

Electrical connection

You will find further information under: sie.ag/2UlrAvy

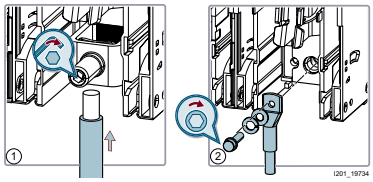


3NP1 are available in versions with box terminals (all sizes) or flat terminals (sizes 00 and larger).

Various additional types of terminal are available as accessories for adaptation to the respective wiring situation, e.g. prism, saddle or three-tier terminals.

Other accessories


You will find further information under: sie.ag/2UlrAvy

Auxiliary switches



Auxiliary switches enable remote querying of the switch position of the 3NP1. Up to two auxiliary switches can be installed.

Power theft



The assembly kit for protection from power theft seals the holes on the front of the 3NP1 (for voltage testing) permanently, which reliably prevents unauthorized access to live parts.


Isolating blades



4-pole 3NP1s are used in 3-phase AC systems with switched neutral conductors. They are supplied without an isolating blade for the N pole. The switching instant is selected by choosing the appropriate isolating blade.

Suitable fuses

You will find further information under: sie.ag/2UlrAvy



The 3NP5 fuse switch disconnector is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for
cable and line protection and motor protection.
Fuses for semiconductor protection (Siemens trademark SITOR) can also be used. However, some of these fuses have substantially higher power losses than fuses according to IEC 60269-2. This means that the load current has to be reduced until the value that is permissible in the fuse switch disconnector is not exceeded.
For use of SITOR semiconductor fuses, ready-made derating tables are available in the linked document.

System overview, page 8/82

© Siemens 2022

3NP1 fuse switch disconnectors

For a complete and valid configuration of your fuse switch disconnectors, please use our online configurator at www.siemens.com/lowvoltage/3np1-configurator

		Flat terminals			
		NH00	NH1	NH2	NH3
					
Fuse monitoring	**Number of poles**	**I_u = 160 A**	**I_u = 250 A**	**I_u = 400 A**	**I_u = 630 A**
Floor mounting					
Without	1-pole	3NP1131-1CA10	3NP1141-1DA10	3NP1151-1DA10	3NP1161-1DA10
	3-pole	3NP1133-1CA10	3NP1143-1DA10	3NP1153-1DA10	3NP1163-1DA10
	4-pole	3NP1134-1CA10	3NP1144-1DA10	3NP1154-1DA10	3NP1164-1DA10
MFM	3-pole	3NP1133-1CA11	3NP1143-1DA11	3NP1153-1DA11	3NP1163-1DA11
EFM10	3-pole	3NP1133-1CA12	3NP1143-1DA12	3NP1153-1DA12	3NP1163-1DA12
EFM15	1-pole	3NP1131-1CA14	3NP1141-1DA14	3NP1151-1DA14	3NP1161-1DA14
	3-pole	3NP1133-1CA14	3NP1143-1DA14	3NP1153-1DA14	3NP1163-1DA14
EFM20	3-pole	3NP1133-1CA13	3NP1143-1DA13	3NP1153-1DA13	3NP1163-1DA13
Mounting on 60 mm busbar systems with reach-around protection for Siemens 8US					
Without FM	3-pole	3NP1133-1BC10	3NP1143-1BC10	3NP1153-1BC10	3NP1163-1BC10
	4-pole	3NP1134-1BC10	3NP1144-1BC10	3NP1154-1BC10	3NP1164-1BC10
MFM	3-pole	3NP1133-1BC11	3NP1143-1BC11	3NP1153-1BC11	3NP1163-1BC11
EFM10	3-pole	3NP1133-1BC12	3NP1143-1BC12	3NP1153-1BC12	3NP1163-1BC12
EFM15	3-pole	3NP1133-1BC14	3NP1143-1BC14	3NP1153-1BC14	3NP1163-1BC14
EFM20	3-pole	3NP1133-1BC13	3NP1143-1BC13	3NP1153-1BC13	3NP1163-1BC13
Mounting on 60 mm busbar systems with reach-around protection for Rittal					
Without FM	3-pole	3NP1133-1JC10	3NP1143-1JC10	3NP1153-1JC10	3NP1163-1JC10
MFM	3-pole	3NP1133-1JC11	3NP1143-1JC11	3NP1153-1JC11	3NP1163-1JC11
EFM10	3-pole	3NP1133-1JC12	3NP1143-1JC12	3NP1153-1JC12	3NP1163-1JC12
EFM20	3-pole	3NP1133-1JC13	3NP1143-1JC13	3NP1153-1JC13	3NP1163-1JC13
Mounting on 40 mm busbar systems with reach-around protection for Siemens 8US					
Without FM	3-pole	3NP1133-1BB10	–	–	–
MFM	3-pole	3NP1133-1BB11	–	–	–
EFM10	3-pole	3NP1133-1BB12	–	–	–
EFM20	3-pole	3NP1133-1BB13	–	–	–
Mounting on 40 mm busbar systems with reach-around protection for Rittal					
Without FM	3-pole	3NP1133-1JB10	–	–	–
MFM	3-pole	3NP1133-1JB11	–	–	–
EFM10	3-pole	3NP1133-1JB12	–	–	–
EFM20	3-pole	3NP1133-1JB13	–	–	–

Notes:
- On the 3NP1 with fuse monitoring, the permissible operating voltage is limited by the fuse monitoring
- Permissible operational voltage with fuse monitoring:
  - MFM AC max. 690 V (L – L)/max. 440 V (L+ – L–)
  - EFM10 230 ... 690 V AC (L – L)
  - EFM15 3-pole 190 ... 690 V AC (L – L)
  - EFM15 1-pole 24 ... 240 V AC (L – N)/24 ... 250 V DC (L+ – L–)
  - EFM20 230 ... 690 V AC (L – L)
- Additional variants are available as accessories:
  - EFM15 with further operating voltage ranges
  - EFM25 – DC version of the EFM20
- Devices for busbar mounting with reach-around protection
  - For Siemens 8US, mounting is possible on the Wöhner Classic and Rittal RiLine systems without a floor pan
  - For Rittal, mounting is possible on the RiLine60 system with a floor pan

Quick selection guide, page 8/80

© Siemens 2022

Box terminals

NH000 narrow	NH000	NH00	NH1	NH2	NH3
					
I_u = 125 A	I_u = 125 A [2]	I_u = 160 A	I_u = 250 A	I_u = 400 A	I_u = 630 A
–	3NP1121-1CA20	3NP1131-1CA20	3NP1141-1DA20	3NP1151-1DA20	3NP1161-1DA20
–	3NP1123-1CA20	3NP1133-1CA20	3NP1143-1DA20	3NP1153-1DA20	3NP1163-1DA20
–	3NP1124-1CA20	3NP1134-1CA20	3NP1144-1DA20	3NP1154-1DA20	3NP1164-1DA20
–	–	3NP1133-1CA21	3NP1143-1DA21	3NP1153-1DA21	3NP1163-1DA21
–	3NP1123-1CA22	3NP1133-1CA22	3NP1143-1DA22	3NP1153-1DA22	3NP1163-1DA22
–	3NP1121-1CA24	3NP1131-1CA24	3NP1141-1DA24	3NP1151-1DA24	3NP1161-1DA24
–	3NP1123-1CA24	3NP1133-1CA24	3NP1143-1DA24	3NP1153-1DA24	3NP1163-1DA24
–	3NP1123-1CA23	3NP1133-1CA23	3NP1143-1DA23	3NP1153-1DA23	3NP1163-1DA23
3NP1113-1BC20 [1]	3NP1123-1BC20	3NP1133-1BC20	3NP1143-1BC20	3NP1153-1BC20	3NP1163-1BC20
–	3NP1124-1BC20	3NP1134-1BC20	3NP1144-1BC20	3NP1154-1BC20	3NP1164-1BC20
–	–	3NP1133-1BC21	3NP1143-1BC21	3NP1153-1BC21	3NP1163-1BC21
–	3NP1123-1BC22	3NP1133-1BC22	3NP1143-1BC22	3NP1153-1BC22	3NP1163-1BC22
–	3NP1123-1BC24	3NP1133-1BC24	3NP1143-1BC24	3NP1153-1BC24	3NP1163-1BC24
–	3NP1123-1BC23	3NP1133-1BC23	3NP1143-1BC23	3NP1153-1BC23	3NP1163-1BC23
3NP1113-1BC20 [1]	3NP1123-1JC20	3NP1133-1JC20	3NP1143-1JC20	3NP1153-1JC20	3NP1163-1JC20
–	–	3NP1133-1JC21	3NP1143-1JC21	3NP1153-1JC21	3NP1163-1JC21
–	3NP1123-1JC22	3NP1133-1JC22	3NP1143-1JC22	3NP1153-1JC22	3NP1163-1JC22
–	3NP1123-1JC23	3NP1133-1JC23	3NP1143-1JC23	3NP1153-1JC23	3NP1163-1JC23
–	3NP1123-1BB20	3NP1133-1BB20	–	–	–
–	–	3NP1133-1BB21	–	–	–
–	3NP1123-1BB22	3NP1133-1BB22	–	–	–
–	3NP1123-1BB23	3NP1133-1BB23	–	–	–
–	3NP1123-1JB20	3NP1133-1JB20	–	–	–
–	–	3NP1133-1JB21	–	–	–
–	3NP1123-1JB22	3NP1133-1JB22	–	–	–
–	3NP1123-1JB23	3NP1133-1JB23	–	–	–

[1] The direction of the cable outlet for the load side cannot be changed on size NH000, narrow design
3NP1113-1BC20 → Cable outlet at the bottom
3NP1113-2BC20 → Cable outlet at the top

[2] If optional infeed terminal is used max. 160 A

8

Quick selection guide, page 8/80

© Siemens 2022


3NP1 fuse switch disconnectors

Accessories

Connection technology – Terminals

- For adaptation to the respective wiring situation
- Contain enough parts to retrofit one side of a 3NP1 accordingly (three terminals for 3-pole 3NP1, one terminal for 1-pole unit)
- If the incoming cable and cable outlet are retrofitted, two packages must be ordered


Saddle terminals



- Allows connection of stripped circular conductors to 3NP1 with flat terminals

Connection	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
	1.5 ... 70 mm²	3NP1931-1BA00	3NP1933-1BA00			■			
	70 ... 120 mm²	3NP1941-1BA00	3NP1943-1BA00				■		
	120 ... 240 mm²	3NP1951-1BA00	3NP1953-1BA00					■	
	150 ... 300 mm²	3NP1961-1BA00	3NP1963-1BA00						■


Prism terminals



- Allows connection of stripped circular conductors to 3NP1 with flat terminals
- Also approved for connection of aluminum conductors, available for one or two conductors

Type	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Single	35 ... 95 mm²	3NP1931-1BB10	3NP1933-1BB10			■			
	70 ... 150 mm²	3NP1941-1BB10	3NP1943-1BB10				■		
	120 ... 240 mm²	3NP1951-1BB10	3NP1953-1BB10					■	
	150 ... 300 mm²	3NP1961-1BB10	3NP1963-1BB10						■
Double	2× 35 ... 70 mm²	3NP1941-1BB20	3NP1943-1BB20				■		
	2× 70 ... 120 mm²	3NP1951-1BB20	3NP1953-1BB20					■	
	2× 150 ... 185 mm²	3NP1961-1BB20	3NP1963-1BB20						■


Three-tier terminal



- Distributes one outgoing feeder directly to three smaller loads

Type	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
For 3NP1 with flat terminals	3× 1.5 ...16 mm²	3NP1931-1BE10	3NP1933-1BE10			■			
For 3NP1 with box terminals	3× 1.5 ...16 mm²	3NP1921-1BE20	3NP1923-1BE20		■	■			


Connection module



- Used with a 3NP1 for busbar mounting if a masking frame is to be supported on the 32 mm cover plane (installation of the terminals under the masking frame)
- For 3NP1 with flat terminals

Type	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Connection module	3× 6 ... 70 mm²	3NP1931-1BC00	3NP1933-1BC00			■			

Infeed terminal



- Extends the conductor cross-section of a 000 with box terminal to up to 95 mm²

Version	Conductor cross-section	1-pole Article No.	3-pole Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Infeed terminal	16 ... 95 mm²	3NP1921-1BD00	3NP1923-1BD00		■				


8

System overview, page 8/82

© Siemens 2022

Connection technology


Auxiliary conductor connections



- For connecting small loads directly to the terminals of the 3NP1
- Connection via commercially available flat tab sleeves 6.3 × 0.8 mm, max. 5 A load
- Scope of supply: 3 units

3NP1 connection	Article No.	3-pole NH000 narrow	3-pole NH000	3-pole NH00	3-pole NH1	3-pole NH2	3-pole NH3
With flat terminals	3NP1933-1BG10			■			
	3NP1943-1BG10				■		
	3NP1943-1BG10					■	
	3NP1943-1BG10						■
With box terminals	3NP1923-1BG40	■	■				
	3NP1933-1BG40			■			
	3NP1943-1BG40				■		
	3NP1953-1BG40					■	
	3NP1953-1BG40						■
With retrofitted prism and saddle terminals	3NP1933-1BG30			■			
	3NP1943-1BG30				■		
	3NP1953-1BG30					■	
	3NP1953-1BG30						■

3-phase busbar system



- For connection of up to 4 3NP1 NH000 for floor mounting on the infeed side
- Infeed is routed through infeed terminals
- With the connection bar, two blocks of bridged 3NP1 can be connected
- Using the cover cap, the connection tags of the busbar are covered on unused feeders to ensure they are safe to touch
- The maximum current-carrying capacity of the interconnected 3NP1 is 225 A in total for the 3-phase busbar system

Version	Scope of supply	Article No.	3-pole NH000
For 2× 3NP1	1 pack = 5 units	3NP1923-1BF20	■
For 3× 3NP1	1 pack = 5 units	3NP1923-1BF30	■
For 4× 3NP1	1 pack = 3 units	3NP1923-1BF40	■
Connection bars	1 pack = 3 units	3NP1923-1BF50	■
Covering caps	1 pack = 20 units	3NP1923-1BF10	■
Infeed terminal	1 pack = 3 units	3NP1923-1BD00	■






System overview, page 8/82

© Siemens 2022

3NP1 fuse switch disconnectors

Accessories

Assembly kits


		NH000 narrow	NH000	NH00	NH1	NH2	NH3
Retrofitting of locking function							
 • For all versions of the 3NP1 • If required for locking with a padlock (not necessary for the 1-pole 3NP1)							
Scope of supply	**Article No.**						
1 pack = 10 units	3NP1900-1HA00		■	■	■	■	■
Protection against power theft							
 • Closes the holes on the front of the 3NP1 (holes for voltage testing) and secures the front window such that power theft is not possible without visible damage to the 3NP1 (when the 3NP1 is locked or sealed)							
Scope of supply	**Article No.**						
1 pack is sufficient to equip 5 3NP1 units, 2.5 units for NH000, narrow design	3NP1900-1EF00	■	■	■	■	■	■
Mechanical connection of 1-pole and 3-pole 3NP1 devices							
 • For 3NP1 with floor mounting • By combining two 3NP1s for floor mounting, any 2-pole and 4-pole devices can be created							
	Article No.						
	3NP1921-1EC00		■				
	3NP1931-1EC00			■			
	3NP1941-1EC00				■	■	■
4-pole connecting kit for mounting on a 8US 60-mm busbar							
 • Connects a 3-pole 3NP1 for busbar mounting 60 mm 8US to a 1-pole 3NP1 for floor mounting • The 1-pole 3NP1 switches the neutral conductor of a 3+N system in this combination							
3NP1 connection	**Article No.**						
With flat terminals	3NP1934-1ED20			■			
With box terminals	3NP1924-1ED10		■				
	3NP1934-1ED10			■			
With flat terminals or box terminals	3NP1944-1ED00				■		
	3NP1954-1ED00					■	■
1-pole connecting kit for mounting on a 8US 60-mm busbar							
 • Permits adaptation of a 1-pole 3NP1 for floor mounting to a 3-pole busbar system • The feeding busbar (L1, L2 or L3) can be chosen freely • If two such 3NP1 are combined by mechanical connection using the assembly kit, 2-pole 3NP1 for busbar mounting can also be assembled							
3NP1 connection	**Article No.**						
With box terminals	3NP1921-1EE10		■				
	3NP1931-1EE10			■			

8

System overview, page 8/82

© Siemens 2022

Assembly kits



- Must be mounted on the rear of a 3NP1 for floor mounting
- Mounting of the 3NP1 on a DIN rail is achieved for size NH000 by mounting on a DIN rail, and for sizes NH00 and NH1 between two DIN rails that are 125 or 150 mm apart

	1/2-pole	3-pole	4-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Assembly kits for mounting on DIN rail									
	Article No.	Article No.	Article No.						
	3NP1921-1EA00	3NP1923-1EA00	3NP1924-1EA00		■				
	3NP1931-1EB00	3NP1933-1EB00	3NP1933-1EB00			■			
	3NP1943-1EB00	3NP1943-1EB00	3NP1943-1EB00				■		

8





System overview, page 8/82

© Siemens 2022

3NP1 fuse switch disconnectors

Accessories

Masking frames and covers

	1-pole	3-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Masking frames								
 • Used to cover an existing gap for a masking frame mounted on the application side								
Outer dimensions (H×W)	**Article No.**	**Article No.**						
215 × 130 mm	–	3NP1923-1DA00		■				
215 × 130 mm	–	3NP1933-1DA00			■			
375 × 220 mm	–	3NP1943-1DA00				■		
375 × 245 mm	–	3NP1953-1DA00					■	
375 × 290 mm	–	3NP1963-1DA00						■
Masking frame supports								
 • Are mounted on the side of the 3NP1 and prevent the supported masking frame from sagging (pack of 2 units)								
	Article No.	**Article No.**						
	3NP1923-1CF00	3NP1923-1CF00		■				
	–	3NP1913-1CF00	■					
	3NP1933-1CF00	3NP1933-1CF00			■			
	3NP1943-1CF00	3NP1943-1CF00				■	■	■
Cable connection covers								
 • Extends the terminal covers integrated in the 3NP1 • In the version with rear reach-around protection, the underside is also covered								
Version	**Article No.**	**Article No.**						
Without rear reach-around protection	3NP1921-1CB00	3NP1923-1CB00 [1]		■				
	–	3NP1913-1CB00	■					
	3NP1931-1CB00	3NP1933-1CB00 [2]			■			
	3NP1941-1CB00	3NP1943-1CB00				■		
	3NP1951-1CB00	3NP1953-1CB00					■	
	3NP1961-1CB00	3NP1963-1CB00						■
With rear reach-around protection	–	3NP1933-1CC00 [1]			■			
	3NP1931-1CD00	3NP1933-1CD00 [3]			■			
	3NP1941-1CD00	3NP1943-1CD00				■		
	3NP1951-1CD00	3NP1953-1CD00					■	
	3NP1961-1CD00	3NP1963-1CD00						■
Reach-around protection for busbar (spare part)								
 • Covers the busbar • For conversion of a 3NP1 to another busbar system								
For busbar systems	**Article No.**	**Article No.**						
Siemens 8US	–	3NP1923-1CA10		■				
	–	3NP1913-1CA10	■					
	–	3NP1933-1CA10			■			
	3NP1941-1CA10	–				■	■	■
	–	3NP1943-1CA10				■		
	–	3NP1953-1CA10					■	
	–	3NP1963-1CA10						■
Siemens 8US compact	–	3NP1923-1CA30		■				
Rittal	–	3NP1923-1CA20		■				
	–	3NP1913-1CA10						
	–	3NP1933-1CA20			■			
	–	3NP1943-1CA20				■		
	–	3NP1953-1CA20					■	
	–	3NP1963-1CA20						■


[1] Only for 3NP1 for mounting on busbar systems
[2] Only for 3NP1 with flat terminals
[3] Only for 3NP1 with flat terminals for floor mounting

System overview, page 8/82

© Siemens 2022

Other accessories


Auxiliary switches



- Up to 2 auxiliary switches can be mounted
- From size NH00, it is possible to choose whether the auxiliary switch will switch simultaneously with the fuses or leading on switch-on. (only leading possible for size NH000)

Contacts	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
1 CO	3NP1920-1FA00		■				
	3NP1910-1FA00	■					
	3NP1930-1FA00			■			
	3NP1940-1FA00				■	■	■
1 CO, solid-state compatible	3NP1920-1FB00		■				
	3NP1930-1FB00			■			
	3NP1940-1FB00				■	■	■

Isolating blades



- Are used if only the isolating function of a 3NP1 is required and not protection with fuses or in the neutral conductor of a 4-pole 3NP1.
- The isolating blade, which is leading on switch-on and lagging on switch-off, is used in the neutral conductor of a 4-pole 3NP1 if shifting of the neutral point of the 3+N system has to be avoided during switching.

Version	Article No.	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Switching simultaneously with fuses	3NG1002		■	■			
	3NG1202				■		
	3NG1302					■	
	3NG1402						■
Leading switch-on, lagging switch-off	3NP1924-1MA20		■				
	3NP1934-1MA20			■			
	3NP1944-1MA20				■		
	3NP1954-1MA20					■	
	3NP1964-1MA20						■

System overview, page 8/82

© Siemens 2022

3NP1 fuse switch disconnectors

Other accessories

		1-pole	3-pole	NH000 narrow	NH000	NH00	NH1	NH2	NH3
Fuse carriers (spare part)									
	• For retrofitting fuse monitoring on an existing 3NP1								
Version		**Article No.**	**Article No.**						
	Standard – without fuse monitoring	3NP1921-1GA00	3NP1923-1GA00		■				
		–	3NP1913-1GA00	■					
		3NP1931-1GA00	3NP1933-1GA00			■			
		3NP1941-1GA00	3NP1943-1GA00				■		
		3NP1951-1GA00	3NP1953-1GA00					■	
		3NP1961-1GA00	3NP1963-1GA00						■
	MFM - for operating voltage 24 ... 690 V AC (L-L)/ 24 ... 240 V DC (L+ - L-)	–	3NP1923-1GB10		■				
		–	3NP1933-1GB10			■			
		–	3NP1943-1GB10				■		
		–	3NP1953-1GB10					■	
		–	3NP1963-1GB10						■
	EFM10 - for operating voltage 230 ... 690 V AC (L-L)	–	3NP1923-1GB20		■				
		–	3NP1933-1GB20			■			
		–	3NP1943-1GB20				■		
		–	3NP1953-1GB20					■	
		–	3NP1963-1GB20						■
	EFM15 - for operating voltage 24 ... 240 V AC (L - N)/ 24 ... 250 V DC (L+ - L-)	3NP1921-1GB43	–		■				
		3NP1931-1GB43	–			■			
		3NP1941-1GB43	–				■		
		3NP1951-1GB43	–					■	
		3NP1961-1GB43	–						■
	EFM15 - for operating voltage 110 ... 690 V AC (L - N)	3NP1921-1GB41	–		■				
		3NP1931-1GB41	–			■			
		3NP1941-1GB41	–				■		
		3NP1951-1GB41	–					■	
		3NP1961-1GB41	–						■
	EFM15 - for operating voltage 120 ... 440 V DC (L - N)	3NP1921-1GB44	–		■				
		3NP1931-1GB44	–			■			
		3NP1941-1GB44	–				■		
		3NP1951-1GB44	–					■	
		3NP1961-1GB44	–						■
	EFM15 - for operating voltage 190 ... 690 V AC (L - L)	–	3NP1923-1GB42		■				
		–	3NP1933-1GB42			■			
		–	3NP1943-1GB42				■		
		–	3NP1953-1GB42					■	
		–	3NP1963-1GB42						■
	EFM15 - for operating voltage 220 ... 440 V DC (L+ - L-)	–	3NP1923-1GB45		■				
		–	3NP1933-1GB45			■			
		–	3NP1943-1GB45				■		
		–	3NP1953-1GB45					■	
		–	3NP1963-1GB45						■
	EFM20 - for operating voltage 230 ... 690 V AC (L - L)	–	3NP1923-1GB30		■				
		–	3NP1933-1GB30			■			
		–	3NP1943-1GB30				■		
		–	3NP1953-1GB30					■	
		–	3NP1963-1GB30						■
	EFM25 - for operating voltage 220 ... 440 V DC (L+ - L-)	–	3NP1923-1GB50		■				
		–	3NP1933-1GB50			■			
		–	3NP1943-1GB50				■		
		–	3NP1953-1GB50					■	
		–	3NP1963-1GB50						■

8

System overview, page 8/82

© Siemens 2022

System overview, page 8/82

© Siemens 2022

3NP5 fuse switch disconnectors

System overview

Basic units



Floor mounting



For 40 mm busbar system

Connection parts



Clamp terminals



Busbar adapters for 60 mm systems

Masking frames and covers



Molded-plastic masking frames



Cable connection covers

Other accessories



Auxiliary switches



Arc chutes



Assembly kits for flush mounting



Fuse carriers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

General information

3NA COM LV HRC fuse link



The new the 3NA COM LV HRC fuse links with communication and measuring function make your products communication-capable.

See Fuse Systems, page 7/50

System description

You will find further information under:
sie.ag/2UlrAvy



3NP50



3NP52




3NP54

The 3NP5 fuse switch disconnector is an extremely robust device for extreme operating conditions.
The fuse carrier has a pretensioned spring that prevents accidental, slow closure.
All 3NP5 are designed for mounting on a mounting plate. Size NH00 is also available in versions for 40 mm busbar systems.
All sizes can also be mounted using adapters on 60 mm busbar systems.

Suitable fuses

You will find further information under:
sie.ag/2UlrAvy



The 3NP5 fuse switch disconnector is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for cable and line protection and motor protection.
Fuses for semiconductor protection (Siemens trademark SITOR) can also be used. However, some of these fuses have substantially higher power losses than fuses according to IEC 60269-2. This means that the load current has to be reduced until the value that is permissible in the fuse switch disconnector is not exceeded.
For use of Siemens SITOR semiconductor fuses, ready-made derating tables are available in the linked document.

© Siemens 2022

3NP5 fuse switch disconnectors

		Flat terminals			
		NH00	NH1	NH2	NH3
					
Types of mounting	**Auxiliary switches**	**I_u = 160 A**	**I_u = 250 A**	**I_u = 400 A**	**I_u = 630 A**
Without fuse monitoring					
Floor mounting	Without	3NP5060-0CA00	3NP5260-0CA00	3NP5360-0CA00	3NP5460-0CA00
	1 NO + 1 NC	3NP5060-0CA10	3NP5260-0CA10	3NP5360-0CA10	3NP5460-0CA10
Mounting on 40 mm busbar systems	Without	3NP5065-1CF00	–	–	–
	1 NO + 1 NC	3NP5065-1CF10	–	–	–
Electromechanical fuse monitoring with 1 NO + 1 NC as a signaling contact					
Floor mounting	1 NO + 1 NC	3NP5060-0EA86	3NP5260-0EA86	3NP5360-0EA86	3NP5460-0EA86
Mounting on 40 mm busbar systems	1 NO + 1 NC	3NP5065-1EF86	–	–	–
Electromechanical fuse monitoring with 2 NO as a signaling contact					
Floor mounting	1 NO + 1 NC	3NP5060-0EA26	3NP5260-0EA26	3NP5360-0EA26	3NP5460-0EA26
Mounting on 40 mm busbar systems	1 NO + 1 NC	3NP5065-1EF26	–	–	–

8

Accessories

Clamp terminals



Version	Scope of supply	Article No.	NH00	NH1	NH 2	NH3
For retrofitting to 3NP5 with flat terminals	3 units	3NY1903	■			
		3NY1907		■		

Busbar adapters



- For 60 mm busbar system

Version	Article No.	NH00	NH1	NH 2	NH3
For adaptation of a 3NP5, for floor mounting on a 60-mm busbar system	8US1291-4SB00	■			
	8US1210-4AG00		■	■	■

Covers for cable lug connections



Version	Scope of supply	Article No.	NH00	NH1	NH 2	NH3
Can be screwed onto the free end of the screw	6 units	3NY1241		■		
		3NY1245			■	■

Covers for 3NP5, with auxiliary switch mounted



- With punched cutouts for auxiliary switches

Color	Version	Dimensions	Article No.	NH00	NH1	NH 2	NH3
Gray	Flat	215 × 135 mm	3NY1115	■			
Black	Flat, with additional bending edges	290 × 135 mm	3NY1116	■			

Covers for 3NP5, without auxiliary switches mounted



- With prepunched cutouts for retrofitting an auxiliary switch

Color	Version	Dimensions	Article No.	NH00	NH1	NH 2	NH3
Gray	Flat	215 × 135 mm	3NY1105	■			
Black	Flat	290 × 135 mm	3NY1106	■			
	Angled	265 × 135 mm	3NY1107	■			
	Flat, with additional bending edges	290 × 135 mm	3NY1108	■			

Auxiliary switches



Version	Article No.	NH00	NH1	NH 2	NH3
1 NO + 1 NC, including mounting kit	3NY3033	■			
	3NY3034		■	■	■

Quick selection guide, page 8/80

© Siemens 2022

Accessories

Arc chutes



- Spare part for arc chutes installed in the factory, one unit per switch is required for NH00, three units for NH1 to NH3

Article No.	NH00	NH1	NH 2	NH3
3NY4031	■			
3NY4011		■		
3NY4012			■	■

Assembly kits for flush mounting in front panel



Version	Article No.	NH00	NH1	NH 2	NH3
Assembly kit with cover and mounting accessories	3NY1208	■			
	3NY1210		■		
	3NY1211			■	
	3NY1212				■
Covers (spare part for assembly kit)	3NY1102		■		
	3NY1103			■	
	3NY1104				■

Fuse carriers



Version	Article No.	NH00	NH1	NH 2	NH3
Without fuse monitoring	3NY1074	■			
	3NY1371		■		
	3NY1372			■	
	3NY1373				■
With electromechanical fuse monitoring by circuit breakers, signaling contact 1 NO + 1 NC, without connecting cable	3NY1420	■			
	3NY1421		■		
	3NY1422			■	
	3NY1423				■
With electromechanical fuse monitoring, signaling contact 1 NO + 1 NC, without connecting cable	3NY1513-0	■			
	3NY1513-2		■		
	3NY1513-3			■	
	3NY1513-4				■

Connectors and connecting cables



Version	Length	Article No.	NH00	NH1	NH 2	NH3
For electromechanical fuse monitoring	1 m	3NY1910	■	■	■	■
	3 m	3NY1911	■	■	■	■
For electronic fuse monitoring	3 m	3NY1915	■	■	■	■

8

System overview, page 8/96

© Siemens 2022

3NJ4 fuse switch disconnectors

System overview

1-pole switchable


Standard


For integratable current transformers

3-pole switchable


Standard


For integratable current transformers


With electronic fuse monitoring


8

Accessories


Covers


Adapters on busbar systems


Mounting and assembly elements


Busbar connection assembly kits


Fuses


Current transformers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

General information

3NA COM LV HRC fuse link




The new the 3NA COM LV HRC fuse links with communication and measuring function make your products communication-capable.

See Fuse Systems, page 7/50

Suitable fuses

You will find further information under:
sie.ag/2UlrAvy




The 3NJ4 fuse switch disconnector is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for cable and line protection.

8

© Siemens 2022

3NJ4 fuse switch disconnectors

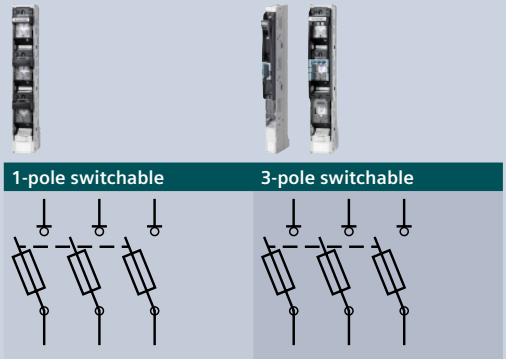


Connection	Size of fuse	Busbar center-to-center spacing	Rated operational current I_e		
Standard					
M8 flat connector	NH00/NH000 [1]	185 mm	160 A	3NJ4101-3BF01	3NJ4103-3BF01
	NH00/NH000	100 mm	160 A	–	3NJ4103-3BF02
F70 box terminal	NH00/NH000	100 mm	160 A	–	3NJ4103-3BR02
M10 flat connector	NH1	185 mm	250 A	3NJ4121-3BF01	3NJ4123-3BF01
M12 flat connector	NH2	185 mm	400 A	3NJ4131-3BF01	3NJ4133-3BF01
	NH3	185 mm	630 A	3NJ4141-3BF01	3NJ4143-3BF01
M12 stud terminal	NH1	185 mm	250 A	–	3NJ4123-3BJ01
	NH2	185 mm	400 A	–	3NJ4133-3BJ01
	NH3	185 mm	630 A	–	3NJ4143-3BJ01
M16 × 60 stud terminal	NH4a	185 mm	1250 A	3NJ5643-0BB00	–
V terminal	NH1	185 mm	250 A	–	3NJ4123-3BT01
	NH2	185 mm	400 A	–	3NJ4133-3BT01
	NH3	185 mm	630 A	–	3NJ4143-3BT01
For integratable current transformers					
M8 flat connector	NH00/NH000	100 mm	160 A	–	3NJ4103-3BF12
M10 flat connector	NH1	185 mm	250 A	3NJ4121-3BF11	3NJ4123-3BF11
M12 flat connector	NH2	185 mm	400 A	3NJ4131-3BF11	3NJ4133-3BF11
	NH3	185 mm	630 A	3NJ4141-3BF11	3NJ4143-3BF11
With electronic fuse monitoring devices EFM					
M8 flat connector	NH00/NH000	100 mm	160 A	–	3NJ4103-3CF02
M10 flat connector	NH1	185 mm	250 A	–	3NJ4123-3CF01
M12 flat connector	NH2 / NH1	185 mm	400 A	–	3NJ4133-3CF01
	NH3/NH2	185 mm	630 A	–	3NJ4143-3CF01
For integratable current transformers, with EFM electronic fuse monitoring					
M8 flat connector	NH00/NH000	100 mm	160 A	–	3NJ4103-3CF12
M10 flat connector	NH1	185 mm	250 A	–	3NJ4123-3CF11
M12 flat connector	NH2/NH1	185 mm	400 A	–	3NJ4133-3CF11
	NH3/NH2	185 mm	630 A	–	3NJ4143-3CF11
For secondary-side fusing of transformers and incoming block					
Flat connector 2× M12	NH3	185 mm	1000 A	–	3NJ4153-3BF01
Flat connector 2× M12	NH3	185 mm	1250 A	–	3NJ4183-3BF01
Flat connector 3× M12	NH3	185 mm	1600 A	–	3NJ4163-3BF01
Flat connector 4× M12	NH3	185 mm	2000 A	–	3NJ4173-3BF01

[1] If mounted together with device sizes NH1 to NH3, a 3NJ5930-3BB adapter is required as an accessory to compensate for differences in height.

Note:
- Fixing screws for mounting on busbars must be ordered separately.

Quick selection guide, page 8/80

© Siemens 2022

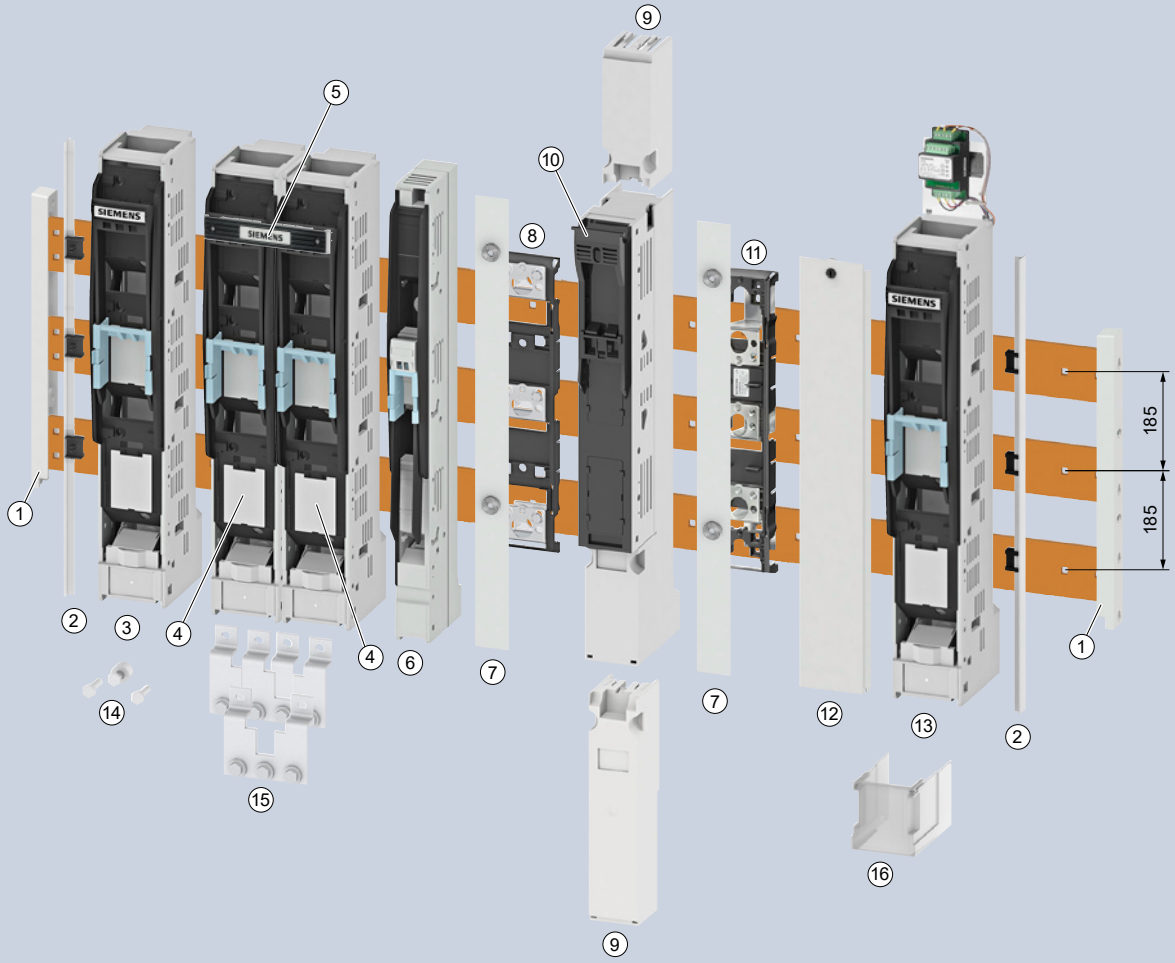

1 Busbar support
2 Lateral masking frame support
3 Switch disconnector, NH1
4 Switch disconnector, NH2
5 Coupling of operating handle
6 Switch disconnector, NH00, 185 mm
7 Unequipped section cover, 50 mm
8 Adapter, 185 mm to 185 mm
9 Cover, spacer
10 Switch disconnector, NH00, 100 mm
11 Adapter, 100 mm to 185 mm
12 Blanking cover, 633 x 100 mm
13 Switch disconnector, NH3, with EFM
14 Assembly kit, 2 x 240 mm²
15 Busbar connection assembly kit, 4 x 185 mm²
16 Cover, NH1-3

Quick selection guide, page 8/80

© Siemens 2022

3NJ4 fuse switch disconnectors

Accessories

Covers



- Additional touch protection when using cable lugs and as spacer

Size	Busbar center-to-center spacing	Version	Article No.
NH00	100 mm	Top and bottom	3NJ4912-1DA02
	185 mm	100 mm for bottom	3NJ4912-1FA01
		132 mm for top	3NJ4912-1FA00
NH1 ... NH3	Connection for top and bottom		3NJ4912-1AA01
NH3	For double in-line disconnectors		3NJ4912-1EA00

Blanking covers




Version	Length	Width	Busbar center-to-center spacing	Article No.
For switchboard cutout	299 mm	50 mm	100 mm only	3NJ4912-2CA00
	633 mm	50 mm		3NJ4912-2AA00
	633 mm	100 mm		3NJ4912-2BA00

Lateral masking frame supports

- 3 clips with T profile

Size	Article No.
NH00 ... NH3	3NJ4912-2DA00

Fixing clips



Scope of supply	Article No.
1 set = 4 units, including fixing accessories	3NJ4918-0AA00

Unequipped section covers



Busbar center-to-center spacing	Width	Article No.
185 mm	50 mm	3NJ4912-3AA00
	100 mm	3NJ4912-3BA01
100 mm	50 mm	3NJ4912-3CA00

Adapters for screw fixing on busbar systems



- Adapters for screw fixing on busbar systems with 185 mm busbar center-to-center spacing
- For mounting 2 fuse switch disconnectors

Version	Fuse switch disconnectors	Article No.
Adaptation to sizes 1 ... 3	From 100 mm to 185 mm	3NJ4918-0DA02
	From 185 mm to 185 mm	3NJ5930-3BB
Adaptation to sizes 1 ... 3, with busbar terminal	From 100 mm to 185 mm	3NJ4918-0DB02

Adapters for screw fixing on busbar systems



- For fitting one fuse switch disconnector (= 3 separate brackets)

Version	Article No.
Adaptation of 100 mm to busbar system with 60 mm busbar center-to-center spacing	3NJ4918-0EA00

Fixing screws

- For fitting 3NJ4103 switch disconnectors with integratable current transformers onto adapters

Scope of supply	Article No.
1 set = 3 units	3NJ4918-0DC02

[1] Touch protection only suitable for 3NJ4103-3BF02
[2] Touch protection only suitable for 3NJ4101-3BF01 and 3NJ4103-3BF01

Quick selection guide, page 8/100

© Siemens 2022

	3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
		■ [1]							
	■ [2]	■ [2]							
	■ [2]	■ [2]							
			■	■	■	■			■
					■	■	■	■	■
		■							
	■	■							
	■	■	■	■	■	■	■	■	■
			■	■	■				
	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■
	■	■	■	■	■	■	■	■	■
		■							
	■	■							
		■							
		■							
		■							

8

Quick selection guide, page 8/100

© Siemens 2022

3NJ4 fuse switch disconnectors

Accessories

Busbar supports



- For screwing on the busbars

Version	Article No.
For 100 and 185 mm busbar center-to-center spacing	3NJ5974-0AB

Grounding kit



Version	Article No.
With connecting cable 25 mm²	3NJ4910-1AA00

Busbar terminals



- Not for devices with transformer installation

Version	Article No.
For each fuse switch disconnector, 3 units are required	3NJ4911-3AA00
For more rapid mounting of the switch disconnectors onto the busbars (1 set = 3 units)	3NJ4911-3BA01

Saddle terminals



- 1 set = 3 units

Connection	Article No.
Cu 1.5 ... 70 mm²	3NJ4911-4AA00

Prism terminal assembly kits



- 1 set = 3 units

Connection	Article No.
Al/Cu 10 ... 70 mm²	3NJ4911-1AA00

Box terminal assembly kits



- For connection to version with flat connector
- 1 set = 3 units

Connection	Article No.
Al/Cu 95 ... 240 mm²	3NJ4911-2BQ00


Auxiliary switch mounting kits



- For 3-pole switchable switch disconnectors only

Version	Contacts	Article No.
For NH00 ... NH3 with connecting cables	1 CO	3NJ4913-1AA01

Mounting hook



- 1 per in-line disconnector required

Article No.
3NJ4918-1AA00

Distance compensation



Version	Article No.
For NH00	3NJ4915-1BA00
For fuse switch disconnectors, with integratable current transformers if no current transformer is built in	3NJ4915-2BA00

Terminal strips



Article No.
3NJ4915-1CA00

8

Quick selection guide, page 8/100

© Siemens 2022

3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
■	■	■	■	■	■	■	■	■
		■	■	■	■	■	■	■
■	■							
		■	■	■				
	■							
■	■							
		■	■	■				
■	■	■	■	■	■	■	■	■
		■	■	■				
	■							
		■	■	■				
	■							

8

Quick selection guide, page 8/100

© Siemens 2022

3NJ4 fuse switch disconnectors

Accessories


Busbar connection assembly kits for NH2 and NH3



- With flat terminals

Screws	Conductor cross-section	Article No.
M12	2× 240 mm²	3NJ4911-5AA00
	2× 300 mm²/3× 120 mm²	3NJ4911-5BA00
M16	1× 400 mm²	3NJ4911-5CA00

Busbar connection assembly kits for NH3



Version	Conductor cross-section	Article No.
For NH3 as double in-line disconnectors	3× 300 mm²/4× 185 mm²	3NJ4911-6AA00
	4× 240 mm²	3NJ4911-6BA00



Mechanical coupling of operating handles		3NJ4911-6CA00

Fuses NH3



- Minimum order quantity 3 units

Version	Article No.
For protection of transformers, 630 kVA, 909 A	3NJ4914-8AA00

Isolating blades NH3

Rated operational current I_e	Article No.
1250 A	3NJ4914-8BA00

Current transformers .../1 A





Rated primary current I_{pr}	Accuracy class	Rated power P_n	Article No.
100/1 A	0.5	1.5 VA	3NJ4915-1EA10
	1	2.0 VA	3NJ4915-1EA20
150/1 A	0.5	2.5 VA	3NJ4915-1FA10
	0.5 calibrated	2.5 VA	3NJ4915-1FA11
	1	3.0 VA	3NJ4915-1FA20
75/1 A	1	1.5 VA	3NJ4915-2DA20
100/1 A	0.5	1.5 VA	3NJ4915-2EA10
	1	2.0 VA	3NJ4915-2EA20
150/1 A	1	2.5 VA	3NJ4915-2FA20
250/1 A	0.5	2.5 VA	3NJ4915-2GA10
	0.5 calibrated	2.5 VA	3NJ4915-2GA11
	1	5.0 VA	3NJ4915-2GA20
400/1 A	0.5	2.5 VA	3NJ4915-2HA10
	0.5 calibrated	2.5 VA	3NJ4915-2HA11
	1	5.0 VA	3NJ4915-2HA20
500/1 A	0.5	2.5 VA	3NJ4915-2JA10
	1	5.0 VA	3NJ4915-2JA20
600/1 A	0.5	2.5 VA	3NJ4915-2KA10
	0.5 calibrated	2.5 VA	3NJ4915-2KA11
	1	5.0 VA	3NJ4915-2KA20

Quick selection guide, page 8/100

© Siemens 2022

3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
		■	■	■				
		■	■	■				
		■	■	■				
			■	■				
			■	■				
			■	■				
								■
					■	■	■	■
	■							
	■							
	■							
	■							
	■							
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				
		■	■	■				

8

Quick selection guide, page 8/100

© Siemens 2022

3NJ4 fuse switch disconnectors

Accessories

Current transformers .../5 A



Rated primary current I_{pr}	Accuracy class	Rated power P_n	Article No.
100/5 A	0.5	1.0 VA	3NJ4915-1EB10
	1	1.5 VA	3NJ4915-1EB20
150/5 A	0.5	1.5 VA	3NJ4915-1FB10
	0.5 calibrated	1.5 VA	3NJ4915-1FB11
	1	2.5 VA	3NJ4915-1FB20
75/5 A	1	1.5 VA	3NJ4915-2DB20
100/5 A	0.5	1.0 VA	3NJ4915-2EB10
	1	2.0 VA	3NJ4915-2EB20
150/5 A	0.5	1.5 VA	3NJ4915-2FB10
	1	2.5 VA	3NJ4915-2FB20
250/5 A	0.5	2.5 VA	3NJ4915-2GB10
	0.5 calibrated	2.5 VA	3NJ4915-2GB11
	1	3.75 VA	3NJ4915-2GB20
400/5 A	0.5	2.5 VA	3NJ4915-2HB10
	0.5 calibrated	2.5 VA	3NJ4915-2HB11
	1	5.0 VA	3NJ4915-2HB20
500/5 A	0.5	2.5 VA	3NJ4915-2JB10
	1	5.0 VA	3NJ4915-2JB20
600/5 A	0.5	2.5 VA	3NJ4915-2KB10
	0.5 calibrated	2.5 VA	3NJ4915-2KB11
	1	5.0 VA	3NJ4915-2KB20

Quick selection guide, page 8/100

© Siemens 2022

	3NJ4101	3NJ4103	3NJ412	3NJ413	3NJ414	3NJ415	3NJ416	3NJ417	3NJ418
		■							
		■							
		■							
		■							
		■							
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				
			■	■	■				

8

Quick selection guide, page 8/100

© Siemens 2022

5SG76 fuse switch disconnectors

System overview

MINIZED fuse switch disconnectors


1P


1P+N






2P


3P


3P+N

© Siemens 2022



Number of poles	1P	1P+N	2P	3P	3P+N
					

Size of fuse	Rated current I_n	Mounting width 1 MW	Mounting width 2 MW	Mounting width 2 MW	Mounting width 3 MW	Mounting width 4 MW
MINIZED fuse switch disconnectors						
D01	6 A [1]	5SG7611-0KK06	–	–	5SG7631-0KK06	–
	10 A	5SG7611-0KK10	–	–	5SG7631-0KK10	–
	16 A	5SG7611-0KK16	5SG7651-0KK16	5SG7621-0KK16	5SG7631-0KK16	5SG7661-0KK16

[1] For 2 A, 4 A, 6 A fuses


Note:
No NEOZED adapter sleeves are required for this type series

Quick selection guide, page 8/80


© Siemens 2022

Switch disconnectors with fuses

Quick selection guide



3KF LV HRC



Size			1	1	1	2	2	3	4	5	5
General technical specifications acc. to IEC 60947-3											
Basic data											
Rated uninterrupted current I_u		A	32	63	80	125	160	250	400	630	800
For fuse links acc. to IEC 60269-2			000 and 00					0 and 1	1 and 2	2 and 3	
Rated operational voltage U_e	At 50/60 Hz AC	V AC	690								
	At DC - 2 conducting paths in series	V DC	220								
	At DC - 3 conducting paths in series	V DC	440								
	At DC	V DC	–								
Operating and short-circuit behavior											
Rated operational current I_e [1]	At AC-21A | AC-21B at 400 V	A	32	63	80	125	160	250	400	630	800
	At AC-21A | AC-21B at 500 V	A	–	–	–	–	–	–	–	–	–
	At AC-21A | AC-21B at 690 V	A	32	63	80	125	160	250	400	630	800
	At AC-22A | AC-22B at 400 V	A	32	63	80	125	160	250	400	630	800
	At AC-22A | AC-22B at 500 V	A	–	–	–	–	–	–	–	–	–
	At AC-22A | AC-22B at 690 V	A	32	63	80	125	160	250	400	630	800
	At AC-23A | AC-23B at 400 V	A	32	63	80	125	160	250	400	630	800
	At AC-23A | AC-23B at 500 V	A	–	–	–	–	–	–	–	–	–
	At AC-23A | AC-23B at 690 V	A	32	63	80	125	160	250	400	630	800
	At DC-21A | DC-21B at 48 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 65 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 110 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 130 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 220 V	A	32	63	80	125	160	250	400	630	800
	At DC-21A | DC-21B at 400 V	A	–	–	–	–	–	–	–	–	–
	At DC-21A | DC-21B at 440 V	A	32	63	80	125	160	250	400	630	800
	At DC-22A | DC-22B at 48 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 65 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 110 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 130 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 220 V	A	32	63	80	125	160	250	400	630	800
	At DC-22A | DC-22B at 400 V	A	–	–	–	–	–	–	–	–	–
	At DC-22A | DC-22B at 440 V	A	32	63	80	125	160	250	400	630	800
	At DC-23A | DC-23B at 48 V	A	–	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 110 V	A	–	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 220 V	A	32	63	80	125	160	250	400	630	800
	At DC-23A | DC-23B at 400 V	A	–	–	–	–	–	–	–	–	–
	At DC-23A | DC-23B at 440 V	A	32	63	80	125	160	250	400	630	800
Motor switching capacity [2]	At AC-23A at 400 V	kW	15	30	37	55	90	132	220	355	400
	At AC-23A at 500 V	kW	18.5	37	55	75	110	160	280	400	560
	At AC-23A at 690 V	kW	30	55	75	110	132	250	400	630	800
Rated conditional short-circuit current with upstream fuse [3]	At 400/500 V AC	kA	100	100	100	100	100	100	100	100	100
	At 690 V AC	kA	100	100	100	100	100	100	100	80	80
Let-through current I_c of usable fuses, max. [3]	At 400/500 V AC	kA	11.8	11.8	11.8	18	18	33.7	37.1	77.4	77.4
	At 690 V AC	kA	11.5	11.5	11.5	25.5	25.5	37.7	47	65	65
Let-through current I^2t value of usable fuses, max. [3]	At 400/500 V AC	kA^2s	34	34	34	223	223	1500	2150	10400	10400
	At 690 V AC	kA^2s	55	55	55	360	360	940	2600	7000	7000
Maximum power loss of the usable fuses (per fuse)		W	6.5	7.5	8.5	11	12	25.5	34	48	60
Degree of protection											
Maximum IP degree of protection (with a rotary operating mechanism)						IP65				IP65	
Maximum IP degree of protection						–				–	



[1] Values valid even at +10% line voltage tolerance in case of AC

[2] Values are provided as a guide only and may vary depending on the make of motor

[3] Valid for combination of 3KF and fuse type 3NA/3ND, characteristic gG/aM

© Siemens 2022



3KF SITOR									3NJ63								5SG7		
																			
1	1	1	2	2	3	4	5	5	00	00	00	00	1	2	3	3	5SG71.	5SG7230	5SG7234.
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	63	63	63
000 and 00					0 and 1	1 and 2	2 and 3		000 and 00				1	1 and 2	2 and 3		D02	D02	D02
690									500 ... 690				690		230 ... 690		400, 415	400	400
220									230 ... 440				230 ... 440		–		130	110	–
440									–				–	–	–		–	–	–
–									–				–	–	–		65	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	160	–	–	–	630	–	–	–
32	63	80	125	160	250	400	630	800	–	–	125	–	250	400	500	–	–|35	–	–|63
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	63|–	–
–	–	–	–	–	–	–	–	–	–	–	–	160	–	–	–	630	–	–	–
32	63	80	125	160	250	400	630	800	63	100	125	–	250	400	500	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–|63	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	63	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	250	400	–	630	–	–|63	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–|63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–|63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–|63	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–|63	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	160	250	400	–	630	–	–	–
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
32	63	80	125	160	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
15	30	37	55	90	132	220	355	400	–	–	–	–	–	–	–	–	–	–	–
18.5	37	55	75	110	160	280	400	560	–	–	–	–	–	–	–	–	–	–	–
30	55	75	110	132	250	400	630	800	–	–	–	–	–	–	–	–	–	–	–
100	100	100	100	100	100	100	100	100	–								50/–	50/–	50/–
100	100	100	100	100	100	100	80	80	60 ... 100 kA_{eff}								–	–	–
11.8	11.8	11.8	18	18	33.7	37.1	77.4	77.4	–								–	–	–
11.5	11.5	11.5	25.5	25.5	37.7	47	65	65	–								–	–	–
34	34	34	223	223	1500	2150	10400	10400	–								–	–	–
55	55	55	360	360	940	2600	7000	7000	–								–	–	–
7	8	12	20	26	36	55	68	85	–								5.5	5.5	5.5
IP65									IP41								–	–	–
–									–								IP20	–	–

8


© Siemens 2022

Switch disconnectors with fuses

Quick selection guide (continued)



3KF LV HRC




Size			1	1	1	2	2	3	4	5	5
General technical specifications acc. to UL											
Basic data											
Certification according to UL standard			–	–	–	–	–	–	–	–	–
I_n acc. to UL 508		A	–	–	–	–	–	–	–	–	–
U_e acc. to UL 508			–	–	–	–	–	–	–	–	–
Operating and short-circuit behavior											
Operational power, 3-phase	At 240 V	kA	–	–	–	–	–	–	–	–	–
	At 480 V	kA	–	–	–	–	–	–	–	–	–
	At 600 V	kA	–	–	–	–	–	–	–	–	–
Short circuit current rating (SCCR)			–	–	–	–	–	–	–	–	–
Fuse type			–	–	–	–	–	–	–	–	–
More information											
			See page 8/126								
Technical specifications			Configuration in SIMARIS								

© Siemens 2022




3KF SITOR



3NJ63



5SG7



1	1	1	2	2	3	4	5	5	00	00	00	00	1	2	3	3	5SG71.	5SG7230	5SG7234.
UL 508									–	–	–	–	–	–	–	–	–	–	–
32	56	56	125	125	500	320	530	530	–	–	–	–	–	–	–	–	–	–	–
600									–	–	–	–	–	–	–	–	–	–	–
10	15	15	25	30	60	100	125	150	–	–	–	–	–	–	–	–	–	–	–
25	30	40	60	75	150	250	300	300	–	–	–	–	–	–	–	–	–	–	–
30	40	40	50	50	1255	250	300	350	–	–	–	–	–	–	–	–	–	–	–
100	100	100	100	100	100	100	100	100	–	–	–	–	–	–	–	–	–	–	–
K-1, RK1, CC, J, T	K-1, RK1, CC, J, T	K-1, RK1, CC, J, T	K-1, RK1, J, T	K-1, RK1, J, T	K-1, RK1, J, T	K-1, RK1, CC, J, T	K-1, RK1, J, T	K-1, RK1, J, T	–	–	–	–	–	–	–	–	–	–	–
See page 8/118									See page 8/134								See page 8/142		
Configuration in SIMARIS									Configuration in SIMARIS								Configuration in SIMARIS		

© Siemens 2022

3KF switch disconnectors with fuses

System overview

Complete units with direct operating mechanisms


Front operating mechanisms, 3-pole


Front operating mechanisms, 4-pole

Basic units


Front operating mechanisms, 3-pole


Front operating mechanisms, 4-pole


Lateral operating mechanisms, 3-pole


Lateral operating mechanisms, 4-pole


3KF SITOR

Additional poles


4th contact elements


N terminals


N/PE terminals


Auxiliary switch modules

Operating mechanisms



Direct operating mechanisms


Door-coupling rotary operating mechanisms



Handles for door-coupling rotary operating mechanisms


Other accessories for door-coupling rotary operating mechanisms

Other accessories and spare parts


Auxiliary switches


Fuse monitoring


Terminal covers


Mounting elements


Fuse covers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

General information

3NA COM LV HRC fuse links




The new the 3NA COM LV HRC fuse links with communication and measuring function make your products communication-capable.

See Fuse Systems, page 7/50

Suitable fuses

You will find further information under: sie.ag/2UlrAvy




The 3KF switch disconnector with fuses is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2. These include fuses for cable and line protection and motor protection.
Fuses for semiconductor protection (Siemens trademark SITOR) can also be used. However, some of these fuses have substantially higher power losses than fuses according to IEC 60269-2. This means that the load current has to be reduced until the value that is permissible in the switch disconnector with fuses is not exceeded.
For use of Siemens semiconductor fuses (SITOR), ready-made derating tables are available in the linked document.

Types of mounting


You will find further information under: sie.ag/2UlrAvy

Floor mounting



All 3KF switch disconnectors with fuses are designed for floor mounting.

DIN rail



Size 1 can be snapped onto a DIN rail (TH35 according to EN 60715) as an alternative mounting method.

© Siemens 2022


3KF switch disconnectors with fuses

General information

Electrical connection


You will find further information under: sie.ag/2UlrAvy

Box terminals




The box terminals for size 1 (32 A ... 80 A) are designed to allow the rapid connection of stripped conductors.

Flat terminals



Sizes 2 ... 5 are available with flat terminals, for the connection of cable lugs or busbar systems.

Flat terminals at rear




Sizes 1 and 2 (32 A, 63 A and 125 A) are available with rear flat terminals, for the connection of cable lugs or busbar systems.

8

Auxiliary switch modules and auxiliary switches


You will find further information under: sie.ag/2UlrAvy

Size 1



The auxiliary switches used for size 1 are microswitches (changeover contacts), which can be snapped into an auxiliary switch module. This auxiliary switch module is mounted on the side of the switch disconnector with fuses in the same way as an additional pole. A maximum of two microswitches can be installed in each auxiliary switch module.

Sizes 2 ... 5



For sizes 2 ... 5, the auxiliary switches are directly attached to the operating mechanism module. The auxiliary switch with the leading switch function is always installed in the right-hand mounting location. The other locations are provided for simultaneously switching with the main contacts. Auxiliary switches with spring-type terminals from the 3SU1 range can also be used.

System overview, page 8/118

© Siemens 2022

Differentiation 3KF SITOR and derating tables for SITOR fuses


You will find further information under: sie.ag/2UlrAvy

Size 1



3KF SITOR is a variation of the proven switch disconnector with 3KF LV HRC fuses and provides optimized heat dissipation and permits the use of fuses with substantially higher power losses. All 3KF SITOR types are approved according to UL508.

Sizes 2 ... 5

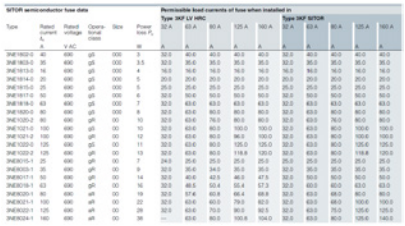

Siemens provides you with pretested load currents of the SITOR semiconductor fuses for installation in the 3KF SITOR. The derating tables are provided both for IEC constraints and for UL constraints and are intended to help you with selection. The permissible load faults for the 3KF LV HRC were calculated from the test results of the 3KF SITOR.

8


System overview, page 8/118

© Siemens 2022

3KF switch disconnectors with fuses

Mounting concept and accessories 3KF

Front operating mechanism left, size 1, 3/4-pole

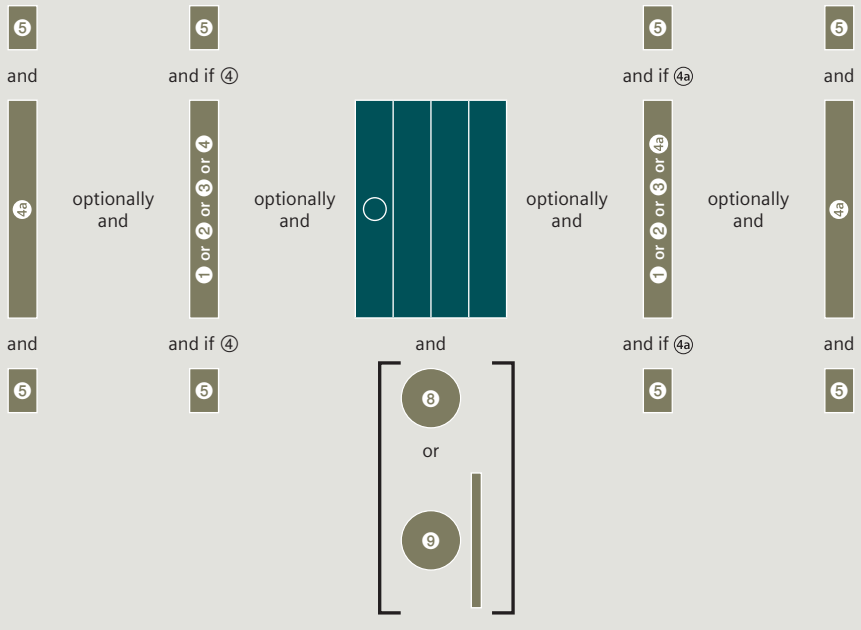


③: Only for 3-pole 3K, max. 1×
④/④a: Max. 1×

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
④ Auxiliary switch module, leading, with test function
④a Auxiliary switch module for auxiliary switches
⑤ Auxiliary switch
⑧ Direct operating mechanism
⑨ Door-coupling rotary operating mechanism

Front operating mechanism right, size 1, 3/4-pole

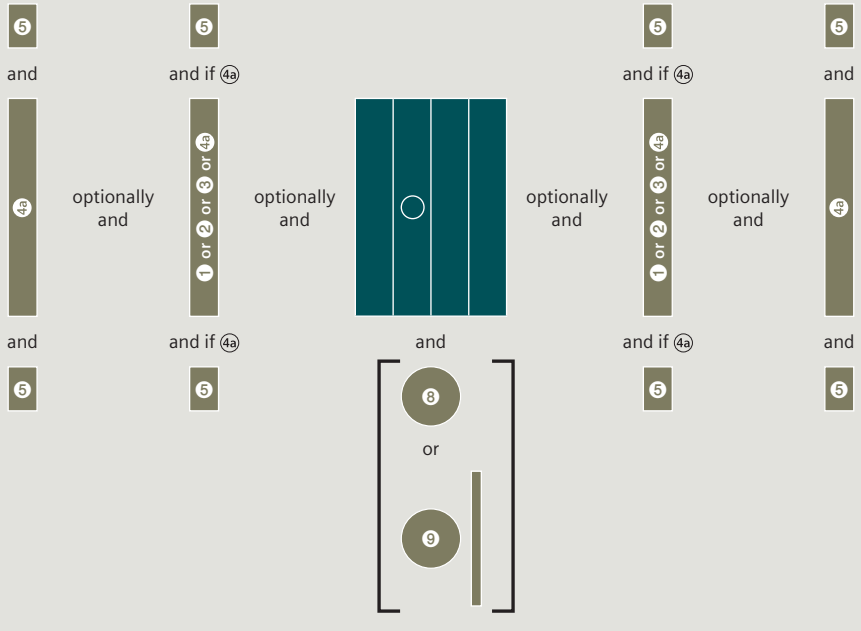

③: Only for 3-pole 3K, max. 1×
④a: Max. 1×

Legend


① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
④a Auxiliary switch module for auxiliary switches
⑤ Auxiliary switch
⑧ Direct operating mechanism
⑨ Door-coupling rotary operating mechanism

8

System overview, page 8/118

© Siemens 2022

Front operating mechanism center or left, sizes 2 to 5, 3/4-pole

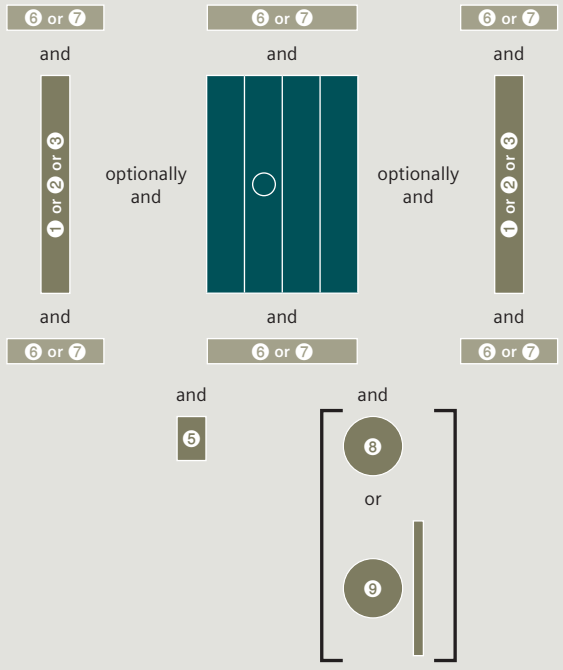

③: Only for 3-pole 3K, max. 1×
⑤: Max. 4×

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑧ Direct operating mechanism
⑨ Door-coupling rotary operating mechanism

8


System overview, page 8/118

© Siemens 2022

3KF switch disconnectors with fuses

Mounting concept and accessories 3KF

Lateral operating mechanism left, size 1, 3/4-pole

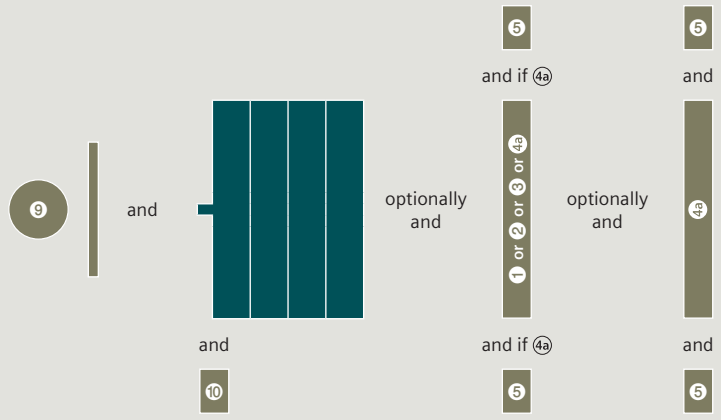


③: Only for 3-pole 3K, max. 1×
④a: Max. 1×

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
④a Auxiliary switch module for auxiliary switches
⑤ Auxiliary switch
⑨ Door-coupling rotary operating mechanism
⑩ Lateral auxiliary switch module

Lateral operating mechanism left, sizes 2 to 5, 3/4-pole

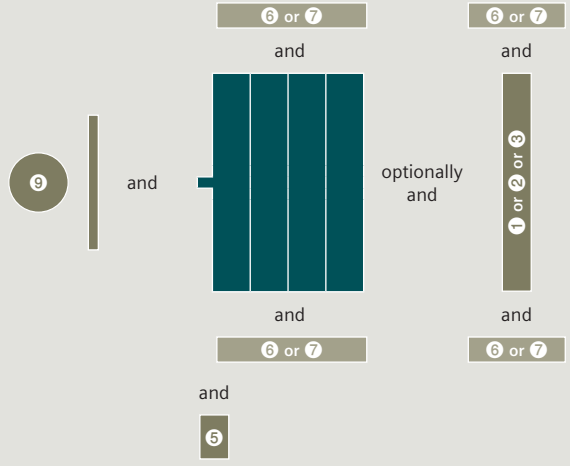

③: Only for 3-pole 3K, max. 1×
⑤: Max. 4×

Legend


① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑨ Door-coupling rotary operating mechanism

8

System overview, page 8/118

© Siemens 2022

Lateral operating mechanism right, size 1, 3/4-pole

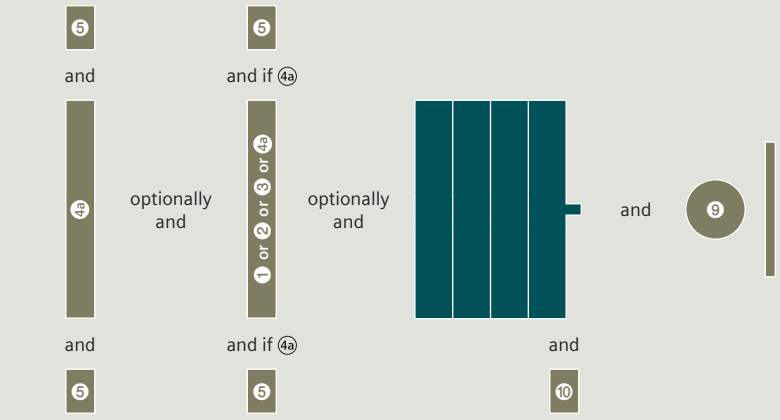


③: Only for 3-pole 3K, max. 1×
④a: Max. 1×

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
④a Auxiliary switch module for auxiliary switches
⑤ Auxiliary switch
⑨ Door-coupling rotary operating mechanism
⑩ Lateral auxiliary switch module

8

Lateral operating mechanism right, sizes 2 to 5, 3/4-pole

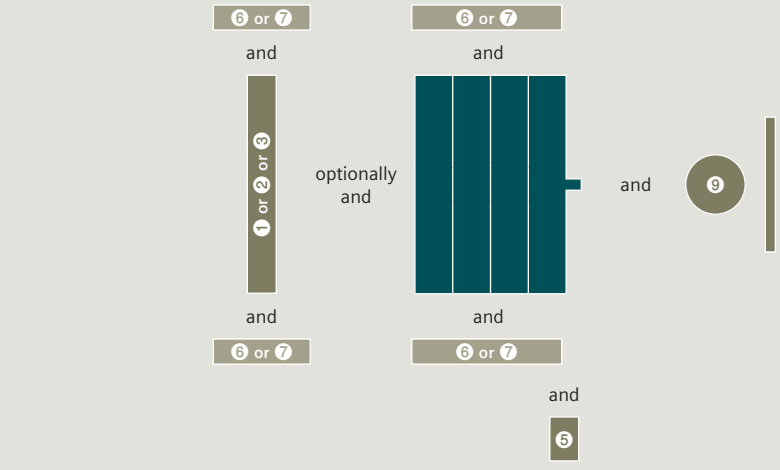

③: Only for 3-pole 3K, max. 1×
⑤: Max. 4×

Legend

① Neutral conductor terminal
② N/PE terminal
③ 4th contact element
⑤ Auxiliary switch
⑥ Phase barrier
⑦ Terminal cover
⑨ Door-coupling rotary operating mechanism






System overview, page 8/118

© Siemens 2022

3KF switch disconnectors with fuses

3KF LV HRC switch disconnector



	Complete units with direct operating mechanisms Front operating mechanisms, left		Basic units without handle Front operating mechanisms, left		Front operating mechanism, center
Number of poles	3P	4P	3P	4P	3P
					

Size	Uninterrupted current I_u					
Box terminals						
1	32 A	3KF1303-2LB11	3KF1403-2LB11	3KF1303-0LB11	3KF1403-0LB11	3KF1303-0MB11
	63 A	3KF1306-2LB11	3KF1406-2LB11	3KF1306-0LB11	3KF1406-0LB11	3KF1306-0MB11
	80 A	3KF1308-2LB11	3KF1408-2LB11	3KF1308-0LB11	3KF1408-0LB11	3KF1308-0MB11
Flat terminals at rear						
1	32 A	–	–	–	–	3KF1303-0MR11
	63 A	–	–	–	–	3KF1306-0MR11
2	125 A	–	–	–	–	3KF2312-0MR11
Flat terminals						
2	125 A	3KF2312-2LF11	3KF2412-2LF11	3KF2312-0LF11	3KF2412-0LF11	3KF2312-0MF11
	160 A	3KF2316-2LF11	3KF2416-2LF11	3KF2316-0LF11	3KF2416-0LF11	3KF2316-0MF11
3	250 A	3KF3325-2LF11	3KF3425-2LF11	3KF3325-0LF11	3KF3425-0LF11	3KF3325-0MF11
4	400 A	3KF4340-2LF11	3KF4440-2LF11	3KF4340-0LF11	3KF4440-0LF11	3KF4340-0MF11
5	630 A	3KF5363-2LF11	3KF5463-2LF11	3KF5363-0LF11	3KF5463-0LF11	3KF5363-0MF11
	800 A	3KF5380-2LF11	3KF5480-2LF11	3KF5380-0LF11	3KF5480-0LF11	3KF5380-0MF11

Note:
- NH00 and NH000: For 3KF sizes 1 and 2
- NH1 and NH0: For 3KF size 3
- NH2 and NH1: For 3KF size 4
- NH3 and NH2: For 3KF size 5
- For 3KF with lateral operating mechanism (left or right), only door-coupling rotary operating mechanisms without "Test" can be used.
- The complete units with a direct operating mechanism are not suitable for conversion to door-coupling rotary operating mechanisms; the basic units are to be used for this purpose.

8






Quick selection guide, page 8/114

© Siemens 2022







	Lateral operating mechanism, left		Lateral operating mechanism, right	
4P	3P	4P	3P	4P
				
3KF1403-0MB11	3KF1303-4LB11	3KF1403-4LB11	3KF1303-4RB11	3KF1403-4RB11
3KF1406-0MB11	3KF1306-4LB11	3KF1406-4LB11	3KF1306-4RB11	3KF1406-4RB11
3KF1408-0MB11	3KF1308-4LB11	3KF1408-4LB11	3KF1308-4RB11	3KF1408-4RB11
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
3KF2412-0MF11	3KF2312-4LF11	3KF2412-4LF11	3KF2312-4RF11	3KF2412-4RF11
3KF2416-0MF11	3KF2316-4LF11	3KF2416-4LF11	3KF2316-4RF11	3KF2416-4RF11
3KF3425-0MF11	3KF3325-4LF11	3KF3425-4LF11	3KF3325-4RF11	3KF3425-4RF11
3KF4440-0MF11	3KF4340-4LF11	3KF4440-4LF11	3KF4340-4RF11	3KF4440-4RF11
3KF5463-0MF11	3KF5363-4LF11	3KF5463-4LF11	3KF5363-4RF11	3KF5463-4RF11
3KF5480-0MF11	3KF5380-4LF11	3KF5480-4LF11	3KF5380-4RF11	3KF5480-4RF11

Quick selection guide, page 8/114



© Siemens 2022

3KF switch disconnectors with fuses

3KF SITOR switch disconnectors





		Basic units without handle	
		Front operating mechanism Left	Front operating mechanism Center
Number of poles		3P	3P
			
Size	**Uninterrupted current I_u**		
Box terminals			
1	32 A	3KF1303-0LB51	–
	63 A	3KF1306-0LB51	–
	80 A	3KF1308-0LB51	–
Flat terminals			
2	125 A	–	3KF2312-0MF51
	160 A	–	3KF2316-0MF51
3	250 A	–	3KF3325-0MF51
4	400 A	–	3KF4340-0MF51
5	630 A	–	3KF5363-0MF51
	800 A	–	3KF5380-0MF51

Note:
- Use of standard LV HRC fuses gG, gL, aM in 3KF SITOR is possible without restriction

Quick selection guide, page 8/114

© Siemens 2022

Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors

Additional poles

Note:

- Additional poles (4th contact element, N or N/PE terminal) must always be mounted directly adjacent to the switch disconnector on the left or right. Accordingly, an auxiliary switch module must not be mounted between the basic unit and an additional pole on size 1.
- For installation, it is important to note that only a 3-pole 3KF switch disconnector may be retrofitted with an additional switching pole with contact system (4th contact element).

4th contact element (switching pole) for 3KF LV HRC



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9105-2AA00	■				
Flat terminals at rear	3KF9105-1AA00	■				
	3KF9205-1AA00		■			
Flat terminals	3KF9205-0AA00		■			
	3KF9305-0AA00			■		
	3KF9405-0AA00				■	
	3KF9505-0AA00					■

4th contact element (switching pole) for 3KF SITOR



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9105-2BA00	■				
Flat terminals	3KF9205-0BA00		■			
	3KF9305-0BA00			■		
	3KF9405-0BA00				■	
	3KF9505-0BA00					■

Neutral conductor terminals with removable jumper, for 3KF LV HRC and 3KF SITOR



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9106-2AA00	■				
Flat terminals at rear	3KF9106-1AA00	■				
	3KF9206-1AA00		■			
Flat terminals	3KF9206-0AA00		■			
	3KF9306-0AA00			■		
	3KF9406-0AA00				■	
	3KF9506-0AA00					■

N/PE terminals with permanent jumper, for 3KF LV HRC and 3KF SITOR



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals	3KF9106-8AA00	■				
Flat terminals at rear	3KF9106-6AA00	■				
	3KF9206-6AA00		■			
Flat terminals	3KF9206-7AA00		■			
	3KF9306-7AA00			■		
	3KF9406-7AA00				■	
	3KF9506-7AA00					■

Operating mechanisms

Direct operating mechanisms, for 3KF LV HRC



Version	Color	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Can be locked with up to 3 padlocks	Gray	3KF9101-1AA00	■				
		3KF9201-1AA00		■			
		3KF9301-1AA00			■		
		3KF9401-1AA00				■	
		3KF9501-1AA00					■
	Red/yellow	3KF9101-2AA00	■				
		3KF9201-2AA00		■			
		3KF9301-2AA00			■		
		3KF9401-2AA00				■	
		3KF9501-2AA00					■

System overview, page 8/118

© Siemens 2022

3KF switch disconnectors with fuses

Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors

Operating mechanisms

Door-coupling rotary operating mechanisms, for 3KF LV HRC and 3KF SITOR



- **Scope of supply**:
  - Handle with masking plate
  - Coupling driver with tolerance compensation
  - Shaft 300 mm
- Can be locked with up to 3 padlocks

Labeling	Color	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Test – O – I	Gray	8UD1171-2AF21	■				
		8UD1141-2AF21		■			
		8UD1141-3AF21			■		
		8UD1151-3AF21				■	
		8UD1161-4AF21					■
	Red/yellow	8UD1171-2AF25	■				
		8UD1141-2AF25		■			
		8UD1141-3AF25			■		
		8UD1151-3AF25				■	
		8UD1161-4AF25					■

Handles, for 3KF LV HRC and 3KF SITOR

- With masking plate
- Can be locked with up to 3 padlocks

Labeling	Lighting	Color	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
O – I	Without	Gray	8UD1771-2AD01	■				
			8UD1841-2AD01		■	■		
			8UD1851-3AD01				■	
			8UD1861-4AD01					■
		Red/yellow	8UD1771-2AD05	■				
			8UD1841-2AD05		■	■		
			8UD1851-3AD05				■	
			8UD1861-4AD05					■
	With	Gray	8UD1771-2CD01	■				
			8UD1841-2CD01		■	■		
			8UD1851-3CD01				■	
			8UD1861-4CD01					■
		Red/yellow	8UD1771-2CD05	■				
			8UD1841-2CD05		■	■		
			8UD1851-3CD05				■	
			8UD1861-4CD05					■
Test – O – I	Without	Gray	8UD1771-2AF01	■				
			8UD1841-2AF01		■	■		
			8UD1851-3AF01				■	
			8UD1861-4AF01					■
		Red/yellow	8UD1771-2AF05	■				
			8UD1841-2AF05		■	■		
			8UD1851-3AF05				■	
			8UD1861-4AF05					■
	With	Gray	8UD1771-2CF01	■				
			8UD1841-2CF01		■	■		
			8UD1851-3CF01				■	
			8UD1861-4CF01					■
		Red/yellow	8UD1771-2CF05	■				
			8UD1841-2CF05		■	■		
			8UD1851-3CF05				■	
			8UD1861-4CF05					■











8

System overview, page 8/118

© Siemens 2022

Operating mechanisms

			Size 1	Size 2	Size 3	Size 4	Size 5
Extension shaft, for 3KF LV HRC and 3KF SITOR							
	• A shaft jack is required for the 8UD1 handle when the 600 mm long shaft is used and for sizes 1 and 2						
	Length	**Article No.**					
	300 mm	8UC6032	■	■			
		8UC6033			■	■	
		8UC6034					■
	600 mm	8UC6082	■	■			
		8UC6083			■	■	
		8UC6084					■
Shaft jack for 8UD1 handle, for 3KF LV HRC and 3KF SITOR							
	**Version**	**Article No.**					
	For shaft 600 mm	8UD1900-0FA00	■	■			
Coupling drivers, for 3KF LV HRC and 3KF SITOR							
	Version	**Article No.**					
	With tolerance compensation	8UD1900-2GA00	■				
		8UD1900-6GA00		■			
		8UD1900-3GA00			■	■	
		8UD1900-4GA00					■
	Without tolerance compensation	8UD1900-2HA00	■				
		8UD1900-6HA00		■			
		8UD1900-3HA00			■	■	
		8UD1900-4HA00					■
Adapters for shafts, for 3KF LV HRC and 3KF SITOR							
	**Shaft size**	**Article No.**					
	8 × 8 mm	8UC6022	■	■			
	10 × 10 mm	8UC6023			■	■	
	12 × 12 mm	8UC6024					■

Other accessories and spare parts

			Size 1	Size 2	Size 3	Size 4	Size 5
Auxiliary switch modules, for 3KF LV HRC and 3KF SITOR							
	• Auxiliary switch modules are supplied without auxiliary switches • The 3KF9112-0AB00 mounting bracket is additionally required for mounting the auxiliary switch modules with the rear terminal • The 3KD9103-6 and 3KD9103-7 auxiliary switch modules and those with a leading NO contact can only be used with 3KF if they have the operating mechanism on the front or on the left						
	**Type**	**Article No.**					
	Standard version	3KD9103-5	■				
	With test function	3KD9103-6	■				
	With leading NO and test function	3KD9103-7	■				
Mounting brackets for auxiliary switch modules, for 3KF size 1 with rear terminals							
	• For mounting auxiliary switch modules on 3KF switch disconnectors with rear terminal						
		Article No.					
		3KF9112-0AB00	■				

8

System overview, page 8/118

© Siemens 2022


3KF switch disconnectors with fuses

Accessories for 3KF LV HRC and 3KF SITOR switch disconnectors

Other accessories and spare parts

Auxiliary switches, for 3KF LV HRC and 3KF SITOR

- Auxiliary switches for sizes 2 to 5 have screw terminals and are mounted on the operating mechanism module of the 3KF. Auxiliary switches with spring-type terminals from the 3SU1 range can also be used.
- All auxiliary switches for sizes 2 to 5 can be used as leading auxiliary switches, depending on the mounting position of the auxiliary switch (see operating instructions).



Type	Contacts	Contact surface	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
With connecting cables	1 CO	Standard	3KD9103-1	■				
		Solid-state compatible	3KD9103-3	■				
Without connecting cables	1 CO	Standard	3KD9103-2	■				
		Solid-state compatible	3KD9103-4	■				
	1 NO	Standard	3SU1400-1AA10-1BA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1LA0		■	■	■	■
	1 NC	Standard	3SU1400-1AA10-1CA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1MA0		■	■	■	■
	1 NO + 1 NC	Standard	3SU1400-1AA10-1FA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1QA0		■	■	■	■
	2 NO	Standard	3SU1400-1AA10-1DA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1NA0		■	■	■	■
	2 NC	Standard	3SU1400-1AA10-1EA0		■	■	■	■
		Gold-plated	3SU1400-1AA10-1PA0		■	■	■	■

Electronic fuse monitoring, for 3KF LV HRC and 3KF SITOR



Version	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For remote display of tripped fuses	3KF9010-1AA00	■	■	■	■	■

Phase barriers, for 3KF LV HRC and 3KF SITOR



Version	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For 3-pole devices	6 units	3KD9308-6		■			
		3KD9408-6			■	■	
		3KD9508-6					■
For 4-pole devices	8 units	3KD9308-8		■			
		3KD9408-8			■	■	
		3KD9508-8					■

Terminal covers, for 3KF LV HRC



Version	Scope of supply	Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For 3-pole devices	6 units	Standard version	3KF9204-6 new		■			
			3KF9304-6			■		
			3KF9404-6 new				■	
			3KD9504-6					■
		Short version	3KF9204-7		■			
			3KF9304-7			■		
			3KF9404-7				■	
For 4-pole devices	8 units	Standard version	3KF9204-8		■			
			3KF9304-8			■		
			3KF9404-8				■	
			3KD9504-8					■
		Short version	3KF9204-5		■			
			3KF9304-5			■		
			3KF9404-5				■	

Spare part for terminal covers (4th contact element), for 3KF LV HRC



Scope of supply	Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	Standard version	3KD9504-1					■
	Short version	3KF9204-1 new		■			
		3KF9304-1			■		
		3KF9404-1 new				■	
6 units	Standard version	3KF9204-6 new		■			
		3KF9304-6			■		
		3KF9404-6 new				■	

Spare part for terminal covers (N and N/PE terminal), for 3KF HRC




Scope of supply	Type	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
1 unit	Standard version	3KD9504-1					■
	Short version	3KD9304-1		■			
		3KD9404-1 new			■	■	
6 units	Standard version	3KD9304-6		■			
		3KD9404-6 new			■	■	

System overview, page 8/118

© Siemens 2022

Other accessories and spare parts


Blocking pin test function, for 3KF LV HRC and 3KF SITOR



- Enables permanent deactivation of the test function for auxiliary switches
- It is installed in the operating mechanism module of the 3KF switch disconnector

Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
10 units	3KF9112-1AA00	■				
	3KF9412-1AA00		■		■	
	3KF9512-1AA00					■


Mounting brackets, for 3KF LV HRC



- The 3KF9112-0AB00 mounting bracket is needed if an auxiliary switch module is mounted on a 3KF1 with rear terminals

Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals, flat terminals	3KF9112-0AA00	■				
	3KF9212-0AA00		■			
Flat terminals at rear	3KF9212-0AB00	■	■			

Mounting brackets, for 3KF SITOR



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals, flat terminals	3KF9112-0AA10	■				
	3KF9212-0AA10		■			

Mounting brackets, for 3KF LV HRC and 3KF SITOR



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Flat terminals	3KF9412-0AA00			■	■	
	3KF9512-0AA00					■

Phase barriers, for 3KF LV HRC and 3KF SITOR



Version	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
For mounting on DIN rail	5 units	3KF9112-0BA00	■				

Fuse covers, for 3KF LV HRC



Connection	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Box terminals, flat terminals	3KF9112-0CA00	■				
	3KF9212-0CA00		■			
	3KF9312-0CA00			■		
	3KF9412-0CA00				■	
	3KF9512-0CA00					■
Flat terminals at rear	3KF9212-0CB00		■			

LV HRC isolating blades, for 3KF LV HRC and 3KF SITOR



Version	Article No.	NH 000	NH 00	NH 1	NH 2	NH 3
With insulated grip lugs	3NG1002	■	■			
	3NG1202			■		
	3NG1302				■	
	3NG1402					■

System overview, page 8/118

© Siemens 2022

3NJ63 switch disconnectors with fuses

System overview

Fuse links



For LV HRC fuses

Accessories



Connection terminals and covers



Auxiliary switches



Current transformers



Ammeters



Guide rails

8

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

General information

3NA COM LV HRC fuse link




The new the 3NA COM LV HRC fuse links with communication and measuring function make your products communication-capable.

See Fuse Systems, page 7/50

Suitable fuses

You will find further information under: sie.ag/2UlrAvy

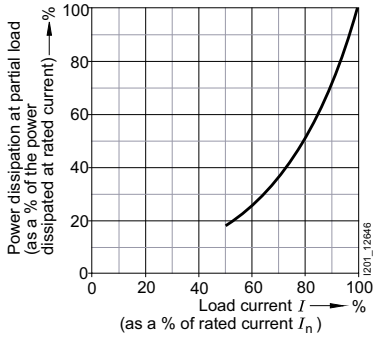

The 3NJ63 switch disconnector with fuses is suitable for all fuses with LV HRC design in sizes 000 to 3 that comply with IEC 60269-2, including fuses for cable and line protection.

System overview, page 8/134

© Siemens 2022

3NJ63 switch disconnectors with fuses

Configuration

For a complete and valid configuration of your switch disconnectors with fuses, please use our online configurator at www.siemens.com/lowvoltage/3nj63-configurator

	6	7	8	9	10	11	12	13	14	15	16
3NJ63			–	A		0		–			

Size and type of fuse	LV HRC fuse	00	160 A	0
		1	250 A	1
		2	400 A	2
		3	630 A	3
Number of poles	2-pole			2
	3-pole			3
	4-pole [1]			4
Breaking capacity	AC-22B	Manually operated		1
		Motorized operating mechanism		2
	AC-23A, DC-23B	Manually operated		3
		Motorized operating mechanism		4
Electronic fuse monitoring	Without			A
	≤690 V AC	Operate voltage <20 V	EFM10	B
	≤690 V AC with line monitoring	Operate voltage <13 V	EFM20	C
	≤440 V DC	Operate voltage <20 V	EFM25	E
Auxiliary switches	Without			0
	1 NC			1
	1 NO			2
	1 NO + 1 NC			3

[1] Only in AC-22B

8

Quick selection guide, page 8/114

© Siemens 2022

		6	7	8	9	10	11	12	13	14	15	16
3NJ63				–					–			

Type of ammeter	Without	0
	Moving iron	1
	Bi-metal	2

Wiring version of the current transformer	Without	A
	1 current transformer to multi-function plug	B
	3 current transformers to multi-function plug	C
	1 current transformer to 1 ammeter	D
	1 current transformer to 1 ammeter and multi-function plug	E
	3 current transformers to 1 ammeter and multi-function plug	F

Current transformer primary current	Without	A
	50 A	B
	100 A	D
	150 A	E
	200 A	F
	250 A	G
	300 A	H
	400 A	J
	500 A	K
	600 A	L


Current transformer secondary current	Without	Without accuracy class	0
	1 A	Accuracy class 1	1
	1 A	Accuracy class 0.5	2
	1 A	Accuracy class 0.5 calibrated	3
	5 A	Accuracy class 1	4
	5 A	Accuracy class 0.5	5
	5 A	Accuracy class 0.5 calibrated	6

Quick selection guide, page 8/114

© Siemens 2022

3NJ63 switch disconnectors with fuses

Accessories

			NH00	NH1	NH2	NH3
Terminals						
	**Type**	**Article No.**				
	For 2/3-pole devices	3NJ6923-1BA00	■			
		3NJ6933-1BA00		■		
		3NJ6943-1CA00			■	■
	For 4-pole devices	3NJ6924-1BA00	■			
		3NJ6934-1BA00		■		
		3NJ6944-1CA00			■	■
Terminal covers						
	**Type**	**Version** / **Article No.**				
	For 2/3-pole devices	– 3NJ6923-1DA00	■			
		3NJ6933-1DA01		■		
		3NJ6943-1DA00			■	■
		As an internal terminal cover 3NJ6933-1DB00		■		
	For 4-pole devices	3NJ6904-1DA00	■	■	■	■
Contact extensions						
	**Number of poles**	**Article No.**				
	3-pole	3NJ6923-1EB00	■			
		3NJ6933-1EB00		■		
		3NJ6943-1EB00			■	■
	4-pole	3NJ6924-1EB00	■			
		3NJ6934-1EB00		■		
		3NJ6944-1EB00			■	■
Electronic fuse monitoring and line monitoring devices						
	**Type**	**Version** / **Article No.**				
	EFM 10	With line monitoring for AC networks 3NJ6920-3FB00	■			
		3NJ6930-3FB00		■		
		3NJ6940-3FB00			■	■
	EFM 20	With line monitoring for AC networks 3NJ6920-3FC00	■			
		3NJ6930-3FC00		■		
		3NJ6940-3FC00			■	■
	EFM 25	With line monitoring for AC networks 3NJ6920-3FE00	■			
		3NJ6930-3FE00		■		
		3NJ6940-3FE00			■	■
Auxiliary switches						
	**Contacts**	**Version** / **Article No.**				
	1 NO	With cover 3NJ6920-2BB00	■			
		3NJ6930-2BB00		■		
		3NJ6940-2BB00			■	■
		Without cover 3NJ6900-2BC00	■	■	■	■
	1 NC	With cover 3NJ6920-2CB00	■			
		3NJ6930-2CB00		■		
		3NJ6940-2CB00			■	■
		Without cover 3NJ6900-2CC00	■	■	■	■

System overview, page 8/134

© Siemens 2022

Current transformers for main devices and contact extensions




Rated current I_{pr}	Class	Apparent power consumption	Feed-through opening diameter	Article No.	NH00	NH1	NH2	NH3
50 A/1 A	1	1 VA	⌀ 21 mm	3NJ6920-3BB11	■	■		
50 A/5 A	1	1 VA	⌀ 21 mm	3NJ6920-3BB21	■	■		
100 A/1 A	1	2,5 VA	⌀ 21 mm	3NJ6920-3BD11	■	■		
	0,5	1,5 VA	⌀ 21 mm	3NJ6920-3BD12	■	■		
	0,5 calibrated	1,5 VA	⌀ 14 mm	3NJ6920-3BD13	■			
			⌀ 15,2 mm	3NJ6930-3BD13 new		■		
100 A/5 A	1	2,5 VA	⌀ 21 mm	3NJ6920-3BD21	■	■		
	0,5	1,5 VA	⌀ 21 mm	3NJ6920-3BD22	■	■		
	0,5 calibrated	1,5 VA	⌀ 14 mm	3NJ6920-3BD23	■			
			⌀ 15,2 mm	3NJ6930-3BD23 new		■		
150 A/1 A	1	2,5 VA	⌀ 21 mm	3NJ6920-3BE11	■	■		
	0,5	1,5 VA	⌀ 21 mm	3NJ6920-3BE12	■	■		
	0,5 calibrated	1,5 VA	⌀ 14 mm	3NJ6920-3BE13	■			
		2,5 VA	⌀ 15,2 mm	3NJ6930-3BE13 new		■		
150 A/5 A	1	2,5 VA	⌀ 21 mm	3NJ6920-3BE21	■	■		
	0,5	1,5 VA	⌀ 21 mm	3NJ6920-3BE22	■	■		
	0,5 calibrated	1,5 VA	⌀ 14 mm	3NJ6920-3BE23	■			
		2,5 VA	⌀ 15,2 mm	3NJ6930-3BE23 new		■		
200 A/1 A	1	2,5 VA	⌀ 21 mm	3NJ6930-3BF11		■		
	0,5	3,75 VA	⌀ 21 mm	3NJ6930-3BF12		■		
	0,5 calibrated	2,5 VA	⌀ 14 mm	3NJ6930-3BF13		■		
200 A/5 A	1	2,5 VA	⌀ 21 mm	3NJ6930-3BF21		■		
	0,5	5 VA	⌀ 21 mm	3NJ6930-3BF22		■		
	0,5 calibrated	2,5 VA	⌀ 14 mm	3NJ6930-3BF23		■		
250 A/1 A	1	5 VA	⌀ 21 mm	3NJ6930-3BG11		■		
	0,5	5 VA	⌀ 21 mm	3NJ6930-3BG12		■		
	0,5 calibrated	2,5 VA	⌀ 14 mm	3NJ6930-3BG13		■		
250 A/5 A	1	2,5 VA	⌀ 21 mm	3NJ6930-3BG21		■		
	0,5	2,5 VA	⌀ 21 mm	3NJ6930-3BG22		■		
	0,5 calibrated	2,5 VA	⌀ 14 mm	3NJ6930-3BG23		■		
300 A/1 A	1	5 VA	–	3NJ6940-3BH11			■	■
	0,5	5 VA	–	3NJ6940-3BH12			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BH13			■	■
300 A/5 A	1	5 VA	–	3NJ6940-3BH21			■	■
	0,5	5 VA	–	3NJ6940-3BH22			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BH23			■	■
400 A/1 A	1	5 VA	–	3NJ6940-3BJ11			■	■
	0,5	5 VA	–	3NJ6940-3BJ12			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BJ13			■	■
400 A/5 A	1	5 VA	–	3NJ6940-3BJ21			■	■
	0,5	5 VA	–	3NJ6940-3BJ22			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BJ23			■	■
500 A/1 A	1	5 VA	–	3NJ6940-3BK11			■	■
	0,5	5 VA	–	3NJ6940-3BK12			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BK13			■	■
500 A/5 A	1	5 VA	–	3NJ6940-3BK21			■	■
	0,5	5 VA	–	3NJ6940-3BK22			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BK23			■	■
600 A/1 A	1	5 VA	–	3NJ6940-3BL11			■	■
	0,5	5 VA	–	3NJ6940-3BL12			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BL13			■	■
600 A/5 A	1	5 VA	–	3NJ6940-3BL21			■	■
	0,5	5 VA	–	3NJ6940-3BL22			■	■
	0,5 calibrated	5 VA	–	3NJ6940-3BL23			■	■

System overview, page 8/134

© Siemens 2022



3NJ63 switch disconnectors with fuses

Accessories

					NH00	NH1	NH2	NH3
Current transformer busbars								
	Type	Version		Article No.				
	For current transformers with feed-through opening diameter 21 mm	For 1 current transformer		3NJ6920-3DB00	■			
				3NJ6930-3DB00		■		
		For 3 current transformers		3NJ6920-3DC00	■			
				3NJ6930-3DC00		■		
		For 4 current transformers		3NJ6920-3DD00	■			
				3NJ6930-3DD00		■		
	For current transformers with feed-through opening diameter 14 mm	For 1 current transformer		3NJ6920-3DE00	■			
				3NJ6930-3DE00		■		
		For 3 current transformers		3NJ6920-3DF00	■			
				3NJ6930-3DF00		■		
		For 4 current transformers		3NJ6920-3DG00	■			
Holders								
	Version			Article No.				
	For ammeters			3NJ6900-4GA00	■	■		■
Amperemeter								
	Type	Version	Rated current I_e	Article No.				
	Moving-iron measuring instruments	For measurements on transformer x/1 A with double overload	50 A/1 A	3NJ6900-4HB11	■	■		
			100 A/1 A	3NJ6900-4HD11	■	■		
			150 A/1 A	3NJ6900-4HE11	■	■		
			200 A/1 A	3NJ6900-4HF11		■		
			250 A/1 A	3NJ6900-4HG11		■		
			300 A/1 A	3NJ6900-4HH11			■	■
			400 A/1 A	3NJ6900-4HJ11			■	■
			500 A/1 A	3NJ6900-4HK11			■	■
			600 A/1 A	3NJ6900-4HL11			■	■
		For measurements on transformer x/5 A with double overload	50 A/5 A	3NJ6900-4HB21	■	■		
			100 A/5 A	3NJ6900-4HD21	■	■		
			150 A/5 A	3NJ6900-4HE21	■	■		
			200 A/5 A	3NJ6900-4HF21		■		
			250 A/5 A	3NJ6900-4HG21		■		
			300 A/5 A	3NJ6900-4HH21			■	■
			400 A/5 A	3NJ6900-4HJ21			■	■
			500 A/5 A	3NJ6900-4HK21			■	■
			600 A/5 A	3NJ6900-4HL21			■	■
	Bi-metal measuring instruments	For measurements on transformer x/1 A with 1.2-times overload	50 A/1 A	3NJ6900-4HB12	■	■		
			100 A/1 A	3NJ6900-4HD12	■	■		
			150 A/1 A	3NJ6900-4HE12	■	■		
			200 A/1 A	3NJ6900-4HF12				
			250 A/1 A	3NJ6900-4HG12				
			300 A/1 A	3NJ6900-4HH12			■	■
			400 A/1 A	3NJ6900-4HJ12			■	■
			500 A/1 A	3NJ6900-4HK12			■	■
			600 A/1 A	3NJ6900-4HL12			■	■
		For measurements on transformer x/5 A with 1.2-times overload	50 A/5 A	3NJ6900-4HB22	■	■		
			100 A/5 A	3NJ6900-4HD22	■	■		
			150 A/5 A	3NJ6900-4HE22	■	■		
			200 A/5 A	3NJ6900-4HF22		■		
			250 A/5 A	3NJ6900-4HG22		■		
			300 A/5 A	3NJ6900-4HH22			■	■
			400 A/5 A	3NJ6900-4HJ22			■	■
			500 A/5 A	3NJ6900-4HK22			■	■
			600 A/5 A	3NJ6900-4HL22			■	■

System overview, page 8/134

© Siemens 2022

				NH00	NH1	NH2	NH3
Multi-function plugs							
	**Version**	**Dimensions**	**Article No.**				
	With fixing screws	6 × 2.5 mm²	3NJ6920-3EB01	■	■		
		8 × 2.5 mm²	3NJ6920-3ED01	■	■		
			3NJ6940-3EC00			■	■
	Without fixing screws	8 × 2.5 mm²	3NJ6940-3ED00			■	■
		10 × 1.5 mm² and 8 × 2.5 mm²	3NJ6920-3EE01	■	■		
		12 × 1.5 mm² and 8 × 2.5 mm²	3NJ6940-3EF00			■	■
Front panels							
	**Use**	**Version**	**Article No.**				
	3NJ6303-.....	With LV HRC fuse	3NJ6923-4BB00	■			
	3NJ6313-.....	With LV HRC fuse	3NJ6933-4BB00		■		
	3NJ6323-.....	With LV HRC fuse	3NJ6943-4BB00			■	■
	3NJ6333-.....	With LV HRC fuse	3NJ6953-4BB00			■	■
Busbar covers							
			**Article No.**				
			3NJ6916-4EA00	■	■	■	■
Connection modules							
			**Article No.**				
			3NJ6900-4CB00	■	■	■	■
Anschlussmodul							
			**Article No.**				
			3NJ6915-3BA00	■	■	■	■
Guide rails							
	**Overall depth**		**Article No.**				
	200 mm		3NJ6900-4FB00	■	■	■	■
	400 mm		3NJ6900-4FC00	■	■	■	■
LV HRC fuse puller tongs							
	Version		**Article No.**				
	For NH00		XPT:8PT9624	■	■	■	■
	For NH1, NH2, NH3		XPT:8PT9625	■	■	■	■
Locking devices for padlocks							
			**Article No.**				
			3NJ6900-4LL	■	■	■	■

8

System overview, page 8/134

© Siemens 2022

5SG switch disconnectors with fuses

System overview

MINIZED switch disconnectors with fuses



1P



3P

NEOZED bus-mounting switch disconnectors



3P



3P, with terminals

Accessories



Auxiliary switches





Lateral modules







Reducers

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022



Number of poles	1P	1P+N	2P	3P		3P+N
						

Size of fuse	Rated current I_n	Mounting width 1.5 MW	Mounting width 3 MW	Mounting width 3 MW	Mounting width 1.5 MW	Mounting width 4.5 MW	Mounting width 6 MW
MINIZED switch disconnectors with fuses [1] [3]							
D02	63 A	5SG7113	5SG7153	5SG7123	–	5SG7133	5SG7163
MINIZED switch disconnectors with fuses – version for Austria only [2] [3]							
D02	25 A	–	–	–	–	5SG7133-8BA25	–
	35 A	–	–	–	–	5SG7133-8BA35	–
	50 A	–	–	–	–	5SG7133-8BA50	–
NEOZED bus-mounting switch disconnectors							
D02	63 A	–	–	–	5SG7230 [4]	–	–
NEOZED bus-mounting switch disconnectors, without LED signal detector							
D02	63 A	–	–	–	5SG7234-1 [4]	–	–
NEOZED bus-mounting switch disconnectors, with LED signal detector							
D02	63 A	–	–	–	5SG7234-2 [5]	–	–

[1] Using draw-out technology with touch protection according to BGV A3, adapter sleeves not included in the scope of delivery
[2] With permanently fitted adapter sleeves, incl. fuse link
[3] Do not use fuse links with nickel-plated contact caps
[4] In the case of permanent load over 35 A, we recommend the use of 5SH5526 lateral modules. Please observe EN 60439-1, Table 1
[5] In the case of permanent load over 35 A, we recommend the use of 5SH5533 lateral modules. Please observe EN 60439-1, Table 1

Note:
NEOZED adapter sleeves are required for these devices

Accessories

Auxiliary switches

	Version	Type	Mounting width	Contacts	Article No.
	For MINIZED D02 switch disconnectors	Standard	0.5 MW	1 NO + 1 NC	5ST3010
				2 NO	5ST3011
				2 NC	5ST3012
		With test button	0.5 MW	1 NO + 1 NC	5ST3010-2
				2 NO	5ST3011-2
				2 NC	5ST3012-2
	For NEOZED bus-mounting switch disconnectors	Standard	0.5 MW	1 CO	5SH5525

Lateral modules


	Version	Type	Mounting width	Article No.
	For NEOZED bus-mounting switch disconnectors	5SG7230	0.5 MW	5SH5526
		5SG7234-1 and -2	0.5 MW	5SH5533

Reducers

	Version	Article No.
	For D01 fuse links	5SH5527

Quick selection guide, page 8/114

© Siemens 2022

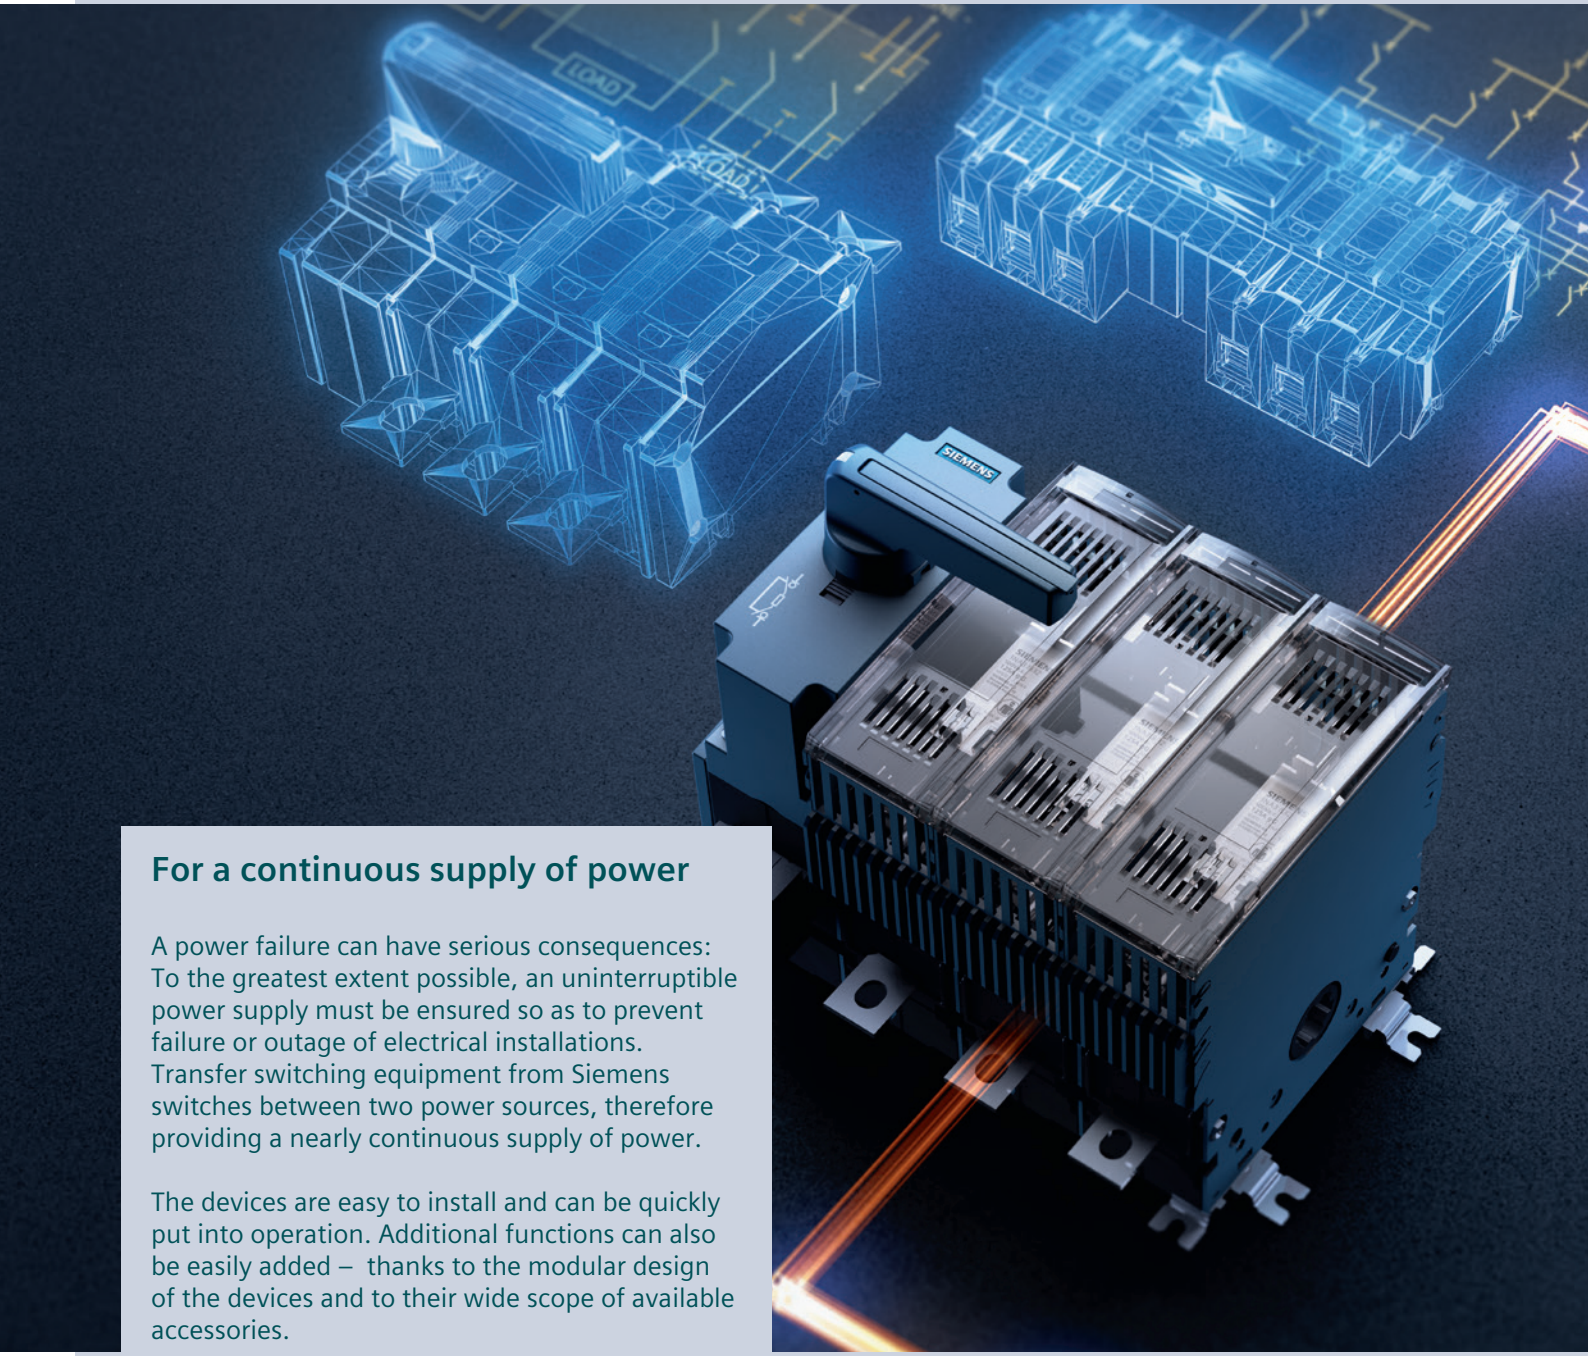

For a continuous supply of power


A power failure can have serious consequences: To the greatest extent possible, an uninterruptible power supply must be ensured so as to prevent failure or outage of electrical installations. Transfer switching equipment from Siemens switches between two power sources, therefore providing a nearly continuous supply of power.

The devices are easy to install and can be quickly put into operation. Additional functions can also be easily added – thanks to the modular design of the devices and to their wide scope of available accessories.

Convenient ordering processes and fast delivery optimize stock keeping and save you time and money. You can also use our CAx data for automated and streamlined planning and configuration.

© Siemens 2022

Transfer Switching Equipment and Load Transfer Switches

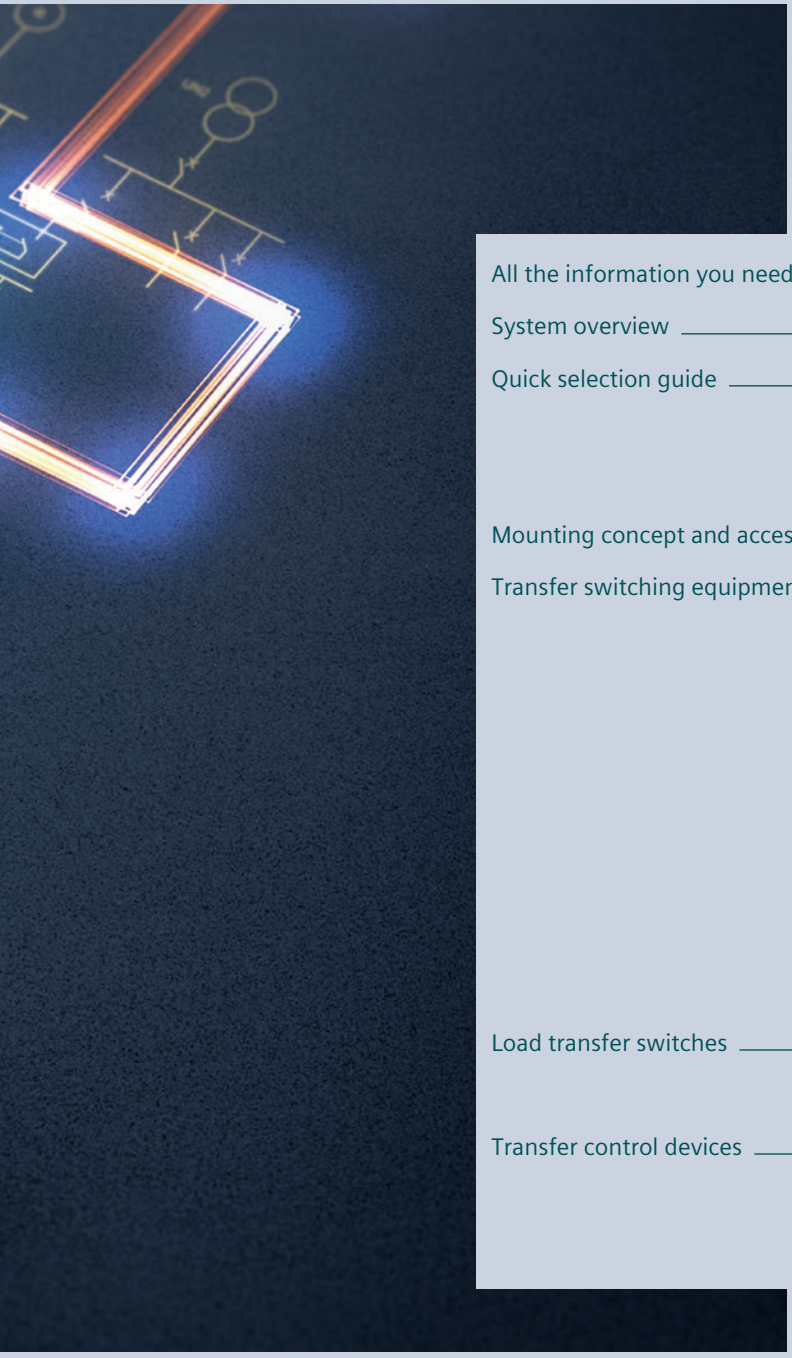

All the information you need 9/2

System overview 9/4

Quick selection guide 9/6

- Applications 9/6
- Transfer switching equipment and load transfer switches 9/8

Mounting concept and accessories 9/12

Transfer switching equipment 9/16

- 3KC3 and 3KC4 remote transfer switching equipment (RTSE) 9/16
- 3KC6 and 3KC8 automatic transfer switching equipment (ATSE) 9/17
- Accessories for remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE) 9/18
- 3KC0 manual transfer switching equipment (MTSE) 9/24
- Accessories for manual transfer switching equipment (MTSE) 9/26

Load transfer switches 9/30

- 3LD2 load transfer switches 9/30

Transfer control devices 9/32

- 3KC ATC transfer control devices 9/32
- Accessories for transfer control devices 9/34

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about transfer switching equipment and load transfer switches, please visit our website **www.siemens.com/switching-devices**

Our white paper provides you with a good overview of the transfer switching equipment **sie.ag/2XBonIi**

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information **www.siemens.com/lowvoltage/product-support**

- Technical basic information
  - Switch disconnectors and transfer switching equipment **(109763354)**

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Transfer switching equipment and load transfer switches **sie.ag/2mmMw6g**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

Order supports are available in Siemens Industry Online Support (SIOS) at **www.siemens.com/lowvoltage/product-support**

- Order support
  - 3KC automatic transfer switching equipment (ATSE) – End-to-end safety for user and systems **(109755620)**
  - 3KC remotely operated transfer switching equipment (RTSE) – End-to-end safety for user and systems **(109755627)**
  - 3KC manual transfer switching equipment (MTSE) – End-to-end safety for user and systems **(109750227)**

9

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at **www.siemens.com/lowvoltage/components/contact**

You can find further information on services at **www.siemens.com/service-catalog**

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at **www.siemens.com/support-request**

... can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  - Transfer switching equipment and load transfer switches **(109769745)**
- Equipment manual
  - 3KC3 and 3KC6 transfer switching equipment **(109754954)**
  - 3KC0 manual transfer switching equipment **(109763232)**
  - 3KC4 and 3KC8 transfer switching equipment **(109738725)**
  - 3KC ATC3100 transfer control device **(100341671)**
  - 3KC ATC6300 transfer control device **(109755149)**
  - 3KC ATC6500 transfer control device **(109758018)**

Technical overview – Transfer switching equipment and load transfer switches

The fast way to get you to our online services

This page provides you with comprehensive information and links on transfer switching equipment and load transfer switches


www.siemens.com/lowvoltage/product-support (109764946)

© Siemens 2022


System overview

Remote (RTSE) and automatic (ATSE) transfer switching equipment



3KC3 (RTSE), 4-pole


3KC4 (RTSE), 3 and 4-pole



3KC6 (ATSE), 4-pole


3KC8 (ATSE), 3 and 4-pole

Accessories, RTSE and ATSE



Bridging bars


Auxiliary switches


Terminal covers


Autotransformers


Dual power supply



Power supply and voltage sensing cables

Manual transfer switching equipment (MTSE)



3KC0 (MTSE), 3 and 4-pole

Accessories, MTSE


Bridging bars


4th contact element


Auxiliary switches


Direct operating mechanisms


Door-coupling rotary operating mechanisms


Phase barriers


Terminal covers

Note:
You will find a detailed range of accessories in the Accessories section.

© Siemens 2022

Load transfer switches



Front mounting 3LD2



Floor mounting 3LD2



Molded-plastic enclosures 3LD2

Accessories




4th contact element



N/PE terminal



Auxiliary switches



Terminal covers

Transfer control devices



3KC ATC3100



3KC ATC6300



3KC ATC6500

Accessories



Expansion modules



Front interface



Protective seal


Note:
You will find a detailed range of accessories in the Accessories section.

9

© Siemens 2022

Applications

Switching with switch disconnectors (without protection function)

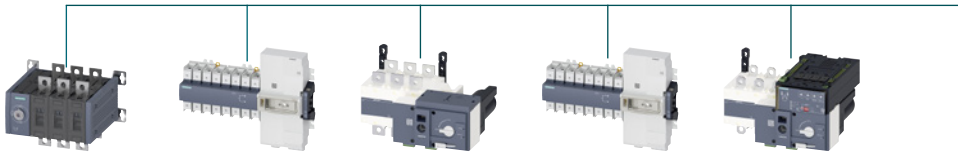


3KC0 | 3KC3 | 3KC4 | 3KC6 | 3KC8


Transfer types	Load transfer	AC	■	■	■	–	–
		DC	–	–	■	–	–
	Transfer control	AC	■	■	■	■	■
Method of operation	Manual (MTSE)		■	■	■	■	■
	Remote (RTSE)		–	■	■	–	■
	Automatic (ATSE)		–	With ATC6300	With ATC6300	■	■
Transfer control	Network/network	AC	■	■	■	■	■
	Network/generator	AC	■	■	■	–	■
	Generator/generator	AC	■	■	■	–	–
Rated operating current			16 ... 1600 A	40 ... 160 A	250 ... 3200 A	40 ... 160 A	250 ... 3200 A
Number of poles			3 and 4	4	3 and 4	4	3 and 4
Communication			–	With ATC6300	With ATC6300	–	–
Automatic load shedding			–	–	–	–	–
More information			From page 9/24 onwards	From page 9/17 onwards	From page 9/17 onwards	From page 9/17 onwards	From page 9/17 onwards

[1] Manual load transfer switch, not an MTSE


Transfer control



With switch disconnectors




With circuit breakers



With circuit breakers and automatic load shedding

Load transfer



With switch disconnectors

System overview, page 9/4

© Siemens 2022

Switching with circuit breakers (with protection function)



3LD2



3KC ATC3100 (+ 3VA/3WA/3WL)



3KC ATC6300 (+ 3VA/3WA/3WL)



3KC ATC6500 (+ 3VA/3WA/3WL)


■	–	–	–
–	–	–	–
–	■	■	■
■ [1)]	–	–	–
–	■	■	■
–	■	■	■
–	■	■	■
–	■	■	■
–	–	■	■
25 ... 250 A	3VA: 16 ... 630 A, 3WA/3WL: 630 ... 6300 A	3VA: 16 ... 630 A, 3WA/3WL: 630 ... 6300 A	3VA: 16 ... 1600 A, 3WA/3WL: 630 ... 6300 A
3 and 4	3 and 4	3 and 4	3 and 4
–	–	■	■
–	–	–	■
From page 9/30 onwards	**From page 9/32 onwards**	**From page 9/32 onwards**	**From page 9/32 onwards**

System overview, page 9/4

© Siemens 2022

Transfer switching equipment and load transfer switches

Remote transfer switching equipment (RTSE), automatic transfer switching equipment (ATSE)




			3KC3424 3KC6424	3KC3426 3KC6426	3KC3428 3KC6428	3KC3430 3KC6430	3KC3432 3KC6432	3KC3434 3KC6434
Rated uninterrupted current I_u			**40 A**	**63 A**	**80 A**	**100 A**	**125 A**	**160 A**
Connection			Box terminal					
Switch positions			I – O – II					
Number of poles			4					
Size			–					
General technical specifications								
Operating voltage at 50/60 Hz AC acc. to IEC 60947-6-1		V	415					
Operating voltage at 50/60 Hz AC acc. to IEC 60947-3 (load transfer switch)		V	415					
Impulse withstand voltage (U_{imp}) for main circuit		kV	6					
Impulse withstand voltage (U_{imp}) for control circuit (RTSE/ATSE)		kV	4 (RTSE)/2.5 (ATSE)					
Operational current in acc. to IEC 60947-6-1	AC-31 A/B, at 415 V	A	40	63	80	100	100/125	100/160
	AC-32 A/B, at 415 V	A	40	63	80	100	100/125	100/160
	AC-33 B, at 415 V	A	40	63	80	100	125	125
Operational current in acc. to IEC 60947-3 (load transfer switch)	AC-21 A/B, at 415 V	A	40	63	80	100	125	125/160
	AC-21 A/B, at 690 V	A	40	63	80	100	125	125
	AC-22 A/B, at 415 V	A	40	63	80	100	125	125/160
	AC-22 A/B, at 690 V	A	40	63	80	80	100/125	100/125
	AC-23 A/B, at 415 V	A	40	63	80	100	125	125/160
	AC-23 A/B, at 690 V	A	40	63	63	80	80	80
Operational power in acc. to IEC 60947-3 (load transfer switch)	AC-23 A/B, at 415 V [1]	kW	22	37	45	55	60	75
	AC-23 A/B, at 690 V [2]	kW	37	55	55	75	75	75
	AC-3 motor load switch at 380 ... 440 V	kW	–					
	AC-3 motor load switch at 660 ... 690 V	kW	–					
Short-circuit behavior								
Short-circuit current ratings in acc. to IEC 60947-6-1	Conditional short-circuit current with gG fuse (415 V)	kA	50	50	50	50	50	40
Short-circuit current ratings in acc. to IEC 60947-3 (load transfer switch)	Conditional short-circuit current with gG fuse (415 V)	kA	50	50	50	50	50	40
	Conditional short-circuit current with gG fuse (690 V)	kA	–					
Transfer switching properties (in acc. to IEC 60947-6-1)								
Switching time I – O and II – O		s	0.045					
Switch-off time I – O – II and II – O – I		s	0.15					
Transfer time I – O – II and II – O – I without/with network monitoring		s	0.18/1.4					
Degree of protection								
IP maximum degree of protection			IP20					
Standards UL/CSA, in acc. to UL508								
Rated operational voltage U_e AC		V	–					
Rated uninterrupted current I_u		A	–					
Maximum rated power (AC-3), 3-phase, 40 ... 60 Hz	480 V	hp	–					
	600 V	hp	–					
More information								
			From page 9/17 onwards					

[1] For 3LD2 at 380 ... 440 V [2] For 3LD2 at 660 ... 690 V

System overview, page 9/4

© Siemens 2022

Remote transfer switching equipment (RTSE), automatic transfer switching equipment (ATSE)




3KC4.38 3KC8.38	3KC4.42 3KC8.42	3KC4.46 3KC8.46	3KC4.48 3KC8.48	3KC4.50 3KC8.50	3KC4.52 3KC8.52	3KC4.54 3KC8.54	3KC4.56 3KC8.56	3KC4.58 3KC8.58	3KC4.60 3KC8.60
250 A	**400 A**	**630 A**	**800 A**	**1000 A**	**1250 A**	**1600 A**	**2000 A**	**2500 A**	**3200 A**
Flat terminal									
I – O – II									
3 and 4									
–									
415									
690									
12									
4									
–/250	–/400	–/630	–/800	–/1000	–/1250	–/1600	–/2000	–/2500	–/3200
–/200	–/400	–/500	–/800	–/1000	–/1250	–/1250	–/2000	–/2000	–/2000
200	200	400	800	1000	1000	1000	1250	1250	1250
250	400	630	800	1000	1250	1600	–/2000	–/2500	–/3200
200	200	500	800	1000	1250	1600	–/2000	–/2000	–/2000
250	400	630	800	1000	1250	1600	–/2000	–/2500	–/3200
160	160	400	630	800	1000	1000	–	–	–
200	400	500/630	800	1000	1250	1250	–/1600	–/1600	–/1600
125	125	400	630	630	800	800	–	–	–
110	220	335	450	700	800	900	–	–	–
110	110	400	400	630	800	800	–	–	–
–									
–									
50	50	50	50	50	100	100	–	–	–
–									
50	50	50	50	50	100	100	–	–	–
0.5	0.5	0.6	1.4	1.4	1.4	1.4	1.6	1.6	1.6
0.4	0.4	0.4	1.4	1.4	1.4	1.5	1.2	1.2	1.2
0.9/1.0	0.9/1.0	1.0/1.1	2.8/3.1	2.8/3.1	2.8/3.1	2.9/3.3	2.8/2.8	2.8/2.8	2.8/2.8
IP20									
–									
–									
–									
–									
From page 9/17 onwards									


System overview, page 9/4

© Siemens 2022

Transfer switching equipment and load transfer switches

Manual transfer switching equipment (MTSE)





			3KC0.16	3KC0.22	3KC0.26	3KC0.28	3KC0.30	3KC0.32	3KC0.34
Rated uninterrupted current I_u			**16 A**	**32 A**	**63 A**	**80 A**	**100 A**	**125 A**	**160 A**
Connection			Box terminal			Box terminal			
Switch positions			I–O–II			I–O–II			
Number of poles			3 and 4			3 and 4			
Size			1			2			
General technical specifications									
Operating voltage at 50/60 Hz AC in acc. to IEC 60947-6-1		V	415			415			
Operating voltage at 50/60 Hz AC in acc. to IEC 60947-3 (load transfer switch)		V	690			690			
Impulse withstand voltage (U_{imp}) for main circuit		kV	8			8			
Impulse withstand voltage (U_{imp}) for control circuit (RTSE/ATSE)		kV	–			–			
Operational current in acc. to IEC 60947-6-1	AC-31 A/B, at 415 V	A	–/16	–/32	–/63	–/80	–/100	–/125	–/160
	AC-32 A/B, at 415 V	A	–/16	–/32	–/63	–/80	–/100	–/125	–/160
	AC-33 B, at 415 V	A	16	32	63	80	100	125	160
Operational current in acc. to IEC 60947-3 (load transfer switch)	AC-21 A/B, at 415 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-21 A/B, at 690 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-22 A/B, at 415 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-22 A/B, at 690 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-23 A/B, at 415 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
	AC-23 A/B, at 690 V	A	16/16	32/32	63/63	80/80	100/100	125/125	160/160
Operational power in acc. to IEC 60947-3 (load transfer switch)	AC-23 A/B, at 415 V [1]	kW	7.5/7.5	15/15	30/30	37/37	55/55	55/55	90/90
	AC-23 A/B, at 690 V [2]	kW	11/11	30/30	55/55	75/75	90/90	110/110	110/110
	AC-3 motor load switch at 380 ... 440 V	kW	–			–			
	AC-3 motor load switch at 660 ... 690 V	kW	–			–			
Short-circuit behavior									
Short-circuit current ratings in acc. to IEC 60947-6-1	Conditional short-circuit current with gG fuse (415 V)	kA	100			100			
Short-circuit current ratings in acc. to IEC 60947-3 (load transfer switch)	Conditional short-circuit current with gG fuse (415 V)	kA	100			100			
	Conditional short-circuit current with gG fuse (690 V)	kA	100			65			
Transfer switching properties (in acc. to IEC 60947-6-1)									
Switching time I–O and II–O		s	–			–			
Switch-off time I–O–II and II–O–I		s	–			–			
Transfer time I–O–II and II–O–I without/with network monitoring		s	–			–			
Degree of protection									
IP maximum degree of protection			IP20			IP20			
Standards UL/CSA, in acc. to UL508									
Rated operational voltage U_e AC		V	–			–			
Rated uninterrupted current I_u		A	–			–			
Maximum rated power (AC-3), 3-phase, 40 ... 60 Hz	480 V	hp	–			–			
	600 V	hp	–			–			
More information									
			From page 9/24 onwards			From page 9/24 onwards			

[1] For 3LD2 at 380 ... 440 V [2] For 3LD2 at 660 ... 690 V





9

System overview, page 9/4

© Siemens 2022

Manual transfer switching equipment (MTSE)

Load transfer switches



3KC0.36	3KC0.38	3KC0.40	3KC0.42	3KC0.44	3KC0.46	3KC0.48	3KC0.50	3KC0.52	3KC0.54	3LD21	3LD22	3LD25	3LD27	3LD23	3LD24
200 A	250 A	315 A	400 A	500 A	630 A	800 A	1000 A	1250 A	1600 A	25 A	32 A	63 A	100 A	160 A	250 A
Flat terminal				Flat terminal			Flat terminal			Box terminal				Box terminal	
I–O–II				I–O–II			I–O–II			I–O–II				I–O–II	
3 and 4				3 and 4			3 and 4			3				3 and 4	
3				4			5			–				–	
415				415			415			–				–	
690				690			690			690				690	
12				12			12			6				6	
–				–			–			–				–	
–/200	–/250	–/315	–/400	–/500	–/630	–/800	–/1000	–/1250	–/1600	–				–	
–/200	–/250	–/315	–/350	–/500	–/630	–/800	–/1000	–/1250	–/1250	–				–	
200	250	315	315	500	500	500	800	800	800	–				–	
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	160	250
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	160	250
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	140	230
200/200	250/250	315/315	400/400	500/500	630/630	800/800	1000/1000	1250/1250	1600/1600	25	32	63	100	140	230
200/200	250/250	315/315	400/400	500/500	630/630	670/670	800/800	800/800	800/800	20	22	43	70	132	224
200/200	250/250	315/315	315/315	500/500	500/500	500/500	800/800	800/800	800/800	11.5	13.5	22	34	47	58
110/110	132/132	160/160	220/220	280/280	355/355	355/355	400/400	400/400	400/400	9.5	11.5	22	37	75	132
185/185	220/220	280/280	355/355	500/500	500/500	500/500	800/800	800/800	800/800	9.5	11.5	18.5	30	45	55
–				–			–			7.5	9.5	18.5	30	50	110
–				–			–			7.5	9.5	15	22	37	45
100	100	65	65	100	100	65	100	80	80	–				–	
100	100	65	65	100	100	65	100	80	80	50	50	50	50	50	50
65	65	35	35	65	65	50	–	–	–	50	50	50	50	50	50
–				–			–			–				–	
–				–			–			–				–	
–				–			–			–				–	
IP20				IP20			IP20			IP65					
–				–			–			600	600	600	600	600	600
–				–			–			20	30	60	100	160	250
–				–			–			10	20 (15) [3]	40	60	75	100
–				–			–			15	30 (20) [3]	50	75	75	75
From page 9/24 onwards				From page 9/24 onwards			From page 9/24 onwards			From page 9/30 onwards					

[3] Values in brackets apply to devices in molded-plastic enclosure.


9

System overview, page 9/4

© Siemens 2022

Mounting concept and accessories

3KC3 (RTSE) 4-pole

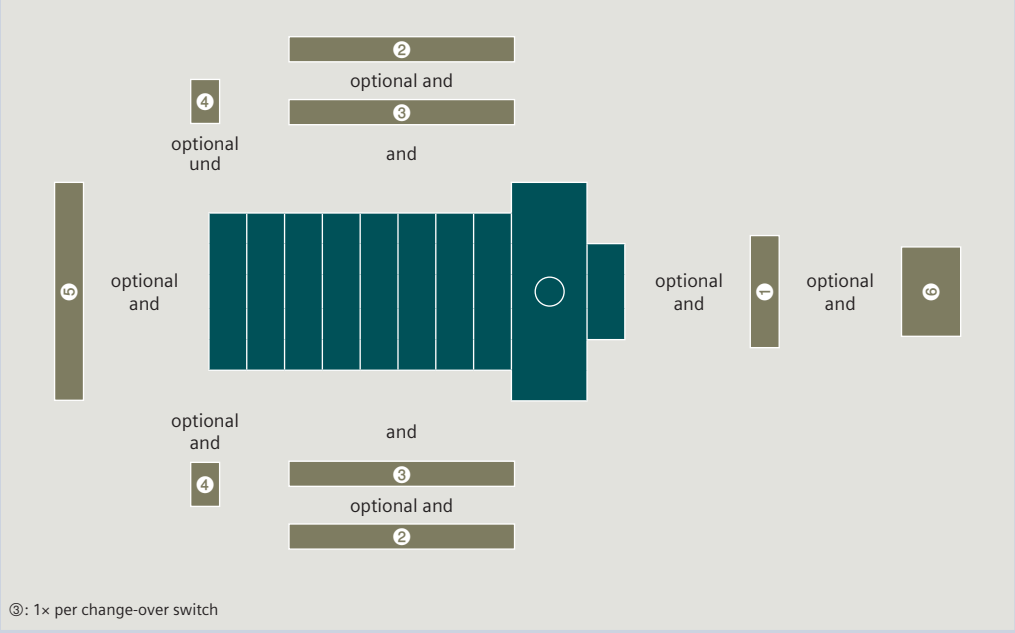


③: 1× per change-over switch

Legend

① Auxiliary switch
② Terminal cover
③ Bridging bar
④ Aux. conductor terminal
⑤ Autotransformer
⑥ Dual power supply

3KC6 (ATSE), 4-pole

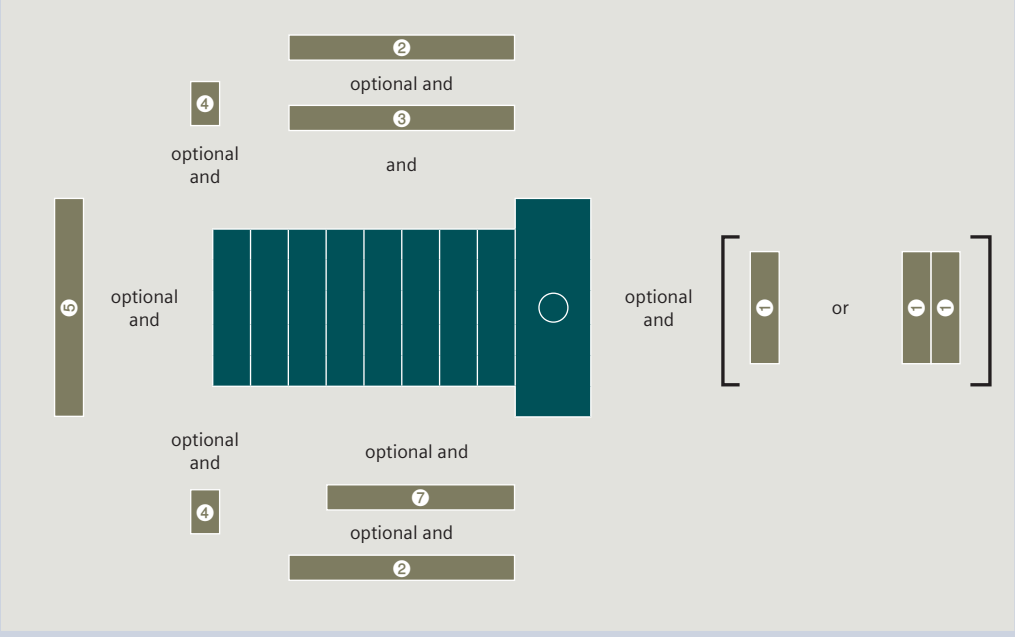


Legend

① Auxiliary switch
② Terminal cover
③ Bridging bar
④ Aux. conductor terminal
⑤ Autotransformer
⑥ Dual power supply
⑦ Sealable cover

System overview, page 9/4

© Siemens 2022

3KC4 (RTSE) 3-pole or 4-pole

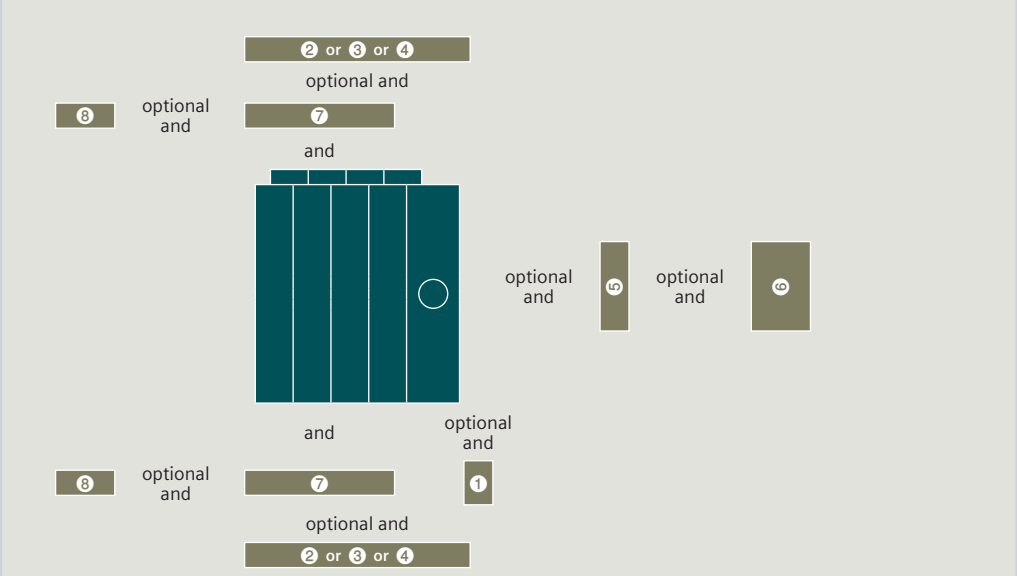


⑧: 3× with 3-pole change-over switch, 4× with 4-pole change-over switch

Legend

① Auxiliary switch
② Phase barrier
③ Terminal cover
④ Terminal plate
⑤ Autotransformer
⑥ Dual power supply
⑦ Bridging bar
⑧ Copper bar connection kit

9

3KC8 (ATSE) 3-pole or 4-pole

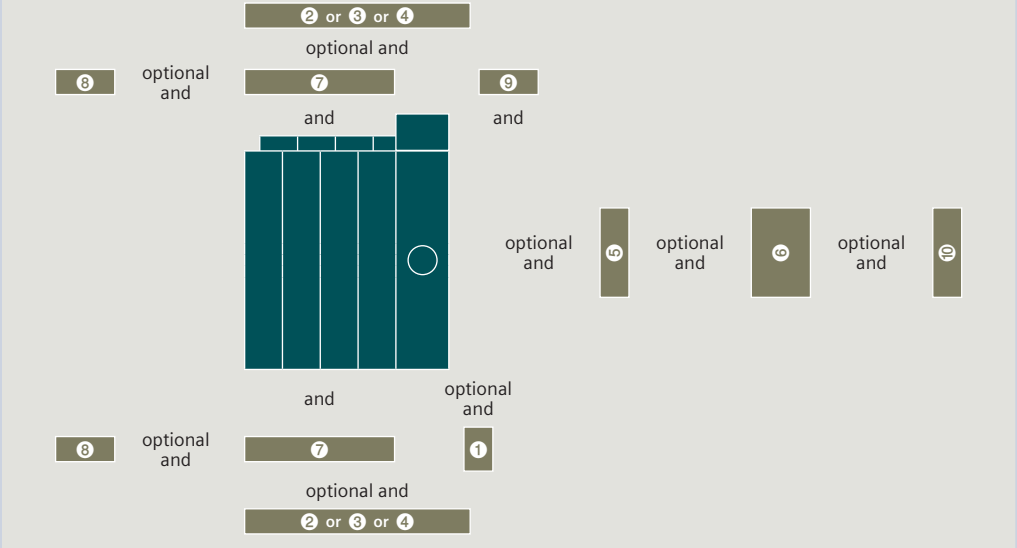

⑧: 3× with 3-pole change-over switch, 4× with 4-pole change-over switch

Legend


① Auxiliary switch
② Phase barrier
③ Terminal cover
④ Terminal plate
⑤ Autotransformer
⑥ Dual power supply
⑦ Bridging bar
⑧ Copper bar connection kit
⑨ Power supply cable
⑩ External display

System overview, page 9/4

© Siemens 2022

Mounting concept and accessories

3KC0 (MTSE) front operating mechanism on left, 3-pole or 4-pole, sizes 3 to 5

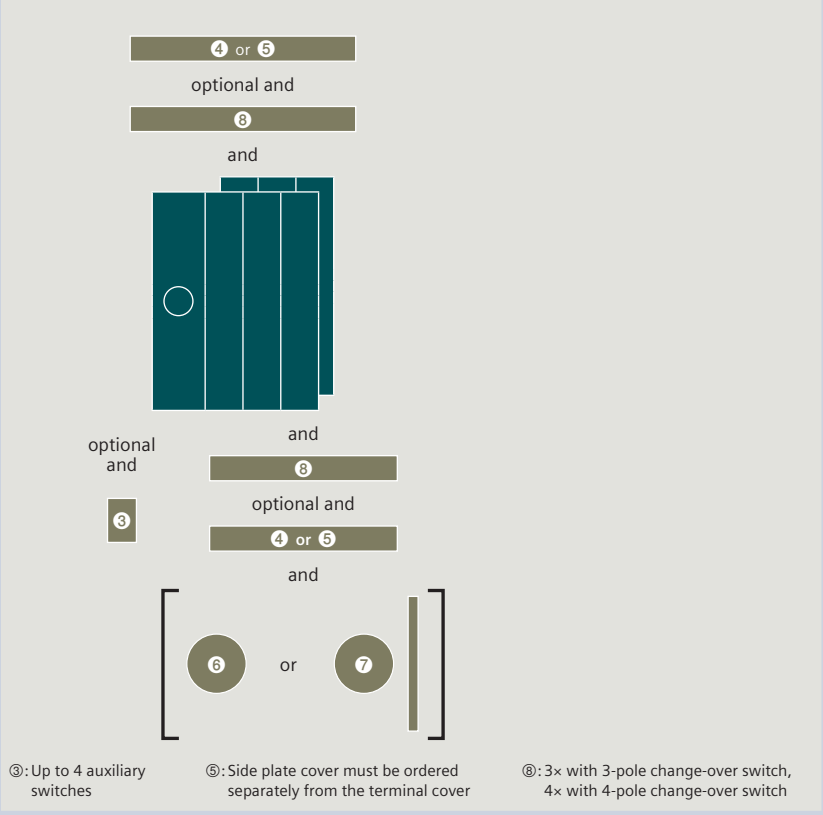


③: Up to 4 auxiliary switches

⑤: Side plate cover must be ordered separately from the terminal cover

⑧: 3× with 3-pole change-over switch, 4× with 4-pole change-over switch

Legend
- ③ Auxiliary switch
- ④ Phase barrier
- ⑤ Side plate cover and terminal cover
- ⑥ Direct operating mechanism
- ⑦ Door-coupling rotary operating mechanism
- ⑧ Bridging bar

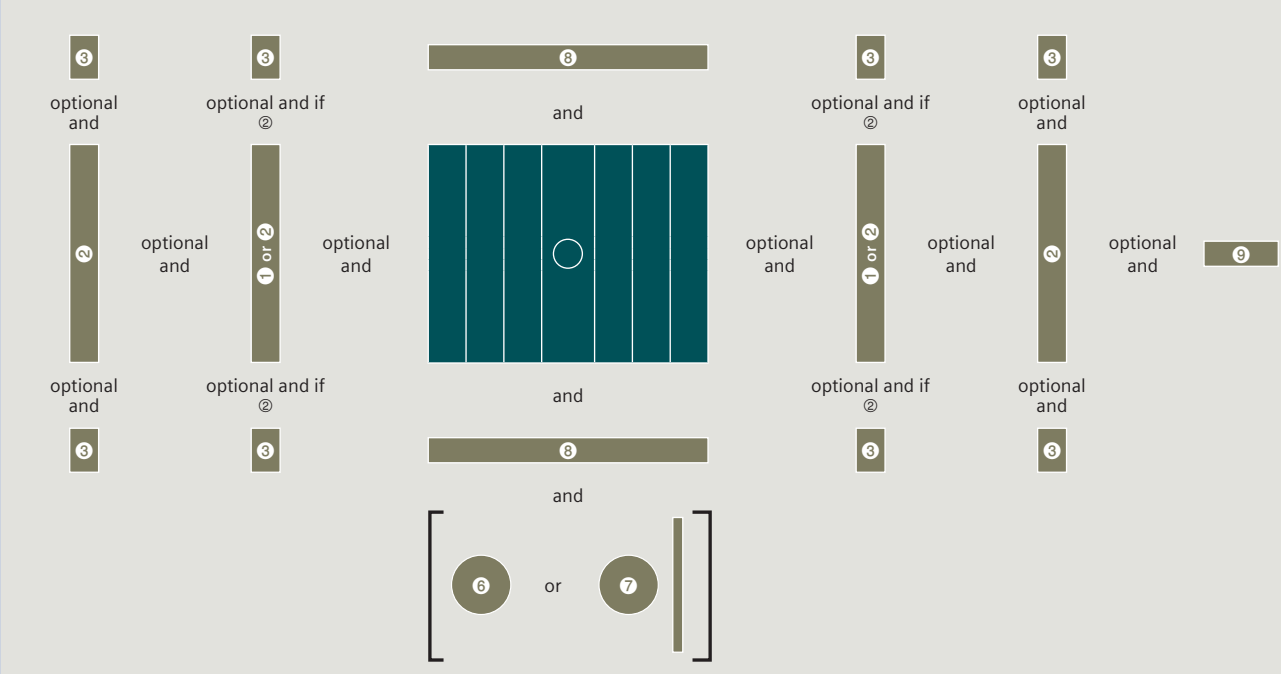

①: For 3-pole 3K only

②: Max. 1× for each side of the switch
②: Requires at least 1× auxiliary switch (③)


⑧: Only 1× per change-over switch

Legend
- ① 4th contact element
- ② Auxiliary switch module, standard version
- ③ Auxiliary switch
- ⑥ Direct operating mechanism
- ⑦ Door-coupling rotary operating mechanism
- ⑧ Bridging bar
- ⑨ Assembly kit for floor mounting

System overview, page 9/4

© Siemens 2022

3LD2 load transfer switch mounting concept

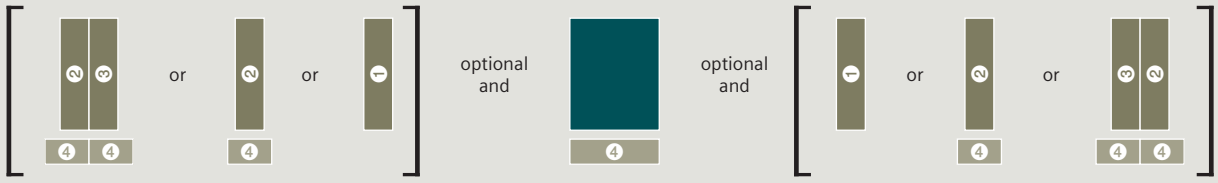

③: N switching contact must first be installed on the basic unit

Legend

① Auxiliary switch
② N/PE terminal
③ N switching contact
④ Terminal cover

9


System overview, page 9/4


© Siemens 2022


3KC3 and 3KC4 remote transfer switching equipment (RTSE)

40 to 3200 A

	Box terminal 3KC3 (RTSE)	Flat terminal 3KC4 (RTSE)
Version	With motorized operating mechanism and additional handle	With motorized operating mechanism and additional handle
Operating mechanism	Operating mechanism on right	Operating mechanism on right
Mounting	Floor and DIN-rail mounting	Floor mounting
Bridging bars	Additionally required for connection side	Additionally required for connection side
Scope of supply	Including 3KC9603 auxiliary switches	







Rated uninterrupted current I_u	4-pole	3-pole	4-pole
Box terminal			
40 A	3KC3424-2AA22-0AA3	–	–
63 A	3KC3426-2AA22-0AA3	–	–
80 A	3KC3428-2AA22-0AA3	–	–
100 A	3KC3430-2AA22-0AA3	–	–
125 A	3KC3432-2AA22-0AA3	–	–
160 A	3KC3434-2AA22-0AA3	–	–
Flat terminal			
250 A	–	3KC4338-0CA21-0AA3	3KC4438-0CA21-0AA3
400 A	–	3KC4342-0DA21-0AA3	3KC4442-0DA21-0AA3
630 A	–	3KC4346-0EA21-0AA3	3KC4446-0EA21-0AA3
800 A	–	3KC4348-0FA21-0AA3	3KC4448-0FA21-0AA3
1000 A	–	3KC4350-0FA21-0AA3	3KC4450-0FA21-0AA3
1250 A	–	3KC4352-0GA21-0AA3	3KC4452-0GA21-0AA3
1600 A	–	3KC4354-0HA21-0AA3	3KC4454-0HA21-0AA3
2000 A	–	3KC4356-0JA21-0AA3	3KC4456-0JA21-0AA3
2500 A	–	3KC4358-0JA21-0AA3	3KC4458-0JA21-0AA3
3200 A	–	3KC4360-0JA21-0AA3	3KC4460-0JA21-0AA3


Quick selection guide, page 9/8


© Siemens 2022


3KC6 and 3KC8 automatic transfer switching equipment (ATSE)

40 to 3200 A

	Box terminal 3KC6 (ATSE)	Flat terminal 3KC8 (ATSE)
Version	With motorized operating mechanism, integrated controller and additional handle	With motorized operating mechanism, integrated controller and additional handle
Operating mechanism	Operating mechanism on right	Operating mechanism on right
Mounting	Floor and DIN-rail mounting	Floor mounting
Bridging bars	Additionally required for connection side	Additionally required for connection side
Scope of supply	Wired ready for operation (including power supply)	Without power supply and voltage sensing cables







Rated uninterrupted current I_u	4-pole	3-pole	4-pole
Box terminal			
40 A	3KC6424-2TA20-0TA3	–	–
63 A	3KC6426-2TA20-0TA3	–	–
80 A	3KC6428-2TA20-0TA3	–	–
100 A	3KC6430-2TA20-0TA3	–	–
125 A	3KC6432-2TA20-0TA3	–	–
160 A	3KC6434-2TA20-0TA3	–	–
Flat terminal			
250 A	–	3KC8338-0CA22-0GA3	3KC8438-0CA22-0GA3
400 A	–	3KC8342-0DA22-0GA3	3KC8442-0DA22-0GA3
630 A	–	3KC8346-0EA22-0GA3	3KC8446-0EA22-0GA3
800 A	–	3KC8348-0FA22-0GA3	3KC8448-0FA22-0GA3
1000 A	–	3KC8350-0FA22-0GA3	3KC8450-0FA22-0GA3
1250 A	–	3KC8352-0GA22-0GA3	3KC8452-0GA22-0GA3
1600 A	–	3KC8354-0HA22-0GA3	3KC8454-0HA22-0GA3
2000 A	–	3KC8356-0JA22-0GA3	3KC8456-0JA22-0GA3
2500 A	–	3KC8358-0JA22-0GA3	3KC8458-0JA22-0GA3
3200 A	–	3KC8360-0JA22-0GA3	3KC8460-0JA22-0GA3


Quick selection guide, page 9/8

© Siemens 2022

Accessories


For remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE)

Bridging bar



- For load-side connection
- For 3KC4/3KC8 3-pole transfer switches 3 units, for 3KC4/3KC8 4-pole transfer switches 4 units are required

Version	Number of poles	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 125 A	4-pole	1 unit	3KC9618-2	■	■
For 160 A	4-pole	1 unit	3KC9618-3	■	■



For 250 A	1-pole	1 unit	3KC9818-2	■	■
For 400 A	1-pole	1 unit	3KC9818-3	■	■
For 630 A	1-pole	1 unit	3KC9818-4	■	■
For 800 ... 1000 A	1-pole	1 unit	3KC9818-5	■	■
For 1250 A	1-pole	1 unit	3KC9818-6	■	■
For 1600 A	1-pole	1 unit	3KC9818-7	■	■
For 2000 ... 3200 A	1-pole	1 unit	3KC9818-8	■	■

Auxiliary conductor terminal



Version	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 160 A	2 units	3KC9622-2	■	■


Auxiliary switches for 40 ... 160 A



- For 250 V AC/5 A or for 24 V DC/2 A
- 1 change-over contact for each position O, I, II
- Max. 2 auxiliary switches can be installed per transfer switching equipment unit

Version	Contact configuration	Article No.	RTSE	ATSE
For 40 ... 160 A	With separate contacts	3KC9603-1	■	■
	With linked common contacts	3KC9603-2	■	■

Auxiliary switches for 250 ... 1600 A



- One auxiliary switch contains 2 leading changeover contacts, one changeover contact for position I and one changeover contact for position II (incl. bolt set)
- Max. two auxiliary switches can be installed per transfer switching equipment unit
- For 2000 ... 3200 A transfer switching equipment the auxiliary switch is included in the basic unit
- 250 V AC/12 A (AC-13), 24 V DC/14 A (DC-13)




Version	Article No.	RTSE	ATSE
For 250 ... 630 A	3KC9803-1	■	■
For 800 ... 1600 A	3KC9803-2	■	■
For 2000 ... 2500 A (included in the basic unit)	–	■	■

9

System overview, page 9/4

© Siemens 2022

Terminal covers

Version	Number of poles	Scope of supply	Article No.	RTSE	ATSE
 For 40 ... 160 A	4-pole	2 units (1 unit covers 4 poles)	3KC9604-2	■	■
 For 250 ... 400 A	3-pole	3 units (1 unit covers 1 pole)	3KC9804-1	■	■
	4-pole	4 units (1 unit covers 1 pole)	3KC9804-2	■	■
 For 630 A	3-pole	3 units (1 unit covers 1 pole)	3KC9804-3	■	■
	4-pole	4 units (1 unit covers 1 pole)	3KC9804-4	■	■

Sealable cover

Version	Scope of supply	Article No.	RTSE	ATSE
 For 3KC6 (ATSE) 40 ... 160 A	Incl. bolt set and sealing ribbons	3KC9721-1	–	■
 For 3KC8 (ATSE) 250 ... 3200 A	Incl. bolt set and sealing ribbons	3KC9821-0	–	■



Sealing ribbon



- Also as spare part for sealable cover

Version	Scope of supply	Article No.	RTSE	ATSE
For 40 ... 3200 A	10 units	3KC9621-2	–	■

Autotransformers

Version	Technical specifications	Article No.	RTSE	ATSE
 For 40 ... 160 A	400 V/230 V AC; 400 VA	3KC9624-1	■	■
 For 250 ... 3200 A, 3-pole	400 V/230 V AC; 200 VA	3KC9824-1	■	■

9







System overview, page 9/4

© Siemens 2022

Accessories

For remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE)

Power supply and voltage sensing cables for ATSE

	Application	Infeed	Switches	Version	Article No.	RTSE	ATSE
 For 250 ... 630 A	2-pole	From below, with power supply	3-pole	For 250 A	3KC9833-1	–	■
				For 400 A	3KC9833-2	–	■
				For 630 A	3KC9833-3	–	■
				For 800 ... 1000 A	3KC9833-4	–	■
				For 1250 A	3KC9833-5	–	■
				For 1600 A	3KC9833-6	–	■
				For 2000 ... 3200 A	3KC9833-7	–	■
 For 800 ... 3200 A		From above, with power supply	3-pole	For 250 A	3KC9834-1	–	■
				For 400 A	3KC9834-2	–	■
				For 630 A	3KC9834-3	–	■
				For 800 ... 1000 A	3KC9834-4	–	■
				For 1250 A	3KC9834-5	–	■
				For 1600 A	3KC9834-6	–	■
				For 2000 ... 3200 A	3KC9834-7	–	■
 For 250 ... 630 A	3-pole	From below, without power supply	3-pole	For 250 A	3KC9822-1	–	■
				For 400 A	3KC9822-2	–	■
				For 630 A	3KC9822-3	–	■
				For 800 ... 1000 A	3KC9822-4	–	■
				For 1250 A	3KC9822-5	–	■
				For 1600 A	3KC9822-6	–	■
				For 2000 ... 3200 A	3KC9822-7	–	■
 For 800 ... 3200 A		From above, without power supply	3-pole	For 250 A	3KC9832-1	–	■
				For 400 A	3KC9832-2	–	■
				For 630 A	3KC9832-3	–	■
				For 800 ... 1000 A	3KC9832-4	–	■
				For 1250 A	3KC9832-5	–	■
				For 1600 A	3KC9832-6	–	■
				For 2000 ... 3200 A	3KC9832-7	–	■
 For 250 ... 630 A	4-pole	From below, with power supply	4-pole	For 250 A	3KC9830-1	–	■
				For 400 A	3KC9830-2	–	■
				For 630 A	3KC9830-3	–	■
				For 800 ... 1000 A	3KC9830-4	–	■
				For 1250 A	3KC9830-5	–	■
				For 1600 A	3KC9830-6	–	■
				For 2000 ... 3200 A	3KC9830-7	–	■
 For 800 ... 3200 A		From above, with power supply	4-pole	For 250 A	3KC9831-1	–	■
				For 400 A	3KC9831-2	–	■
				For 630 A	3KC9831-3	–	■
				For 800 ... 1000 A	3KC9831-4	–	■
				For 1250 A	3KC9831-5	–	■
				For 1600 A	3KC9831-6	–	■
				For 2000 ... 3200 A	3KC9831-7	–	■

System overview, page 9/4

© Siemens 2022

				RTSE	ATSE
Dual power supply					
	**Version**	**Technical specifications**	**Article No.**		
	For 3KC3 and 3KC4 (RTSE) 40 ... 3200 A	240 V AC, 3 A	3KC9625-1	■	–
External display					
	• For installing in the control cabinet door				
	Version		**Article No.**		
	For 3KC8 (ATSE) 250 ... 3200 A		3KC9823-0	–	■
Connection cable					
	• 3 m RJ45 cable for external display				
	Version		**Article No.**		
	For 250 ... 3200 A		3KC9823-2	–	■
Phase barrier					
	• For 800 ... 3200 A transfer switching equipment included in the scope of supply of the basic unit				
	Version	**Number of poles**	**Scope of supply**	**Article No.**	
	For 250 ... 400 A	3-pole	2 units	3KC9808-1	■	■
		4-pole	3 units	3KC9808-6	■	■
	For 630 A	3-pole	2 units	3KC9808-2	■	■
		4-pole	3 units	3KC9808-7	■	■
Cover frame for ATSE					
	• For a clean and safe door cut-out • To enable access to the front of the 3KC8 transfer switching equipment (electronic module and operation of the motorized operating mechanism)				
	Version			**Article No.**	
	250 ... 630 A			3KC9820-4	–	■
	800 ... 3200 A			3KC9820-5	–	■

9



System overview, page 9/4

© Siemens 2022

Accessories

For remote transfer switching equipment (RTSE) and automatic transfer switching equipment (ATSE)

Copper bar connection kit

	Version	Designation	Scope of supply	Article No.	RTSE	ATSE
	For 2000 ... 2500A	C-bracket, part A	1 unit	3KC9811-0	■	■
	For 2000 ... 3200 A	Bolt set, part B	1 unit	3KC9811-1	■	■
				3KC9811-2	■	■
		T-bracket, part C	1 unit	3KC9811-3	■	■
		L-bracket, part D	2 units	3KC9811-4	■	■
		Bridging bars, part E	1 unit	3KC9818-8	■	■

Terminal plates




- For protecting the front side at the upper and lower connecting terminals

	Version	Number of poles	Article No.	RTSE	ATSE
	For 250 ... 400 A	3-pole	3KC9827-1	■	■
		4-pole	3KC9828-1	■	■
	For 630 A	3-pole	3KC9827-2	■	■
		4-pole	3KC9828-2	■	■
	For 800 ... 1250 A	3-pole	3KC9827-3	■	■
		4-pole	3KC9828-3	■	■
	For 1600 A	3-pole	3KC9827-4	■	■
		4-pole	3KC9828-4	■	■
	For 2000 ... 3200 A	3-pole	3KC9827-5	■	■
		4-pole	3KC9828-5	■	■

9

System overview, page 9/4

© Siemens 2022

			RTSE	ATSE
Motorized operating mechanism as spare part				
	Version	**Article No.**		
	For 250 ... 400 A	3KC9826-1	■	■
	For 630 A	3KC9826-2	■	■
	For 800 ... 1250 A	3KC9826-3	■	■
	For 1600 A	3KC9826-4	■	■
	For 2000 ... 3200 A	3KC9826-5	■	■
Controller (electronic module) as spare part				
	Version	**Article No.**		
	For 250 ... 3200 A	3KC9826-0	–	■
Mounting kit as spare part				
	• Comprising two device holders, each with two plastic covers			
	Version	**Article No.**		
	For 250 ... 630 A	3KC9820-6	■	■

9

Copper bar connection kit

You will find further information at: sie.ag/36U7MCb








System overview, page 9/4

© Siemens 2022

3KC0 manual transfer switching equipment (MTSE)

16 to 1600 A

	Box terminal			
	Size 1		Size 2	
Version	Basic unit without handle		Basic unit without handle	
Operating mechanism	Front operating mechanism		Front operating mechanism	
Mounting	DIN-rail and floor mounting [1]		DIN-rail and floor mounting [1]	
Bridging bars	Additionally required for connection side		Additionally required for connection side	
				







Rated uninterrupted current I_u	3-pole	4-pole	3-pole	4-pole
Box terminal				
16 A	3KC0316-2ME00-0AA0	3KC0416-2ME00-0AA0	–	–
32 A	3KC0322-2ME00-0AA0	3KC0422-2ME00-0AA0	–	–
63 A	3KC0326-2ME00-0AA0	3KC0426-2ME00-0AA0	–	–
80 A	–	–	3KC0328-2NE00-0AA0	3KC0428-2NE00-0AA0
100 A	–	–	3KC0330-2NE00-0AA0	3KC0430-2NE00-0AA0
125 A	–	–	3KC0332-2NE00-0AA0	3KC0432-2NE00-0AA0
160 A	–	–	3KC0334-2NE00-0AA0	3KC0434-2NE00-0AA0
Flat terminal				
200 A	–	–	–	–
250 A	–	–	–	–
315 A	–	–	–	–
400 A	–	–	–	–
500 A	–	–	–	–
630 A	–	–	–	–
800 A	–	–	–	–
1000 A	–	–	–	–
1250 A	–	–	–	–
1600 A	–	–	–	–

[1] An assembly kit is required for floor mounting

9

Quick selection guide, page 9/10

© Siemens 2022




Flat terminal					
Size 3		**Size 4**		**Size 5**	
Basic unit without handle		Basic unit without handle		Basic unit without handle	
Front operating mechanism		Front operating mechanism		Front operating mechanism	
Floor mounting		Floor mounting		Floor mounting	
Additionally required for connection side		Additionally required for connection side		Additionally required for connection side	
					
3-pole	**4-pole**	**3-pole**	**4-pole**	**3-pole**	**4-pole**
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
3KC0336-0PE00-0AA0	3KC0436-0PE00-0AA0	–	–	–	–
3KC0338-0PE00-0AA0	3KC0438-0PE00-0AA0	–	–	–	–
3KC0340-0PE00-0AA0	3KC0440-0PE00-0AA0	–	–	–	–
3KC0342-0PE00-0AA0	3KC0442-0PE00-0AA0	–	–	–	–
–	–	3KC0344-0QE00-0AA0	3KC0444-0QE00-0AA0	–	–
–	–	3KC0346-0QE00-0AA0	3KC0446-0QE00-0AA0	–	–
–	–	3KC0348-0QE00-0AA0	3KC0448-0QE00-0AA0	–	–
–	–	–	–	3KC0350-0RE00-0AA0	3KC0450-0RE00-0AA0
–	–	–	–	3KC0352-0RE00-0AA0	3KC0452-0RE00-0AA0
–	–	–	–	3KC0354-0RE00-0AA0	3KC0454-0RE00-0AA0

Quick selection guide, page 9/10

© Siemens 2022

Accessories



For manual transfer switching equipment (MTSE)

				Size 1	Size 2	Size 3	Size 4	Size 5
Box terminal (4th contact element, switching pole)								
	**Connection**		**Article No.**					
	N — N		3KD9105-2	■				
			3KD9205-2		■			
Auxiliary switch module								
	• **Delivery:** Does not include auxiliary switch • A maximum of 2 auxiliary switches can be installed per auxiliary switch module. • The auxiliary switches indicate the switch position of the respective switching equipment (I or II) to which the auxiliary switch module is connected.							
	Type		**Article No.**					
	Standard version		3KD9103-5	■	■			
Auxiliary switches								
	• Auxiliary switches for sizes 3 to 5 have a screw terminal and are mounted on the 3K operating mechanism module. Auxiliary switches with spring-type terminals from the 3SU1 program can also be used. • All auxiliary switches for sizes 3 to 5 can be used as leading auxiliary switches, depending on the mounting position of the auxiliary switch (see operating instructions).							
	Type	**Contacts**	**Contact surface**	**Article No.**				
	With connecting cables	1 CO	Standard	3KD9103-1	■	■		
			Solid-state compatible	3KD9103-3	■	■		
	Without connecting cables	1 CO	Standard	3KD9103-2	■	■		
			Solid-state compatible	3KD9103-4	■	■		
		1 NO	Standard	3SU1400-1AA10-1BA0		■	■	■
			Gold-plated	3SU1400-1AA10-1LA0		■	■	■
		1 NC	Standard	3SU1400-1AA10-1CA0		■	■	■
			Gold-plated	3SU1400-1AA10-1MA0		■	■	■
		1 NO + 1 NC	Standard	3SU1400-1AA10-1FA0		■	■	■
			Gold-plated	3SU1400-1AA10-1QA0		■	■	■
		2 NO	Standard	3SU1400-1AA10-1DA0		■	■	■
			Gold-plated	3SU1400-1AA10-1NA0		■	■	■
		2 NC	Standard	3SU1400-1AA10-1EA0		■	■	■
			Gold-plated	3SU1400-1AA10-1PA0		■	■	■
Bridging bars								
	• For load-side connection • For 3-pole transfer switches (sizes 3 to 5) 3 units, for 4-pole transfer switches (sizes 3 to 5) 4 units are required							
	Number of poles			**Article No.**				
	1-pole		1 unit	3KC9318-0			■	
				3KC9418-0				■
				3KC9518-0				■
	3-pole		1 unit	3KC9118-1	■			
				3KC9218-1		■		
	4-pole		1 unit	3KC9118-2	■			
				3KC9218-2		■		

9

System overview, page 9/4

© Siemens 2022

				Size 1	Size 2	Size 3	Size 4	Size 5
Direct operating mechanism standard version								
	• Can be locked with up to max. 3 padlocks • Requires additional mounting depth in locked state							
	Color		**Article No.**					
	Gray		3KC9201-3	■	■			
			3KC9301-1			■		
			3KC9401-1				■	
			3KC9501-1					■
	Red/yellow		3KC9301-2			■		
			3KC9401-2				■	
			3KC9501-2					■
Flat direct operating mechanism for distribution boards								
	• Can be locked with one padlock • No additional mounting depth in locked state							
	Color		**Article No.**					
	Gray		3KC9101-4	■				
Door-coupling rotary operating mechanism, 8UD1 series								
	• Handle with masking plate • Coupling driver with tolerance compensation • Shaft 300 mm • Can be locked with up to max. 3 padlocks • Labeling I – O – II							
	Color	**Handle length**	**Shaft**	**Article No.**				
	Gray	55 mm	8 × 8 mm	8UD1131-2AE21	■	■		
		100 mm	8 × 8 mm	8UD1141-2AE21			■	
		140 mm	10 × 10 mm	8UD1151-3AE21				■
		200 mm	12 × 12 mm	8UD1161-4AE21				■
Handles for door-coupling rotary operating mechanisms, 8UD1 series								
	• Without extension shaft and coupling driver • With masking plate • Can be locked with up to max. 3 padlocks • Labeling I – O – II							
	Color	**Handle length**	**Shaft**	**Article No.**				
	Gray	55 mm	8 × 8 mm	8UD1731-2AE01	■	■		
		100 mm	8 × 8 mm	8UD1841-2AE01			■	
		140 mm	10 × 10 mm	8UD1851-3AE01				■
		200 mm	12 × 12 mm	8UD1861-4AE01				■
	Red/yellow	55 mm	8 × 8 mm	8UD1731-2AE05	■	■		
		100 mm	8 × 8 mm	8UD1841-2AE05			■	
		140 mm	10 × 10 mm	8UD1851-3AE05				■
		200 mm	12 × 12 mm	8UD1861-4AE05				■




9

System overview, page 9/4

© Siemens 2022

Accessories

For manual transfer switching equipment (MTSE)

				Size 1	Size 2	Size 3	Size 4	Size 5
Extension shaft for door-coupling rotary operating mechanism, 8UD1 series								
	• A shaft jack is required for the 8UD1 handle when the 600 mm long shaft is used and for sizes 1/2.							
	Length	**Cross-section**	**Article No.**					
	300 mm	8 × 8 mm	8UC6032	■	■	■		
		10 × 10 mm	8UC6033				■	
		12 × 12 mm	8UC6034					■
	600 mm	8 × 8 mm	8UC6082	■	■	■		
		10 × 10 mm	8UC6083				■	
		12 × 12 mm	8UC6084					■
Shaft jack for handle 8UD1 for shaft, 600 mm								
	**Shaft**		**Article No.**					
	8 × 8 mm		8UD1900-0FA00	■	■			
Coupling drivers								
	Type	**Shaft**	**Article No.**					
	With tolerance compensation	8 × 8 mm	8UD1900-2GA00	■	■			
		8 × 8 mm	8UD1900-6GA00			■		
		10 × 10 mm	8UD1900-3GA00				■	
		12 × 12 mm	8UD1900-4GA00					■
	Without tolerance compensation	8 × 8 mm	8UD1900-2HA00	■	■			
		8 × 8 mm	8UD1900-6HA00			■		
		10 × 10 mm	8UD1900-3HA00				■	
		12 × 12 mm	8UD1900-4HA00					■
Adapters for shafts								
	• Non-interchangeability features (rivet and lug)							
	Shaft		**Article No.**					
	8 × 8 mm		8UC6022	■	■			
	8 × 8 mm		8UC6022			■		
	10 × 10 mm		8UC6023				■	
	12 × 12 mm		8UC6024					■
Phase barriers								
	• For manual transfer switching equipment (MTSE) with flat terminals • One pack (6 or 8 units) is required for the infeed side and the load side							
	Number of poles, switch	**Scope of supply**	**Article No.**					
	3-pole	6 units	3KD9308-6			■		
		6 units	3KD9408-6				■	
		6 units	3KD9508-6					■
	4-pole	8 units	3KD9308-8			■		
		8 units	3KD9408-8				■	
		8 units	3KD9508-8					■

9

System overview, page 9/4

© Siemens 2022

Terminal covers

- For manual transfer switching equipment (MTSE) with flat terminals
- One pack (6 or 8 units) is required for the infeed side and the load side
- Additional side plates for terminal covers are required for the terminal side, where bridging bars are used (normally the lead side)





Length	Number of poles, switch	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard length	3-pole	6 units	3KD9304-6			■		
			3KD9404-6				■	
			3KD9504-6					■
	4-pole	8 units	3KD9304-8			■		
			3KD9404-8				■	
			3KD9504-8					■
Short version	3-pole	6 units	3KD9304-7			■		
			3KD9404-7				■	
	4-pole	8 units	3KD9304-5			■		
			3KD9404-5				■	

Terminal covers as spare parts





Length	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard length	1 unit	3KD9504-1					■
Short version	1 unit	3KD9304-1			■		
		3KD9404-1				■	

Side plates



- For lateral touch protection on the terminal side, where bridging bars are used (normally the load side)
- Suitable for terminal covers in standard length

Length	Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
Standard length	2 units	3KC9304-0			■		
		3KC9404-0				■	
		3KC9504-0					■


Assembly kit for floor mounting



- For floor mounting of sizes 1 and 2
- Contains 4 mounting brackets and 2 mounting plates for 3-pole and 4-pole devices

Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
3KC9120-1	■	■			

Mounting bracket as spare part



- Spare part, included in the scope of supply of the assembly kit for 3-pole and 4-pole devices

Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
4 units	3KD9120-1	■	■			

Slide for mounting on DIN rail as spare part



- Spare part included in the scope of supply for the 3KC0 slide for DIN-rail mounting

Scope of supply	Article No.	Size 1	Size 2	Size 3	Size 4	Size 5
5 units	3KF9112-0BA00	■	■			

9

System overview, page 9/4

© Siemens 2022

3LD2 load transfer switches

Up to 250 A

	Front mounting Direct operating mechanism (knob-operated mechanism)
Actuator color	Black
Locking device	3LD23 and 3LD24 lockable with up to 3 padlocks with a shackle thickness of 4 to 6 mm (all other versions non-lockable)
Mounting	Four-hole mounting
Bridging bars	Pre-assembled



Rated uninterrupted current I_u (AC-21A, 380 ... 440 V)	Rated operational power (50/60 Hz, 380 ... 440 V)		3P	3P+N
	at AC-23A	at AC-3		
25 A	9.5 kW	7.5 kW	3LD2123-7UK01	–
32 A	11.5 kW	9.5 kW	3LD2223-7UK01	–
63 A	22.0 kW	18.5 kW	3LD2524-7UK01	–
100 A	37.0 kW	30.0 kW	3LD2724-7UK01	–
160 A	75 kW	50 kW	3LD2305-7UK01	3LD2305-7UL01
250 A	132 kW	110 kW	3LD2405-7UK01	3LD2405-7UL01

9

Accessories



4th contact (N conductor)

- Leading switch-on, lagging switch-off
- Bridging bars for the switchable N pole are not included in the scope of supply

Load transfer switch design	Article No.	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD23 (160 A)	3LD24 (250 A)
Front mounting	3LD9220-0B	■	■				
	3LD9250-0BA			■			
	3LD9280-0B				■		
	3LD9240-0B					■	■
Floor mounting	3LD9240-0C					■	■
Molded-plastic enclosures	3LD9220-0C	■	■				
	3LD9250-0CA [1]			■			
	3LD9280-0C [1]				■		



N or PE terminals

- Through-type

Load transfer switch design	Article No.	3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD23 (160 A)	3LD24 (250 A)
Front mounting	3LD9220-2B	■	■				
	3LD9250-2BA			■			
	3LD9280-2B				■		
	3LD9240-2B					■	■
Floor mounting	3LD9240-2C					■	■


[1] Can only be used as a spare part, as no additional poles can be installed in the enclosure.

Quick selection guide, page 9/10

© Siemens 2022

Floor mounting Door-coupling rotary operating mechanism (knob-operated mechanism)		Molded-plastic enclosures Direct operating mechanism (knob-operated mechanism)
Black		Black
Lockable in O position with up to 3 padlocks with a hasp thickness of 4 to 6 mm		3LD21 and 3LD22 lockable in O position with up to 3 padlocks with a hasp thickness of 4 to 6 mm (all other versions non-lockable)
Four-hole mounting		Metric screw connection
Pre-assembled		Pre-assembled
		
3P	**3P+N**	**3P + N and PE base terminal**
–	–	3LD2165-7UB01
–	–	3LD2265-7UB01
–	–	3LD2566-7UB01
–	–	3LD2766-7UB01
3LD2318-7UK01	3LD2318-7UL01	–
3LD2418-7UK01	3LD2418-7UL01	–


9

				3LD21 (25 A)	3LD22 (32 A)	3LD25 (63 A)	3LD27 (100 A)	3LD23 (160 A)	3LD24 (250 A)
Auxiliary switches									
	• For mounting on the left and/or right, lagging switch-on, leading switch-off • For 3-pole load transfer switches only • Indicate the switch position of the respective load transfer switch (I or II) to which the auxiliary switch module is connected								
	Load transfer switch design	**Contacts**	**Type of contact**	**Article No.**					
	Front mounting	1 NO + 1 NC	Standard	3LD9200-5B	■	■	■	■	■	■
			Gold-plated	3LD9200-5BF	■	■	■	■	■	■
	Floor mounting and molded-plastic enclosure	1 NO + 1 NC	Standard	3LD9200-5C	■	■	■	■	■	■
			Gold-plated	3LD9200-5CF	■	■	■	■	■	■
		2 NO	Standard	3LD9200-6C	■	■	■	■	■	■
Terminal covers as additional touch protection									
	• For mounting on load side only								
	Number of poles		**Scope of supply**	**Article No.**					
	1-pole		4 units	3LD9221-2A	■	■				
				3LD9251-2A			■			
				3LD9281-2A				■		
				3LD9241-2A					■	■
	3-pole		4 units	3LD9221-0A	■	■				
				3LD9251-0A			■			
Shaft coupling									
	• No ON-lock								
	Load transfer switch design			**Article No.**					
	Floor mounting			3LD9242-4F				■	■

Quick selection guide, page 9/10

© Siemens 2022

3KC ATC transfer control devices

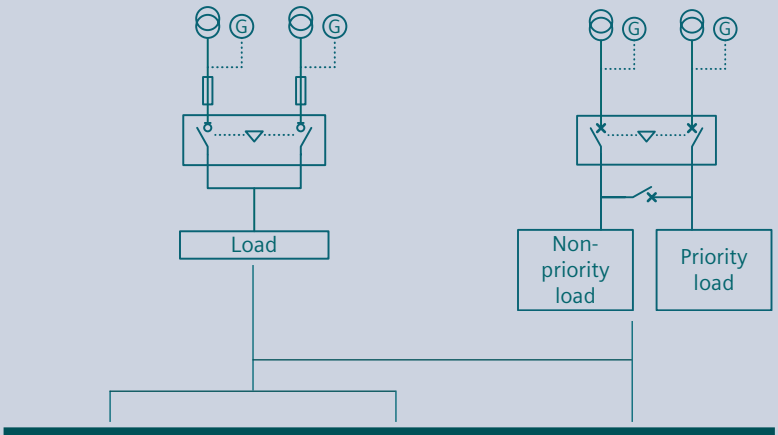

Version	Controllable switching devices	Interfaces	ATC3100	ATC6300	ATC6500
For fast parameterization without software	2	–	3KC9000-8EL10	–	–
For programming with user-friendly software, with programmable inputs and outputs	2	Optional communications interface and LCD display	–	3KC9000-8TL40	–
	3	Integrated RS485 interface and LCD display	–	–	3KC9000-8TL50

9

System overview, page 9/4

© Siemens 2022

Further technical specifications

		ATC3100	ATC6300	ATC6500
Application				
Transfer between		Network/network, network/generator	Network/network, network/generator, generator/generator	
Controllable switching devices		2		3
In-phase transition		–		Yes
Implementation of transfer with		3VA, 3VL, 3VT, 3WA/3WL, 3WT	3WA/3WL FSI-III, 3WT, 3KC3, 3KC4, 3VA, 3VL	3WA/3WL FSI-III, 3WL10, 3WT, 3VA
Measuring inputs				
Max. rated operational voltage U_e	Phase-phase	400 V AC	480 V AC	600 V AC
	Phase-neutral conductor	230 V AC	277 V AC	346 V AC
Measuring range	Phase-phase	–	50 ... 576 V AC	50 ... 720 V AC
	Phase-neutral conductor	161 ... 264 V AC	50 ... 333 V AC	30 ... 415 V AC
Frequency range		50/60 Hz	45 ... 65 Hz	
Relative error of measurement method		±5%	±0.25%	
Communication				
Integrated RS485 interface (Modbus RTU)		–		Yes
Optional RS485 interface (Modbus RTU)		–	Yes	Ready-integrated
Optional Ethernet interface (Modbus TCP)		–	Yes	
Power supply				
Auxiliary power supply	Rated operational voltage U_e AC	220 ... 240 V	100 ... 240 V	
	Rated operational voltage U_e DC	–	110 ... 250 V	
	Frequency range	50/60 Hz	45 ... 65 Hz	
Battery power supply	Rated operational voltage U_e DC	12/24 V		12/24/48 V
Digital inputs				
Number of inputs		5	6	8
Freely programmable		–	All	
Relay outputs				
Number of outputs		7	7	
Freely programmable		–	All	
Contact configuration		–	6× 1 NO, 8 A, 250 V AC (AC-1) 1× 1 CO, 8 A, 250 V AC (AC-1)	2× 1 NO, 12 A, 250 V AC (AC-1) 2× 1 NO, 8 A, 250 V AC (AC-1) 3× 1 CO, 8 A, 250 V AC (AC-1)
Real time clock and event log				
ATC component		No	Yes	
Operating time without voltage		–	300 s	14 days
Max. number of events that can be stored		–	100	250
Connections				
Terminal type		Removable/plug-in		
Cable cross-section	IEC	0.5 ... 2.5 mm²	0.2 ... 2.5 mm²	
Enclosures				
Version		Door installation, DIN-rail mounting, floor mounting	Door installation	
Degree of protection		IP41 on the front, IP20 on the rear side	IP40 on the front, IP20 on the rear side	

System overview, page 9/4

© Siemens 2022

Accessories for transfer control devices

3KC ATC3100 transfer switching equipment

Connecting cable for 3KC ATC3100

- Measurement and control cable for connection of 3KC ATC3100 to 3VL or 3WA/3WL

Cable length	Article No.
1.8 m	3KC9000-8EL62

For 3KC ATC6300 and 3KC ATC6500 transfer switching equipment

Expansion modules with digital inputs and outputs



ATC6 expansion module	Features	Article No.
4DI	• 4 digital inputs • Including insulated 24 V DC/1 W power supply for digital inputs and sensors	3KC9000-8TL60
4DO, SSR	• 4 solid-state-compatible digital outputs • 4 NO at the solid-state-compatible output max. 55 mA at 30 V AC or 40 V DC	3KC9000-8TL61
2DI/2DO, SSR	• 2 digital inputs and 2 solid-state compatible digital outputs • Including insulated 24 V DC/1 W power supply for digital inputs and sensors • 2 NO at the solid-state-compatible output max. 55 mA at 30 V AC or 40 V DC	3KC9000-8TL62
2DO, relay	• 2 relay outputs • 2 CO at relay output, 5 A, 250 V AC (AC-1)	3KC9000-8TL63
2DI/2DO, relay	• 2 digital inputs and 2 relay outputs • 2 NO at relay output, 5 A, 250 V AC (AC-1)	3KC9000-8TL64

Expansion modules with communication interfaces



- **Note**: The 3KC ATC6500 transfer switching equipment comes with an integrated RS485 interface

ATC6 expansion module	Features	Article No.
RS485	• RS485 interface, Modbus RTU	3KC9000-8TL74
Ethernet	• Ethernet interface, Modbus TCP	3KC9000-8TL75

Front interface



- For parameterization on the front using software

ATC6 front interface	Features	Article No.
USB	• Mini-USB cable, 1.8 m	3KC9000-8TL73

Protective seal



- For front IP65 protection

Suitable for	Version	Article No.
3KC ATC6300	144 × 144 mm	3KC9000-8TL67
3KC ATC6500	240 × 180 mm	3KC9000-8TL68

System overview, page 9/4

© Siemens 2022

System overview, page 9/4

© Siemens 2022



Easy, reliable, cost-efficient

There are many advantages to be had from keeping a watchful eye on your energy consumption: in addition to cost savings through optimized consumption, you ensure increased resilience with the monitoring of power supply systems and network quality in infrastructure and industrial plants.

At the same time, systematic power monitoring increases your awareness of actual energy consumption, making it a key prerequisite for greater energy efficiency.

Integration into open IoT operating systems such as MindSphere results in even greater optimization potential.

What is more, with a power monitoring system you lay the foundation for regular energy audits and a corporate energy management system according to ISO 50001 and ISO 50003.

© Siemens 2022

Measuring Devices, Power Monitoring and Digitalization Solutions



All the information you need 10/2

Quick selection guide 10/4

- Power monitoring 10/4
- Hardware components 10/6
- Accessories 10/10

Software and digitalization solutions 10/12

- SENTRON powerconfig 10/12
- SENTRON powermanager 10/14
- 7KN Powercenter 10/18
- SENTRON powermind 10/20
- SIMATIC Energy Suite 10/22
- SIMATIC Modbus/TCP SENTRON PAC 10/22
- PAC/3WL/3VA SIMATIC PCS 7 library 10/23

Measuring devices 10/24

- 7KM PAC measuring devices 10/24
- 7KT PAC measuring devices 10/28
- SEM3 multichannel current measuring system 10/30
- SEM3T multichannel temperature measuring system new 10/32
- Time and pulse counters 10/34

Current transformers 10/36

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about measuring devices, power monitoring and digitalization solutions, please visit our websites
www.siemens.com/powermonitoring
www.siemens.com/sentron-digital

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technical basic information
  - SENTRON power monitoring and digital solutions **(109769851)**
- Brochure
  - Reliable, sustainable, and efficient – TÜV-certified power monitoring system in accordance with ISO 50001 **(109744679)**
  - SENTRON portfolio for power monitoring **(109744725)**
  - SENTRON powermanager – update and benefit **(109805178)**

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Siemens YouTube channel

- Power monitoring (general) **bit.ly/2lZ9QqC**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Measuring devices and power monitoring **sie.ag/2kTH9Lz**
- Digitalization solutions **sie.ag/2olIiNi**
- Library for SIMATIC **sie.ag/2kpbwcs**
- SENTRON powermanager/SENTRON powerconfig **sie.ag/2kTJjuF**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

10

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)
- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SENTRON circuit protection devices with measuring and communication function (WT-LVBCOM)
- Power Monitoring with SENTRON (WT-LVAEM)
- Energy Management with Powermanager 5.x – User training (LV-PM5)
- Energy Management with Powermanager 5.x including graphic module – User training (LV-PM5-G)
- Communication with SENTRON components (LV-COM)

SENTRON powerconfig

The combined commissioning and service tool SENTRON powerconfig for communication-capable measuring devices, circuit protection devices and circuit breakers.

Free download SENTRON powerconfig via
www.siemens.com/powerconfig

Free download SENTRON powerconfig mobile via
App Store and **Play Store**

Manuals

Manuals are available for downloading in Siemens Industry Online Support at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Measuring devices and power monitoring **(45315973)**
- Equipment manual
  – 7KT PAC1600 energy meter **(109759827)**
  – 7KT PAC1600 multimeter **(109760293)**
  – PAC2200 measuring device **(109746835)**
  – 7KM Power Monitoring Device PAC2200CLP **(109783220)**
  – SENTRON PAC3200 power monitoring device **(26504150)**
  – PAC3200T measuring device **(109746833)**
  – PAC3100 measuring device **(37881976)**
  – SENTRON PAC5100/5200 7KM5212/5412 **(109477872)**
  – 7KM PAC3120 and 7KM PAC3220 **(109767307)**
  – 7KN POWERCENTER 3000 **(109763838)**
- System manual
  – 7KT multichannel current measuring system **(109483442)**
  – SENTRON PAC4200 power monitoring devices **(34261595)**
  – Circuit protection devices with communication and measuring function **(109791806)**
- Communication manual
  – SENTRON PAC5100/5200 7KM5212/5412 **(109477870)**
  – 3VA molded case circuit breakers with IEC and UL certification **(98746267)**
- SEM3™
  – Embedded Micro Metering Module™ **(109748928)**
- Quick Installation Guide
  – 7KN POWERCENTER 3000 **(109766001)**
- Installation manual
  – Circuit protection devices with communication and measuring function **(109791805)**

Technical overview – Measuring devices, power monitoring and digitalization solutions

The fast way to get you to our online services

This page provides you with comprehensive information and links on measuring devices, power monitoring and digitalization solutions

www.siemens.com/lowvoltage/product-support (109764480)

© Siemens 2022

Power monitoring

Software

Local monitoring systems

Web	Mobile App
INTERNET	POWERCON SIEMENS
Web interface integrated	SENTRON powerconfig

Functions for power monitoring

	Web	Mobile App
Commissioning of measuring devices and circuit breakers	–	■
Displaying current data	■	■
Displaying/evaluating current/historical values	■	■
Prepared analyses/reports	–	–
Customized reporting	–	–
Data analysis in the cloud	–	–
Additionally for energy management		
Switching loads on and off	–	–
Operating environment		
Use	Free of charge	Free of charge
System requirements	Browser	Android, iOS
Suitable according to ISO 50001	–	–
Connection of non-Siemens devices	–	–
Integrated cloud interface	–	–
More information		From page 10/12

10


Measuring devices, circuit breakers and circuit protection devices

		Web	Mobile App
Measuring devices for industrial applications	7KM PAC1020	–	–
	7KM PAC2200/PAC2200 CLP	■	■ 1) 2)
	7KM PAC3200T	■	■ 1)
	7KM PAC3120	–	■ 2)
	7KM PAC3220	■	■
	7KM PAC4200	■	■
	7KM PAC5200	■	–
Measuring devices for buildings and infrastructure	7KT PAC1200	■	–
	7KT PAC1600	–	–
	SEM3/SEM3T new	■	–
Circuit breakers	3WA	–	■
	3WL	–	■
	3WL10/3VA27	–	–
	3VA ETU5/8	–	■
Communication-capable circuit protection device	7KN Powercenter 1000/ 5ST3 COM AS+FC/ 5SL6 COM MCB/ 5SV6 COM AFDD/ 3NA COM Fuse	–	■
Other Modbus devices		–	–

■ Function available – Function not available

1) Via WiFi 2) Via gateway (PAC4200) 3) Incl. module for Desigo CC building management 4) Via XML/JSON 5) Via SPP2000

© Siemens 2022

	PC-based			Cloud	World of SIMATIC	
					TIA Portal	
						
	SENTRON powerconfig	**SENTRON powermanager** [3]	**7KN Powercenter 3000**	**SENTRON powermind (MindSphere)**	**SIMATIC TIA Portal integrated**	**SIMATIC TIA Portal capable**
	■	–	–	–	■	–
	■	■	■	■	■	■
	■	■	■	■	■	■
	–	■	–	■	■	–
	–	■	–	–	–	–
	–	–	–	■	–	–
	–	■	–	–	■	■
	Free of charge	License and trial license	–	Subscription	–	–
	Windows X64	Windows X64	–	Browser	–	–
	–	■ (TÜV)	■	■	–	–
	–	■	■	■	–	–
	–	■	■	■	–	–
	From page 10/12	**From page 10/14**	**From page 10/18**	**From page 10/20**		
	■	■ [4]	■	■	–	–
	■	■	■	■	–	■ [5]
	■	■	■	■	–	■ [5]
	■	■	■	■	–	–
	■	■	■	■	■	■
	■	■	■	■	■	■
	■	■	–	–	–	–
	■	■	–	–	–	–
	■	■	■	–	–	–
	–	■/■ [4]	–	–	–	–
	■	■	■	■	–	■
	■	■	■	■	■	■
	■	■	–	–	–	■
	■	■	■	■	■	■
	■	■ [4]	■	■	–	–
	■	■	■	■	–	–

© Siemens 2022

Hardware components

Industry








	7KM PAC1020	7KM PAC2200	7KM PAC2200 CLP	7KM PAC3200T	7KM PAC3120	7KM PAC3220
Type of mounting						
Front mounting | DIN rail | Screw mounting	■ | – | –	– | ■ | –	– | ■ | –	– | ■ | –	■ | – | –	■ | – | –
Withdrawable | Fixed-mounted	– | –	– | –	– | –	– | –	– | –	– | –
Measuring connection						
Direct measurement	–	■	■	–	–	–
Transformer measurement	■	■	■	■	■	■
Multichannel measuring system	–	–	–	–	–	–
Suitable transformers						
Window-type current transformers	■	■	■	■	■	■
Folding transformer	■	■	■	■	■	■
Integrated transformer	–	–	–	–	–	–
Commissioning						
MID version	– | –	■ | –	■ | ■	– | –	– | –	– | –
Max. input voltage L-L/L-N	400 V/230 V	400 V/230 V	400 V/230 V	400 V/230 V	690 V/400 V	690 V/400 V
Transformer connection version	x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A	x/1 A or x/5 A
Direct connection version	–	65 A	65 A	–	–	–
DC power supply unit with extra-low voltage version	–	–	–	–	24 ... 60 V DC ±20 %	24 ... 60 V DC ±20 %
1-phase counter version	–	■	■	–	–	–
Electrically isolated voltage inputs	–	–	–	–	–	–
Version without display (for web interface)	–	–	–	■	–	–
Evaluation						
Measured quantities						
Average value of measured values	–	■	■	■	■	■
Voltage, current, frequency	■	■	■	■	■	■
Power, power factor	■	■	■	■	■	■
Energy measurement						
Daily energy storage	–	60 days	60 days	60 days	60 days	60 days
Apparent | Active | Reactive energy | p.f.	– | ■ | ■ | –	■ | ■ | ■ | –	■ | ■ | ■ | –	■ | ■ | ■ | –	■ | ■ | ■ | ■	■ | ■ | ■ | ■
Distortion factor THD (voltage, current)	–	–	–	■	■	■
Harmonics (voltage, current)	–	–	–	–	–	–
Phase angle/phase chart	–	–	–	–	–	–
Load profile recording	–	–	■	–	–	–
Flicker acc. to IEC 61000-4-15	–	–	–	–	–	–
Monitoring functions						
Operating hours counter	–	–	–	■	■	■
Limit monitoring	–	–	–	■	■	■
Logic functions	–	–	–	■	■	■
Event log	–	–	–	–	–	–
Gateway function	–	–	–	–	–	–
Reporting acc. to EN 50160	–	–	–	–	–	–
Integrated fault recorder	–	–	–	–	–	–
Integrated communication interfaces						
Digital inputs/digital outputs	1/1	1/1	1/1	1/1	2/2	2/2
S0 interface	■	■	■	■	■	■
M-Bus	–	■	–	–	–	–
RS485 (Modbus RTU)	■	■	–	–	■	–
Ethernet with Modbus TCP	–	■	■	■	–	■
BACnet	–	–	–	–	–	–
More information						
	See page 10/24	See page 10/24	See page 10/24	See page 10/24	See page 10/24	See page 10/24

© Siemens 2022

Industry		Buildings and infrastructure			Circuit breakers			
								
7KM PAC4200	**7KM PAC5200**	**7KT PAC1200**	**7KT PAC1600**	**SEM3**	**3WA**	**3WL**	**3WL10/ 3VA27**	**3VA ETU8**
■ | – | –	■ | ■ | –	– |■| –	– |■| –	– | – |■	– | – | –	– | – | –	– | – | –	– | – | –
– | –	– | –	– | –	– | –	– | –	■ | ■	■ | ■	■ | ■	– | ■
–	–	■	■	–	–	–	–	–
■	■	■	■	–	■	■	■	■
–	–	■	–	■	–	–	–	–
■	■	■	■	■	–	–	–	–
■	■	■	■	■	–	–	–	–
–	–	■	–	■	■	■	■	■
– | –	– | –	– | –	■ | –	– | –	– | –	– | –	– | –	– | –
690 V/400 V	690 V/400 V	400 V/230 V	400 V/230 V	480 V/277 V	1000 V/577 V	690 V/400 V	690 V/400 V	690 V/400 V
x/1 A or x/5 A	x/1 A or x/5 A	x/5 A	x/5 A	50 ... 1200 A/0.1 A	integrated	integrated	integrated	integrated
–	–	40/63 A	63/80 A	–	–	–	–	–
22 ... 65 V DC	–	–	–	–	24 V DC	24 V DC	24 V DC	24 V DC
–	–	■	■	■	–	–	–	–
–	■	–	–	–	–	–	–	–
–	■	■	–	■	–	–	–	–
■	–	–	–	–	■	■	–	–
■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■
–	–	–	–	–	–	–	–	–
■ | ■ | ■ | ■	■ | ■ | ■ | ■	– | ■ | ■ | –	■ | ■ | ■ | –	■ | ■ | ■ | ■	■ | ■ | ■ | ■	■ | ■ | ■ | ■	■ | ■ | ■ | ■	■ | ■ | ■ | ■
■	■	–	–	–	■	■	–	■
2nd to 64th	2nd to 40th	–	–	–	2nd to 31st	2nd to 29th	–	–
■	■	–	–	–	–	–	–	–
■	■	–	–	■	■	■	■	■
–	■	–	–	–	–	–	–	–
■	–	–	■	–	■	■	–	■
■	■	–	■	–	–	■	■	■
■	■	–	–	■	–	–	–	–
>4000 events	■	–	–	■	–	■	■	■
■	–	–	–	–	–	–	–	–
–	■	–	–	–	–	–	–	–
–	■	–	–	–	–	–	–	–
2/2	0/2	–	1/1	2/1	■	■	■	■
■	–	–	■	–	■	–	■	■
–	–	–	■	–	–	–	–	–
–	–	–	■	■	–	■	■	■
■	■	■	–	■	■	■	■	■
–	–	–	–	■	–	–	–	–
See page 10/24	See page 10/24	See page 10/29	See page 10/28	See page 10/30	See page 1/4	Siehe Seite 1/56	Siehe Seite 1/56 See page 2/6	See page 2/6

10

© Siemens 2022

Hardware components

Circuit protection devices






	7KN Powercenter 1000	5ST3 COM auxiliary switches and fault signal contacts	5SV6 COM AFDD/MCB
Communication interfaces			
Wireless	■	■	■
Modbus TCP	■	–	–
Bluetooth	■	–	–
Gateway function	■	–	–
Type of mounting			
DIN rail	■	■	■
Busbars	–	–	–
Evaluation			
Temperatures	–	■	■
Current	–	–	■
Voltage	–	–	■
Frequency	–	–	■
Apparent, reactive and active power, power factor	–	–	■
Reactive and active energy	–	–	■
Monitoring functions			
Operating hours counter	■	■	■
Operating hours counter with load current	–	–	■
Operating cycle counter	–	■	■
Trip counter	–	■	■
Short-circuit trip counter	–	–	■
Alarms for limit monitoring	■	■	■
Detection of overload and short circuit	–	–	■
Detection of arcing faults	–	–	■
More information			
	See page 10/19	See page 3/50 and 4/62	See page 4/54

[1] Protection function provided, but tripping is not communicated

© Siemens 2022

Circuit protection devices

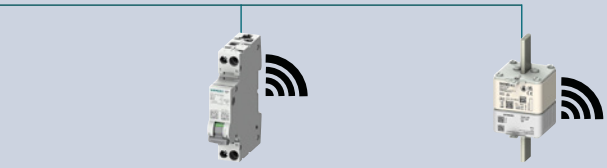

5SL6 COM miniature circuit breakers	3NA COM fuses
■	■
–	–
–	–
–	–
■	–
–	■
■	■
■	■
■	–
■	–
■	–
■	–
■	■
■	■
■	–
■	–
■	–
■	■
■	– [1]
–	–
See page 3/38	See page 7/50

10

© Siemens 2022

Accessories

Communication modules






		7KM Switched Ethernet PROFINET/Modbus TCP	7KM PROFIBUS DP	7KM RS485 Modbus RTU	SENTRON PROFINET Proxy SPP2000 new
Industry					
	7KM PAC1020	–	–	–	–
	7KM PAC2200	–	–	–	■
	7KM PAC2200 CLP	–	–	–	■
	7KM PAC3200T	–	–	–	■
	7KM PAC3120	–	–	–	–
	7KM PAC3220	■	■	■	–
	7KM PAC4200	■	■	■	–
	7KM PAC5200	–	–	–	–
Buildings and infrastructure					
	7KT PAC1200	–	–	–	–
	7KT PAC1600	–	–	–	–
	SEM3	–	–	–	–
Circuit breakers					
	3WA/3WL	–	–	–	–
	3WL10/3VA27	–	–	–	–
	3VA ETU5/8	■	■	■	–

10

© Siemens 2022

Expansion modules		Current transformers		
				
7KM PAC 4DI/2DO	**7KM PAC I(N), I(Diff), analog**	**4NC**	**7KT**	**3NJ calibrated**
–	–	■	■	■
–	–	■	■	■
–	–	–	–	■
–	–	■	■	■
–	–	■	■	■
■	■	■	■	■
■	■	■	■	■
–	–	■	■	■
–	–	–	–	–
–	–	■	■	■
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–

10

© Siemens 2022

SENTRON powerconfig

Configuration software for commissioning and maintenance

SENTRON powerconfig is available free of charge at
www.siemens.com/powerconfig

You can find more information on the Internet at
www.siemens.com/sentron

Free download SENTRON powerconfig mobile via:




App Store




Play Store

- Software tool for the efficient commissioning and diagnostics of communication-capable SENTRON components
- Supports all electronic SENTRON devices, e.g. 3WA, 3WL, 3VA, 7KN Powercenter 3000 and 7KN Powercenter 1000, with 5ST3 AS+FC COM, 5SL6 MCB COM, 5SV6 AFDD COM and 3NA Fuse COM
- General range of functions:
  - User-friendly parameter assignment even for complex devices such as the 3WA
  - Fast, optical detection of communication and metering-capable circuit protection devices, such as 7KN Powercenter 1000
  - Saving and printing of device settings
  - Monitoring, saving and printing of instantaneous measured quantities
  - Execution of specific device functions, such as resetting of devices and setting of energy counters
- Service functions:
  - Detection of devices and acquisition of measured quantities and status information via different networks, e.g. via Ethernet
  - Device and status acquisition via local interfaces, such as Bluetooth and USB
  - Acquisition and archiving of historic records, such as load profiles and events
  - Firmware updates
  - Switching of language packs for 7KM PAC measuring devices
- Cooperative interaction between powerconfig mobile and powerconfig on the PC:
  - powerconfig mobile offers a high degree of mobile versatility, e.g. to scan codes on the circuit protection devices
  - powerconfig on the PC can be used for subsequent editing and archiving of the system configuration


Quick selection guide, page 10/4

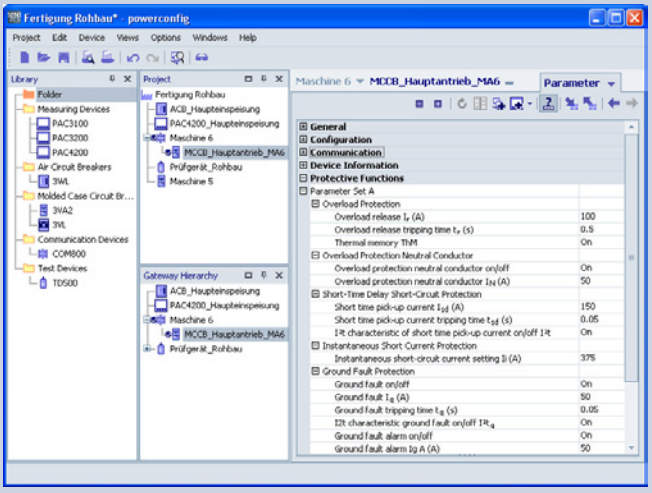


Setting of parameter values

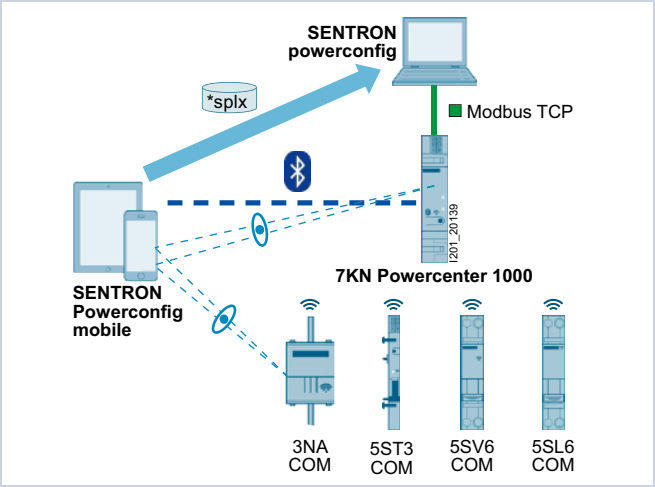

Scanning of circuit protection devices

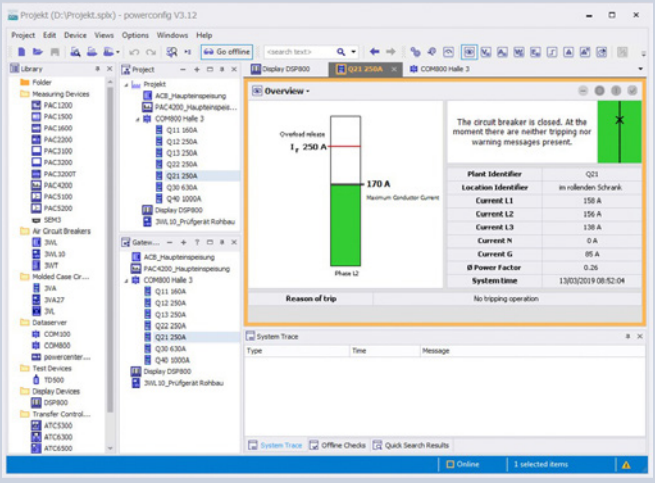

Display of the circuit breaker status

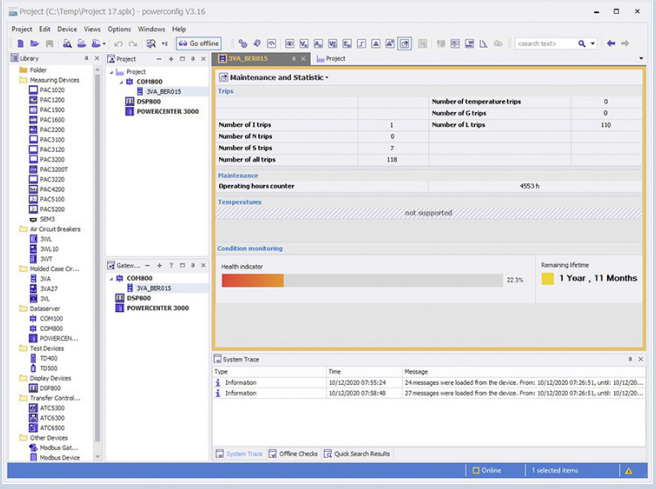

Display of the state of health of the 3VA

10

Quick selection guide, page 10/4

© Siemens 2022

SENTRON powermanager

PC-based power monitoring software



SENTRON powermanager

SENTRON powermanager is based on the modern Desigo CC platform with advanced graphical capabilities and a standard SQL database. The workflows for setting up the system, creating devices, graphically displaying the device data and processing it in reports have been fundamentally revised.

You can find the latest download and change information in the SIOS portal at
www.siemens.com/lowvoltage/product-support (109771760)

Updates and upgrades of version 4.x or higher are based on the SUS/SUR principles.
You can find more information in the brochure – SENTRON powermanager – update and benefit
www.siemens.com/lowvoltage/product-support (109805178)

If you wish to migrate from classic powermanager (3.6) to the current version, please get in touch with your local Siemens contact.

The „Trial" license gives customers the opportunity to gain initial experience with SENTRON powermanager during a 60-day test phase. The application can still be used by purchasing a regular license.

You can find more information on the Internet at
www.siemens.com/powermanager

You can find training courses on the Internet at
www.siemens.com/sitrain-lowvoltage


Version	Description	Article No.
powermanager		
Extended Package	Full product license for up to 10 devices, installation for client/server, web access	7KN2710-2CE40-0YC0
Trial license	Full product license limited to 60 days for up to 10 devices, incl. all functions; software download via SIOS Portal **www.siemens.com/lowvoltage/product-support (109771760)** A free license for one-time use (limited to 60 days) must also be requested via **powermanagerlicence.de@siemens.com**	
Device expansions		
Device Pack (20)	Device expansion license for up to 20 devices	7KN2711-1CE40-0YC0
Device Pack (50)	Device expansion license for up to 50 devices	7KN2711-2CE40-0YC0
Device Pack (100)	Device expansion license for up to 100 devices	7KN2711-3CE40-0YC0
Device Pack (200)	Device expansion license for up to 200 devices	7KN2711-4CE40-0YC0
Device Pack (500)	Device expansion license for up to 500 devices	7KN2711-5CE40-0YC0
Device Pack (1000)	Device expansion license for up to 1000 devices	7KN2711-6CE40-0YC0
Option packs		
"Graphics Editor 60 Days" option pack	Option for creating any number of freely configured graphics, validity period limited to 60 days	7KN2712-0CE40-0YC0
"Graphics Editor Unlimited" option pack	Option for creating custom-made SENTRON powermanager applications, e.g. graphics; especially suitable for partners such as Solution Providers, control cabinet builders, etc.	7KN2712-0CE40-0YC1
"Client (2)" option pack	Expansion for up to 2 clients	7KN2712-1CE40-0YC0
"Client (5)" option pack	Expansion for up to 5 clients	7KN2712-2CE40-0YC0
"powermanager Server" option pack	Additionally, powermanager server license for distributed systems without devices, web, etc.	7KN2712-4CE40-0YC0
Powermanager SUR-Unit	Update – Extend subscription period by 12 months	7KN2713-7CE40-0YC0 new
Powermanager SUS-Unit	Update – Start new 12-month subscription period	7KN2713-8CE40-0YC0 new
System packages		
System 1	Package comprising 1× powermanager Extended 1× PAC4200 1× PAC3120 1× RS485 modules	7KN2715-1CE40-0YC0
System 3	Package comprising 1× powermanager Extended 3× PAC3220	7KN2715-3CE40-0YC0
System 4	Package comprising 1× powermanager Extended 1× PAC4200 4× PAC1600 1× RS485 module	7KN2715-4CE40-0YC0
System 5	Package comprising 1× powermanager Extended 5× PAC2200 transformer measurement Modbus TCP	7KN2715-5CE40-0YC0

Quick selection guide, page 10/4


© Siemens 2022



powermanager – Measuring device diagram

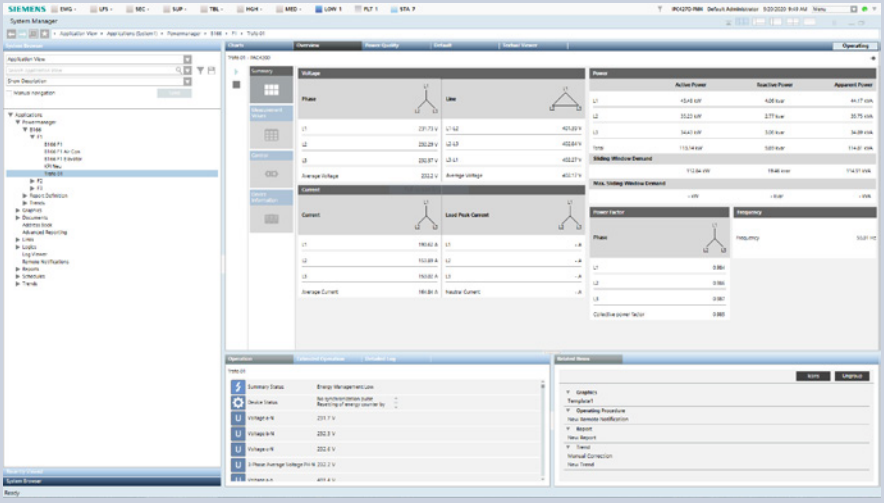

powermanager – Overview of measuring devices

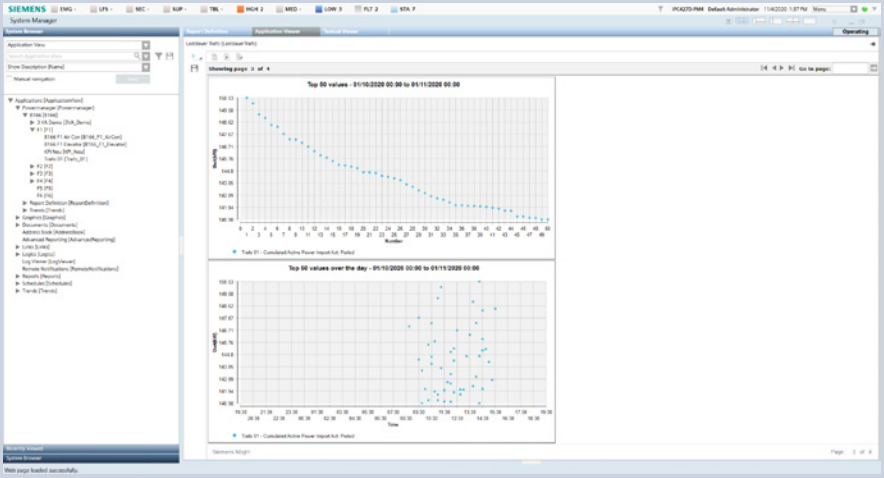


powermanager – Load duration report

Quick selection guide, page 10/4


© Siemens 2022

SENTRON powermanager

PC-based power monitoring software

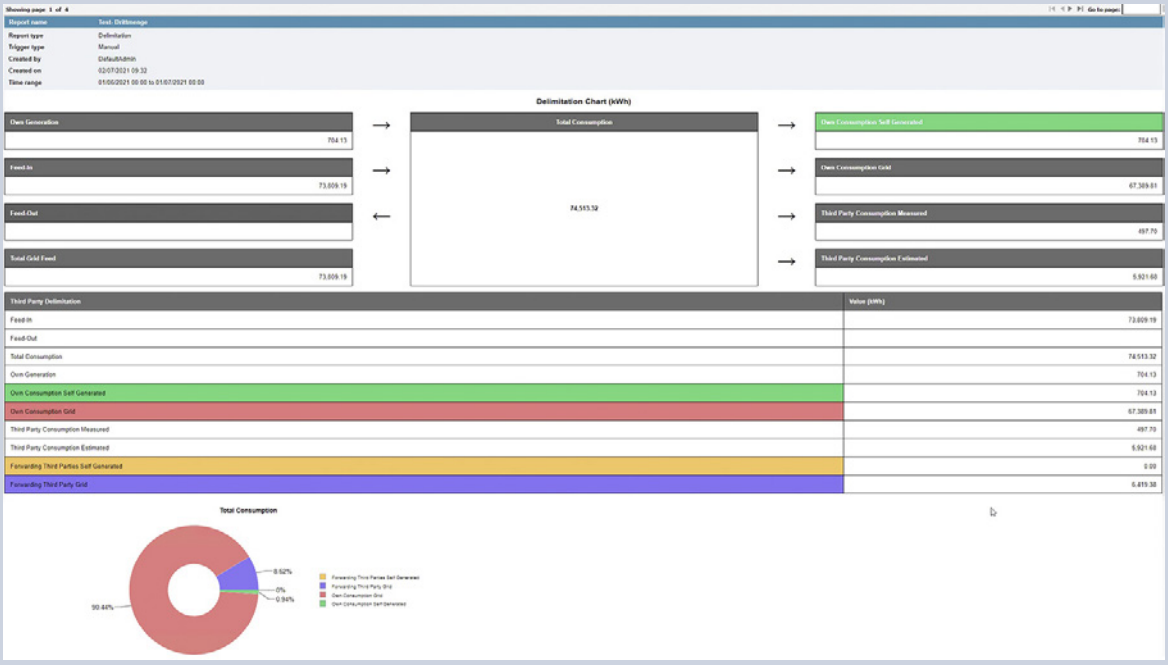


10

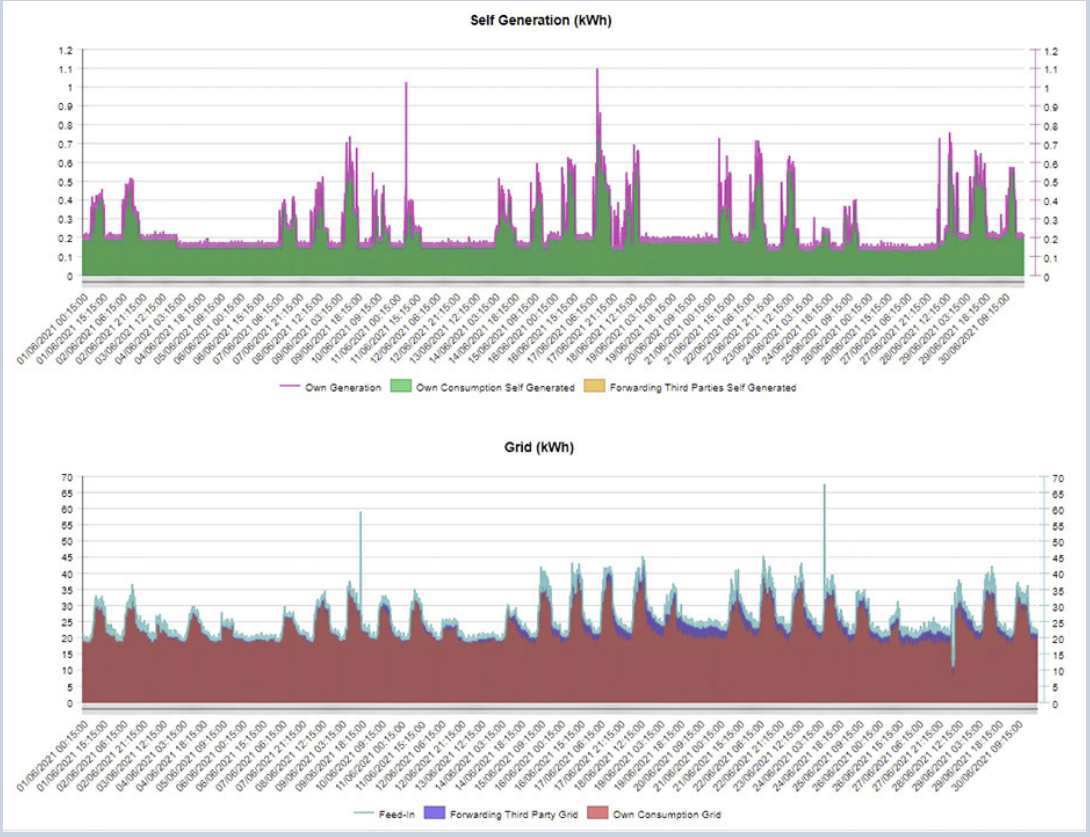


Third-party quantity report

Quick selection guide, page 10/4

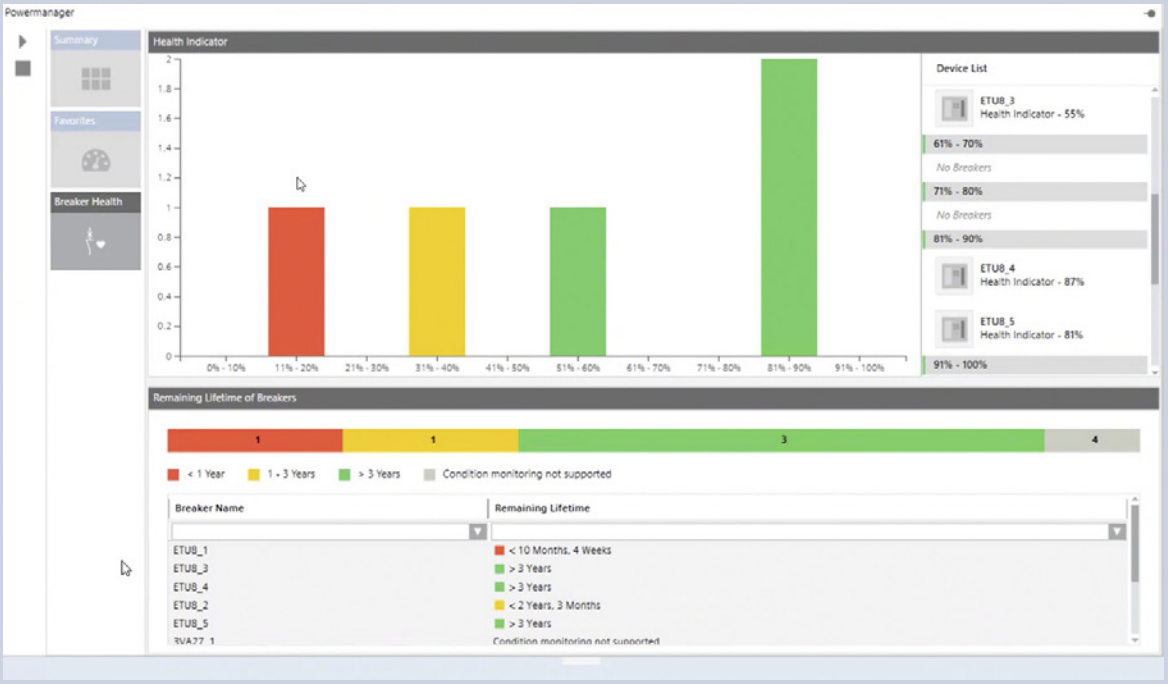

Health Dashboard

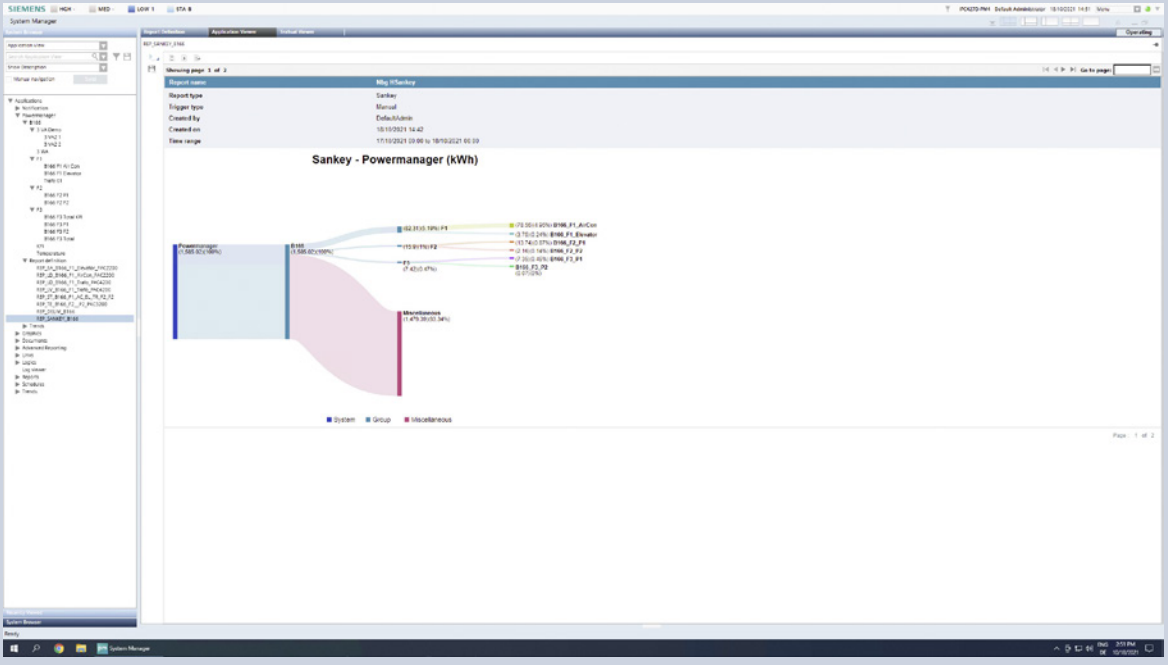

Sankey Report

Quick selection guide, page 10/4

7KN Powercenter


Edge/IoT-based data acquisition and visualization for low-voltage power distribution

7KN Powercenter 3000

Areas of use and applications
- Basis for certified energy management according to ISO 50001 to improve energy efficiency and optimize maintenance management
- Transparency and fault localization in single and distributed locations
- Future-proof foundation for expanding data analysis from on-site analysis to cloud-based analysis


Features
- Data acquisition/provision
  - All key data of lower-level devices
  - 15-minute energy values as a basis for ISO 50001
  - Export in form of CSV file (once, periodically)
- Visualization/data analysis
  - On the web interface (for all devices or for each device individually)
  - Analysis of data in graphical form, e.g. lines, bars, heatmap, Sankey diagram
  - Can also be output as a report
- Interfaces for the digitalization of low-voltage
  - Integrated and easy-to-configure communication with SENTRON powermind (see separate section)
  - To other cloud applications, e.g. based on AWS, Azure, AliCloud, etc.
  - Via Modbus TCP for other applications, e.g. SENTRON powermanager
- General:
  - Easy commissioning using powerconfig
  - Compact design, 24 V DC supply
  - Web interface in 10 languages
  - Flexible IT security features for protection against unauthorized access

More information: **www.siemens.com/powermonitoring**

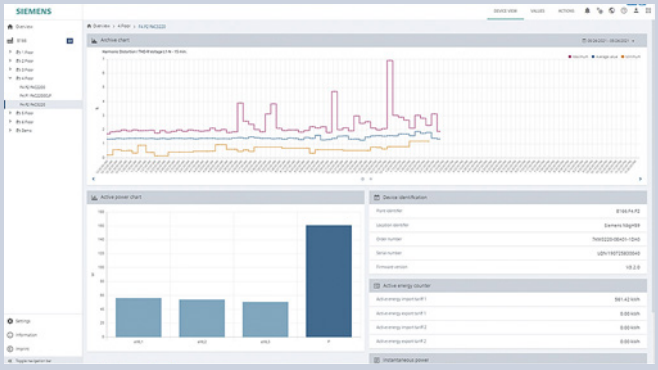

Data visualization based on the example of a measuring device

Mounting	Interfaces	Protocols	Article No.
DIN-rail mounting	2× Ethernet	Modbus TCP, http, MindSphere	7KN1310-0MC00-0AA8

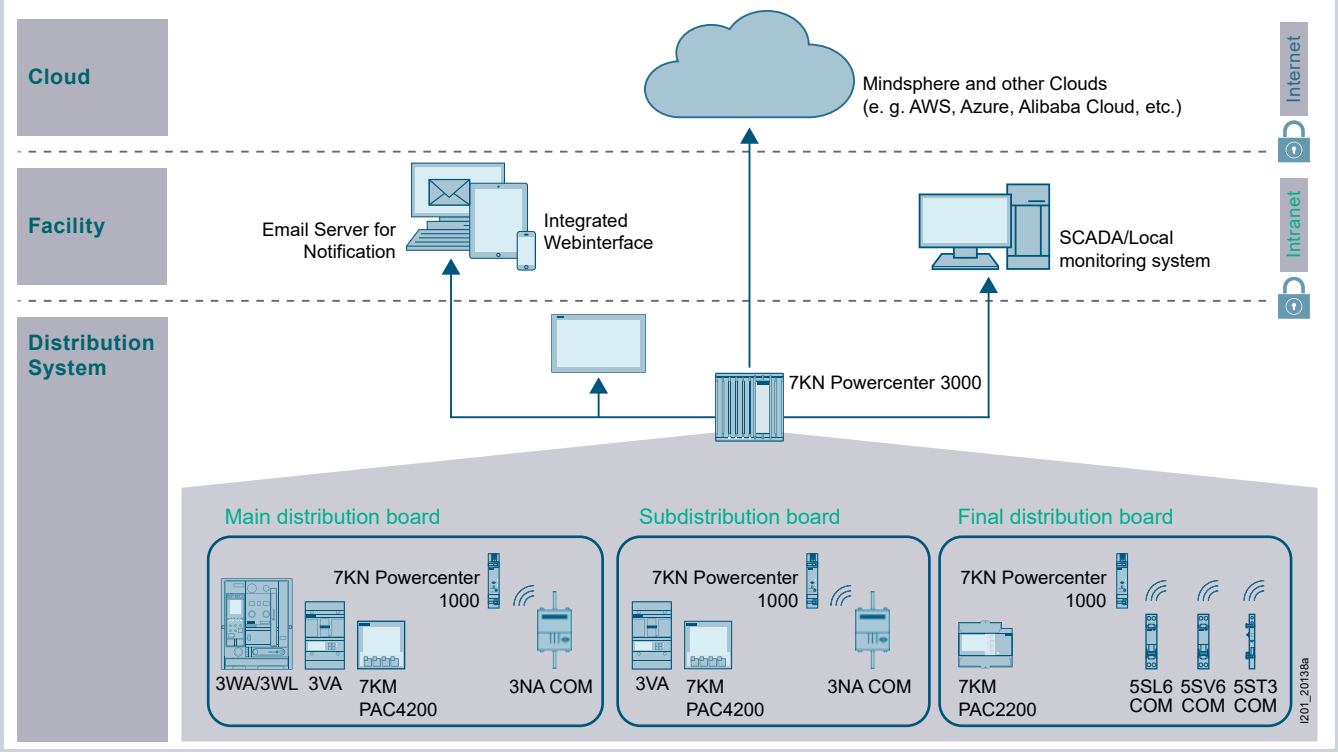

Areas of use and applications for 7KN Powercenter 3000

Quick selection guide, page 10/4

Wireless data acquisition and visualization in the final circuit

7KN Powercenter 1000

The 7KN Powercenter 1000 data transceiver is designed to enable comprehensive data acquisition of communication and metering-capable circuit protection devices. This increases transparency in the final circuit, through which optimization measures can be derived to increase system availability.

Up to 24 devices can communicate wirelessly with 7KN Powercenter 1000 via radio link. This means that no increased installation effort is required for communication. Selected measured values of the circuit protection devices are stored in the data transceiver for up to 30 days. These can be visualized to ensure extensive data availability.

The compact design of the 7KN Powercenter 1000, in a single modular width, results in an extremely small footprint in the distribution board so as to enable wireless, comprehensive data acquisition.

This is complemented by easy mounting on a 35 mm DIN rail and plug-in terminals for a 24 V DC power supply, which can be immediately looped through (daisy chain) to supply other devices.


The integrated Bluetooth interface enables simple on-site communication and commissioning via the SENTRON powerconfig mobile app. Connection to various configuration or power monitoring systems, such as SENTRON powerconfig, SENTRON powermanager or customized solutions, is ensured via the Modbus TCP interface. Furthermore, this interface also enables a connection via e.g. 7KN Powercenter 3000 or via LOGO! to cloud applications.

Mounting	Power supply	Devices that can be connected	Interfaces	Article No.
DIN-rail mounting	24 V DC SELV	24 circuit protection devices via radio link	1× Ethernet (Modbus TCP) 1× Bluetooth	7KN1110-0MC00

Note:
Please note the country-specific radio licenses of the products in SIOS:
www.siemens.com/lowvoltage/certificates (109801197)

10

7KN Powercenter 1000 data transceiver

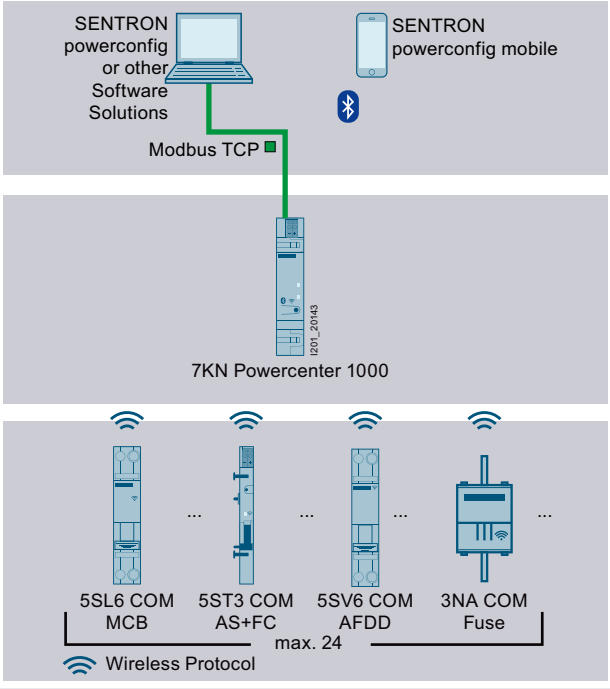

- Acquisition and storage of data and measured values from up to 24 communication-capable circuit protection devices via radio link
- Parameterization, visualization and further processing of the data in higher-level applications via Bluetooth and Modbus TCP



You will find further information under:
www.siemens.com/lowvoltage/manuals

Installation manual – Circuit protection devices with communication and measuring function **(109791805)**

System manual – Circuit protection devices with communication and measuring function **(109791806)**

Quick selection guide, page 10/4

© Siemens 2022

SENTRON powermind



Cloud-based solution for data visualization and analysis in power distribution systems


SENTRON powermind is aimed equally at energy managers, facility managers and/or operators. For energy managers, predefined, automated representations and analyses of energy data are available, such as:

- Analysis of data in graphical form, e.g. lines, bars, heatmap, Sankey diagram (Can also be output as a report)
- Comparison of energy consumption on weekdays versus weekends with percentage day-by-day representation of the distribution of energy consumption to identify unnecessary energy consumption
- Comparison of energy consumption and power import during a selected period as compared with a reference period to assess the effectiveness of energy efficiency measures
- Day-by-day representation of the 15 min power demand, incl. min and max values to assess power peaks

SENTRON powermind offers operators and facility managers the following information and analyses:

- Status of the switching and protection devices, such as 3VA, 3WA and 3WL
- Display of the maximum current value of an individual phase in relation to I_n
- Condition monitoring information about the condition of the contact system of each circuit breaker and also as an overview of all circuit breakers
- The following devices are supported:
  PAC1020, PAC2200/PAC2200CLP, PAC3100/PAC3120, PAC3200/PAC3200T/PAC3220, PAC4200 measuring devices, 3VA, 3WA and 3WL circuit breakers

You can find more information on the MindSphere Store at
www.dex.siemens.com/mindsphere/applications

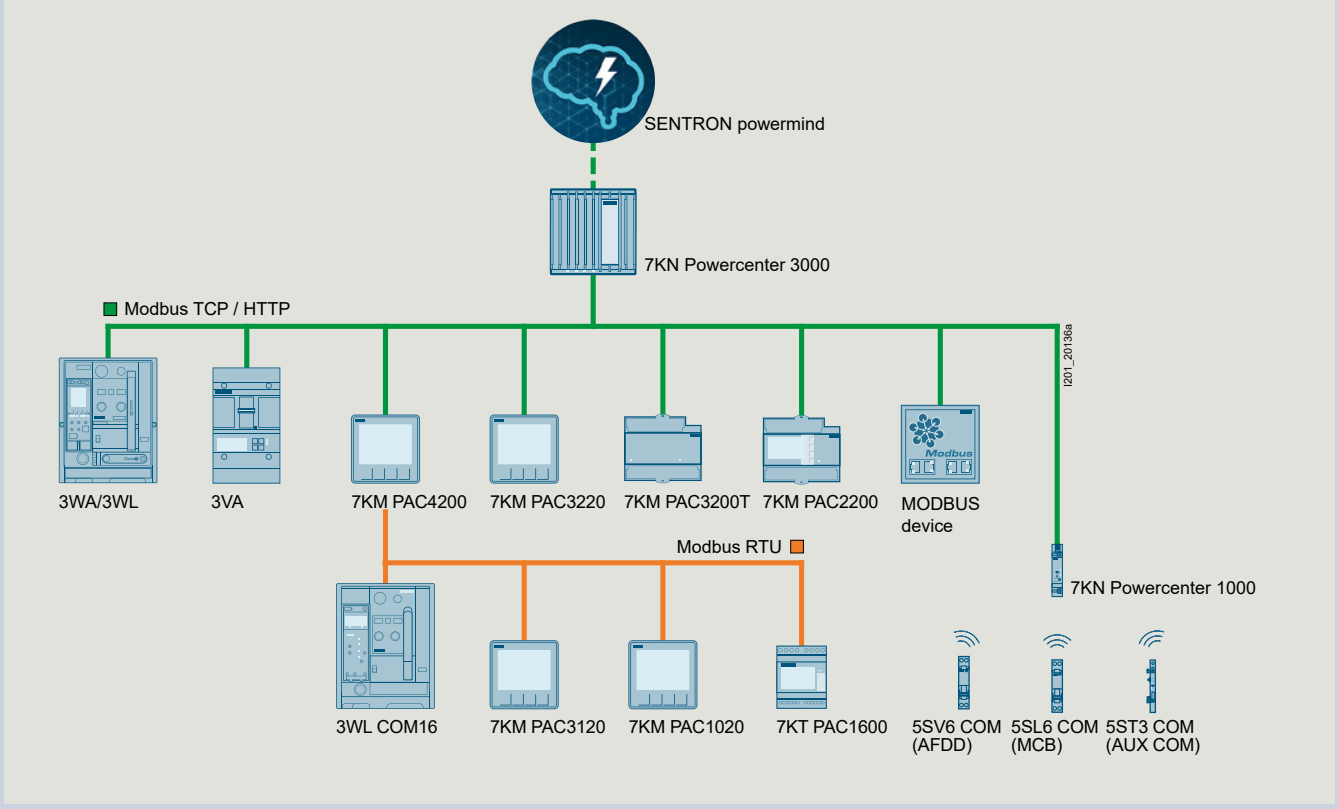


A large number of devices transmit data via SENTRON Powercenter 3000 or SENTRON powermanager to SENTRON powermind

SENTRON powermind processes data from SENTRON Powercenter 3000. No complex configuration or parameterization is required, as the necessary information is exchanged using files. This also prevents possible incorrect entries or write errors. An error-free connection can thus be easily established in just a few minutes.


Quick selection guide, page 10/4

The examples show some of the functions of SENTRON powermind, which are aimed at different customer groups, such as energy managers and maintenance personnel, but also electricians. All information is available via a web browser on a standard PC, but also on mobile devices, such as tablets and smartphones. The information is therefore available both on-site (locally) and off-site (remotely).

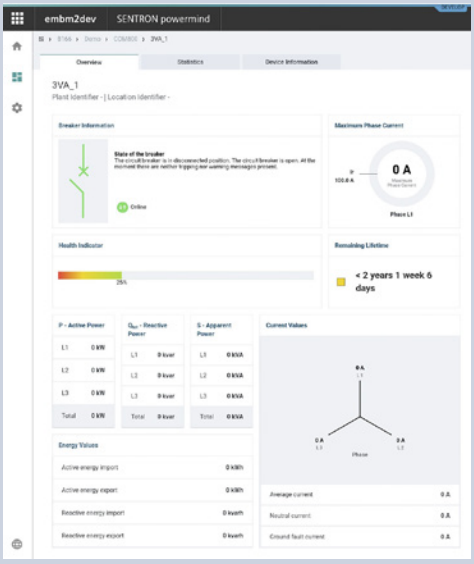

Creating transparency


- Representation of the device status, e.g. open, closed, tripped and relevant measured quantities, such as maximum phase current, total power ...
- Information about the state of health of the device to take action proactively

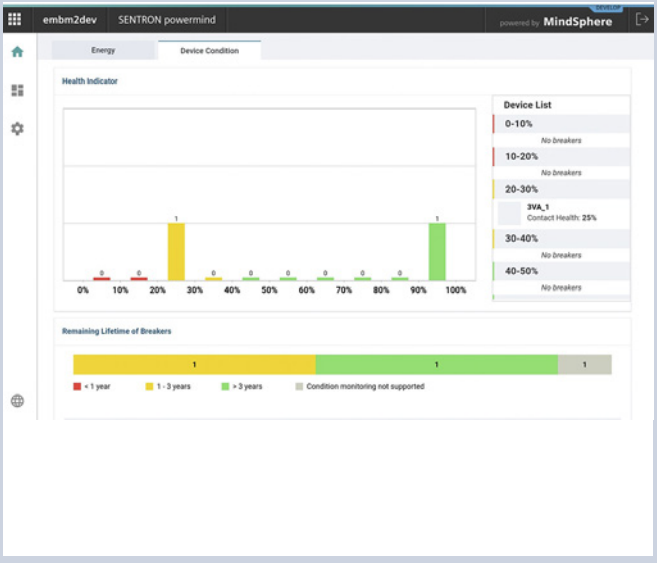

Overview of the circuit breaker status

- Overview of the state of the health of all circuit breakers in the switchboard
- Assignment to a maintenance cycle (< 1 year; between 1 and 3 years; > 3 years)
- Display of circuit breakers in list form as well as link to the respective circuit breaker dashboard



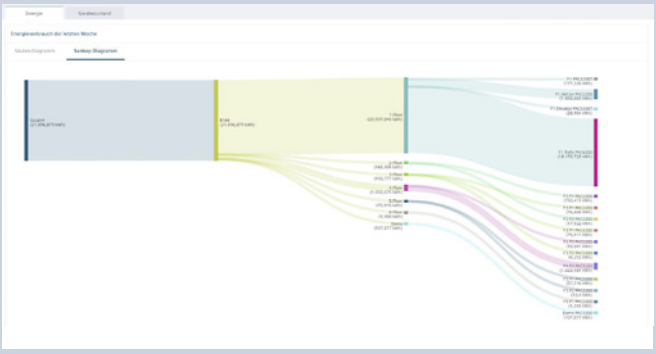

Creating transparency

- Representation of the power flow/power import in various parts of the power distribution system
- Comparison of the weekly energy consumption (percentage distribution of weekdays in comparison to weekend) to identify unusual energy consumption patterns and to check energy-saving measures in the form of a bar chart or Sankey diagram





Energy management

- Comparison of the energy consumption of two periods, for example, to assess the effectiveness of energy saving measures
- Representation of the active power as mean and min/max values in a line diagram or heatmap

Quick selection guide, page 10/4

© Siemens 2022

SIMATIC Energy Suite

For integrated energy management

Highlights

- Simple and intuitive configuration instead of programming
- Automatic generation of the PLC energy program
- Convenient integration of measuring components from the Siemens portfolio and from other manufacturers
- Integrated into the TIA Portal and the automation system
- Archiving in WinCC Professional or PLC
- Seamless interfacing to Energy Manager PRO and Energy
- Analytics

Additional information on the SIMATIC Energy Suite:
www.siemens.com/energysuite

SIMATIC Modbus/TCP SENTRON PAC

For 7KM PAC3200/4200 measuring devices


Use and version	Valid for	Type	Article No.
Communication via the integrated PN interface for reading values out of PAC 3200 and PAC PAC 4200 devices, single license	1 CPU and up to 20 SENTRON PACs	Modbus/TCP 20 SENTRON PAC	6AV6676-6MA30-0AX0
	1 CPU and up to 100 SENTRON PACs	Modbus/TCP 100 SENTRON PAC	6AV6676-6MA30-1AX0
	1 CPU and up to 512 SENTRON PACs	Modbus/TCP 512 SENTRON PAC	6AV6676-6MA30-2AX0

Quick selection guide, page 10/4

PAC/3WL/3VA SIMATIC PCS 7 library

For 7KM PAC3200/3220/4200 measuring devices and 3WL/3VA/3VL circuit breakers

Use	Version	Type of delivery	Article No.
PAC/3WL/3VA SIMATIC PCS 7 library			
• AS blocks and faceplates for integrating the 3WL/3VA/3VL circuit breakers into SIMATIC PCS 7, V8.x, V9.0 SP2 or V9.1 • For each SIMATIC PCS 7 Operator Station of the single station/server version, a license containing the following is required: – Engineering license for one SIMATIC PCS 7 Operator Station of the single station/server version – Runtime license for one automation system (1 required per automation system, further AS runtime licenses can be ordered separately)	Engineering and runtime software, software class A, 2-language (English, German), single license for one installation	Software and electronic documentation as a software download, engineering and runtime license as Certificate of License	3ZS2787-1CC30-0YG0
AS runtime license for PAC/3WL/3VA library for SIMATIC PCS 7			
License for one automation system in each case	Runtime software, software class A, 2-language (English, German), single license for one installation	Runtime license as Certificate of License without software and documentation	3ZS2787-1CC30-6YH0

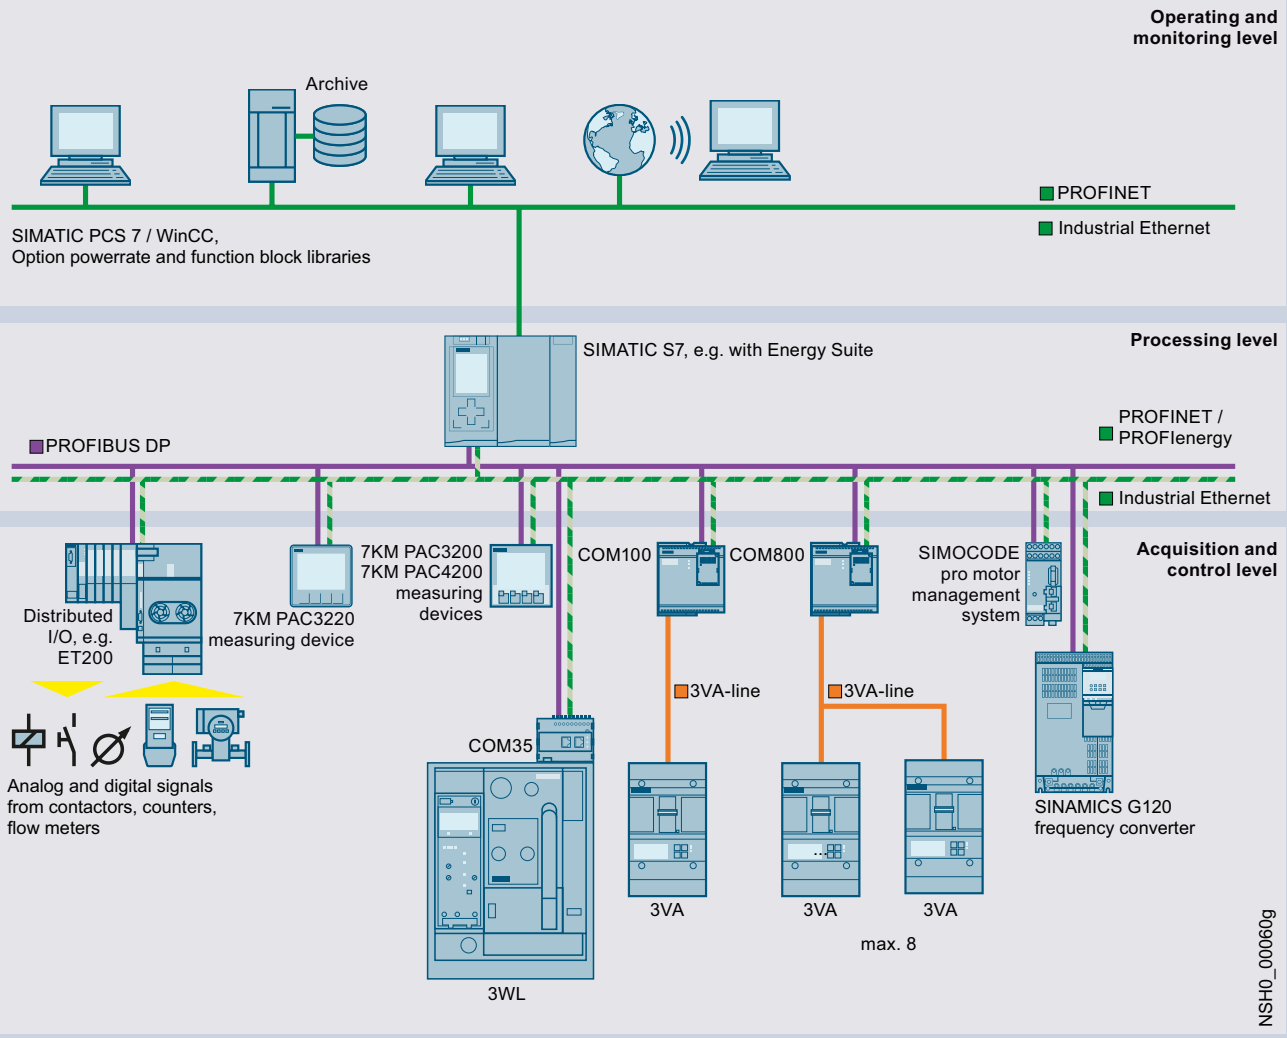

10

Quick selection guide, page 10/4

© Siemens 2022

7KM PAC measuring devices

Basic units






Connections	Power supply	Display	Interface	MID	PTB-A50.7	7KM PAC1020	7KM PAC2200/PAC2200 CLP	7KM PAC3200T
Transformer measurement								
Screw terminals	Self-powered	With	M-Bus	With	Without	–	7KM2200-2EA30-1GA1	–
				Without	Without	–	7KM2200-2EA30-1CA1	–
			Modbus RTU	With	Without	–	7KM2200-2EA30-1HA1	–
				Without	Without	–	7KM2200-2EA30-1DA1	–
			Modbus TCP	With	With	–	7KM2200-2EA00-1JB1	–
					Without	–	7KM2200-2EA30-1JA1	–
				Without	Without	–	7KM2200-2EA30-1EA1	–
	AC/DC wide-voltage power supply unit	With	Modbus RTU	Without	Without	7KM1020-0BA01-1DA0	–	–
			Modbus TCP	Without	Without	–	–	–
		Without	Modbus TCP	Without	Without	–	–	7KM3200-0CA01-1AA0
	DC power supply unit with extra-low voltage	With	Modbus TCP	Without	Without	–	–	–
			Modbus RTU	Without	Without	–	–	–
Ring cable lug connection	AC/DC wide-voltage power supply unit	With	Modbus TCP	Without	Without	–	–	–
Direct measurement								
Screw terminals	Self-powered	With	M-Bus	With	Without	–	7KM2200-2EA40-1GA1	–
				Without	Without	–	7KM2200-2EA40-1CA1	–
			Modbus RTU	With	Without	–	7KM2200-2EA40-1HA1	–
				Without	Without	–	7KM2200-2EA40-1DA1	–
			Modbus TCP	With	With	–	7KM2200-2EA40-1JB1	
					Without	–	7KM2200-2EA40-1JA1	–
				Without	Without	–	7KM2200-2EA40-1EA1	–

10

Further technical specifications

		7KM1020-..	7KM2200-..	7KM3200-..	7KM3120-0..	7KM3120-1..
Basic data						
Installation		Front mounting	DIN rail		Front mounting	
Modular width		–	6 MW		–	
Control panel instrument		96 × 96 mm	–		96 × 96 mm	
External auxiliary voltage	50/60 Hz AC	100 ... 250 V	–	90 ... 276 V	100 ... 250 V ±10%	–
	DC	110 ... 250 V ±10%	–	110 ... 275 V	110 ... 250 V ±10%	24 ... 60 V ±20%
Measuring inputs						
Transformer connection	Secondary input current I_e	x/1 A or x/5 A	x/1 A or x/5 A		x/1 A or x/5 A	
Direct connection	Input voltage U_e 3 AC 50/60 Hz	400/230 V			690/400 V	
	Rated current I_n	–	65 A	–		

Quick selection guide, page 10/6

© Siemens 2022







7KM PAC3120	7KM PAC3220	7KM PAC4200	7KM PAC5200
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
7KM3120-0BA01-1DA0	–	–	–
–	7KM3220-0BA01-1DA0	7KM4212-0BA00-3AA0	7KM5412-6BA00-1EA2
–	–	–	7KM5412-6CA00-1EA8
–	7KM3220-1BA01-1EA0	7KM4211-1BA00-3AA0	–
7KM3120-1BA01-1EA0	–	–	–
–	–	7KM4212-0BA00-2AA0	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–

7KM3220-0..	7KM3220-1..	7KM4212-..	7KM4211-..	7KM5412-..
Front mounting				Front mounting/DIN rail
–				
96 × 96 mm				
100 ... 250 V ±10%	–	95 ... 240 V ±10%	–	110 ... 230 V ±10%
100 ... 250 V ±10%	24 ... 60 V ±20%	110 ... 340 V ±10%	22 ... 65 V ±10%	24 ... 250 V ±10%
x/1 A or x/5 A				
690/400 V			500/289 V	690/400 V
–				


10

Quick selection guide, page 10/6

© Siemens 2022

7KM PAC measuring devices

Accessories

	7KM PAC1020	7KM PAC3120 7KM PAC3220 7KM PAC4200
7KM PAC TMP2 DIN-rail adapter		
 • Two-tier adapter for mounting a measuring device on a DIN rail • Front display • For manual intervention	7KM9900-0XA00-0AA0	
7KM PAC TMP mounting plate		
 • Adapter for mounting a measuring device on DIN rail • Display faces backwards towards DIN rail • Readout and evaluation of measurements solely via mains operation	7KM9900-0YA00-0AA0	
Compact holder		
 • Device holder for 7KM PAC1020/3100/3120/3200/3220/4200 • 10 holders for 5 PAC devices • For seamless side-by-side mounting of the devices (without spaces)	7KM9900-0GA00-0AA0	
Spare parts for 7KM PAC		
 • Spare parts comprising: – Device holders for panel mounting (2X) – Screw terminal for connection of voltage inputs – Screw terminal for connection of current inputs – Terminal block inputs/outputs for 7KM PAC3100/4200 – Terminal block inputs/outputs for 7KM PAC3200 – RS485 terminal blocks for 7KM PAC3100	–	7KM9900-0SA00-0AA0

10

	7KM PAC2200 7KM PAC2200 CLP 7KM PAC2200 MID	7KM PAC300T
SENTRON PROFINET Proxy SPP2000 new		
 • Proxy for transition from Modbus TCP-capable measuring devices to PROFINET IO. Connection of up to 8 devices from the PAC2200, PAC2200 CLP, PAC2200 MID and PAC3200T product ranges • PROFINET Conformance Class C • Two switched ports • Integration in TIA by means of GSDML file	7KM9300-0PP20-0AA0	

Quick selection guide, page 10/10

© Siemens 2022

Expansion and communication modules

		7KM PAC3220 7KM PAC4200	COM100/800 (3VA)
7KM Switched Ethernet PROFINET communication module			
	• Latest PROFINET switching properties • S2 system redundancy for operation in H systems • CiR Configuration in Run • Firmware update via the modules for PAC4200 and PAC3220	7KM9300-0AE02-0AA0	
7KM PROFIBUS DP communication module			
		7KM9300-0AB01-0AA0	
7KM RS485 communication module			
		7KM9300-0AM00-0AA0 [1]	
7KM PAC 4DI/2DO expansion module			
		7KM9200-0AB00-0AA0	–
7KM PAC I(N), I(Diff), analog expansion module			
	• To add the following functions to the measuring inputs: – N conductor measurement – Two analog inputs, also for measuring non-electrical quantities such as temperature, water or air pressure – Residual current measurement via type A or type B summation current transformers	7KM9200-0AD00-0AA0	–

[1] Suitable for 7KM PAC4200 (especially for the Modbus TCP/RTU Gateway)

Residual-current transformers for 7KM PAC I(N), I(Diff), analog expansion module, **from page 11/1 onwards**

Quick selection guide, page 10/10

© Siemens 2022

7KT PAC measuring devices

PAC1600 basic unit



Connections	Version	Power supply	Display	Interface	MID	7KT PAC1600
Transformer measurement						
Screw terminals	3-phase	Self-powered	With	Modbus RTU	Without	7KT1661
					With	7KT1662
				M-Bus	Without	7KT1663
					With	7KT1664
				S0 interface	Without	7KT1672
					With	7KT1673
	3-phase, universal	Auxiliary power: 100 ... 240 V AC, 110 ... 250 V DC 50/60Hz	With	–	Without	7KT1681
				Modbus RTU	Without	7KT1682
Direct measurement						
Screw terminals	1-phase	Self-powered	With	Modbus RTU	Without	7KT1651
					With	7KT1652
				M-Bus	Without	7KT1653
					With	7KT1654
				S0 interface	Without	7KT1655
					With	7KT1656
	3-phase	Self-powered	With	Modbus RTU	Without	7KT1665
					With	7KT1666
				M-Bus	Without	7KT1667
					With	7KT1668
				S0 interface	Without	7KT1670
					With	7KT1671

Quick selection guide, page 10/6

© Siemens 2022

PAC1200 multichannel current measuring system




Connections	Version	Power supply	Display	Interface	MID	7KT PAC1200
Direct measurement						
Screw terminals	3-phase	Self-powered	Without	Modbus TCP	Without	7KT1260

PAC1200

7KT PAC1200

Data manager with 7KT1260, sensor bars



Number of connections	Article No.
3	7KT1233
6	7KT1236
9	7KT1238
12	7KT1242

Data manager with 7KT1260, sensors




Current I_e	Article No.
40 A	7KT1254
63 A	7KT1255

10

PAC1200 Bundles





Data manager	Sensor bars	Sensors	18 bundle	24 bundle
1× data manager 7KT1260	2× 9-sensor bar 7KT1238	18× sensors 40 A 7KT1254	7KT1222	–
	2× 12-sensor bar 7KT1242	24× sensors 40 A 7KT1254	–	7KT1223

Quick selection guide, page 10/6

© Siemens 2022

SEM3 multichannel current measuring system

Data manager



Connections	Version	Power supply	Display	Interface	MID	
Transformer measurement						
Screw terminals	3-phase	Self-powered	Without	Modbus TCP RS485 Modbus RTU	Without	US2:SEM3CONTROLLER

Further technical specifications	SEM3
Basic data	
Installation	Screw mounting
Measuring inputs	
Max. input voltage 50/60 Hz AC	480 V/277 V
Standard current transformers	50 ... 1200 A/0.1 A
Folding transformer	50 ... 2000 A/0.1 A

Quick selection guide, page 10/6

© Siemens 2022

Accessories


Metering modules



- For recording measured values
- Accuracy of 0.2% or 1% for the entire measurement including current transformer
- Simple setting of phase configuration by means of slide switch
- Connection of a current transformer for measuring a phase
- Metering module is plugged into meter rack

Measuring accuracy	Article No.
0.2%	US2:SEM3PHAMETER
1%	US2:SEM3PLAMETER

Meter racks



Version	Article No.
For 3 metering modules	US2:SEM3RACK3
For 9 metering modules	US2:SEM3RACK9
For 15 metering modules	US2:SEM3RACK15
For 21 metering modules	US2:SEM3RACK21

Connecting cables



- 600 V insulated special cable for connecting meter racks to the data manager

Length	Article No.
0.3 m	US2:SEM3CAB12INCH
0.6 m	US2:SEM3CAB24INCH
0.9 m	US2:SEM3CAB36INCH


Standard current transformers



- Standard power cable brown and yellow, 1.82 m long
- Can be extended up to 100 m while still maintaining accuracy
- Transformer configuration is carried out in the data manager

Output signal	Transformer transmission ratio	Article No.
100 mA	50 : 0.1	US2:SEM3SCCT50
	125 : 0.1	US2:SEM3SCCT125
	250 : 0.1	US2:SEM3SCCT250
	400 : 0.1	US2:SEM3SCCT400
	600 : 0.1	US2:SEM3SCCT600
	800 : 0.1	US2:SEM3SCCT800
	1200 : 0.1	US2:SEM3SCCT1200


Folding transformers



- Standard power cable brown and yellow, 1.82 m long
- Can be extended up to 100 m while still maintaining accuracy
- Transformer configuration is carried out in the data manager

Output signal	Transformer transmission ratio	Article No.
100 mA	50 : 0.1	7KT1280-5MA00
	125 : 0.1	7KT1280-5MA01
	250 : 0.1	7KT1280-5MA02
	400 : 0.1	7KT1280-5MA03
	600 : 0.1	7KT1280-5MA04
	800 : 0.1	7KT1280-5MA05
	1200 : 0.1	7KT1280-5MA06
	1600 : 0.1	7KT1280-5MA07
	2000 : 0.1	7KT1280-5MA08

DIN-rail adapters



- 5 adapters for snapping onto DIN rail
- 1 adapter each for data manager and for meter racks with 3, 9, 15 and 21 metering modules
- Adapters are screwed onto the data manager or the meter racks

	Article No.
	US2:SEM3DINKIT

10

Quick selection guide, page 10/6

© Siemens 2022

SEM3T multichannel temperature measuring system new

Data manager for thermal monitoring in electrical systems



Connections	Version	Power supply	Display	Interface	
Plug-in connectors	Temperature measurement	24 V DC	Without	Modbus TCP	7KT1281-0AA00
				Modbus TCP/Wi-Fi	7KT1281-0AA10

Further technical specifications

	SEM3T
Basic data	
Installation	DIN-rail mounting
Measuring inputs	
Temperature sensors	0 to 130°C

10

Quick selection guide, page 10/6

© Siemens 2022

Accessories


Metering module



- For recording measured values
- No configuration necessary for modules
- Connection of a temperature sensor
- Metering module is plugged into meter rack

Article No.
7KT1281-1AA00

Meter racks



Version	Article No.
For 3 metering modules	US2:SEM3RACK3
For 9 metering modules	US2:SEM3RACK9
For 15 metering modules	US2:SEM3RACK15
For 21 metering modules	US2:SEM3RACK21

Connecting cables



- 600 V insulated special cable for connecting meter racks to the data manager

Length	Article No.
0.3 m	US2:SEM3CAB12INCH
0.6 m	US2:SEM3CAB24INCH
0.9 m	US2:SEM3CAB36INCH

Temperature sensors

- Standard connection cable, brown and yellow, 3 m long
- Can be extended up to 15 m while still maintaining accuracy
- Configuration is carried out in the data manager





Version	Size	Article No.
Sensors with ring terminal lugs	Sensor 1/4"	7KT1281-2SA00
	Sensor 5/16"	7KT1281-2SA01
	Sensor 3/8"	7KT1281-2SA02
	Sensor 1/2"	7KT1281-2SA03
Cylindrical sensor		7KT1281-2CA00

10

Quick selection guide, page 10/6

© Siemens 2022

Time and pulse counters

Mechanical counting mechanisms






Display	Resetting	Rated frequency	Rated control supply voltage U_c	48 × 48 mm	72 × 72 mm	–
Time counter						
00000.00 h	Without	–	10 ... 80 V DC	7KT5500	–	–
			10 ... 50 V DC	–	7KT5600	–
			12 ... 24 V DC	–	–	7KT5801
		50 Hz	24 V AC	7KT5505	–	7KT5802
			115 V AC	7KT5501	7KT5601	7KT5803
			230 V AC	7KT5502	7KT5602	7KT5804
		60 Hz	115 V AC	7KT5503	7KT5603	7KT5806
			230 V AC	7KT5504	7KT5604	7KT5807
Pulse counter						
0000000	Without	–	12 ... 24 V DC	–	–	7KT5811
		50/60 Hz	24 V AC	–	–	7KT5812
			230 V AC	–	–	7KT5814

Further technical specifications

	7KT55..	7KT56..	7KT58..
Basic data			
Installation	Front mounting		DIN rail
Modular width	–		2 MW
Front frame	48 × 48 mm	72 × 72 mm	–
Display	Drum-type register		
Version	–	With narrow frame according to DIN 43700	–

Accessories

			7KT55..	7KT56..	7KT58..
Cover					
	Size		Article No.	Article No.	Article No.
	55 × 55 mm		7KT9020	–	–
Sealing ring for cover					
	Degree of protection	Scope of supply	Article No.	Article No.	Article No.
	IP43 (in switchboards with smooth surfaces)	1 set = 5 units	7KT9000	–	–
Terminal cover					
	Degree of protection		Article No.	Article No.	Article No.
	IP20 (with connected conductors)		–	7KT9021	–

10

Quick selection guide, page 10/6

© Siemens 2022

Electronic counting mechanisms



Display	Resetting	Rated frequency	Rated control supply voltage U_c	
Time counter				
000000.0 h	Without	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5821
	Electrical	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5822
	Electrical and mechanical	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5823
Pulse counter				
0000000	Electrical and mechanical	50/60 Hz	24 ... 240 V AC, 12 ... 150 V DC	7KT5833

Further technical specifications

	7KT58..
Basic data	
Installation	DIN rail
Modular width	2 MW
Display	LCD display

10

Quick selection guide, page 10/6

© Siemens 2022

Current transformers

For measuring purposes

				4NC [1]		7KT	3NJ [1]	
				1-phase		3-phase	1-phase	
								
Size	Insulation level U_m	Rated primary current I_{pr}	Rated power P_n	I_{sr} = 5 A	I_{sr} = 1 A	I_{sr} = 5 A	I_{sr} = 5 A	I_{sr} = 1 A
Accuracy class 0.2s								
1	720 V	150 A	1 VA	4NC5121-2FA21	–	–	–	–
		200 A	2.5 VA	4NC5122-2FC21	–	–	–	–
		250 A	2.5 VA	4NC5123-2FC21	–	–	–	–
		300 A	5 VA	4NC5124-2FE21	–	–	–	–
		400 A	5 VA	4NC5125-2FE21	–	–	–	–
		500 A	5 VA	4NC5126-2FE21	–	–	–	–
5	720 V	600 A	5 VA	4NC5227-2FE21	–	–	–	–
		700 A	5 VA	4NC5228-2FE21	–	–	–	–
		800 A	5 VA	4NC5231-2FE21	–	–	–	–
		1000 A	5 VA	4NC5232-2FE21	–	–	–	–
Accuracy class 0.5								
1	720 V	100 A	1 VA	4NC5117-2DA21	4NC5117-0DA21	–	–	–
		150 A	2.5 VA	4NC5121-2DC21	4NC5121-0DC21	–	–	–
		200 A	5 VA	4NC5122-2DE21	4NC5122-0DE21	–	–	–
		250 A	5 VA	4NC5123-2DE21	4NC5123-0DE21	–	–	–
2	720 V	200 A	5 VA	4NC5222-2DE21	4NC5222-0DE21	–	–	–
		250 A	5 VA	4NC5223-2DE21	4NC5223-0DE21	–	–	–
		300 A	5 VA	4NC5224-2DE21	4NC5224-0DE21	–	–	–
		400 A	5 VA	4NC5225-2DE21	4NC5225-0DE21	–	–	–
3	720 V	400 A	5 VA	4NC5325-2DE21	4NC5325-0DE21	–	–	–
		500 A	5 VA	4NC5326-2DE21	4NC5326-0DE21	–	–	–
		600 A	5 VA	4NC5327-2DE21	4NC5327-0DE21	–	–	–
		750 A	5 VA	4NC5330-2DE21	4NC5330-0DE21	–	–	–
		800 A	5 VA	4NC5331-2DE21	–	–	–	–
4	720 V	800 A	10 VA	4NC5431-2DH21	4NC5431-0DH21	–	–	–
		1000 A	10 VA	4NC5432-2DH21	4NC5432-0DH21	–	–	–
		1200 A	10 VA	4NC5433-2DH21	4NC5433-0DH21	–	–	–
		1500 A	10 VA	4NC5435-2DH21	4NC5435-0DH21	–	–	–
		1600 A	15 VA	4NC5436-2DK21	–	–	–	–
		2000 A	20 VA	4NC5438-2DL21	–	–	–	–
		2500 A	25 VA	4NC5440-2DM21	–	–	–	–
		3000 A	30 VA	4NC5441-2DN21	–	–	–	–
Accuracy class 0.5 calibrated								
–	720 V	100 A	1.5 VA	–	–	–	3NJ6920-3BD23	3NJ6920-3BD13
		150 A	2.5 VA	–	–	–	3NJ6920-3BE23	3NJ6920-3BE13
		300 A	5 VA	–	–	–	3NJ6940-3BH23	3NJ6940-3BH13
		400 A	5 VA	–	–	–	3NJ6940-3BJ23	3NJ6940-3BJ13
		500 A	5 VA	–	–	–	3NJ6940-3BK23	3NJ6940-3BK13
		600 A	5 VA	–	–	–	3NJ6940-3BL23	3NJ6940-3BL23

[1] Overcurrent limiting factor FS5

10


Quick selection guide, page 10/4

© Siemens 2022

				4NC [1]		7KT	3NJ [1]	
				1-phase		3-phase	1-phase	
								
Size	**Insulation level U_m**	**Rated primary current I_{pr}**	**Rated power P_n**	**I_{sr} = 5 A**	**I_{sr} = 1 A**	**I_{sr} = 5 A**	**I_{sr} = 5 A**	**I_{sr} = 1 A**
Accuracy class 1.0								
1	720 V	50 A	1.2 VA	4NC5112-2CB21	4NC5112-0CB21	–	–	–
		60 A	1.2 VA	4NC5113-2CB21	4NC5113-0CB21	–	–	–
			1.25 VA	–	–	7KT1200	–	–
		75 A	2.5 VA	4NC5115-2CC21	4NC5115-0CC21	–	–	–
		100 A	2.5 VA	4NC5117-2CC21	4NC5117-0CC21	7KT1201	–	–
		150 A	2.5 VA	4NC5121-2CC21	4NC5121-0CC21	–	–	–
			3.75 VA	–	–	7KT1202	–	–
		200 A	5 VA	4NC5122-2CE21	4NC5122-0CE21	–	–	–
		250 A	5 VA	4NC5123-2CE21	4NC5123-0CE21	–	–	–
2	720 V	200 A	5 VA	4NC5222-2CE21	4NC5222-0CE21	–	–	–
		250 A	5 VA	4NC5223-2CE21	4NC5223-0CE21	–	–	–
		300 A	5 VA	4NC5224-2CE21	4NC5224-0CE21	–	–	–
		400 A	5 VA	4NC5225-2CE21	4NC5225-0CE21	–	–	–
3	720 V	400 A	5 VA	4NC5325-2CE21	4NC5325-0CE21	–	–	–
		500 A	5 VA	4NC5326-2CE21	4NC5326-0CE21	–	–	–
		600 A	5 VA	4NC5327-2CE21	4NC5327-0CE21	–	–	–
		750 A	5 VA	4NC5330-2CE21	4NC5330-0CE21	–	–	–
4	720 V	800 A	10 VA	4NC5431-2CH21	4NC5431-0CH21	–	–	–
		1000 A	10 VA	4NC5432-2CH21	4NC5432-0CH21	–	–	–
		1250 A	10 VA	4NC5434-2CH21	4NC5434-0CH21	–	–	–
		1500 A	10 VA	4NC5435-2CH21	4NC5435-0CH21	–	–	–
		2000 A	12.5 VA	4NC5438-2CJ21	4NC5438-0CJ21	–	–	–
		2500 A	12.5 VA	4NC5440-2CJ21	4NC5440-0CJ21	–	–	–
		3000 A	30 VA	4NC5441-2CN21	–	–	–	–

Accessories

DIN-rail mounting



For transformer size	Article No.	Article No.	Article No.	Article No.	Article No.
1 and 5	4NC5923-5LT21	4NC5923-5LT21	–	–	–
2	4NC5925-5LT21	4NC5925-5LT21	–	–	–
3	4NC5930-5LT21	4NC5930-5LT21	–	–	–
4	4NC5940-5LT21	4NC5940-5LT21	–	–	–

Quick selection guide, page 10/4

© Siemens 2022



Well-monitored – well-protected

Monitoring devices perform numerous functions to protect people and machinery: At dusk, they switch on automatically, control the temperature or signal the location where a fuse has tripped.

They also ensure reliable switchover to emergency power supply, monitor the emergency lighting, ensure overload-free operation of motors and neutral monitoring for breakage and overvoltages.

Monitoring devices can do even more, e.g., underload monitoring of asynchronous motors in no-load operation.

© Siemens 2022

Monitoring Devices



All the information you need 11/2

System overview 11/4

Monitoring devices for electrical values 11/6

- 5SV8 residual current monitors 11/6
- 5SV8 modular residual current device 11/8
- 5TT3 undervoltage relays 11/12
- 5TT3 short-time voltage relay 11/14
- 5TT3 undervoltage and overvoltage relays 11/15
- 5TT6 current relays 11/16
- 5TT3 fuse monitors 11/17
- 5TT3 phase monitors 11/18
- 5TT3 phase sequence monitors 11/19
- 5TT3 insulation monitors for industrial applications 11/20

Monitoring devices for plants and equipment 11/21

- 5TT5 EMERGENCY STOP modules 11/21
- 5TT3 level relays 11/22
- 5TT3 line circuit relays 11/23
- 7LQ2 twilight switches 11/24

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about monitoring devices, please visit our website **www.siemens.com/lowvoltage**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Monitoring devices **sie.ag/2m3no4A**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at **www.siemens.com/lowvoltage/components/contact**

You can find further information on services at **www.siemens.com/service-catalog**

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at **www.siemens.com/support-request**

© Siemens 2022

... can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Monitoring devices **(45316099)**

Technical overview – Monitoring devices

The fast way to get you to our online services

This page provides you with comprehensive information and links on monitoring devices
www.siemens.com/lowvoltage/product-support (109769086)

© Siemens 2022

System overview

Monitoring devices for electrical values



5SV8 residual current monitor



5SV8 modular residual current device



5TT3 and 5TT6 relay



5TT3 monitors

Accessories



Summation current transformer



Holders for DIN rails



Magnetic field centering sleeves

Monitoring devices for plants and equipment



5TT5 EMERGENCY STOP modules



5TT3 relay



7LQ2 twilight switches

11

Accessories



Immersion electrodes

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

© Siemens 2022

5SV8 residual current monitors

Type A and type AC

	RCM analog	RCM digital	
Modular width	2 MW	3 MW	3 MW
			

Rated operational voltage U_e	Rated residual current $I_{\Delta n}$		Response time Δt			
	Type A	Type AC			1 channel	4 channels
230 V AC	0.03 ... 5 A	>3 A	0.02 ... 5 s	5SV8000-6KK	–	–
	0.03 ... 3 A	5 ... 30 A	0.02 ... 10 s, INS, SEL [1]	–	5SV8001-6KK	5SV8200-6KK

Further technical specifications

		5SV8000-6KK	5SV8001-6KK	5SV8200-6KK
Standards				
Standards		EN 62020, IEC 62020		
Approvals		–	UL	
Supply				
Rated operational voltage U_e		230 V AC		
Frequency		50/60 Hz		
Rated residual current $I_{\Delta n}$	Type A	0.03 ... 3 A		
	Type AC	>3 A	5 ... 30 A	
Response time Δt		0.02 ... 5 s	0.02 ... 10 s, INS, SEL [1]	
Relay contacts				
Relay contacts		1× alarm	1× pre-alarm, 1× alarm	1× pre-alarm, 4× alarm
Rated voltage		230 V AC		
Rated current		6 A		
Summation current transformer				
Diameter		20 ... 210 mm		
Equipment				
Maximum cable length RCM/CT		10 m (shielded cable)		
Conductor cross-section		1.5 mm²		
Test/reset		Yes/Yes		
External tripping operation/external reset		–/Yes	Yes/Yes	
Safety				
Degree of protection	Contacts	IP20		
	Front	IP41		
Ambient conditions				
Operating temperature		–10 ... +50 °C		

[1] INS: Instantaneous,
SEL: Selective


System overview, page 11/4


© Siemens 2022

Accessories

Summation current transformers







- Including holder for DIN rail or wall mounting
- Standard ®

Mounting options	Lowest measurable residual current $I_{\Delta n\ min}$	Rated current I_n	Maximum current [2] I_{max}	Internal diameter	Article No.
DIN rail	30 mA	≤40 A	240 A	20 mm	5SV8700-0KK
		≤63 A	380 A	30 mm	5SV8701-0KK
Wall mounting, DIN rail[1]	30 mA	≤80 A	480 A	35 mm	5SV8702-0KK
		≤200 A	1200 A	70 mm	5SV8703-0KK
Wall mounting	100 mA	≤250 A	1500 A	105 mm	5SV8704-0KK
	300 mA	≤500 A	3000 A	140 mm	5SV8705-0KK
		≤600 A	3600 A	210 mm	5SV8706-0KK

Holders for DIN rails



- Suitable for summation current transformers with internal diameter of 20 mm, 30 mm, 35 mm, 70 mm
- Cannot be used together with magnetic field centering sleeves.

Article No.
5SV8900-1KK

Magnetic field centering sleeves



Internal diameter	Article No.
35 mm	5SV8902-1KK
70 mm	5SV8903-1KK
105 mm	5SV8904-1KK
140 mm	5SV8905-1KK
210 mm	5SV8906-1KK

[1] The holder for DIN rails is additionally required for mounting onto the DIN rail.
[2] Short-time starting current, up to 2 s

System overview, page 11/4

© Siemens 2022

5SV8 modular residual current device

Type A

	MRCD
Modular width	3 MW



Rated operational voltage U_e	Rated residual current $I_{\Delta n}$ Type A	Response time Δt	
230 V AC	0.03 ... 3 A	0.02 ... 10 s, INS, SEL [1]	5SV8101-6KK

Further technical specifications

Standards		
Standards		EN 60947-2 (Annex M), IEC 60947-2 (Annex M)
Approvals		–
Supply		
Rated operational voltage U_e		230 V AC from a 1-phase auxiliary voltage source (also externally)
Frequency		50/60 Hz
Rated residual current $I_{\Delta n}$	Type A	0.03 ... 3 A (default setting: 30 mA)
	Type AC	–
Response time Δt	$I_{\Delta n}$ = 30 mA	INS instantaneous
	$I_{\Delta n}$ > 30 mA	INS – SEL – 0.06 ... 10 s [1] (default setting INS)
Relay contacts		
Relay contacts		1× alarm, 1x tripping operation
Rated voltage		230 V AC
Rated current		6 A
Summation current transformer		
Diameter		35 ... 210 mm
Equipment		
Maximum cable length RCM/CT		10 m (shielded cable)
Conductor cross-section		0.125 ... 2.08 mm²
Test/reset		Yes/Yes
External tripping operation/external reset		Yes/Yes
Safety		
Degree of protection	Contacts	IP20
	Front	IP41
Ambient conditions		
Operating temperature		–10 ... +50 °C


[1] INS: Instantaneous,
SEL: Selective


System overview, page 11/4

© Siemens 2022

Accessories

Summation current transformers





- Including holder for wall mounting
- Standard ®

Mounting options	Lowest measurable residual current $I_{\Delta n\ min}$	Rated current I_n	Maximum current [2] I_{max}	Internal diameter	Article No.
Wall mounting, DIN rail [1]	30 mA	≤80 A	480 A	35 mm	5SV8702-0KK
	30 mA	≤200 A	1200 A	70 mm	5SV8703-0KK
Wall mounting	100 mA	≤250 A	1500 A	105 mm	5SV8704-0KK
	300 mA	≤500 A	3000 A	140 mm	5SV8705-0KK
		≤600 A	3600 A	210 mm	5SV8706-0KK

Holders for DIN rails



- Suitable for summation current transformers with internal diameter of 20 mm, 30 mm, 35 mm, 70 mm
- Cannot be used together with magnetic field centering sleeves

Article No.
5SV8900-1KK


Magnetic field centering sleeves



Internal diameter	Article No.
35 mm	5SV8902-1KK
70 mm	5SV8903-1KK
105 mm	5SV8904-1KK
140 mm	5SV8905-1KK
210 mm	5SV8906-1KK

[1] The holder for DIN rails is additionally required for mounting onto the DIN rail.
[2] Short-time starting current, up to 2 s

Tested combination options

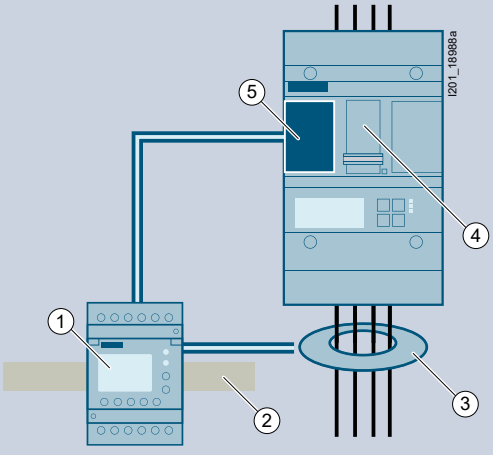

5SV8101-6KK/- (tested combinations)

❶ Modular residual current device		
5SV8101-6KK		
❷ DIN rail		
EN 60715 – TH35 – 7.5 35 – 15		
❸ Summation current transformers		**Magnetic field centering sleeves**
Ø 35 mm	5SV8702-0KK	5SV8902-1KK
Ø 70 mm	5SV8703-0KK	5SV8903-1KK
Ø 105 mm	5SV8704-0KK	5SV8904-1KK
Ø 140 mm	5SV8705-0KK	5SV8905-1KK
Ø 210 mm	5SV8706-0KK	5SV8906-1KK
❹ Molded case circuit breakers		**❺ Trip element**
3VL17...		3VL9400-1UP00
3VL27...		
3VL37...		
3VL47...		
3VA10...		3VA9908-0BB11
3VA11...		3VA9908-0BB20
3VA20...		3VA9908-0BB24
3VA21...		3VA9908-0BB25
3VA22...		
3VA12...		3VA9908-0BB11
3VA23...		3VA9908-0BB20
3VA24...		3VA9908-0BB24

System overview, page 11/4

© Siemens 2022

5SV8 modular residual current device

Type B

	MRCD digital
Modular width	2 MW



Rated operational voltage U_e	Rated residual current $I_{\Delta n}$ Type B	Response time Δt	
230 V AC	0.03 ... 1 A	0 ... 10 s	5SV8101-4KK
24 V DC	0.03 ... 1 A	0 ... 10 s	5SV8111-4KK

Further technical specifications

		5SV8101-4KK	5SV8111-4KK
Standards			
Standards		EN 60947-2 (Annex M), IEC 60947-2 (Annex M)	
Supply			
Supply voltage U_s		230 V AC (70 ... 300 V AC)	24 V DC (9.6 ... 94 V DC)
Frequency		50/60 Hz	–
Power consumption		<6.5 VA	
Relay contacts			
Relay contacts		1× alarm, 1× tripping operation	
Rated voltage		250 V AC	
Rated current		5 A	
External summation current transformer			
Internal diameter		35 ... 210 mm (5SV8701-2KK, 5SV8701-2KP, 5SV8702-2KK, 5SV8702-2KP, 5SV8703-2KK, 5SV8704-2KK)	
Rated voltage	(Summation current transformers)	690 V	
Response characteristic	Acc. to IEC 60947-2 (M)	Type B	
Rated frequency		0 ... 2 kHz	
Response residual current	$I_{\Delta n}1$ (AL1 alarm)	50 ... 100% of $I_{\Delta n}2$ (factory setting: 50%)	
	$I_{\Delta n}2$ (TP2 tripping)	30 mA ... 1 A (factory setting: 30 mA)	
Response delay	$t_{on}1$ (alarm)	0 ... 10 s (factory setting: 1 s)	
	$t_{on}2$ (tripping)	0 ... 10 s (factory setting: 0 s)	
Equipment			
Maximum cable length MRCD/converter		10 m (6 × 0.75 mm²)	
Password		Off/0 ... 999 (factory setting: 0)	
Safety			
Degree of protection	Components (IEC 60529)	IP30	
	Terminals (IEC 60529)	IP20	
EMC		IEC 60947-2 (M)	
Overvoltage category		III	
Pollution degree		3	
Mechanical data			
Width		36 mm (2 MW)	
Depth		64 mm	
Height		85 mm	
Weight		150 g	
Mounting		DIN rail	
Enclosure material		Polycarbonate	
Electrical connection		Screw terminals	
Conductor cross-section	Rigid	0.2 ... 4 mm²	
	Flexible, with end sleeve	0.2 ... 2.5 mm² (AWG 24 ... 12)	
Stripped length		8 ... 9 mm	
Tightening torque		0.5 ... 0.6 Nm	
Ambient conditions			
Operating temperature		–25 ... + 55 °C	

System overview, page 11/4

© Siemens 2022

Accessories

Summation current transformers



Lowest measurable residual current $I_{\Delta n\ min}$	Rated current I_n	Maximum current [1] I_{max}	Internal diameter	Version	Article No.
10 mA	≤80 A	500 A	35 mm	Standard	5SV8701-2KK
				With shield	5SV8701-2KP
	≤160 A	1000 A	60 mm	Standard	5SV8702-2KK
				With shield	5SV8702-2KP
100 mA	≤330 A	2000 A	120 mm	Standard	5SV8703-2KK
300 mA	≤630 A	3800 A	210 mm	Standard	5SV8704-2KK


Holders for DIN rails




Suitable for summation current transformers	Article No.
5SV8701-2KK, 5SV8701-2KP	5SV8900-2KK
5SV8702-2KK, 5SV8702-2KP	5SV8900-3KK

[1] Short-time starting current, up to 2 s

Tested combination options

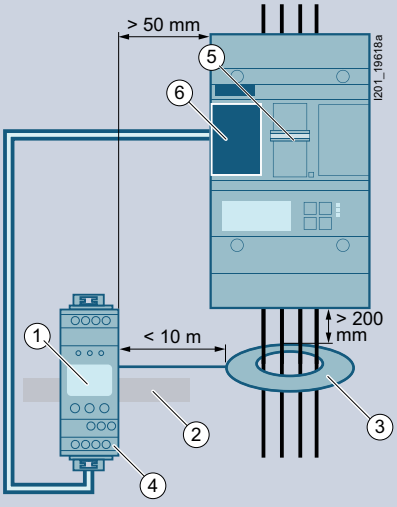

5SV8101-4KK/5SV8111-4KK (tested combinations)

❶ Modular residual current device	
5SV8101-4KK/5SV8111-4KK	
❷ DIN rail	
EN 60715 – TH35 – 7,5 35 – 15	
❸ Summation current transformers	
Ø 35 mm	5SV8701-2KK/5SV8701-2KP
Ø 60 mm	5SV8702-2KK/5SV8702-2KP
Ø 120 mm	5SV8703-2KK
Ø 210 mm	5SV8704-2KK
❹ Relay contacts	
DC: 	AC: max. 230 V, 5A

❺ Molded case circuit breakers	❻ Trip element
3VA1...	3VA9908-0BB11
3VA20...	3VA9908-0BB24
3VA21...	3VA9908-0BB25
3VA22...	
3VA23...	3VA9908-0BB11
3VA24...	3VA9908-0BB25

System overview, page 11/4

© Siemens 2022

5TT3 undervoltage relays

Without response delay

				For the monitoring of		
				1, 2 or 3 phases against N		3 phases against N
			Contacts	1 CO	2 CO	2 CO
			Modular width	1 MW	2 MW	2 MW
						
Rated operational voltage U_e	**Rated operational current I_e**	**Switching thresholds**	**Hysteresis**			
Not adjustable						
230 V AC	4 A	0.7 and 0.9 × U_c	–	5TT3400	5TT3402	5TT3404
		0.85 and 0.95 × U_c	–	5TT3401	–	5TT3405
Adjustable						
230 V AC	4 A	0.7 ... 0.95 × U_c	5%	–	–	5TT3406
		0.9 ... 0.95 × U_c	–	–	5TT3403	–

Further technical specifications

		5TT3400 5TT3401 5TT3402 5TT3403	5TT3404 5TT3405	5TT3406
Standards				
Standards		IEC 60255, DIN VDE 0435-110, DIN VDE 0435-303		
Supply				
Rated control circuit voltage U_c		230/400 V AC		
Primary operating range (overload capability)		1.1 × U_c		
Rated frequency		50/60 Hz		
Contacts				
µ contact	AC-11	4 A		
Response values	ON-switching	0.9/0.95 × U_c		4% hysteresis
	OFF-switching	0.7/0.85 × U_c		0.7 ... 0.95 × U_c
Minimum contact load		10 V/100 mA		
Safety				
Rated insulation voltage U_i	Between coil/contact	4 kV		
Electrical isolation, creepage distances and clearances	Actuator/contact	3 mm	5.5 mm	
Rated impulse withstand voltage U_{imp}	Actuator/contact	>2.5 kV	>4 kV	
Functions				
Phase asymmetry	Setting accuracy	–	Approx. 5 ... 10%	
	Repeat accuracy	–	1	
Phase failure detection	At L1 or L2 or L3	100 ms		
Functions	Monitoring of 1/2 phases against N	Yes	–	
	Monitoring of 3 phases against N	Yes		
	Asymmetry (failure) detection	–	Yes	
	Reverse (failure) detection	–	Yes	
	Phase failure detection	Yes		
	N-conductor monitoring	–	Yes	
Connection				
Terminals	± Screw (Pozidriv)	PZ 1		
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²		
	Flexible, with end sleeve	Min. 1x 0.5 mm²		
Ambient conditions				
Permissible ambient temperature		–20 ... +60 °C		
Resistance to climate	Acc. to EN 60068-1	20/60/4		

11

System overview, page 11/4

© Siemens 2022

5TT3 undervoltage relays

With response delay

				For the monitoring of 1, 2 or 3 phases against N	
				Contacts	1 CO	2 CO
				Modular width	1 MW	1 MW
						
Rated operational voltage U_e	**Rated operational current I_e**	**Switching thresholds**	**Hysteresis**	**Standard**	**With TEST pushbutton**
Not adjustable					
230 V AC	4 A	0.85 × U_c	5%	5TT3414	5TT3415

Further technical specifications

		5TT3414	5TT3415
Supply			
Rated control circuit voltage U_c		230/400 V AC	
Primary operating range (overload capability)		1.15 × U_c	
Rated frequency		50/60 Hz	
Contacts			
Contacts	AC-15	1 CO	2 CO
Response values	ON-switching	5% hysteresis	
	OFF-switching	0.85 × U_c	
Response delay		0.5 s	
Return transfer delay		60 s	
Minimum contact load		10 V/100 mA	
Electrical service life in operating cycles	AC-15 (1 A, 230 V AC)	1 × 10^5	
Safety			
Rated insulation voltage U_i	Between coil/contact	–	
Rated impulse withstand voltage	Acc. to IEC 60664-1	6 kV	
Pollution degree		2	
Functions			
Phase failure detection	At L1 or L2 or L3	500 ms	
Functions	Monitoring of 1 or 2 phases against N	Yes	
	Monitoring of 3 phases against N	Yes	
	Phase failure detection	Yes	
Connection			
Terminals	– Screw (slot)	3.5 mm	
Conductor cross-sections	Rigid	1× 4 mm^2	
	Flexible, with end sleeve	1× 2.5 mm^2	
Ambient conditions			
Permissible ambient temperature		–25 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	20/060/04	

System overview, page 11/4

© Siemens 2022

5TT3 short-time voltage relay

Without response delay

	For the monitoring of 1, 2 or 3 phases against N
Contacts	2 CO
Modular width	2 MW



Rated operational voltage U_e	Rated operational current I_e	Switching thresholds	
Not adjustable			
230 V AC	4 A	0.8 ... 0.85 × U_c	5TT3407

Further technical specifications

Standards			
Standards			IEC 60255, DIN VDE 0435-303
Supply			
Rated control circuit voltage U_c			230/400 V AC
Primary operating range (overload capability)			1.1 × U_c
Rated frequency			50/60 Hz
Rated operational power P_s	AC operation:	230 V and p.f. = 1	2000 VA
		230 V and p.f. = 0.4	1250 VA
	DC operation:	U_e = 24 V and I_e = 6 A	Max. 100 W
		U_e = 60 V and I_e = 1 A	Max. 100 W
		U_e = 110 V and I_e = 0.6 A	Max. 100 W
		U_e = 220 V and I_e = 0.5 A	Max. 100 W
Back-up fuse	Terminals L1/L2/L3		2 A
Contacts			
µ contact	AC-11		3 A
Response values	ON-switching		0.85 × U_c
	OFF-switching		0.8 × U_c
Automatic reclosing delay (return transfer delay)			0.2 ... 2 s
Minimum contact load			10 V/100 mA
Safety			
Rated insulation voltage U_i	Between coil/contact		4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact		4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact		>4 kV
Functions			
Phase failure detection	At L1 or L2 or L3		≥20 ms
Phase asymmetry	Setting accuracy		Approx. 5 ... 10%
	Repeat accuracy		1
Functions	Monitoring of 1 or 2 phases against N		Yes
	Monitoring of 3 phases against N		Yes
	Phase failure detection		Yes
	N-conductor monitoring		Yes
Connection			
Terminals	± Screw (Pozidriv)		PZ 1
Conductor cross-sections	Rigid		Max. 2x 2.5 mm²
	Flexible, with end sleeve		Min. 1x 0.5 mm²
Ambient conditions			
Permissible ambient temperature			–20 ... +60 °C
Humidity class	Acc. to IEC 60068-2-30		F

System overview, page 11/4

© Siemens 2022

5TT3 undervoltage and overvoltage relays

With adjustable response delay

	For the monitoring of 3 phases against N
Contacts	2 CO
Modular width	2 MW



Rated operational voltage U_e	Rated operational current I_e	Switching thresholds	Hysteresis	
Adjustable				
230 V AC	4 A	0.7 and 1.1 × U_c 0.9 and 1.3 × U_c	4% 4%	5TT3408

Further technical specifications

Standards			
Standards			IEC 60255, DIN VDE 0435-303
Supply			
Rated control circuit voltage U_c			230/400 V AC
Primary operating range (overload capability)			1.35 × U_c
Rated frequency			50/60 Hz
Back-up fuse	Terminals L1/L2/L3		2 A
Contacts			
µ contact	AC-11		1 A
Response values	Overvoltage:	ON-switching	4% hysteresis
		OFF-switching	0.9 ... 1.3 × U_c
	Undervoltage:	ON-switching	4% hysteresis
		OFF-switching	0.7 ... 1.1 × U_c
On/off-delay (response delay)			0.1 ... 20 s
Automatic reclosing delay (return transfer delay)			–
Minimum contact load			10 V/100 mA
Safety			
Rated insulation voltage U_i	Between coil/contact		4 kV
Electrical isolation, creepage distances and clearances	Contact/contact		4 mm
	Actuator/contact		4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact		>4 kV
Functions			
Phase failure detection	At L1 or L2 or L3		100 ms
Phase asymmetry	Setting accuracy		Approx. 5 ... 10%
	Repeat accuracy		1
Functions	Monitoring of 1 or 2 phases against N		–
	Monitoring of 3 phases against N		Yes
	Asymmetry detection		Yes
	Reverse voltage detection		Yes
	Phase failure detection		Yes
	N-conductor monitoring		Yes
Connection			
Terminals	± Screw (Pozidriv)		PZ 1
Conductor cross-sections	Rigid		Max. 2x 2.5 mm²
	Flexible, with end sleeve		Min. 1x 0.5 mm²
Ambient conditions			
Permissible ambient temperature			–20 ... +60 °C
Humidity class	Acc. to IEC 60068-2-30		F

System overview, page 11/4

© Siemens 2022

5TT6 current relays

For 1-phase loads up to 230 V AC

				Auxiliary voltage and load voltage				
				Not isolated		Galvanically isolated		
			Modular width	1 MW	1 MW	2 MW	2 MW	2 MW
								
Rated operational voltage U_e	**Rated operational current I_e**	**Contacts**	**Rated control current I_c**	**Monitoring Undercurrent**	**Overcurrent**	**Monitoring Undercurrent**	**Overcurrent**	**Overcurrent/ undercurrent**
230 V AC	5 A	1 CO	1 ... 10 A	5TT6111	5TT6112	–	–	–
		2 CO	0.1 ... 1 A, 0.5 ... 5 A, 1 ... 10 A, 1.5 ... 15 A	–	–	5TT6113	5TT6114	5TT6115

Further technical specifications

		5TT6111 5TT6112	5TT6113 5TT6114 5TT6115
Standards			
Standards		IEC 60255	IEC 60255 DIN VDE 0435-303
Supply			
Rated control current I_c		1 ... 10 A	0.1 ... 1 A, 0.5 ... 5 A, 1 ... 10 A, 1.5 ... 15 A
Rated control circuit voltage U_c		230 V AC	
Primary operating range		0.9 ... 1.1 × U_c	
Overload capability	Continuous	15 A	20 A
	At 50 °C ambient temperature max. 3 s	20 A	–
	Independent of measuring range, max. 3 s	–	30 A
Rated frequency		50/60 Hz	
Contacts			
µ contact (AC-15)	NO	3 A	5 A
	NC	1 A	
Response values	ON-switching	Infinitely variable	
	OFF-switching	Permanent, 4% hysteresis	
Switching delay t_v		0.1 ... 20 s, continuously adjustable	
Response time	Non-adjustable	Current corresponds to the rated operational power of the continuous-flow heater	See Siemens Service and Support Portal, search term "Article No.", e.g. 5TT6113
Minimum contact load		10 V/100 mA	
Safety			
Rated insulation voltage U_i	Between coil/contact	2.5 kV	
Electrical isolation, creepage distances and clearances	Actuator/contact	3 mm	
Rated impulse withstand voltage U_{imp}	Actuator/contact	>4 kV	
Connection			
Terminals	± Screw (Pozidriv)	PZ 1	
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²	
	Flexible, with end sleeve	Min. 1x 0.5 mm²	
Ambient conditions			
Permissible ambient temperature		–20 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	20/60/4	

System overview, page 11/4

© Siemens 2022

5TT3 fuse monitors

For all low-voltage fuse systems

Modular width	2 MW



Rated operational voltage U_e	Rated operational current I_e	Rated control circuit voltage U_c	
Adjustable			
250 V AC	4 A	380 ... 415 V AC	5TT3170

Further technical specifications

Standards		
Standards		IEC 60255, DIN VDE 0435-110
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	AC-1	4 A
Rated control circuit voltage U_c	3 AC	380 ... 415 V
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency		50 ... 400 Hz
Contacts		
Internal resistance of measuring paths		>1000 Ω/V
Max. permissible rear feed		90%
Response/release time		<50 ms
Electrical endurance AC-11	In switching cycles at 1 A	1.5×10^5
Safety		
Rated impulse withstand voltage U_{imp}	Input/output	>4 kV
Application		
Area of application		Asymmetric, systems afflicted with harmonics, regenerative motors
Message		Also for disconnected loads
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²
	Flexible, with end sleeve	Min. 1x 0.5 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +45 °C
Resistance to climate	Acc. to EN 60068-1	20/45/4

System overview, page 11/4

© Siemens 2022

5TT3 phase monitors

For monitoring of voltages in a 3-phase system

Modular width	1 MW



Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	With 3 green LEDs for 3 phases
250 V AC	4 A	1 CO	230/400 V	5TT3421

Further technical specifications

Standards		
Standards		IEC 60255, DIN VDE 0435
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		4 A
Rated control circuit voltage U_c		230/400 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency		50/60 Hz
Rated power dissipation P_v	Electronics	9 VA
	Contacts	0.2 VA
Contacts		
µ contact	AC-11	3 A
Minimum contact load		10 V/100 mA
Safety		
Rated insulation voltage U_i	Between coil/contact	4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact	4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact	>2.5 kV
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140/VDE 0140-1	II
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²
	Flexible, with end sleeve	–
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

System overview, page 11/4

© Siemens 2022

5TT3 phase sequence monitors

For monitoring of phase sequence in a 3-phase system

Modular width	1 MW



Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	With one green LED, which lights up for right-rotating field
250 V AC	4 A	1 CO	400 V	5TT3423

Further technical specifications

Standards		
Standards		IEC 60255, DIN VDE 0435
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		4 A
Rated control circuit voltage U_c		400 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency		50/60 Hz
Rated power dissipation P_v	Electronics	9 VA
	Contacts	0.2 VA
Contacts		
µ contact	AC-11	3 A
Minimum contact load		10 V/100 mA
Safety		
Rated insulation voltage U_i	Between coil/contact	4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact	4 mm
Rated impulse withstand voltage U_{imp}	Actuator/contact	>2.5 kV
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140/VDE 0140-1	II
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²
	Flexible, with end sleeve	–
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

System overview, page 11/4

© Siemens 2022

5TT3 insulation monitors for industrial applications

Are used for protection of persons and against fire in non-grounded systems (IT systems)

Modular width	2 MW



Measurement voltage range U_{meas}	Measuring range	Contacts	Rated control circuit voltage U_c	
0 ... 500 V AC	5 ... 100 kΩ	2 CO	230 V AC	5TT3470
12 ... 280 V DC	5 ... 200 kΩ	2 CO	–	5TT3471

Further technical specifications

		5TT3470	5TT3471
Supply			
Rated operational voltage U_e		230 V AC	12 ... 280 V DC
Rated operational current I_s	Thermal current I_{th}	4 A	
	DC-13 at 24 V DC	–	2 A
	DC-13 at 250 V DC	–	0.2 A
	AC-15	–	3 A
	AC-15 NO	5 A	–
	AC-15 NC	2 A	–
Supply voltage U_c	For AC supply	220 ... 240 V AC	–
Primary operating range	For AC supply	0.8 ... 1.1 × U_c	–
Frequency range for U_c		45 ... 400 Hz	–
Rated power dissipation P_v	For AC supply	Approx. 2 VA	–
	For DC supply	–	Approx. 1 W
Contacts			
µ contact		2 CO	
Switching hysteresis	At R_{meas} 50 kΩ	15%	10 ... 15%
Measuring circuit			
Measuring circuit		For 3-phase and AC systems	For direct voltage systems
Measurement voltage range *Umeas*		0 ... 500 V AC	12 ... 280 V DC
Measurement voltage *Umeas*	Internal	Approx. 15 V DC	–
Primary operating range		0 ... 1.1 × *Umeas*	0.9 ... 1.1 × *Umeas*
Frequency range for *Umeas*		10 ... 10000 Hz	–
Alarm values	Measuring shunt R_{AL}	5 ... 100 kΩ	5 ... 200 kΩ
Setting of alarm value	On absolute scale	Infinitely variable	Infinitely variable
Alternating current internal resistance	Internal testing resistance	>250 kΩ	–
Direct current internal resistance	Internal testing resistance	>250 kΩ	–
	L+ and L- to PE	–	75 kΩ each
Max. measurement current I_{meas}	Short circuit	<0.1 mA	0.2 ... 4 mA, depending on the voltage
Direct interference voltage	Max. permissible	500 V DC	–
Response delay at R_{AL} 50 kΩ and 1 µF	∞ to 0.9 × R_{meas}	<1.3 s	0.8 s
	R_{meas} from ∞ to 0 Ω	<0.7 s	0.4 s
Safety			
Rated impulse withstand voltage U_{imp}	Terminals A1 to A2	<4 kV	
	Terminals L to PE	<4 kV	
	Terminals A1, A2 to L, PE	<4 kV	<3 kV
	Terminals against contacts	<6 kV	
Degree of protection	Terminals (according to EN 60529)	IP20	
	Enclosure (according to EN 60529)	IP40	
Connection			
Terminals	± Screw (Pozidriv)	PZ 2	
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²	
	Flexible, with end sleeve	Min. 1× 0.50 mm²	
Ambient conditions			
Permissible ambient temperature		–20 ... +60 °C	
Resistance to climate	Acc. to EN 60068-1	20/060/04	

System overview, page 11/4

© Siemens 2022

5TT5 EMERGENCY STOP modules

Efficient personal and machine protection in small units

Modular width	4 MW



Rated operational voltage U_e	Rated operational current I_e	Rated control circuit voltage U_c	
400 V AC	5 A	230 V AC	5TT5200

Further technical specifications

Standards		
Standards		ISO 13849-1: 2015; EN 62061: 2005 + AC: 2010 + A1: 2013 + A2: 2015; ISO 13850: 2015; EN 60204-1: 2006 + A1: 2009 + AC: 2010 (in extracts); EN 60947-5: 2004 + A1: 2009; EN 50178: 1997; EN 61508 Parts 1-7: 2010; EN 50156-1: 2005 (in extracts)
Certification		German Technical Inspectorate Rheinland
Supply		
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency f_n		50 Hz
Rated power dissipation P_v	Coil/drive	3.5 VA
	Contact per pole	0.8 VA
Control voltage	Terminal Y1	24 V AC/DC
Control current	Terminal Y1	45 mA
Contacts		
Contacts	NO AC-15	3 A
	NC AC-15	2 A
	NO/NC AC-1	5 A
Contact gap		>1 mm
Electrical service life	AC-15 (2 A, 230 V AC)	10^5 operating cycles
Reliable switching frequency		600 operating cycles/h
Recovery time		500 ms
Safety		
Rated impulse withstand voltage U_{imp}	Actuator/contact	>4 kV
Electrical isolation, creepage distances and clearances	Actuator/contact	3 mm
Vibration resistance	Amplitude acc. to EN 60068-2-610 (up to 55 Hz)	0.35 mm
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections of main current paths	Rigid	Max. 2x 2.5 mm²
	Flexible, with end sleeve	Min. 1× 0.50 mm²
Ambient conditions		
Permissible ambient temperature		0 ... +50 °C
Resistance to climate	Acc. to EN 60068-1	0/55/04

System overview, page 11/4

© Siemens 2022

5TT3 level relays

For level monitoring and control

Modular width	2 MW



Rated operational voltage U_e	Rated operational current I_e	Rated control circuit voltage U_c	
250 V AC	5 A	230 V AC	5TT3435

Further technical specifications

Standards		
Standards		IEC 60255; DIN VDE 0435-110
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e		5 A
Rated control circuit voltage U_c		230 V AC
Primary operating range		0.8 ... 1.1 × U_c
Rated frequency f_n		50/60 Hz
Measuring circuit		
Setting range of the liquid level		2 ... 450 kΩ
Switching point hysteresis of set value	At 450 kΩ	3%
	At 2 kΩ	6%
Electrode voltage		Max. approx. 10 V AC
Electrode current		Max. approx. 1.5 mA AC
Response delay	Adjustable	0.2 ... 20 s
OFF-delay	Adjustable	0.2 ... 20 s
Test voltage	Input/auxiliary circuit	4 kV
	Input/output circuit	4 kV
	Auxiliary/output circuit	4 kV
Voltage temperature influence	From set value	<2%
Max. cable length to the electrodes at 100 µF/km	Set value 450 kΩ	50 m
	Set value 100 kΩ	200 m
	Set value 35 kΩ	500 m
	Set value 10 kΩ	1500 m
	Set value 5 kΩ	3000 m
Connection		
Terminals	± Screw (Pozidriv)	PZ 2
Conductor cross-sections	Rigid, max.	Max. 2x 2.5 mm²
	Flexible, with end sleeve	Min. 1× 0.50 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to EN 60068-1	20/60/4

Accessories

Immersion electrodes



- Made of stainless steel, with PG13 sealing cap
- Suitable for pure water in open containers

Temperature range	Connection	Article No.
0 ... 60 °C	Terminal connection	5TG8223

11

System overview, page 11/4

© Siemens 2022

5TT3 line circuit relays

To interrupt circuits where there are no active loads

Modular width	1 MW



Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	
250 V AC	16 A	1 NC	230 V AC	5TT3171

Further technical specifications

Standards		
Standards		IEC 60255; DIN VDE 0435-110
Supply		
Rated operational voltage U_e		250 V AC
Rated operational current I_e	AC-1	16 A
Rated control circuit voltage U_c		230 V AC
Primary operating range		0.85 ... 1.15 × U_c
Rated frequency		50/60 Hz
Rated power dissipation P_v	Electronics	5 VA
	Contacts	2.6 VA
Contacts		
Response value	Adjustable	2 ... 20 VA
Release value	% of the response value	70%
Electrical service life	In switching cycles at 3 A (AC-11)	5 × 10^5
Safety		
Rated impulse withstand voltage U_{imp}	Input/output	>4 V
Degree of protection	Acc. to IEC/EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140/VDE 0140-1	II
Monitoring voltage		3 V
Connection		
Terminals	± Screw (Pozidriv)	PZ 1
Conductor cross-sections	Rigid	Max. 2x 2.5 mm²
	Flexible, with end sleeve	Min. 1× 0.50 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +45 °C
Humidity class	Acc. to IEC 60068-2-30	F

Accessories

Base load resistors for electronic devices

- With 15 cm connection wires, end sleeves and shrink sleeving

Article No.
5TG8222

System overview, page 11/4

© Siemens 2022

7LQ2 twilight switches

For lighting system monitoring and control

Modular width	1 MW



Rated operational voltage U_e	Rated operational current I_e	Contacts	Rated control circuit voltage U_c	
230 V AC	16 A	1 NO	250 V AC	7LQ2300

Further technical specifications

Standards		
Standards		EN 60669-1
Supply		
Rated operational voltage U_e		230 V AC
Rated frequency f_n		50/60 Hz
Safety		
Degree of protection		IP30
Contacts		
Incandescent lamp/halogen lamp load		2000 W
Energy-saving lamp load		1000 W
Fluorescent lamp load	Series corrected	2000 W
	Parallel corrected (at max. 70 µF)	1000 W
LV halogen lamp load ECG		2000 W
Luminosity setting		1 ... 100 000 Lux
Measuring circuit		
On/off-delay		Approx. 90 s
Connection		
Terminals	± Screw (Pozidriv)	PZ1
Conductor cross-sections	Rigid	Max. 2× 1.5 mm²
Mechanical data		
Width		17.5 mm (1 MW)
Mounting		DIN rail
Ambient conditions		
Permissible ambient temperature		–20 ... +55 °C

Spare part

Light sensor



- Included in the 7LQ2300 package
- IP65 degree of protection

Temperature range	Mounting	Article No.
–20 ... +70 °C	Surface mounting	7LQ2920

© Siemens 2022

System overview, page 11/4

© Siemens 2022



Simply well supplied

Whether you need socket outlets for installing in VDE, UL, CEI or CEE distribution boards or power supply units – our electrical installation technology offers you a complete program.

Short-circuit-proof transformers and power supply units with different voltage and power ratings fulfill every requirement for safety extra-low voltage systems.

© Siemens 2022

Transformers, Power Supply Units and Socket Outlets



All the information you need 12/2

System overview 12/4

Transformers 12/6

4AC32 bell transformer 12/6

4AC37 safety transformer 12/8

Power supply units 12/10

4AC2 electronic power supply unit 12/10

Socket outlets 12/12

5TE6 socket outlet for modular installation devices 12/12

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about transformers, power supply units and socket outlets, please visit our website **www.siemens.com/lowvoltage**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Transformers, power supply units and socket outlets **sie.ag/2mmSHHu**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Transformers, power supply units and socket outlets **(45315886)**

Technical overview – Transformers, power supply units and socket outlets

The fast way to get you to our online services

This page provides you with comprehensive information and links on transformers, power supply units and socket outlets

www.siemens.com/lowvoltage/product-support (109764946)

© Siemens 2022

System overview

Transformers



4AC32 bell transformers



4AC37 safety transformers

Power supply units



4AC2 electronic power supply units

Socket outlets





5TE6 socket outlet for modular installation devices

Accessories



Hinged lid

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022



© Siemens 2022

4AC32 bell transformer

U_e 230 V AC





	Bell transformers	
Modular width	2 MW	2 MW
		

Rated secondary current I_{sec} AC at rated secondary voltage U_{sec} AC				Rated operational power P_s	
4 V	8 V	12 V	24 V	8 VA	8 VA
–	1.0 A	–	–	4AC3208-0	–
		0.6 A	–	–	4AC3208-1
	2.0 A	1.3 A	0.6 A	–	–
2.0 A	2.0 A	1.5 A	–	–	–

Further technical specifications



		4AC3208-0	4AC3208-1	4AC3214-0	4AC3218-0
Standards					
Standards		EN 61558-1, EN 61558-2-8			
Supply					
Rated operational voltage U_e		230 V AC			
Primary operating range at 50 Hz		1.04 × U_e			
Rated frequency		50 Hz			
Rated power dissipation P_V	In no-load operation	1.2 W		1.3 W	
	At a rated voltage of 4 V	–			5.5 W
	At a rated voltage of 8 V	5.7 W		10.5 W	8.1 W
	At a rated voltage of 12 V	–	3.8 W	7.4 W	8.4 W
	At a rated voltage of 24 V	–		4.2 W	–
Safety					
Safe separation	Creepage distances and clearances	>6 mm			
Insulation class		E			
Test voltage (50 Hz, 1 s)	Primary against secondary winding	4 kV			
Connection					
Conductor cross-section	Rigid	1× 4 mm² or 2× 2.5 mm²			
	Flexible, with end sleeve	1× 2.5 mm² or 2× 1.5 mm²			
Ambient conditions					
Permissible ambient temperature		40 °C	35 °C	40 °C	
Permissible humidity		91%			
Degree of protection	Acc. to EN 60629	IP20			
Protection class	Acc. to EN 61140 (VDE 0140-1)	II			

System overview, page 12/4

© Siemens 2022





2 MW	2 MW
	
14 VA	**18 VA**
–	–
–	–
4AC3214-0	–
–	4AC3218-0

12

System overview, page 12/4



© Siemens 2022

4AC37 safety transformer

U_e 230 V AC





Modular width	2 MW	3 MW
		

Rated secondary current I_{sec} AC at rated secondary voltage U_{sec} AC					Rated operational power P_s	
8 V	**12 V**	**16 V**	**24 V**	**32 V**	**16 VA**	**24 VA**
2.0 A	–	–	–	–	4AC3716-0	–
	2.0 A	–	–	–	–	4AC3724-0
–	3.3 A	2.5 A	1.6 A	1.2 A	–	–
		–	1.6 A	–	–	–
	5.2 A	–	2.6 A	–	–	–

Further technical specifications		**4AC3716-0**	**4AC3724-0**	**4AC3740-0**	**4AC3740-1**	**4AC3763-0**
Standards						
Standards		EN 61558-1, EN 61558-2-6				
Supply						
Rated operational voltage U_e		230 V AC				
Primary operating range at 50 Hz		1.04 × U_e				
Rated frequency		50 Hz				
Rated power dissipation P_V	In no-load operation	1.1 W		3.5 W	3.9 W	
	At a rated voltage of 8 V	6.8 W	4.6 W	–		
	At a rated voltage of 12 V	–	7.6 W	7.1 W	7.5 W	13.2 W
	At a rated voltage of 16 V	–			7.7 W	–
	At a rated voltage of 24 V	–		7.7 W	8.1 W	13.5 W
	At a rated voltage of 32 V	–			7.6 W	–
Safety						
Safe separation	Creepage distances and clearances	>6 mm				
Insulation class		E		F		
Test voltage (50 Hz, 1 s)	Primary against secondary winding	4 kV				
Connection						
Conductor cross-section	Rigid	1× 4 mm² or 2× 2.5 mm²				
	Flexible, with end sleeve	1× 2.5 mm² or 2× 1.5 mm²				
Ambient conditions						
Permissible ambient temperature		25 °C				
Permissible humidity		91%				
Degree of protection	Acc. to EN 60629	IP20				
Protection class	Acc. to EN 61140 (VDE 0140-1)	II				




System overview, page 12/4

© Siemens 2022





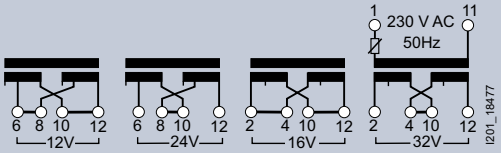

5 MW	5 MW	5 MW
		
40 VA	**40 VA**	**63 VA**
–	–	–
–	–	–
4AC3740-1	–	–
–	4AC3740-0	–
–	–	4AC3763-0

12

System overview, page 12/4


© Siemens 2022

4AC2 electronic power supply unit

SELV, short-circuit-proof



Modular width 2 MW



Rated operational voltage U_e		Rated secondary voltage U_{sec}	Rated secondary current I_{sec}	Rated operational power P_s	
AC	DC	DC	DC		
85 ... 265 V	85 ... 300 V	24 ±5% V	0.35 A	8.4 W	4AC2402

12

System overview, page 12/4

© Siemens 2022

Further technical specifications

Standards		
Standards		EN 60068-2, EN 61558-1, EN 61000-4
Approvals		–
Supply		
Primary operating range	At 50/60 Hz	–
Rated frequency		50/60 Hz
Operating frequency range		–
Rated power dissipation P_v	In no-load operation	–
	At rated load	–
Safety		
Current limitation		Electronic overload protection
Residual ripple		<100 mV
Hum-free	Core molded	–
Safe separation, creepage distances and clearances		>5.5 mm
Insulation class		–
Test voltage (50 Hz, 1 min)	Primary against secondary winding	–
Insulation resistance		4 kV
Rated impulse withstand voltage/Degree of pollution	Acc. to IEC 60664-1	6 kV/2
Static discharge	Acc. to IEC/EN 61000-4-2	8 kV
RF irradiation	Acc. to IEC/EN 61000-4-3	10 V/m
Transient overvoltage (burst)	Acc. to IEC/EN 61000-4-4	4 kV
Transient overvoltage (surge)	Acc. to IEC/EN 61000-4-5	
	Supply lines A1, A2	1 kV
	A1/A2 and ground	2 kV
RF, conducted disturbance	Acc. to IEC/EN 61000-4-6	10 V
Interference suppression to lower limit class	Acc. to EN 61000-6-3	Complied with
Connection		
Terminals	Screw (slotted-head)	M2.5
	± Screw (Pozidriv)	–
Conductor cross-section	Rigid	0.5 ... 2.5 mm²
	Flexible, with end sleeve, min.	0.5 ... 1.5 mm²
Ambient conditions		
Permissible ambient temperature		–20 ... +60 °C
Resistance to climate	Acc. to IEC/EN 60068-1	20/045/04
Resistance to vibrations, frequency 10 ... 55 Hz	Acc. to IEC/EN 60068-2-6	0.35 mm amplitude
Degree of protection	Acc. to EN 60529	IP20, with connected conductors
Protection class	Acc. to EN 61140	II

System overview, page 12/4

© Siemens 2022

5TE6 socket outlet for modular installation devices

Version	SCHUKO® socket outlet DIN VDE 0620-1	
		

Rated operational voltage U_e	Rated operational current I_e	Modular width		
Without hinged lid [1]				
125 V AC	15 A	2.5 MW	–	–
230 V AC	16 A	2.5 MW	5TE6800	–
With hinged lid [2]				
230 V AC	16 A	2.5 MW	–	5TE6801

Accessories

5TE6 hinged lids for socket outlets



	Modular width	Article No.	Article No.
	2.5 MW	5TE9120	–

[1] The hinged lid can be retrofitted on all versions.
[2] In distribution boards with 55 mm mounting depth, the socket outlet can only be used without the hinged lid.
[3] In system components where equipment is still live even after the main switch has been disconnected, this must be indicated according to EN 50110-1 (VDE 0105-1) and IEC/EN 60204-1/VDE 0113-1.
Yellow socket outlets are used for these applications.

12

Further technical specifications		5TE6800 5TE6801 5TE6810	5TE6802	5TE6803	5TE6804
Standards					
Standards		VDE 0620-1	CEI 23-50	CEE 7 standard sheet V	UL 498
Approvals		VDE 0620-1	–		UL File No. E258598/ CSA C22.2 No. 182.3M
Connection					
Terminals	± Screw (Pozidriv)	PZ1			
Terminal tightening torque	Max.	0.8 ... 1 Nm			
Stripped length		10 mm			
Conductor cross-section	Rigid	1.5 ... 6 mm² (AWG 10 ... 14)			
	Flexible, with end sleeve	0.5 ... 4 mm² (AWG 14)			
Ambient conditions					
Permissible ambient temperature		–10 ... +55 °C			
Degree of protection	Acc. to EN 60529	IP20, with connected conductors			
Mounting position	Without hinged lid	Any			
	With hinged lid	Horizontally or vertically			

System overview, page 12/4

© Siemens 2022

	Socket outlets **CEE 7 standard sheet V**	**Socket outlets** **CEI 23-50**	**Socket outlets** **UL 498**
Yellow RAL 1018 [3]	With grounding pin		
			
–	–	–	5TE6804
5TE6810	5TE6803	–	–
–	–	5TE6802	–

Article No.	**Article No.**	**Article No.**	**Article No.**
–	5TE9120	–	5TE9120

12

System overview, page 12/4

© Siemens 2022



Simplified distribution board design and time-saving assembly

Simplified assembly and connection of electrical power distribution systems and devices ensures that customer requirements can be met more quickly and flexibly.

In addition, installation and plant engineers benefit from a simplified configuration and reduced space requirements in distribution systems and control cabinets.

Our busbar systems for electrical installations offer a particularly easy way of fitting distribution systems with electrotechnical components.

The modular design saves space, while quick assembly contacts ensure fast mounting.

© Siemens 2022

Busbar Systems



All the information you need 13/2

System overview 13/4

Quick selection guide 13/5

40 mm 8US busbar system 13/6

- Basic assemblies 13/6

60 mm 8US compact busbar system 13/7

- Basic assemblies 13/7
- Infeeds and connection methods 13/8
- Built-in components 13/8
- Device adapters 13/10

60 mm 8US busbar system 13/12

- Basic assemblies 13/12
- Infeeds and connection methods 13/16
- Built-in components 13/22
- Device adapters and device holders 13/26

13

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about busbar systems, please visit our website **www.siemens.com/lowvoltage**

Your product in detail

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Busbar systems **sie.ag/2lXoUFl**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Configuration manual
  – Busbar systems **(81379793)**

Technical overview – Busbar systems

The fast way to get you to our online services

This page provides you with comprehensive information and links on busbar systems
www.siemens.com/lowvoltage/product-support (109769087)

© Siemens 2022

System overview

❶ Basic assemblies



Busbar supports



N/PE busbar supports

Accessories



Flat copper profiles



TT special profiles



Connection pieces



Cover profiles




Blanking covers

❷ Infeeds and connection methods



Connection modules



Terminals

Accessories



Covers

❸ Built-in components



Bus-mounting fuse bases



Bus-mounting fuse holders



Bus-mounting switch disconnectors

Accessories



Covers



Auxiliary switches



Lateral modules

❹ Device adapters



Device adapters



Device holders

Accessories



N/PE modules



Lateral modules




Vibration & shock kits

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

Quick selection guide






		40 mm busbar system	60 mm compact busbar system	60 mm busbar system flat copper profile	60 mm busbar system TT profile
Busbars					
Busbar center-to-center spacing		40 mm	60 mm	60 mm	60 mm
Flat copper profiles	5 mm	12 × 5 mm 15 × 5 mm	12 × 5 mm	12 × 5 mm 15 × 5 mm 20 × 5 mm 25 × 5 mm 30 × 5 mm	–
	10 mm	12 × 10 mm 15 × 10 mm	12 × 10 mm	20 × 10 mm 30 × 10 mm	–
TT special profile		–	–	–	2400 × 30 × 40 mm
Rated values					
Rated operational current	IEC	200 ... 360 A	200 ... 360 A	200 ... 900 A	1020 ... 1600 A
I_e	UL 508	–	300 A	630 A	1400 A
Rated operational voltage	IEC	690 V AC	690 V AC	690 V AC	690 V AC
U_e	UL 508	–	600 V AC	600 V AC	600 V AC
Standards					
IEC		■	■	■	■
UL 508		■	■	■	■
Connection modules and terminals for					
Circular conductors	IEC	–	Cu 1.5 ... 150 mm²	Cu 1.5 ... 300 mm² Al 95 ... 300 mm²	Cu 16 ... 300 mm²
	UL 508	–	Cu AWG 2 ... MCM 300	Cu AWG 16 ... MCM 600 Al AWG 3	Cu AWG 4 ... MCM 600
Laminated copper		–	Cu lam. 15 ... 20 × 5 ... 10 mm	Cu lam. 3 × 20 × 1 ...10 × 32 × 1 mm	Cu lam. 2 × 40 × 10 mm
Cable lugs		–	–	Max. 240 mm²	–
Built-in components for					
NEOZED bus-mounting fuse bases		–	■	■	■
DIAZED bus-mounting fuse bases		–	–	■	■
Bus-mounting fuse holders for cylindrical fuses 10 × 38 mm		–	–	■	■
Class CC bus-mounting fuse holders		–	–	■	■
Class J bus-mounting fuse holders		–	–	■	■
NEOZED bus-mounting switch disconnectors				■	■
Device adapters for					
Universal application 3P/5P		–	■/■	■/■	■/■
Molded case circuit breakers		–	■	■	■
Switch disconnectors		–	–	■	■
Fuse switch disconnectors		–	–	■	■
SIRIUS 3RM1 motor starters		–	■	–	–
SIRIUS load feeders		–	–	■	■
3RM193 fuse module		–	■	–	–
5SY miniature circuit breakers		–	■	–	–
More information					
		See page 13/6	See page 13/7	See page 13/12	See page 13/14

© Siemens 2022

❶ Basic assemblies

For 40 mm 8US busbar system up to 400 A

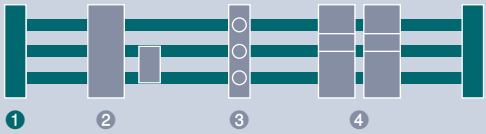

						Busbar supports	
					No. of poles	3P	5P
							
Flat copper profiles				**Rated operational voltage U_e**	**Standard**	**Connection**	**Connection**
12 × 5 mm	**15 × 5 mm**	**12 × 10 mm**	**15 × 10 mm**	**IEC**		**L1 – L3**	**L1 – L3 + N + PE/N**
Interior mounting							
■	■	■	■	690 V AC	IEC	8US1903-3AB00 [1]	–
■	–	■	–	690 V AC	IEC	–	8US1903-5AA00
More information							
3NP1 fuse switch disconnectors						See page 8/86	See page 8/86

[1] One package contains 2 busbar supports including inlay parts for bar thickness 5 mm and lateral finger-safe covers.

Suitable accessories

				3P	5P
Flat copper profile					
	**Surface**	**Length**	**Size**	**Article No.**	**Article No.**
	Bare	2400 mm	12 × 5 mm	8WC5123	8WC5123
			15 × 5 mm	8WC5121	–
Cover profiles for busbars					
	**Material**	**Length**	**Size**	**Article No.**	**Article No.**
	Plastic profile	1000 mm	12 × 5 mm	8US1922-2CA00	8US1922-2CA00
			15 × 5 mm	8US1922-2AA00	–


13

Quick selection guide, page 13/5

© Siemens 2022

❶ Basic assemblies

For 8US compact busbar system up to 360 A (3P) or 200 A (5P)

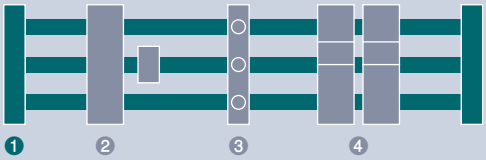

									Busbar supports [1]
								No. of poles	3P/5P
									
Flat copper profiles		Rated operational voltage U_e		Short-circuit current rating SCCR		Standard	Dimensions	Min. order quantity	Connection
12 × 5 mm	12 × 10 mm	IEC	UL 508	3-pole	5-pole				L1 – L3 + N + PE/N
Interior mounting									
■	■	690 V AC	–	54 kA	32 kA	IEC	12 × 160 × 45 mm	10 units	8US1923-5CA02
		–	600 V AC	18 kA	–	UL 508	12 × 160 × 45 mm	10 units	8US1923-5CA02

[1] Including end cover

Suitable accessories

Flat copper profiles



Surface	Length	Size	Article No.
Bare	2400 mm	12 × 5 mm	8WC5123

UL spacers for busbar supports



Dimensions	Minimum order quantity	Height	Article No.
12 × 160 × 18 mm	10 units	18 mm	8US1922-1CA02

Stabilizing modules

- Only for 12 × 5 mm busbars
- For protecting the N and PE busbars against bending

Dimensions	Minimum order quantity	Article No.
2 × 160 × 47 mm	10 units	8US1928-5CA02

Cover profiles



Dimensions	Minimum order quantity	Article No.
700 × 160 × 63 mm	2 units	8US1922-2CB02

Holders for 8US1922-2CB02 cover profile



Dimensions	Minimum order quantity	Article No.
5 × 156 × 55 mm	10 units	8US1922-2CA02


13

Quick selection guide, page 13/5

© Siemens 2022

❷ Infeeds and connection methods


For 8US compact busbar system up to 360 A (3P) or 200 A (5P)

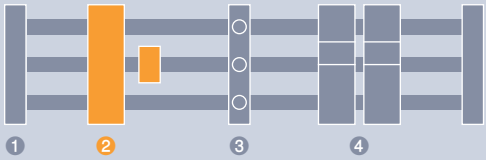

Conductor cross-section	Rated operational current I_e		Rated operational voltage U_e		Rated peak withstand current	Standard	Minimum order quantity	Dimensions
	IEC	UL 508	IEC	UL 508	IEC I_{pk} Max.			
Spring terminal								
1.5 ... 16 mm²	63 A	48 A	690 V AC	600 V AC	10 kA	IEC, UL 508	6 units	20 × 160 × 91 mm
Connecting terminal								
6 ... 50 mm²	175 A	175 A	690 V AC	600 V AC	40.5 kA	IEC, UL 508	1 unit	54 × 160 × 115 mm
10 ... 120 mm²	250 A	200 A	690 V AC	600 V AC	35.4 kA	IEC, UL 508	1 unit	90 × 160 × 80 mm
	–	–	690 V AC	600 V AC	35.1 kA	IEC, UL 508	1 unit	30 × 160 × 80 mm
					35.4 kA	IEC, UL 508	1 unit	30 × 160 × 80 mm
35 ... 150 mm²	275 A	285 A	690 V AC	600 V AC	45.9 kA	IEC, UL 508	1 unit	90 × 160 × 115 mm

❸ Built-in components

For 8US compact busbar systems up to 360 A (3P)

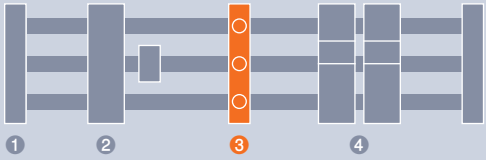

Number of poles
Modular width

Conductor cross-section	For flat copper profiles		Rated operational current I_e	Rated operational voltage U_e	Standard	Minimum order quantity
	12 × 5 mm	12 × 10 mm	IEC	IEC		
Box terminals						
Rigid 1.5 ... 10 mm² Flexible 1.5 ... 25 mm²	■	■	63 A	400 V AC	IEC	6 units

See NEOZED screw caps, NEOZED adapter sleeves and NEOZED fuse links, from page 7/1 onwards

Quick selection guide, page 13/5

© Siemens 2022

For 12 × 5 mm and 12 × 10 mm flat copper profiles			
For 3-pole system (up to 360 A)	For 5-pole system (up to 200 A)		
			
Connection modules	**Connection modules**	**Connection modules**	**Connection modules**
3P	**3P**	**N**	**PE**
8US1921-1BA02	–	–	–
8US1921-1CB02	–	–	–
–	8US1921-1CD02	–	–
–	–	8US1921-1CE02	–
–	–	–	8US1921-1CF02
8US1921-1CC02	–	–	–

NEOZED bus-mounting bases
Size D02
3P
2 MW

With touch protection
5SG6208


13

Quick selection guide, page 13/5

© Siemens 2022

❹ Device adapters

For 8US compact busbar system up to 360 A (3P) or 200 A (5P)

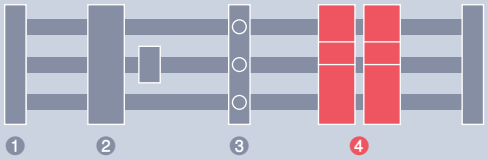

For 3-pole system
For universal applications



Rated operational current I_e		Rated operational voltage U_e		Standard	For flat copper profiles		Dimensions			Min. order quantity	
IEC	UL 508	IEC	UL 508		12 × 5 mm	12 × 10 mm	Height	Width	Length		
16 A	–	690 V AC	–	IEC	–	–	160 mm	22.5 mm	122 mm	4 units	–
							200 mm	22.5 mm	122 mm	5 units	–
25 A	–	690 V AC	–	IEC	■	–	160 mm	22.5 mm	41.5 mm	5 units	–
							185 mm	22.5 mm	23.5 mm	5 units	–
							200 mm	22.5 mm	41.5 mm	5 units	–
32 A	–	690 V AC	–	IEC	■	–	160 mm	18 mm	73 mm	12 units	–
	25 A	690 V AC	600 V AC	IEC, UL 508	■	■	160 mm	45 mm	63 mm	4 units	8US1651-5DK02
63 A	–	690 V AC	–	IEC	■	–	160 mm	18 mm	73 mm	12 units	–
							160 mm	18 mm	82 mm	12 units	–
	65 A	690 V AC	600 V AC	IEC, UL 508	■	■	160 mm	54 mm	63 mm	4 units	8US1661-5FK02
144 A	–	690 V AC	–	IEC	■	■	160 mm	77 mm	35 mm	1 unit	–

Suitable accessories

N modules



Rated voltage U_e	Connecting terminal	Dimensions	Minimum order quantity	Article No.
690 V AC	1.5 ... 16 mm²	9 × 160 × 114 mm	12 units	–

PE modules



Rated voltage U_e	Connecting terminal	Dimensions	Minimum order quantity	Article No.
690 V AC	1.5 ... 16 mm²	9 × 160 × 114 mm	12 units	–

Support modules




Dimensions	Minimum order quantity	Article No.
18 × 160 × 54 mm	6 units	8US1620-5AK02

Lateral modules



Dimensions	Minimum order quantity	Article No.
9 × 160 × 47 mm	12 units	8US1998-2BH02

Set of module connectors



Use	Package	Article No.
For connecting adapters	1 pack = 100 units	–

13

Quick selection guide, page 13/5

© Siemens 2022

For 3-pole system For 3VA10/11 molded case circuit breakers	For 5-pole system For universal applications	For SIRIUS 3RM1 motor starters and for relays	For 3RM193, 8US1615 and 8US1215 fuse modules		For 5SY miniature circuit breakers
					
With latching function	**Adapters, 1-pole**	**With fuse module and DIN mounting rail**		**With DIN mounting rail**	**Adapters, 1-pole**
–	–	8US1615-5CK10	–	–	–
–	–	8US1215-5CS10	–	–	–
–	–	–	8US1616-0AK02	–	–
–	–	–	–	8US1716-0RK00	–
–	–	–	8US1216-0AS00	–	–
–	8US1621-2NJ02	–	–	–	–
–	–	–	–	–	–
–	8US1621-2FK02	–	–	–	–
–	–	–	–	–	8US1624-2FK02
–	–	–	–	–	–
8US1613-4AU01	–	–	–	–	–


Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
–	8US1600-0RE02	8US1600-0RE02	8US1600-0RE02	8US1600-0RE02	8US1600-0RE02
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**
–	8US1600-0RF02	8US1600-0RF02	8US1600-0RF02	8US1600-0RF02	8US1600-0RF02
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8US1620-5AK02	8US1620-5AK02	8US1620-5AK02	8US1620-5AK02	8US1620-5AK02	8US1620-5AK02
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8US1998-2BH02	8US1998-2BH02	8US1998-2BH02	8US1998-2BH02	8US1998-2BH02	8US1998-2BH02
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**
–	8US1998-1AA02	8US1998-1AA02	8US1998-1AA02	8US1998-1AA02	8US1998-1AA02

Quick selection guide, page 13/5

© Siemens 2022

❶ Basic assemblies

Up to 630 A

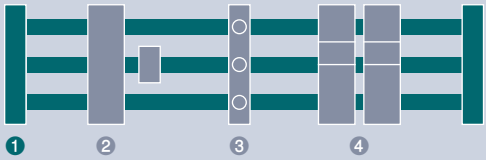

Flat copper profiles							Standard
12 × 5 mm	15 × 5 mm	20 × 5 mm	25 × 5 mm	30 × 5 mm	20 × 10 mm	30 × 10 mm	
Interior mounting							
■	■	■	■	■	■	■	IEC 61439-1
–	–	■	–	–	■	■	IEC 61439-1, UL 508 [1]
■	■	■	■	■	■	■	IEC 61439-1
■	–	■	–	■	■	■	IEC 61439-1
■	■	■	■	■	■	■	IEC 61439-1, UL 508
Exterior mounting							
■	■	■	■	■	■	■	IEC 61439-1
■	■	■	■	■	■	■	IEC 61439-1

[1] Only with base plate 8US1922-2UA01

Suitable accessories

Flat copper profile



Surface	Length	Size	Rated operational current	Cross-section	Standard	Article No.
Bare	1100 mm	25 × 5 mm	400 A	125 mm²	EN 12167	8WC5031-1AA00
		30 × 5 mm	447 A	150 mm²	EN 12167	8WC5033-1AA00
	2400 mm	12 × 5 mm	200 A	60 mm²	EN 12167	8WC5123
		15 × 5 mm	250 A	75 mm²	EN 12167	8WC5121
		20 × 5 mm	320 A	100 mm²	EN 12167	8WC5126
		25 × 5 mm	400 A	125 mm²	EN 12167	8WC5131
		30 × 5 mm	447 A	150 mm²	EN 12167	8WC5133
		20 × 10 mm	520 A	200 mm²	EN 12167	8WC5128
		30 × 10 mm	630 A	300 mm²	EN 12167	8WC5134



Tin-plated	2000 mm	12 × 5 mm	200 A	60 mm²	EN 12167	8WC5051
		15 × 5 mm	250 A	75 mm²	EN 12167	8WC5052
		20 × 5 mm	320 A	100 mm²	EN 12167	8WC5053
		25 × 5 mm	400 A	125 mm²	EN 12167	8WC5054
		30 × 5 mm	447 A	150 mm²	EN 12167	8WC5055
		20 × 10 mm	520 A	200 mm²	EN 12167	8WC5063
		30 × 10 mm	630 A	300 mm²	EN 12167	8WC5065

End covers

- For covering free busbar ends

For connection	For busbar support	Standard	Article No.
L1–L3	8US1923-2AA01, 8US1923-3AA01, 8US1923-3UA01	IEC, UL 508	8US1922-1AC00
L1–L3 + PE/N	8US1923-4AA00	IEC	8US1922-1AB00

13

Quick selection guide, page 13/5

© Siemens 2022

No. of poles	End and intermediate supports			N/PE busbar supports
	3P	2P	4P	1P
				
	Connection L1–L3	**Connection L1/L2/L3/PE/N**	**Connection L1–L3 + PE/N**	**Connection PE/N**
	8US1923-3AA01	–	–	–
	8US1923-3UA01	–	–	–
	–	–	8US1923-4AA00	–
	–	–	–	5SH3540
	–	–	–	8US1923-1AA01
	8US1923-2AA01	–	–	–
	–	8US1923-5AA00	–	–

Cover profiles for busbars



Length	Width	Depth	Flat copper profile size	Standard	Article No.
1000 mm	15 mm	10 mm	12 × 5 mm	UL 508	8US1922-2CA00
	40 mm	9 mm	15, 20, 25, 30 × 5 mm	UL 508	8US1922-2AA00
	40 mm	14 mm	12, 15, 20, 25, 30 × 10 mm	UL 508	8US1922-2BA00

Blanking covers



Length	Height	Depth	Standard	Article No.
700 mm	195 mm	63 mm	UL 508	8US1922-2EB00

Supports for blanking covers



Depth	Standard	Article No.
32 mm	UL 508	8US1922-2EA00
107 mm	UL 508	8US1922-2EA01

Base plates

Version	Length	Width	Standard	Article No.
For 3-pole system	1100 mm	240 mm	UL 508	8US1922-2UA01

Connecting piece for flat copper profiles





Length	For flat copper profiles	Article No.
40 mm	20 × 5 mm, 25 × 5 mm, 30 × 5 mm, 20 × 10 mm, 25 × 10 mm, 30 × 10 mm	8US1921-2BE00
55 mm	12 × 5 mm, 15 × 5 mm, 20 × 5 mm 12 × 10 mm, 15 × 10 mm, 20 × 10 mm	8US1921-2BF00


13

Quick selection guide, page 13/5

© Siemens 2022

❶ Basic assemblies

Up to 1600 A

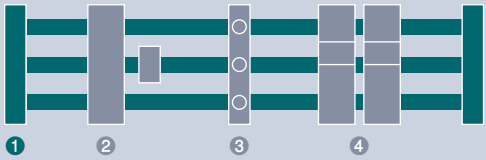


	Busbar supports
No. of poles	3P
	

Copper profile	Rated operational current I_e		Rated operational voltage U_e		Short-circuit current rating SCCR		Standard	Connection
	IEC	UL 508	IEC	UL 508	IEC	UL 508		L1–L3
Interior mounting								
TT special profile	1600 A	1400 A	690 V AC	600 V AC	90 kA	100 kA	IEC, UL 508	8US1943-3AA00

1 pack = 2 busbar supports + finger-safe end covers


Suitable accessories

TT special copper profile



Surface	Length	Rated operational current	Rated operational voltage	Cross-section	Article No.
Tin-plated	2400 mm	1600 A	690 V AC	720 mm²	8US1948-2AA00

Cover profile for TT special copper profile



Length	Article No.
1000 mm	8US1922-2DA00

Blanking covers



Length	Height	Depth	Standard	Article No.
700 mm	195 mm	63 mm	UL 508	8US1922-2EB00

Supports for blanking covers




Depth	Standard	Article No.
32 mm	UL 508	8US1922-2EA00
107 mm	UL 508	8US1922-2EA01

Connecting piece for TT special profile



Article No.
8US1941-2BF01

Partitions, closed



- For additional lateral touch protection at the top/bottom

Length	Depth	Article No.
2400 mm	76 mm	8US1922-1JA00

13

Quick selection guide, page 13/5


© Siemens 2022

Quick selection guide, page 13/5

© Siemens 2022

❷ Infeeds and connection methods

Up to 1600 A

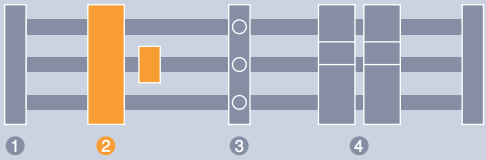

Conductor cross-section, circular conductor		Conductor cross-section, laminated copper	Rated operational current I_e		Rated operational voltage U_e		Standard	Length
IEC	UL 508		IEC	UL 508	IEC	UL 508		
With cover								
Cu 1.5 ... 16 mm²	Cu AWG 16 ... 4	Cu lam. 8 × 6 × 0.5 mm	63 A	48 A	690 V AC	600 V AC	IEC, UL 508	200 mm
Cu 6 ... 50 mm²	Cu AWG 10 ... 2	–	175 A	175 A	690 V AC	600 V AC	IEC, UL 508	200 mm
Cu 25 ... 120 mm²	Cu AWG 6 ... MCM 250	–	250 A	250 A	690 V AC	600 V AC	IEC, UL 508	200 mm
Cu 95 ... 300 mm² Al 120 ... 240 mm²	AWG 3/0 ... MCM 600	–	500 A	420 A	690 V AC	–	IEC, UL 508	200 mm
Without cover								
Cu 95 ... 300 mm²	AWG 3/0 ... MCM 600	–	500 A	420 A	690 V AC	600 V AC	IEC, UL 508	184 mm
–	–	Cu lam. 3 × 20 × 1 ... 10 × 32 × 1 mm	550 A	420 A	690 V AC	600 V AC	IEC, UL 508	184 mm
For 4th pole (PE/N) [2]								
Cu 1.5 ... 16 mm²	–	–	–	–	690 V AC	600 V AC	IEC, UL 508	242 mm

[1] Shown without cover
[2] For mounting on device adapter or device holder


Suitable accessories

Cover for connection module



Quick selection guide, page 13/5

© Siemens 2022

	Connection modules For 5 mm and 10 mm flat copper profiles		For 5 mm and 10 mm flat copper profiles and TT special profile		For laminated copper
			 		
Width	**Connection modules** **3P**	**Connection modules** **3P**	**Connection modules** **3P**	**Connection modules** **PE/N**	**Connection modules** **3P**
20 mm	5SH3538	–	–	–	–
54 mm	–	–	8US1921-1BA00	–	–
81 mm	–	–	8US1921-1AA00	–	–
135 mm	–	5SH3535 [1]	–	–	–
153 mm	–	–	–	–	8US1941-2AA03
153 mm	–	–	–	–	8US1941-2AA04
18 mm	–	–	–	8US1200-0AA00	–
	Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**
	–	–	–	–	8US1922-1GC00


13

Quick selection guide, page 13/5

© Siemens 2022

❷ Infeeds and connection methods

Up to 1600 A

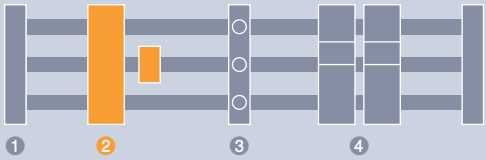

Conductor cross-section, circular conductor		Conductor cross-section, laminated copper	Rated operational current I_e		Rated operational voltage U_e		Standard	Minimum order quantity
IEC	UL 508		IEC	UL 508	IEC	UL 508		
Cu 1.5 ... 16 mm²	AWG 16 .. 6	Cu lam. 8 × 6 × 0.5 mm	65 A	55 A	690 V AC	600 V AC	IEC, UL 508	15 units
								100 units
Cu 4 ... 35 mm²	AWG 10 ... 2	Cu lam. 3 × 9 × 0.8 mm, Cu lam. 6 × 9 × 0.8 mm	115 A	115 A	690 V AC	600 V AC	IEC, UL 508	15 units
								50 units
Cu 16 ... 70 mm²	AWG 4 ... 2/0	Cu lam. 2 × 9 × 0.8 mm, Cu lam. 6 × 9 × 0.8 mm, Cu lam. 6 × 13 × 0.5 mm	175 A	175 A	690 V AC	600 V AC	IEC, UL 508	15 units
								50 units
Cu 16 ... 120 mm²	AWG 4 ... MCM 250	Cu lam. 4 × 15.5 × 0.8 mm, Cu lam. 6 × 15.5 × 0.8 mm, Cu lam. 10 × 15.5 × 0.5 mm	250 A	255 A	690 V AC	600 V AC	IEC, UL 508	15 units
								50 units

[1] Finely stranded, directly clamped or with end sleeve, solid and stranded circular conductor

Suitable accessories

Terminal covers for circular conductors



- Fixing to busbar

Length	Width
200 mm	84 mm

13

Quick selection guide, page 13/5

© Siemens 2022


Terminals [1]							
For 12 × 5 mm, 15 × 5 mm, 20 × 5 mm, 25 × 5 mm and 30 × 5 mm flat copper profiles				For 12 × 10 mm, 15 × 10 mm, 20 × 10 mm, 25 × 10 mm and 30 × 10 mm flat copper profiles and TT special profile			
							
8US1921-2AA01	–	–	–	8US1921-2BA01	–	–	–
8US1921-2AA00	–	–	–	8US1921-2BA00	–	–	–
–	8US1921-2AB01	–	–	–	8US1921-2BB01	–	–
–	8US1921-2AB00	–	–	–	8US1921-2BB00	–	–
–	–	8US1921-2AD01	–	–	–	8US1921-2BD01	–
–	–	8US1921-2AD00	–	–	–	8US1921-2BD00	–
–	–	–	8US1921-2AC01	–	–	–	8US1921-2BC01
–	–	–	8US1921-2AC00	–	–	–	8US1921-2BC00
Article No.	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**	**Article No.**
8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00	8US1922-1GA00

Quick selection guide, page 13/5

© Siemens 2022

❷ Infeeds and connection methods

Up to 1600 A

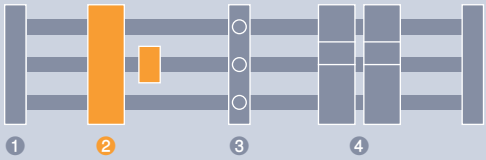

Conductor cross-section, circular conductor		Conductor cross-section, laminated copper	Conductor cross-section, cable lugs	Rated operational current I_e		Rated operational voltage U_e		Standard
IEC	UL 508			IEC	UL 508	IEC	UL 508	
Cu 95 ... 185 mm² Al 95 ... 185 mm²	AWG 3/0 ... MCM 350	–	–	300 A	310 A	690 V AC	600 V AC	IEC, UL 508
Cu 95 ... 300 mm² Al 120 ... 140 mm²	AWG 3/0 ... MCM 600	–	–	500 A	420 A	690 V AC	600 V AC	IEC, UL 508
–	–	Cu lam. 3 × 20 × 1 ... 10 × 24 × 1 mm	–	500 A	420 A	690 V AC	600 V AC	IEC, UL 508
		Cu lam. 2 × 40 × 10 mm	–	1250 A	–	690 V AC	–	IEC
		–	Max. 240 mm²	630 A	–	690 V AC	–	IEC

Suitable accessories

Terminal covers for circular conductors




- Fixing to busbar

Length	Width
200 mm	270 mm

13

Quick selection guide, page 13/5

© Siemens 2022

	Terminals				
	For 20 × 5 mm, 25 × 5 mm and 30 × 5 mm flat copper profiles		For 20 × 10 mm, 25 × 10 mm and 30 × 10 mm flat copper profiles		For 40 × 25 mm and 30 × 10 mm flat copper profiles and TT special profile
					
Mounting					
–	8US1941-2AA01	–	–	–	–
–	8US1941-2AA02	–	–	–	–
M16 threaded pin, size 8 Allen key	–	8US1941-2BB00	–	8US1941-2BB00	–
M16 threaded pin, size 8 Allen key	–	–	–	–	8US1941-2BA00
M16 threaded pin, size 8 Allen key, M10 hexagon bolt, width across flats 17	–	–	8US1941-2AC00	–	–
	Article No.	Article No.	Article No.	Article No.	Article No.
	8US1922-1GA02	–	–	–	–


13

Quick selection guide, page 13/5

© Siemens 2022

❸ Built-in components

Up to 630 A

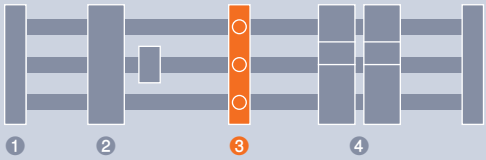

						NEOZED bus-mounting fuse bases Size D02		
						Modular width	1.5 MW	1.5 MW	2 MW
									
For flat copper profiles	**Rated operational current I_e**		**Rated operational voltage U_e**			**Standard**	**Standard**	**With touch protection**	
	IEC	**UL 508**	**IEC AC**	**IEC DC**	**UL**				
Box terminals									
5 mm and 10 mm	25 A	–	500 V AC	–	–	IEC	–	–	–
	63 A	–	400 V AC	250 V DC	–	IEC	5SG6202	5SG6206	5SG6207
			690 V AC	–	–	IEC	–	–	–
	–	30 A	690 V AC	–	600 V AC	IEC, cULus, CSA	–	–	–
			–	–	600 V AC	UL, CSA	–	–	–
		100 A	–	–	600 V AC	cULus	–	–	–
		200 A	–	–	600 V AC	cULus	–	–	–
		400 A	–	–	600 V AC	CSA, cULus	–	–	–
More information									
3NP1 fuse switch disconnectors							See page 8/86	See page 8/86	See page 8/86

Note:
NEOZED adapter sleeves or DIAZED screw adapters are required for NEOZED and DIAZED bus-mounting fuse bases.


13

Suitable accessories

NEOZED covers for standard version						
	Size	**Version**	**Modular width**	**Article No.**	**Article No.**	**Article No.**
	D02	Standard	1.5 MW	5SH5241	–	–
		Extra wide	2 MW	5SH5242	–	–
		With double width	3 MW	5SH5243	–	–
DIAZED covers for standard version						
	**Size**		**Modular width**	**Article No.**	**Article No.**	**Article No.**
	DII		2.3 MW	–	–	–
	DIII		3.2 MW	–	–	–

Quick selection guide, page 13/5

© Siemens 2022

DIAZED bus-mounting fuse bases		Bus-mounting fuse holders				
Size DII	Size DIII	Cylindrical fuses 10 × 38 mm	Class CC	Class J		
2.3 MW	3.2 MW	1.5 MW	1.5 MW	106 mm	184 mm	256 mm
						
Standard	With touch protection			3P	3P	3P
5SF6015	5SF6020	–	–	–	–	–
–	–	–	–	–	–	–
5SF6215	5SF6220	–	–	–	–	–
–	–	3NW7431	–	–	–	–
–	–	–	3NW7431-0HG	–	–	–
–	–	–	–	3NW7431-6HG	–	–
–	–	–	–	–	3NW7431-7HG	–
–	–	–	–	–	–	3NW7431-8HG
See page 8/86	See page 8/86	See page 8/86	See page 8/86	See page 8/86	See page 8/86	See page 8/86

13


Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
–	–	–	–	–	–	–
–	–	–	–	–	–	–
–	–	–	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
5SH2042	–	–	–	–	–	–
5SH2242	–	–	–	–	–	–

Quick selection guide, page 13/5

© Siemens 2022

❸ Built-in components

Up to 630 A

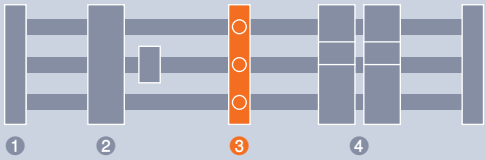

							NEOZED bus-mounting switch disconnectors Size D02		
						Modular width	1.5 MW	1.5 MW	1.5 MW
									
For flat copper profiles	Rated operational current I_e		Rated operational voltage U_e			Standard	Without LED signal detector		With LED signal detector
	IEC	UL 508	IEC AC	IEC DC	UL 508				
Box terminals									
5 mm, 10 mm	63 A	–	400 V AC	–	–	IEC	5SG7234-1 [2]	–	5SG7234-2 [2]
				110 V DC	–	IEC	–	5SG7230 [1]	–

[1] From 35 A current load use 5SH5526 lateral module
[2] From 35 A current load use 5SH5533 lateral module

Note:
NEOZED adapter sleeves or DIAZED screw adapters are required for NEOZED and DIAZED bus-mounting fuse bases.

Suitable accessories

Auxiliary switches



- For signaling the switching state for bus-mounting switch disconnectors

Contacts	Modular width	Article No.	Article No.	Article No.
1 CO	0.5 MW	–	5SH5525	–

Lateral modules



- For greater heat dissipation for loads from 35 A

Modular width	Article No.	Article No.	Article No.
0.5 MW	5SH5533	5SH5526	5SH5533

Reducers



- For NEOZED D01 fuse links in SR60 bus-mounting switch disconnectors

	Article No.	Article No.	Article No.
	–	5SH5527	–

13

Quick selection guide, page 13/5


© Siemens 2022

Quick selection guide, page 13/5

© Siemens 2022

❹ Device adapters and device holders

For universal application up to 1600 A

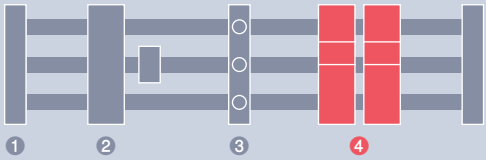

Rated operational current I_e		Rated operational voltage U_e		Standard	For copper profiles	Adapters		Connecting cable		
IEC	UL 508	IEC	UL 508			Width	Height	Cross-section	Max. temperature	Length
25 A	25 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	45 mm	200 mm	AWG 12	150 °C	99 mm
										167 mm
							260 mm	AWG 12	150 °C	99 mm
										167 mm
32 A	32 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	45 mm	200 mm	AWG 10	105 °C	118 mm
									150 °C	99 mm
										167 mm
							260 mm	AWG 10	150 °C	99 mm
										167 mm
80 A	80 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	54 mm	200 mm	AWG 4	150 °C	150 mm
							260 mm	AWG 4	150 °C	150 mm
						119 mm	260 mm	AWG 4	150 °C	150 mm
100 A	100 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	72 mm	200 mm	AWG 4	105 °C	210 mm
–	–	–	–	–	5 mm, 10 mm, TT profile	45 mm	200 mm	–	–	–
								–	–	–
							260 mm	–	–	–

13

Accessories

Lateral modules



- For extending device adapters and device holders of the same length

Length	Width
200 mm	9 mm

Quick selection guide, page 13/5

© Siemens 2022

Device adapters with connecting cables For contact with busbars						Device holders No electrical contact	
							
							For lateral mounting on device adapter
8US1251-5DS10	–	–	–	–	–	–	–
8US1251-5DS11	–	–	–	–	–	–	–
8US1251-5DT10	–	–	–	–	–	–	–
8US1251-5DT11	–	–	–	–	–	–	–
–	8US1211-1NS10	–	–	–	–	–	–
–	–	8US1251-5NS10	–	–	–	–	–
–	–	8US1251-5NS11	–	–	–	–	–
–	–	8US1251-5NT10	–	–	–	–	–
–	–	8US1251-5NT11	–	–	–	–	–
–	–	–	8US1261-5MS13	–	–	–	–
–	–	–	8US1261-6MT10	–	–	–	–
–	–	–	–	–	8US1211-6MT10	–	–
–	–	–	–	8US1211-4TR00	–	–	–
–	–	–	–	–	–	–	8US1250-1AA10
–	–	–	–	–	–	8US1250-5AS10	–
–	–	–	–	–	–	8US1250-5AT10	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	–	–	8US1998-2BJ10	–


13

Quick selection guide, page 13/5

© Siemens 2022

❹ Device adapters and device holders

For molded case circuit breakers and switch disconnectors up to 1600 A

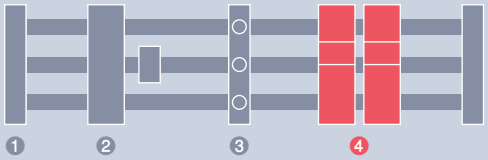

Rated operational current I_e		Rated operational voltage U_e		Standard	For copper profile	Adapters		Connecting cable
IEC	UL 508	IEC	UL 508			Length	Width	
Screw terminals								
80 A	80 A	–	600 V AC	UL 508	5 mm, 10 mm, TT profile	200 mm	81 mm	AWG 4
125 A	125 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	90 mm	Cu laminated 6 × 9 × 0.8 mm
Busbar contact								
144 A	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	200 mm	76 mm	–
160 A	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	175 mm	108 mm	–
250 A	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	175 mm	108 mm	–
Tubular contacts								
150 A	150 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	190 mm	105 mm	–
250 A	250 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	190 mm	105 mm	–
						240 mm	105 mm	–
	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	270 mm	140 mm	–
400 A	400 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	296 mm	140 mm	–
540 A	540 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	296 mm	140 mm	–
580 A	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	325 mm	184 mm	–
590 A	600 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	300 mm	140 mm	–
	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	300 mm	185 mm	–
M10 pin connector								
400 A	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	320 mm	184 mm	–
630 A	630 A	690 V AC	600 V AC	IEC, UL 508	5 mm, 10 mm, TT profile	320 mm	250 mm	–
	–	690 V AC	–	IEC	5 mm, 10 mm, TT profile	320 mm	184 mm	–
						320 mm	250 mm	–

[1] Observe the short-circuit strength of the busbar system: Short-circuit strength > 50 kA on request.
[2] Usable only for 3VL circuit breakers with line-side box terminals.
[3] Only for 3VL 250 A circuit breakers, for screw fixing with metric thread, for flat terminals.
[4] Without connecting cables. The connecting cable between adapter and device should be manufactured in accordance with the rated operational current as a round cable, e.g. H07V-R with cable lug, or as a flat conductor for an M10 pin connector.
[5] Without connecting cables. The connecting cable between adapter and device should be manufactured in accordance with the rated operational current as a round cable, e.g. H07V-R, bared at both ends for tunnel terminals.

13

Quick selection guide, page 13/5

© Siemens 2022

	Device adapter				
	For molded case circuit breakers			For switch disconnectors	For fuse switch disconnectors
	3VA		3VL [1]	3KA and 3KL	3NP5
					
Device	**3-pole**	**4-pole**	**3-pole**	**3-pole**	**3-pole**
Size/type					
NGG, HGG, LGG	8US1240-5MA00	–	–	–	–
3VA10, 3VA11, 3VA51, NGG, HGG, LGG (connection at top)	8US1211-4SS00	–	–	–	–
3VA10, 3VA11, 3VA51 (connection at bottom)	8US1215-4SS00	–	–	–	–
3VA10, 3VA11	8US1213-4AU01	–	–	–	–
3VL1 [2], 3VL2 [2]	–	–	8US1211-4SL01	–	–
3NP5060 (NH00)	–	–	–	–	8US1291-4SB00
3VL3 [3]	–	–	8US1211-4SL00	–	–
VL150X UL CG frame	–	–	8US1213-4AQ01	–	–
VL150 UL DG frame	–	–	8US1213-4AQ03	–	–
VL250 UL FG frame	–	–	8US1213-4AQ03	–	–
3VA12, 3VA20, 3VA21, 3VA22, 3VA52, 3VA61, 3VA62	8US1213-4AP03	–	–	–	–
3VA12, 3VA20, 3VA21, 3VA22	–	8US1313-4AH03	–	–	–
VL400 UL JG frame	–	–	8US1213-4AH00	–	–
VL400X UL LG frame	–	–	8US1213-4AH00	–	–
3VL5	–	–	8US1213-4AF00	–	–
3VA13, 3VA14, 3VA23, 3VA24, 3VA53, 3VA54, 3VA63, 3VA64	8US1213-4AH04	–	–	–	–
3VA13, 3VA14, 3VA23, 3VA24	–	8US1313-4AM04	–	–	–
3VL1 to 3VL4 (also with RCD module) [2]	–	–	8US1210-4AF00 + 8US1927-4AF01	–	–
3NP52, 3NP53, 3NP54 [5]	–	–	–	–	8US1210-4AG00
3KA52, 3KA53, 3KL52, 3KL53	–	–	–	8US1210-4AF00 [4]	–
3KA55, 3KA57, 3KA58, 3KL55, 3KL57	–	–	–	8US1210-4AG00 [4]	–


13

Quick selection guide, page 13/5

© Siemens 2022

❹ Device adapters and device holders

For load feeders up to 1600 A

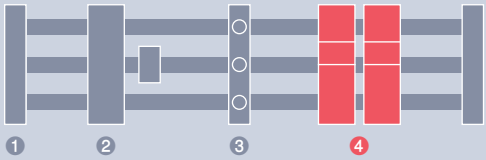

Rated operational current I_e		Rated operational voltage U_e			Standard	For copper profile	Adapters		Connecting cable		Device
IEC	UL 508	IEC	UL 508	cULus, CCC			Length	Width	Cross-section	Max. temperature	Size
Screw terminals											
25 A	25 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 12	150 °C	S00
											S0
							260 mm	45 mm	AWG 12	150 °C	S00
32 A	32 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 10	150 °C	S0
							260 mm	45 mm	AWG 10	150 °C	S0
		–	–	690 V AC	cULus, CCC	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 10	105 °C	S00/S0
65 A	65 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	260 mm	54 mm	AWG 4	150 °C	S2
								119 mm	AWG 4	150 °C	S2
80 A	80 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	54 mm	AWG 4	150 °C	S2
							215 mm	72 mm	AWG 4	150 °C	S3
Spring-loaded terminals											
25 A	25 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 12	150 °C	S00
							260 mm	45 mm	AWG 12	150 °C	S00
32 A	32 A	690 V AC	600 V AC	–	IEC, UL 508	5 mm, 10 mm, TT profile	200 mm	45 mm	AWG 10	150 °C	S0
							260 mm	45 mm	AWG 10	150 °C	S0

Suitable accessories

Vibration & shock kit S2



Use
For size 2 devices

Lateral modules



- For extending device adapters and device holders of the same length

Length	Width
200 mm	9 mm

13

Quick selection guide, page 13/5

© Siemens 2022

For 3-pole system

Device adapters for load feeders

SIRIUS 3RV2/3RT2			SIRIUS 3RV1/3RT1	SIRIUS 3RA6	
Circuit breakers	Direct-on-line starters	Reversing starters	Circuit breakers	Direct-on-line starters	Reversing starters
					
8US1251-5DS10	8US1251-5DS10	8US1251-5DS10 + 8US1250-5AS10	–	–	–
8US1251-5DS10	–	–	–	–	–
–	8US1251-5DT10	–	–	–	–
8US1251-5NS10	–	–	–	–	–
8US1251-5NT10	8US1251-5NT10	8US1251-5NT10 + 8US1250-5AT10	–	–	–
–	–	–	–	8US1211-1NS10	8US1211-1NS10 + 8US1250-1AA10
–	8US1261-6MT10	–	–	–	–
–	–	8US1211-6MT10	–	–	–
8US1261-5MS13	–	–	–	–	–
–	–	–	8US1211-4TR00	–	–
8US1251-5DS11	–	–	–	–	–
8US1251-5DT11	8US1251-5DT11	8US1251-5DT11 + 8US1250-5AT10	–	–	–
8US1251-5NS11	–	–	–	–	–
8US1251-5NT11	8US1251-5NT11	8US1251-5NT11 + 8US1250-5AT10	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-1DA10	8US1998-1DA10	8US1998-1DA10	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.	Article No.
8US1998-2BJ10	8US1998-2BJ10	8US1998-2BJ10	–	8US1998-2BJ10	8US1998-2BJ10


13

Quick selection guide, page 13/5

© Siemens 2022

❹ Device adapters and device holders

Accessories for device adapters for SIRIUS 3RV2/3RT2 load feeders

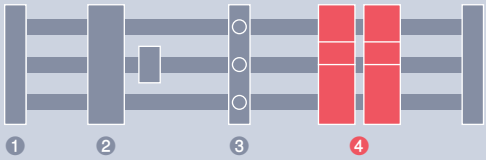

Support rails (35 mm) made of plastic with fixing screws

	Width	For adapter width	Article No.
	45 mm	45 mm	8US1998-7CB45
	54 mm	54 mm	8US1998-7CB54
	72 mm	54 mm	8US1998-7CB72

Positioning pieces

- For pushing on
- Secures the adaptable devices on the adapter

	For adapter width	Article No.
	45 mm	8US1998-1DA45
	54 mm	8US1998-1DA54


Connecting element



- For connecting busbar adapters and device holders

Article No.
8US1998-1AA10

Spacers



- Fix the feeder to the busbar adapter

Article No.
8US1998-1BA10

Vibration & shock kit

Article No.
8US1998-1CA10

13

Quick selection guide, page 13/5

© Siemens 2022

Quick selection guide, page 13/5

© Siemens 2022




Always the right connection

Terminal blocks enable incoming and outgoing cables to be connected in switchboards and control systems in a convenient and space-saving manner. They can be used in transport systems and automation technology as well as in building installation technology.

We offer you the complete range of connection technology with screw terminals, spring-loaded terminals and In-Push-out (iPo) terminals, combination plug-in terminals, insulation displacement terminals and a wide variety of accessories. These can be combined with each other. This allows you to benefit from a high level of flexibility as well as simplified configuration.

© Siemens 2022

Terminal Blocks

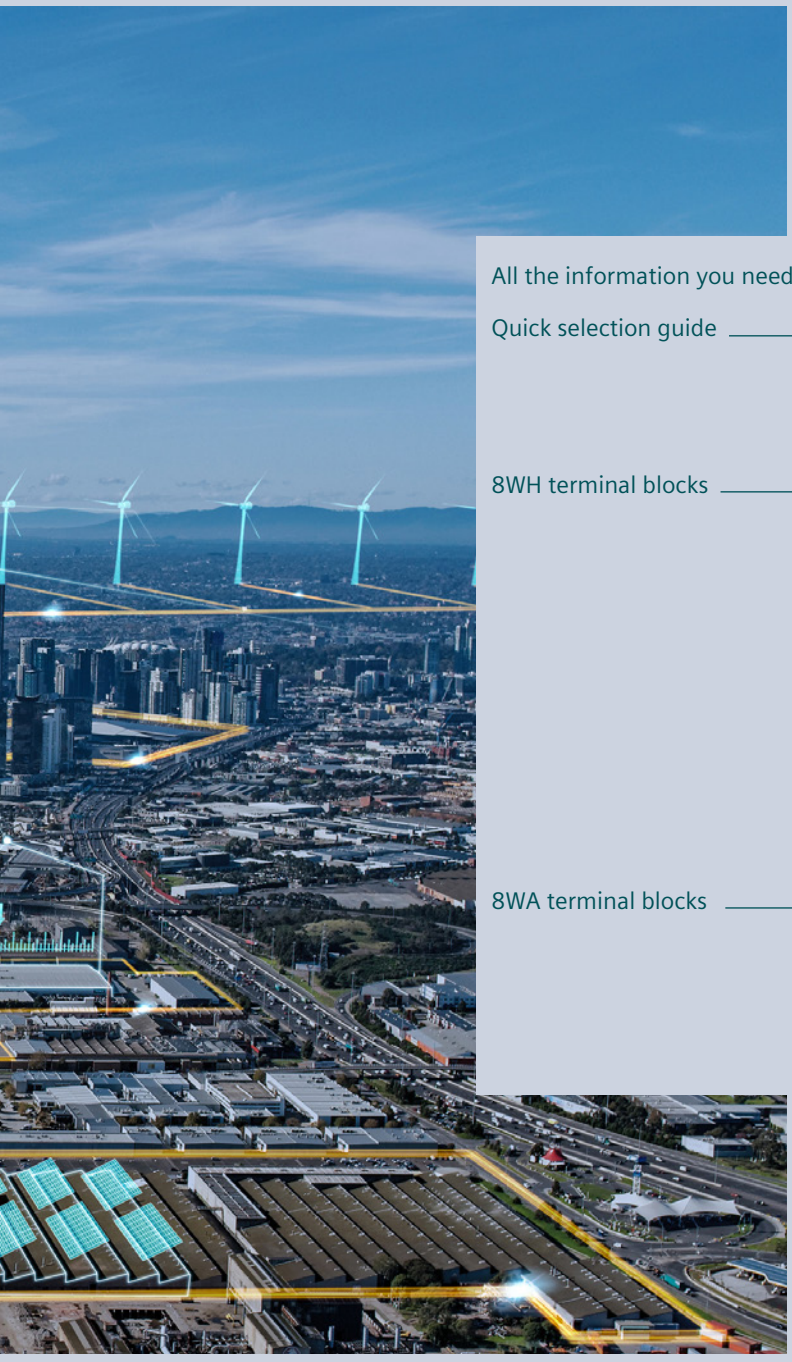

All the information you need 14/2

Quick selection guide 14/4

8WH terminal blocks 14/4

8WA terminal blocks 14/6

8WH terminal blocks 14/8

8WH6 iPo plug-in terminals 14/8

8WH6 iPo installation terminals 14/18

8WH2 spring-loaded terminals 14/24

8WH5 combination plug-in terminals 14/36

8WH3 insulation displacement terminals 14/40

8WH screw terminals 14/44

Accessories for 8WH terminal blocks 14/57

8WA terminal blocks 14/62

8WA1 screw terminals 14/62

8WA2 spring-loaded terminals 14/76

Accessories for 8WA terminal blocks 14/78

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about terminal blocks, please visit our website **www.siemens.com/distribution-components**

Your product in detail

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Siemens ALPHA FIX terminal blocks – 8WH2 terminal with spring-loaded-connection **bit.ly/2kKVz0D**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- Terminal blocks **sie.ag/2kW8ZXo**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/components/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

© Siemens 2022

… can be found in our online services

Commissioning + operation

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Technical overview – Terminal blocks

The fast way to get you to our online services

This page provides you with comprehensive information and links on terminal blocks
www.siemens.com/lowvoltage/product-support (109769088)


© Siemens 2022


8WH terminal blocks









8WH6 iPo plug-in terminals





8WH6 iPo installation terminals

Through-type terminals 	Through-type terminals	2.5 ... 150 mm²	See page 14/8	2.5 ... 35 mm²	See page 14/18
	Two-tier terminals	2.5 ... 4 mm²	See page 14/11	–	
	Three-tier terminals	–		–	
	Four-tier motor terminals	–		–	
Isolating terminals 	Isolating and isolating blade terminals	2.5 ... 4 mm²	See page 14/12	–	
	Two-tier isolating terminals	–		–	
	N conductor isolating terminals	–		2.5 ... 35 mm²	See page 14/20
	Measuring transformer isolating terminals	–		–	
Initiator/actuator terminals 	Initiator terminals	1.5 mm²	See page 14/15	–	
	Actuator terminals	1.5 mm²	See page 14/15	–	
	Infeed terminals	2.5 mm²	See page 14/16	–	
Function terminals 	Fuse terminals	4 mm²	See page 14/14	–	
	Three-tier terminals	–		2.5 mm²	See page 14/22
	Three-tier isolating terminals	–		2.5 mm²	See page 14/23
	Diode terminals	–		–	
	Two-tier diode terminals	–		–	
	Shield terminals	–		–	
	Further information	From page 14/8		From page 14/18	


14

© Siemens 2022





8WH2 spring-loaded terminals





8WH5 combination plug-in terminals





8WH3 insulation displacement terminals






8WH1 screw terminals

1.5 ... 35 mm²	See page 14/24	2.5 mm²	See page 14/36	1.5 ... 2.5 mm²	See page 14/40	2.5 ... 240 mm²	See page 14/44
1.5 ... 4 mm²	See page 14/27	–		1.5 mm²	See page 14/40	2.5 ... 4 mm²	See page 14/47
2.5 mm²	See page 14/28	–		–		–	
2.5 ... 4 mm²	See page 14/29	–		–		–	
2.5 ... 4 mm²	See page 14/30	–		1.5 ... 2.5 mm²	See page 14/40	4 ... 6 mm²	See page 14/48
–		–		–		4 mm²	See page 14/50
–		–		–		–	
–		–		–		6 mm²	See page 14/51
–		–		–		–	
–		–		–		–	
–		–		–		–	
4 mm²	See page 14/32	–		–		4 ... 6 mm²	See page 14/52
–		–		–		–	
–		–		–		–	
2.5 mm²	See page 14/34	–		–		4 mm²	See page 14/54
2.5 mm²	See page 14/34	–		–		2.5 mm²	See page 14/55
–		–		–		Diameter 2 ... 35 mm	See page 14/56
From page 14/24		From page 14/36		From page 14/40		From page 14/44	

14

© Siemens 2022

8WA terminal blocks





8WA1 screw terminals



8WA2 spring-loaded terminals

		8WA1 screw terminals	8WA2 spring-loaded terminals
Through-type terminals	Through-type terminals	2.5 ... 95 mm² See page 14/62	
	Two-tier terminals	4 mm² See page 14/67	–
	Three-tier terminals	2.5 mm² See page 14/68	–
	Four-tier motor terminals	–	–
Isolating terminals	Isolating and isolating blade terminals	–	–
	Two-tier isolating terminals	–	–
	N conductor isolating terminals	2.5 ... 16 mm² See page 14/69	–
	Measuring transformer terminals	6 mm² See page 14/71	–
Initiator/actuator terminals	Initiator terminals	–	1.5 mm² See page 14/76
	Actuator terminals	–	1.5 mm² See page 14/76
	Infeed terminals	–	1.5 mm² See page 14/77
Function terminals	Fuse terminals	1.5 mm² See page 14/72	–
	Three-tier terminals	–	–
	Three-tier isolating terminals	–	–
	Diode terminals	2.5 mm² See page 14/73	–
	Two-tier diode terminals	4 mm² See page 14/74	–
	Shield terminals	–	–
	Further information	From page 14/62	From page 14/76

© Siemens 2022





© Siemens 2022

8WH6 iPo plug-in terminals

Through-type terminals

① ②

	Terminal size 2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. operational current I_{max}	24 A	32 A
Max. operational voltage U_{max}	800 V	800 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, c UL us	IEC 60947-7-1, IEC 60947-7-2, c UL us

Terminals	Color		
❶ Through-type terminals			
2	Gray	8WH6000-0AF00	8WH6000-0AG00
	Blue	8WH6000-0AF01	8WH6000-0AG01
3	Gray	8WH6003-0AF00	8WH6003-0AG00
	Blue	8WH6003-0AF01	8WH6003-0AG01
4	Gray	8WH6004-0AF00	8WH6004-0AG00
	Blue	8WH6004-0AF01	8WH6004-0AG01
❷ PE through-type terminals			
2	Green-yellow	8WH6000-0CF07	8WH6000-0CG07
3	Green-yellow	8WH6003-0CF07	8WH6003-0CG07
4	Green-yellow	8WH6004-0CF07	8WH6004-0CG07

Special accessories

Covers



Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9000-1GA00	8WH9003-1GA00
3	Gray	2.2 mm	8WH9000-2GA00	8WH9003-2SA00
4	Gray	2.2 mm	8WH9000-4GA00	8WH9003-4SA00

Compartment partitions



Terminals	Color	Width	Article No.	Article No.
2	Gray	2.0 mm	8WH9070-0AA00	8WH9070-0AA00
3	Gray	2.0 mm	8WH9070-0GA00	8WH9070-0GA00
4	Gray	2.0 mm	8WH9070-0HA00	8WH9070-0HA00

Cover segments







Color	Article No.	Article No.
Gray	8WH9000-0GA00	–

Warning covers new

Article No.	Article No.
8WH9060-5CA06	8WH9063-5CA06

See general accessories, from page 14/57 onwards

© Siemens 2022




6 mm²	10 mm²	16 mm²	35 mm²
8.2 mm	10.2 mm	12.2 mm	16 mm
41 A	57 A	90 A	125 A
1000 V	1000 V	1000 V	1000 V
20 ... 8	20 ... 6	20 ... 4	10 ... 2
0.5 ... 10 mm²	0.5 ... 16 mm²	0.5 ... 25 mm²	6 ... 35 mm²
0.5 ... 6 mm²	0.5 ... 10 mm²	0.5 ... 16 mm²	6 ... 35 mm²
IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2,	IEC 60947-7-1, IEC 60947-7-2,
			
Article No.	**Article No.**	**Article No.**	**Article No.**
8WH6000-0AH00	8WH6000-0AJ00	8WH6000-0AK00	8WH6000-0AM00
8WH6000-0AH01	8WH6000-0AJ01	8WH6000-0AK01	8WH6000-0AM01
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**
8WH6000-0CH07	8WH6000-0CJ07	8WH6000-0CK07	8WH6000-0CM07
–	–	–	–
–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**
8WH9004-3SA00	8WH9005-1SA00	8WH9006-1SA00	–
–	–	–	–
–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**
–	–	–	–
–	–	–	–
–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**
–	–	–	–
Article No.	**Article No.**	**Article No.**	**Article No.**
8WH9063-5CA06	8WH9065-5CA06	8WH9066-5CA06	8WH9067-5CA06

© Siemens 2022

8WH6 iPo plug-in terminals

Through-type terminals for high-current applications

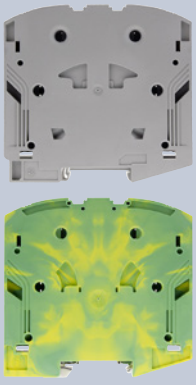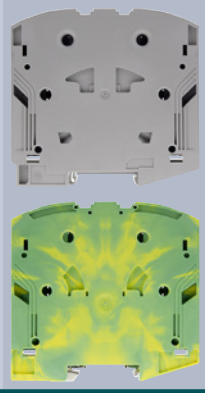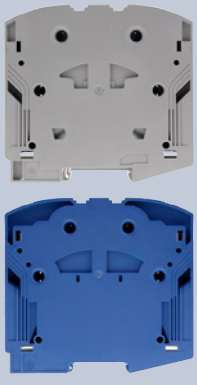

	Terminal size		
	50 mm²	**95 mm²**	**150 mm²**
Terminal width	20 mm	25 mm	31 mm
Max. operational current I_{max}	150 A	232 A	309 A
Operational voltage AC/DC	1000 V/1500 V	1000 V/1500 V	1000 V/1500 V
AWG	8 ... 2/0	4 ... 3/0	1/0 ... 300
Connection capacity, rigid	10 ... 70 mm²	25 ... 95 mm²	95 ... 150 mm²
Connection capacity, flexible with end sleeve	10 ... 50 mm²	25 ... 95 mm²	95 ... 150 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, cULus
			

Terminals	Color			
❶ Through-type terminals				
2	Gray	8WH6000-0AN00	8WH6000-0AQ00	8WH6000-0AS00
	Blue	8WH6000-0AN01	8WH6000-0AQ01	8WH6000-0AS01
❷ PE through-type terminals				
2	Green-yellow	8WH6000-0CN07	8WH6000-0CQ07	–

Special accessories

Connecting combs



Number of poles	Article No.	Article No.	Article No.
2-pole	8WH9020-3AB00	8WH9020-3AD00	8WH9020-3AF00
3-pole	8WH9020-3AC00	8WH9020-3AE00	8WH9020-3AG00

Tap-off terminal



Number of poles	Article No.	Article No.	Article No.
1-pole	8WH9120-0DA00	8WH9120-0DA00	8WH9120-0DA00

Test plugs



Surface	Article No.	Article No.	Article No.
Metal	8WH9010-0NB00	8WH9010-0NB00	8WH9010-0NB00

Insulating sleeves for test plugs



Color	Article No.	Article No.	Article No.
Red	8WH9010-0MB02	8WH9010-0MB02	8WH9010-0MB02

Warning covers new






	Article No.	Article No.	Article No.
	8WH9067-5CA06	8WH9068-5CA06	8WH9068-5CA06

See general accessories, from page 14/57 onwards

© Siemens 2022

Two-tier terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. operational current I_{max}	26 A	32 A
Max. operational voltage U_{max}	500 V	500 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
		

Version	Color			
❶ Two-tier terminals				
Without equipotential bonding	●	Gray	8WH6020-0AF00	8WH6020-0AG00
	●	Blue	8WH6020-0AF01	8WH6020-0AG01
With equipotential bonding	●	Gray	8WH6025-0AF00	8WH6025-0AG00
❷ PE two-tier terminals [1]				
	◐	Green-yellow	8WH6020-0CF07	8WH6020-0CG07

[1] Bridging the terminal is only possible in the top tier (in the center).

Special accessories

Covers



Terminals	Color		Width	Article No.	Article No.
4	●	Gray	2.2 mm	8WH9000-4SE00	–
4	●	Gray	2.2 mm	–	8WH9003-1VA00

Compartment partitions





Terminals	Color		Width	Article No.	Article No.
4	●	Gray	2 mm	8WH9070-0BA00	8WH9070-0BA00

See general accessories, from page 14/57 onwards

© Siemens 2022

8WH6 iPo plug-in terminals

Isolating terminals

	Terminal size	
	2.5 mm²	**4 mm²**
Terminal width	5.2 mm	6.2 mm
Max. operational current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	500 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
		

Terminals	Color			
2	Gray	8WH6000-6CF00	8WH6000-6AG00
3	Gray	8WH6003-6CF00	–
4	Gray	8WH6004-6CF00	–

Special accessories

Covers



Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9000-3SC00	8WH9003-1GA00
3	Gray	2.2 mm	8WH9000-3SD00	–
4	Gray	2.2 mm	8WH9000-5GA00	–

Compartment partitions



Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9070-0AA00	8WH9070-0AA00
3	Gray	2.2 mm	8WH9070-0GA00	–

Plug-in zone connectors

Type	Color	I_{max}	Illuminated display	Article No.	Article No.
 Isolating plugs	Orange	–	–	8WH9040-0DB04	8WH9040-0DB04
 Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
 Fused connectors [1]	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
			Without	8WH9040-3DB08	8WH9040-3DB08
 Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00



[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links.
Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested.
Higher ambient temperatures represent an additional load for the fuse links.
A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

© Siemens 2022

Isolating blade terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. operational current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	400 V
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, two rigid conductors	–	0.5 ... 6 mm²
Connection capacity, one flexible conductor	0.14 ... 2.5 mm²	0.2 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
		

Terminals	Color		
2	Gray	8WH6000-6AF00	8WH6000-6CG00
3	Gray	8WH6003-6AF00	–
4	Gray	8WH6004-6AF00	–

Special accessories

Covers



Terminals	Color	Width	Article No.	Article No.
2	Gray	2.2 mm	8WH9000-3SC00	8WH9003-1GA00
3	Gray	2.2 mm	8WH9000-3SD00	–
4	Gray	2.2 mm	8WH9000-5GA00	–

Compartment partitions



Terminals	Color	Width	Article No.	Article No.
2	Gray	2 mm	8WH9070-0AA00	8WH9070-0AA00


See general accessories, from page 14/57 onwards

© Siemens 2022

8WH6 iPo plug-in terminals

Fuse terminals

① 

② 

	Terminal size 4 mm²
Terminal width	6.2 mm
Max. operational current I_{max}	6.3 A
Max. operational voltage U_{max}	500 V
AWG	24 ... 10
Connection capacity, one rigid conductor	0.2 ... 6 mm²
Connection capacity, one flexible conductor with end sleeve	0.2 ... 4 mm²
Standard	cULus,



LED	Color	
Fuse terminals for 5 × 20 mm G fuse links		
① Without	Black	8WH6000-1GG08
② 10 ... 30 V AC/DC	Black	8WH6000-1KG38
② 110 ... 250 V AC/DC	Black	8WH6000-1MG88

Special accessories

Covers



Terminals	Color	Width	Article No.
2	Gray	2.2 mm	8WH9003-1GA00

5 × 25 mm G fuse links



Type	Breaking capacity	Rated uninterrupted current	Article No.
Quick	Large	1 A	8WA1822-7EF16
		1,6 A	8WA1822-7EF18
		2,5 A	8WA1822-7EF21
		4 A	8WA1822-7EF23
		6,3 A	8WA1822-7EF25
Slow	Small	1 A	8WA1822-7EF76
		1,6 A	8WA1822-7EF78
		2,5 A	8WA1822-7EF81
		4 A	8WA1822-7EF83
		6,3 A	8WA1822-7EF85

Isolating links, 5 × 25 mm






Size	Article No.
5 × 25 mm	8WH9021-0CB12

See general accessories, from page 14/57 onwards

© Siemens 2022

Initiator/actuator terminals

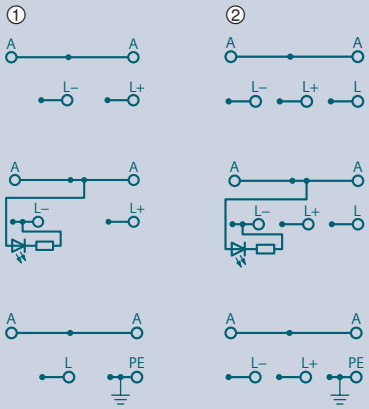

	Terminal size 1.5 mm²	
Terminal width	3.5 mm	3.5 mm
Max. operational current I_{max}	13.5 A	13.5 A
Max. operational voltage U_{max}	250 V	250 V
AWG	26 ... 14	26 ... 14
Connection capacity, flexible with end sleeve, with plastic sleeve	0.14 ... 1.0 mm²	0.14 ... 1.0 mm²
Connection capacity, flexible with end sleeve, without plastic sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Standard	IEC 60947-7-1	IEC 60947-7-1
		

Conductors [1]	Number of connections	LED	Color		
❶ Initiator terminal					
3-wire, L+, L–, A	4	–	Gray	8WH6003-0DE00	–
3-wire, L+, L–, A	4	Green, 24 V (15 ... 30 V DC)	Gray	8WH6003-0FE00	–
3-wire, L, A, PE	4	–	Gray	8WH6003-0HE00	–
❷ Actuator terminal					
4-wire, L+, L–, L, A	5	–	Gray	–	8WH6004-0DE00
4-wire, L+, L–, L, A	5	Green, 24 V (15 ... 30 V DC)	Gray	–	8WH6004-0FE00
4-wire, L+, L–, PE, A	5	–	Gray	–	8WH6004-0HE00

[1] L+ = red, L– = blue, A (output) = petrol, L = petrol, PE (ground) = green/yellow

Special accessories

Covers




Version	Width	Color	Article No.	Article No.
For 3-wire	2.2 mm	Gray	8WH9001-2VD00	–
For 4-wire	2.2 mm	Gray	–	8WH9001-4VE00

© Siemens 2022


8WH6 iPo plug-in terminals

Infeed terminals for initiator/actuator terminals

① 

② 

	Terminal size 2.5 mm²
Terminal width	7 mm
Max. operational current I_{max}	20 A
Max. operational voltage U_{max}	250 V
AWG	24 ... 12
Connection capacity, flexible with end sleeve, with plastic sleeve	0.2 ... 2.5 mm²
Connection capacity, flexible with end sleeve, without plastic sleeve	0.2 ... 2.5 mm²
Standard	IEC 60947-7-1



Conductors [1]	Color	
① 3-wire, L+, L–	Orange	8WH6003-0DF04
② 4-wire, L+, L–, PE	Orange	8WH6004-0HE04

[1] L+ = red, L– = blue, A (output) = petrol, L = petrol, PE (ground) = green/yellow

See general accessories, from page 14/57 onwards

© Siemens 2022

Special accessories for 8WH6 initiator/actuator terminals

Connecting combs




Number of poles	Load current	Color	Article No.
2-pole	17.5 A	Red	8WH9020-6JC02
		Blue	8WH9020-6JC01
		Gray	8WH9020-6JC00
3-pole	17.5 A	Red	8WH9020-6JD02
		Blue	8WH9020-6JD01
		Gray	8WH9020-6JD00
4-pole	17.5 A	Red	8WH9020-6JE02
		Blue	8WH9020-6JE01
		Gray	8WH9020-6JE00
5-pole	17.5 A	Red	8WH9020-6JF02
		Blue	8WH9020-6JF01
		Gray	8WH9020-6JF00
10-pole	17.5 A	Red	8WH9020-6JL02
		Blue	8WH9020-6JL01
		Gray	8WH9020-6JL00
20-pole	17.5 A	Red	8WH9020-6JS02
		Blue	8WH9020-6JS01
		Gray	8WH9020-6JS00

Labels, front, for terminal width 3.5 mm and terminal size 1.5 mm²



Type		Color	Article No.
Blank		White	8WH8110-0AA05
Custom inscription	Printed vertically	White	8WH8140-0XA05-Z Y01
	Printed horizontally	White	8WH8120-0XA05-Z Y01

Labels, flat, for terminal width 3.5 mm and terminal size 1.5 mm²





Type		Inscription	Color	Article No.
Blank			White	8WH8111-0AA05
Consecutive numbering	Printed vertically	1 ... 10 (10×)	White	8WH8141-0AB05
		11 ... 20 (10×)	White	8WH8141-0AB15
		21 ... 30 (10×)	White	8WH8141-0AB25
		31 ... 40 (10×)	White	8WH8141-0AB35
		41 ... 50 (10×)	White	8WH8141-0AB45
	Printed horizontally	1 ... 10 (10×)	White	8WH8121-0AB05
		11 ... 20 (10×)	White	8WH8121-0AB15
		21 ... 30 (10×)	White	8WH8121-0AB25
		31 ... 40 (10×)	White	8WH8121-0AB35
		41 ... 50 (10×)	White	8WH8121-0AB45
Custom inscription	Printed vertically		White	8WH8141-0XA05-Z Y01
	Printed horizontally		White	8WH8121-0XA05-Z Y01

Labels for 8WH initiator/actuator terminals for labeling system



Type	Terminal width	Standard	Color	Article No.
Front, blank	3.5 mm	WIN 486	White	8WH8112-0AA05
Flat, blank	3.5 mm	WIN 416	White	8WH8113-0AA05




© Siemens 2022

8WH6 iPo installation terminals

Through-type terminals

①

② 

	Terminal size			
	2.5 mm²		4 mm²	
Terminal width	5.2 mm	5.2 mm	6.2 mm	6.2 mm
Terminal length	59.5 mm	59.5 mm	66 mm	66 mm
Terminal height	42.5 mm	43 mm	44 mm	46.3 mm
Max. load current I_{max}	24 A	–	32 A	–
Max. rated voltage U_{max}	800 V	–	800 V	–
Rated impulse withstand voltage	–	–	–	–
AWG	26 ... 12	24 ... 12	24 ... 10	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 4 mm²	0.2 ... 6 mm²	0.2 ... 6 mm²
Connection capacity, two rigid conductors	–	–	–	–
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm²	0.25 ... 2.5 mm²	0.25 ... 4 mm²	0.25 ... 4 mm²
Connection capacity, flexible without end sleeve	0.14 ... 2.5 mm²	0.25 ... 2.5 mm²	0.25 ... 4 mm²	0.25 ... 4 mm²
Tightening torque	–	–	–	–
Standard	IEC 60947-7-1	IEC 60947-7-2	IEC 60947-7-1	IEC 60947-7-2
				

Terminals	Color	iPo plug-in technology		iPo plug-in technology	
❶ Through-type terminals					
2	Gray	8WH6001-0AF00	–	8WH6001-0AG00	–
	Blue	8WH6001-0AF01	–	8WH6001-0AG01	–
❷ PE through-type terminals					
2	Green-yellow	–	8WH6001-0CF07	–	8WH6001-0CG07

Special accessories

Covers



Color	Width	Article No.	Article No.
Gray	1.8 mm	–	–
	2.2 mm	8WH9000-1WA00	8WH9003-7WA00

N conductor support brackets



- For holding the N busbar

Color	Article No.	Article No.
Blue	8WH9143-0AF01	8WH9143-0AF01

Connecting combs



Number of poles	Article No.	Article No.
2-pole	–	–
3-pole	–	–
10-pole	–	–

Compartment partitions



Color	Article No.	Article No.
Gray	–	–

Insulation plate



Color	Article No.	Article No.
Gray	–	–

Connecting terminals



Color	Width	Article No.	Article No.
Blau	10,3 mm	8WH9126-0BA01	8WH9126-0BA01



N busbars, 10 × 3 mm new



Version	Length	Article No.	Article No.
Kupfer verzinnt	1000 mm	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/57 onwards

© Siemens 2022


6 mm²		16 mm²		35 mm²	
8.2 mm	8.2 mm	12.2 mm	12.2 mm	15.2 mm	15 mm
66 mm	66 mm	51 mm	51 mm	55 mm	55 mm
50 mm	50 mm	50 mm	50 mm	51 mm	51 mm
41 A	–	76 A	–	125 A	125 A
800 V	–	400 V	–	800 V	–
–	–	6 kV	6 kV	8 kV	8 kV
20 ... 8	20 ... 8	22 ... 4	22 ... 4	18 ... 2	18 ... 2
0.5 ... 10 mm²	0.5 ... 10 mm²	6 ... 25 mm²	6 ... 25 mm²	0.75 ... 35 mm²	0.75 ... 35 mm²
–	–	2.5 ... 10 mm²	2.5 ... 10 mm²	0.75 ... 10 mm²	0.75 ... 10 mm²
0.5 ... 6 mm²	0.5 ... 6 mm²	6 ... 16 mm²	6 ... 16 mm²	0.75 ... 35 mm²	0.75 ... 35 mm²
0.5 ... 6 mm²	0.5 ... 6 mm²	6 ... 16 mm²	6 ... 16 mm²	0.75 ... 10 mm²	0.75 ... 10 mm²
–	–	2.5 ... 3.0 Nm	2.5 ... 3.0 Nm	3.2 ... 3.7 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1	IEC 60947-7-2	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus,	cULus,	cULus,
					
iPo plug-in technology		**Screw terminals**		**Screw terminals**	
8WH6001-0AH00	–	8WH1201-0AK00	–	8WH1201-0AM00	–
8WH6001-0AH01	–	8WH1201-0AK01	–	8WH1201-0AM01	–
–	8WH6001-0CH07	–	8WH1201-0CK07	–	8WH1201-0CM07

Article No.	Article No.	Article No.
–	8WH9005-3PA00	–
8WH9004-1WA00	–	–
Article No.	**Article No.**	**Article No.**
8WH9143-0AH01	–	–
Article No.	**Article No.**	**Article No.**
–	–	8WH9030-6BC00
–	–	8WH9030-6BD00
–	8WH9030-6AL00	–
Article No.	**Article No.**	**Article No.**
–	8WH9070-6HA00	–
Article No.	**Article No.**	**Article No.**
–	8WH9070-6GA00	8WH9070-6GA00
Article No.	**Article No.**	**Article No.**
8WH9126-0BA01	8WH9126-0BA01	–
Article No.	**Article No.**	**Article No.**
8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

© Siemens 2022

8WH6 iPo installation terminals

N conductor isolating terminals

	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Terminal length	59 mm	66 mm
Terminal height	46.3 mm	46.3 mm
Max. rated current I_{max} / cross-section	24 A/2.5 mm²	32 A/4 mm²
Max. rated voltage U_{max}	250 V	250 V
Rated impulse withstand voltage	4 kV	6 kV
AWG	26 ... 12	24 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.2 ... 6 mm²
Connection capacity, two rigid conductors	0.2 ... 1.5 mm²	0.2 ... 2 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.25 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	max. 0.5 mm²	max. 1 mm²
Tightening torque	–	–
Standard	IEC 60947-7-1	IEC 60947-7-1
		
Terminals	**Color**	**iPo plug-in technology**	**iPo plug-in technology**
2	Blue	8WH6001-0BF01	8WH6001-0BG01

Special accessories

Covers





Color	Width	Article No.	Article No.
Blue	2.2 mm	8WH9000-1SA00	8WH9003-1SA00
Gray	2.2 mm	–	–

N conductor support brackets

- For holding the N busbar 10 × 3 mm
- To be placed every 20 cm





Color	Article No.	Article No.
Blue	8WH9143-0AF01	8WH9143-0AF01
	–	–

Connecting terminals



Color	Width	Article No.	Article No.
Blue	10.3 mm	8WH9126-0BA01	8WH9126-0BA01



N busbars, 10 × 3 mm new



Version	Length	Article No.	Article No.
Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/57 onwards

© Siemens 2022

6 mm²	10 mm²	16 mm²	35 mm²
8.2 mm	10.2 mm	12.2 mm	15 mm
66.3 mm	55 mm	55 mm	55 mm
50 mm	47 mm	50 mm	50 mm
41 A/6 mm²	57 A/16 mm²	76 A/25 mm²	110 A/35 mm²
400 V	400 V	400 V	400 V
6 kV	6 kV	6 kV	6 kV
20 ... 8	–	–	–
0.5 ... 10 mm²	0.5 ... 16 mm²	6 ... 25 mm²	0.75 ... 35 mm²
0.5 ... 4 mm²	0.5 ... 4 mm²	2.5 ... 10 mm²	0.75 ... 10 mm²
0.5 ... 6 mm²	0.5 ... 10 mm²	6 ... 16 mm²	0.75 ... 35 mm²
0.5 ... 1.5 mm²	0.5 ... 2.5 mm²	4 ... 6 mm²	0.75 ... 10 mm²
–	1.5 ... 1.8 Nm	1.5 ... 1.8 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
			
iPo plug-in technology	**Screw terminals**	**Screw terminals**	**Screw terminals**
8WH6001-0BH01	8WH1201-0BJ01	8WH1201-0BK01	8WH1201-0BM01

Article No.	Article No.	Article No.	Article No.
8WH9004-1SA00	–	–	–
–	8WH9005-3PB00	8WH9005-3PB00	–

Article No.	Article No.	Article No.	Article No.
8WH9143-0AH01	–	–	–
–	8WH9141-0BC01	8WH9141-0BC01	8WH9141-0BC01


Article No.	Article No.	Article No.	Article No.
8WH9126-0BA01	8WH9126-0BA01	8WH9126-0BA01	–

Article No.	Article No.	Article No.	Article No.
8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12


© Siemens 2022

8WH6 iPo installation terminals

Three-tier terminals



	Terminal size 2.5 mm²
Terminal width	5.2 mm
Terminal length	101 mm
Terminal height	50.5 mm
Max. rated current I_{max}/cross-section	24 A/4 mm²
Max. rated voltage U_{max} (L–L)	400 V
Rated voltage U_n (L–N, L–PE)	250 V
AWG	26 ... 12
Connection capacity, rigid	0.14 ... 4 mm²
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm²



Type	Color	
L	Gray	8WH6001-4QF00
L/L	Gray	8WH6001-4DF00
L/N	Gray	8WH6001-4CF00
PE/L/L	Gray	8WH6001-4HF00
PE/L/N	Gray	8WH6001-4EF00
PE/L/NT	Gray	8WH6001-4FF00

Special accessories

Covers



Color	Width	Article No.
Gray	2.2 mm	8WH9000-3SA00

N conductor support brackets



- For holding the N busbar
- To be placed every 20 cm

Color	Width	Article No.
Blue	2 mm	8WH9142-0AF01

Connecting terminals



Color	Width	Article No.
Blue	10.3 mm	8WH9126-0BA01

N busbars, 10 × 3 mm new




Version	Length	Article No.
Copper, tinned [1]	1000 mm	8WH9030-2AB12




[1] Only copper busbars may be installed.

See general accessories, from page 14/57 onwards

© Siemens 2022

Three-tier isolating terminals



	Terminal size 2.5 mm²		
Terminal width	5.2 mm	5.2 mm	5.2 mm
Terminal length	101 mm	101 mm	101 mm
Terminal height	50.5 mm	50.5 mm	50.5 mm
Max. rated current I_{max}/cross-section	24 A/4 mm²	24 A/4 mm²	24 A/4 mm²
Max. rated voltage U_{max} (L–L)	400 V	400 V	400 V
Rated voltage U_n (L–N, L–PE)	250 V	250 V	250 V
AWG	26 ... 12	26 ... 12	26 ... 12
Connection capacity, rigid	0.25 ... 4 mm²	0.25 ... 4 mm²	0.25 ... 4 mm²
Connection capacity, flexible with end sleeve	0.25 ... 2.5 mm²	0.25 ... 2.5 mm²	0.25 ... 2.5 mm²
			

Type	Color			
❶ Through-type terminals with identical contour				
PE/L/L	Gray	–	–	8WH6001-4PF00
❷ Isolating terminals				
PE/L/L isolation	Gray	8WH6001-4MF00	–	–
❸ Isolating blade terminals				
PE/L/L isolating blade	Gray	–	8WH6001-4NF00	–
PE/L/N isolating blade	Gray	–	8WH6001-4GF00	–

Special accessories

Covers for isolating terminal in the contour




Color	Width	Article No.	Article No.	Article No.
Gray	2.2 mm	–	8WH9000-6SA00	8WH9000-6SA00



See general accessories, from page 14/57 onwards

© Siemens 2022

8WH2 spring-loaded terminals

Through-type terminals



	Terminal size	
	1.5 mm²	2.5 mm²
Terminal width	4.2 mm	5.2 mm
Max. load current I_{max}	17.5 A	31 A
Max. operational voltage U_{max}	500 V	800 V
AWG	28 ... 16	28 ... 12
Connection capacity, rigid	0.08 ... 1.5 mm²	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.14 ... 1.5 mm²	0.14 ... 2.5 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, c UL us,	IEC 60947-7-1, IEC 60947-7-2, c UL us
		

Terminals	Color		
❶ Through-type terminals			
2	Gray	8WH2000-0AE00	8WH2000-0AF00
	Blue	8WH2000-0AE01	8WH2000-0AF01
	Orange	8WH2000-0AE04	8WH2000-0AF04
	Red	8WH2000-0AE02	8WH2000-0AF02
	Black	8WH2000-0AE08	8WH2000-0AF08
	Green	8WH2000-0AE03	8WH2000-0AF03
	White	8WH2000-0AE05	8WH2000-0AF05
	Yellow	8WH2000-0AE06	8WH2000-0AF06
3	Gray	8WH2003-0AE00	8WH2003-0AF00
	Blue	8WH2003-0AE01	8WH2003-0AF01
	Orange	8WH2003-0AF04	8WH2003-0AF04
4	Gray	8WH2004-0AE00	8WH2004-0AF00
	Blue	8WH2004-0AE01	8WH2004-0AF01
	Orange	8WH2004-0AF04	8WH2004-0AF04
❷ PE through-type terminals			
2	Green-yellow	8WH2000-0CE07	8WH2000-0CF07
3	Green-yellow	8WH2003-0CE07	8WH2003-0CF07
4	Green-yellow	8WH2004-0CE07	8WH2004-0CF07

Special accessories

Covers



Color	Width	Terminals	Article No.	Article No.
Gray	2.2 mm	2	8WH9000-1GA00	8WH9000-1GA00
		3	8WH9000-2GA00	8WH9000-2GA00
		4	8WH9000-4GA00	8WH9000-4GA00

Compartment partitions



Color	Terminals	Article No.	Article No.
Gray	2	8WH9070-0AA00	8WH9070-0AA00
	3	8WH9070-0GA00	8WH9070-0GA00
	4	8WH9070-0HA00	8WH9070-0HA00

Cover segments



- For covering multi-wire terminals when mounting two-wire terminals side-by-side






Color	Article No.	Article No.
Gray	8WH9000-0GA00	8WH9000-0GA00

Warning covers for the operating shafts of 8WH2 through-type terminals



	Article No.	Article No.
	8WH9061-5AA06	8WH9060-5AA06

© Siemens 2022

4 mm²	6 mm²	10 mm²	16 mm²	35 mm²
6.2 mm	8.2 mm	10.2 mm	12.2 mm	16 mm
40 A	52 A	65 A	90 A	125 A
800 V	1000 V	1000 V	1000 V	1000 V
28 ... 10	24 ... 8	24 ... 6	24 ... 4	14 ... 2
0.08 ... 6 mm²	0.2 ... 10 mm²	1.5 ... 16 mm²	0.2 ... 25 mm²	2.5 ... 35 mm²
0.14 ... 4 mm²	0.25 ... 6 mm²	1.5 ... 10 mm²	0.25 ... 16 mm²	2.5 ... 35 mm²
IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus
				
8WH2000-0AG00	8WH2000-0AH00	8WH2000-0AJ00	8WH2000-0AK00	8WH2000-0AM00
8WH2000-0AG01	8WH2000-0AH01	8WH2000-0AJ01	8WH2000-0AK01	8WH2000-0AM01
8WH2000-0AG04	–	–	–	–
8WH2000-0AG02	–	–	–	–
8WH2000-0AG08	–	–	–	–
8WH2000-0AG03	–	–	–	–
8WH2000-0AG05	–	–	–	–
8WH2000-0AG06	–	–	–	–
8WH2003-0AG00	8WH2003-0AH00	–	–	–
8WH2003-0AG01	8WH2003-0AH01	–	–	–
–	–	–	–	–
8WH2004-0AG00	–	–	–	–
8WH2004-0AG01	–	–	–	–
–	–	–	–	–
8WH2000-0CG07	8WH2000-0CH07	8WH2000-0CJ07	8WH2000-0CK07	8WH2000-0CM07
8WH2003-0CG07	8WH2003-0CH07	–	–	–
8WH2004-0CG07	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9003-1GA00	8WH9004-1GA00	8WH9005-1GA00	8WH9006-1GA00	–
8WH9003-2GA00	8WH9004-2GA00	–	–	–
8WH9003-4GA00	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9070-0AA00	8WH9070-0DA00	–	–	–
8WH9070-0GA00	8WH9070-0DA00	–	–	–
8WH9070-0HA00	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9003-0GA00	–	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9063-5AA06	8WH9064-5AA06	8WH9065-5AA06	8WH9066-5AA06	8WH9067-5AA06





© Siemens 2022

8WH2 spring-loaded terminals

Hybrid through-type terminals

①

② 

	Terminal size	
	2.5 mm²	**4 mm²**
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	28 A	32 A
Max. operational voltage U_{max}	800 V	800 V
AWG spring	28 ... 12	28 ... 10/26 ... 10
Connection capacity, rigid, spring-loaded	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible, spring-loaded	0.08 ... 2.5 mm²	0.08 ... 4 mm²
AWG screw	26 ... 14	28 ... 10/26 ... 10
Connection capacity, rigid, screw-type	0.14 ... 4 mm²	0.14 ... 6 mm²
Connection capacity, flexible, screw-type	0.14 ... 2.5 mm²	0.14 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2	IEC 60947-7-1, IEC 60947-7-2
		
		

Terminals	Color	Screw-type connection and spring-loaded connection	Screw-type connection and spring-loaded connection
❶ Hybrid through-type terminals			
3	Gray	8WH2103-2BF00	8WH2103-2BG00
	Blue	8WH2103-2BF01	8WH2103-2BG01
❷ PE hybrid through-type terminals			
3	Green-yellow	8WH2103-3BF07	8WH2103-3BG07

Special accessories

Covers




Color	Width	Terminals	Article No.	Article No.
Gray	2.2 mm	3	8WH9000-2HA00	8WH9003-2HA00




14

See general accessories, from page 14/57 onwards

© Siemens 2022

Two-tier terminals

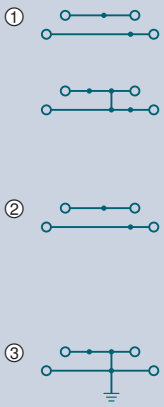

	Terminal size		
	1.5 mm²	2.5 mm²	4 mm²
Terminal width	4.2 mm	5.2 mm	6.2 mm
Max. load current I_{max}	17.5 A	26 A	32 A
Max. operational voltage U_{max}	500 V	500 V	500 V
AWG	28 ... 16	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 1.5 mm²	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 1.5 mm²	0.08 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, c UL us, CCA	IEC 60947-7-1, IEC 60947-7-2, c UL us	IEC 60947-7-1, IEC 60947-7-2, c UL us
			

Version	Number of poles	Terminals	Color			
❶ Two-tier terminals						
Without equipotential bonding	2-pole	4	Gray	8WH2020-0AE00	8WH2020-0AF00	8WH2020-0AG00
			Blue	8WH2020-0AE01	8WH2020-0AF01	8WH2020-0AG01
		6	Gray	–	8WH2023-0AF00	–
			Blue	–	8WH2023-0AF01	–
With equipotential bonding	1-pole	4	Gray	8WH2025-0AE00	8WH2025-0AF00	8WH2025-0AG00
			Blue	–	8WH2025-0AF01	–
		6	Gray	–	8WH2022-0AF00	–
❷ Two-tier terminals, N at top and L at bottom						
Without equipotential bonding	2-pole	4	Gray	–	8WH2020-4CF00	–
❸ PE two-tier terminals [1]						
		4	Green-yellow	8WH2020-0CE07	8WH2020-0CF07	8WH2020-0CG07
		6	Green-yellow	–	8WH2023-0CF07	–

[1] Only top tier can be fitted with connecting combs.

14

Special accessories


Covers					
Width	Terminals	Color	Article No.	Article No.	Article No.
2.2 mm	4	Gray	8WH9000-1VA00	8WH9000-1VA00	8WH9003-1VA00
	6	Gray	–	8WH9000-2VA00	–
Compartment partitions					
		Color	Article No.	Article No.	Article No.
		Gray	8WH9070-0BA00	8WH9070-0BA00	8WH9070-0BA00

See general accessories, from page 14/57 onwards


© Siemens 2022

8WH2 spring-loaded terminals

Three-tier terminals

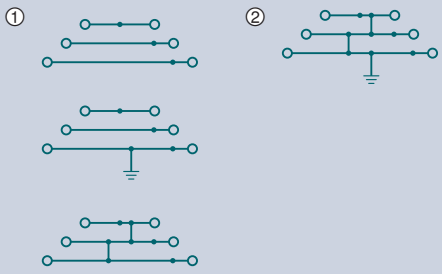① ② 

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	28 A [1]
Max. operational voltage U_{max}	500 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, c UL us



Version	Type	Color	
❶ Three-tier terminals			
Without equipotential bonding	–	Gray	8WH2030-0AF00
		Blue	8WH2030-0AF01
	PE/L/N	Gray	8WH2030-4EF00
	PE/L/L	Gray	8WH2030-4HF00
With equipotential bonding		Gray	8WH2035-0AF00
		Blue	8WH2035-0AF01
❷ PE three-tier terminals			
		Green-yellow	8WH2035-0CF07

[1] The total current through all connected conductors must not exceed the maximum load current.

Special accessories

Covers



Width	Color	Article No.
2.2 mm	Gray	8WH9000-1GD00

Label holder




Color	Article No.
Gray	8WH9060-4BA00

See general accessories, from page 14/57 onwards

© Siemens 2022

Four-tier motor terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	26 A	32 A
Max. operational voltage U_{max}	800 V	800 V
AWG	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus, CB
		
Type	**Color**		
L/L/L/PE	Gray	8WH2040-4LF00	8WH2040-4LG00

Special accessories

Covers




Color	Width	Article No.	Article No.
Gray	2.2 mm	8WH9000-1GE00	–



See general accessories, from page 14/57 onwards

© Siemens 2022

8WH2 spring-loaded terminals

Isolating terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A
Max. operational voltage U_{max}	400 V	400 V
AWG	28 ... 12	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
		

Terminals	Color		
2	Gray	8WH2000-6AF00	8WH2000-6AG00
3	Gray	8WH2003-6AF00	–
4	Gray	8WH2004-6AF00	–

Special accessories

Covers



Width	Color	Terminals	Article No.	Article No.
2.2 mm	Gray	2	8WH9000-2GA00	–
		3	8WH9000-4GA00	–
		4	8WH9000-5GA00	–

Compartment partitions



Color	Terminals	Article No.	Article No.
Gray	2	8WH9070-0AA00	8WH9070-0AA00
	3	8WH9070-0GA00	–
	4	8WH9070-0HA00	–

Cover segments



- For covering multi-wire terminals when mounting two-wire terminals side-by-side

Color	Terminals	Article No.	Article No.
Gray	3/4	8WH9000-0GA00	–

Plug-in zone connectors


Type	Color	I_{max}	Illuminated display	Article No.	Article No.
 Isolating plugs	Orange	20 A	–	8WH9040-0DB04	8WH9040-0DB04
 Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
 Fused connectors [1]	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
			Without	8WH9040-3DB08	8WH9040-3DB08
 Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00




[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links.
Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested.
Higher ambient temperatures represent an additional load for the fuse links.
A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

© Siemens 2022

Isolating blade terminals



	Terminal size		
	2.5 mm²		4 mm²
Terminal width	5.2 mm	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A [1]	16 A
Max. operational voltage U_{max}	400 V	400 V	400 V
AWG	28 ... 12	26 ... 14	28 ... 10
Connection capacity, rigid	0.08 ... 4 mm²	0.14 ... 4 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.14 ... 2.5 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
			

Terminals	Color			
2	Gray	8WH2000-6CF00	–	8WH2000-6CG00
3	Gray	–	8WH2003-6CF00	–
4	Gray	–	8WH2004-6CF00	–

[1] On terminals with three and four clamping points, the total current through all connected conductors must not exceed the max. load current.

Special accessories

Covers



Color	Width	Terminals	Article No.	Article No.	Article No.
Gray	2.2 mm	2	8WH9000-2GA00	8WH9000-2GA00	–
		3	8WH9000-4GA00	8WH9000-4GA00	–
		4	8WH9000-5GA00	8WH9000-5GA00	–

Compartment partitions



Color	Terminals	Article No.	Article No.	Article No.
Gray	2	8WH9070-0AA00	8WH9070-0AA00	8WH9070-0AA00
	3	8WH9070-0GA00	8WH9070-0GA00	–
	4	8WH9070-0HA00	8WH9070-0HA00	–

Cover segments



Color	Terminals	Article No.	Article No.	Article No.
Gray	3/4	8WH9000-0GA00	8WH9000-0GA00	–


See general accessories, from page 14/57 onwards


© Siemens 2022

8WH2 spring-loaded terminals

Fuse terminals

① 

② 

	Terminal size 4 mm²		
Terminal width	6.2 mm	8.2 mm	8.2 mm
Max. load current I_{max}	6.3 A	10 A	30 A
Max. operational voltage U_{max}	250 V	400 V	400 V
Max. individual power loss as overload protection	1.6 W	–	–
Max. power loss as a group as overload protection	1.6 W	–	–
Max. individual power loss as short-circuit protection	4 W	–	–
Max. power loss as a group as short-circuit protection	2.5 W	–	–
AWG	28 ... 10	28 ... 10	28 ... 10
Connection capacity, rigid	0.08 ... 6 mm²	0.08 ... 6 mm²	0.08 ... 6 mm²
Connection capacity, flexible with end sleeve	0.08 ... 4 mm²	0.08 ... 4 mm²	0.08 ... 4 mm²
Standard	IEC 60947-7-3, cULus	IEC 60947-7-3, cULus	IEC 60947-7-3, cULus
			

Illuminated display	Color				
For 5 × 20 mm G fuse links					
① Without	●	Black	8WH2000-1GG08	–	–
② 15 ... 30 V	●	Black	8WH2000-1JG38	–	–
② 30 ... 60 V	●	Black	8WH2000-1JG68	–	–
② 110 ... 250 V	●	Black	8WH2000-1MG08	–	–
For 6.3 × 32 mm G fuse links					
① Without	●	Black	–	8WH2000-1HG08	–
② 100 ... 250 V	●	Black	–	8WH2000-1RG08	–
For blade-type fuses according to ISO/DIS 8820 and DIN 72581-3 [1]					
① Without	●	Black	–	–	8WH2000-1AG08
② 12 V	●	Black	–	–	8WH2000-1BG28
② 24 V	●	Black	–	–	8WH2000-1BG38

[1] Blade-type fuses must be ordered separately.

Special accessories

Compartment partitions



Color	Terminals	Article No.	Article No.	Article No.
● Gray	2	8WH9070-0AA00	8WH9070-0AA00	8WH9070-0AA00

See general accessories, from page 14/57 onwards

© Siemens 2022

© Siemens 2022


8WH2 spring-loaded terminals

Diode terminals

①

② 

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	Determined by the diode
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
Blocking voltage	1300 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²
Diode	1N 4007, integrated
Standard	cULus



Terminals	Color	Let-through	
3	Gray	❶ From left to right	8WH2003-5DF00
	Gray	❷ From right to left	8WH2003-5CF00

Special accessories

Covers



Color	Width	Terminals	Article No.
Gray	2.2 mm	3	8WH9000-4GA00

Compartment partitions



Color	Terminals	Article No.
Gray	3	8WH9070-0GA00

Cover segments




- For covering multi-wire terminals when mounting two-wire terminals side-by-side

Color	Terminals	Article No.
Gray	3	8WH9000-0GA00


See general accessories, from page 14/57 onwards

© Siemens 2022

Two-tier diode terminals

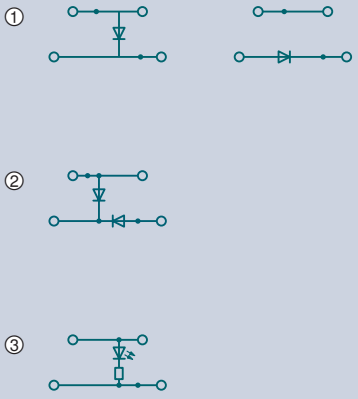

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	26 A
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
Blocking voltage	1300 V
AWG	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²
Diode	1N 4007, integrated
Standard	cULus



Type	Color	
❶ With one diode		
Let-through from top to bottom	Gray	8WH2020-5AF00
Let-through from bottom left to bottom right	Gray	8WH2020-5DF00
❷ With two diodes		
Let-through from top to bottom left and from bottom right to bottom left	Gray	8WH2020-5KF00
❸ With illuminated display		
15 ... 30 V DC/2.5 ... 7.5 A	Gray	8WH2020-5JF30

Special accessories

Covers



Width	Color	Article No.
2.2 mm	Gray	8WH9000-1VA00

Compartment partitions



Color	Article No.
Gray	8WH9070-0BA00

See general accessories, from page 14/57 onwards

© Siemens 2022


8WH5 combination plug-in terminals


Through-type terminals

① 

② 

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	24 A
Max. operational voltage U_{max}	500 V
Standard	IEC 61984, c UL us





Terminals	Color	Combination plug-in connection
❶ Through-type terminals		
2	Gray	8WH5000-0AF00
	Blue	8WH5000-0AF01
❷ PE through-type terminals		
2	Green-yellow	8WH5000-0CF07

Special accessories

Covers




Terminals	Color	Width	Article No.
2	Gray	2.2 mm	8WH9000-1VA00

Compartment partitions



Terminals	Color	Article No.
2	Gray	8WH9070-0BA00


See general accessories, from page 14/57 onwards

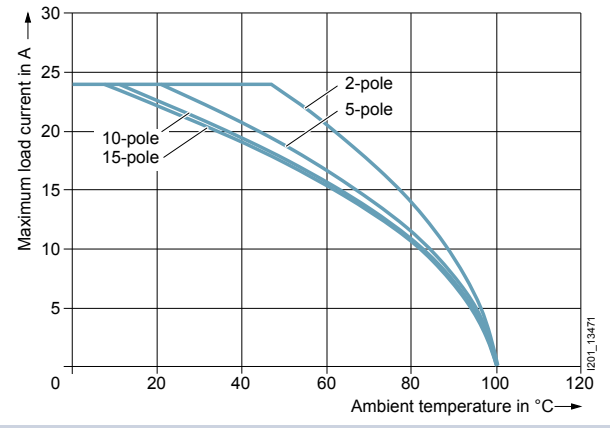


Derating curve for 8WH5000-0AF00

© Siemens 2022

Hybrid through-type terminals



	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. rated current I_{max}/cross-section	24 A/2.5 mm²
Max. rated voltage U_{max}	500 V
AWG	26 ... 12
Connection capacity, rigid	0.14 ... 4 mm²
Connection capacity, flexible with end sleeve	0.14 ... 2.5 mm²
Standard	cULus





Terminals	Color	iPo plug-in connection and combination plug-in connection
❶ Hybrid through-type terminals		
2	Gray	8WH5100-2PF00
❷ PE hybrid through-type terminals		
2	Green-yellow	8WH5100-3PF07

Special accessories

Covers



Terminals	Color	Width	Article No.
2	Gray	2.2 mm	8WH9000-1GA00

Compartment partitions




Terminals	Color	Article No.
4	Gray	8WH9070-0HA00

See general accessories, from page 14/57 onwards

© Siemens 2022

8WH5 combination plug-in terminals

8WH9 plugs

	Terminal size 2.5 mm²	
Terminal width	5.2 mm	5.2 mm
Max. load current I_{max}	24 A	24 A
Max. operational voltage U_{max}	500 V	500 V
AWG	28 ... 12	28 ... 12
Connection capacity, rigid	0.08 ... 4 mm²	0.08 ... 4 mm²
Connection capacity, flexible with end sleeve	0.08 ... 2.5 mm²	0.08 ... 2.5 mm²
Number of poles	1P	1P
Standard	cULus	cULus
		
		

Version	Color	With slot for comb	Without slot for comb
Plug			
Left element	Gray	8WH9040-1DB00	8WH9040-1AB00
	Blue	8WH9040-1DB01	8WH9040-1AB01
Central element	Gray	8WH9040-1EB00	8WH9040-1BB00
	Blue	8WH9040-1EB01	8WH9040-1BB01
Right element	Gray	8WH9040-1FB00	8WH9040-1CB00
	Blue	8WH9040-1FB01	8WH9040-1CB01
PE plugs			
Left element	Green-yellow	8WH9040-1DB07	8WH9040-1AB07
Central element	Green-yellow	8WH9040-1EB07	–
Right element	Green-yellow	8WH9040-1FB07	8WH9040-1CB07

14

Special accessories

Latches



Version	Color	Article No.	Article No.
With strain relief	Orange	8WH9050-2BA04	8WH9050-2BA04
Without strain relief	Orange	8WH9050-2AA04	8WH9050-2AA04

Shielding




- For connection of shielded cables

Cable diameter	Color	Article No.	Article No.
5 ... 10 mm	Black	8WH9120-0DB08	8WH9120-0DB08

See general accessories, from page 14/57 onwards

© Siemens 2022

Configuration of combination plug

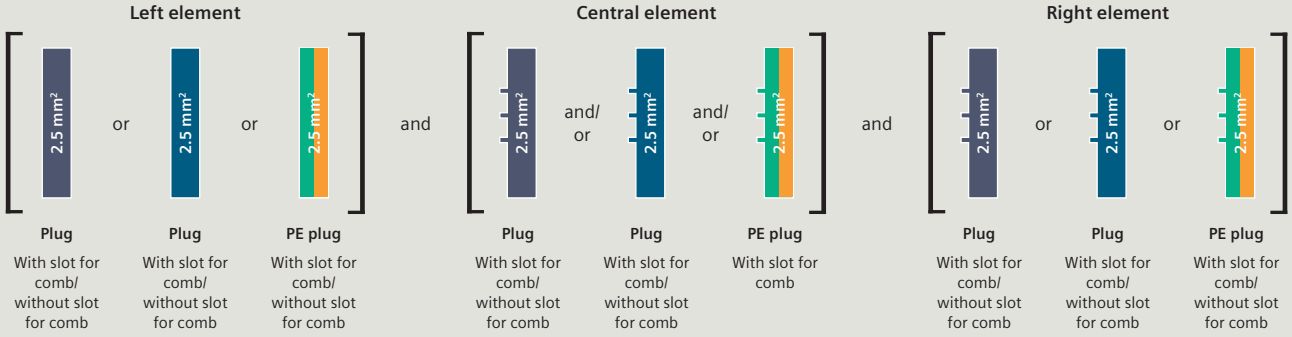


Note:
The configuration concept shown is just one example of how combination plugs can be configured.

© Siemens 2022


8WH3 insulation displacement terminals

Through-type terminals



	Terminal size 1.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	17.5 A [1]
Max. operational voltage U_{max}	800 V
AWG	24 ... 16
Connection capacity, rigid	0.25 ... 1.5 mm²
Connection capacity, flexible with end sleeve	0.25 ... 1.5 mm²





Terminals	Color		
❶ Through-type terminals			
2		Gray	8WH3000-0AE00
		Blue	8WH3000-0AE01
3		Gray	8WH3003-0AE00
		Blue	8WH3003-0AE01
4		Gray	8WH3004-0AE00
		Blue	8WH3004-0AE01
❷ PE through-type terminals			
2		Green-yellow	8WH3000-0CE07
3		Green-yellow	8WH3003-0CE07
4		Green-yellow	8WH3004-0CE07

[1] On terminals with three and four clamping points, the total current through all connected conductors must not exceed the maximum load current.

Special accessories

Covers



Terminals	Color		Width	Article No.
2		Gray	2.2 mm	8WH9001-1AA00
3		Gray	2.2 mm	8WH9001-2AA00
4		Gray	2.2 mm	8WH9001-4AA00

Compartment partitions



Terminals	Color		Width	Article No.
2		Gray	2 mm	8WH9070-0JA00
4		Gray	2 mm	8WH9070-0MA00

See general accessories, from page 14/57 onwards


© Siemens 2022


Two-tier terminals

① 

② 

	Terminal size 1.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	17.5 A
Max. operational voltage U_{max}	500 V
AWG	24 ... 16
Connection capacity, rigid	0.25 ... 1.5 mm²
Connection capacity, flexible with end sleeve	0.25 ... 1.5 mm²
Standard	cULus





Version	Color	
❶ Two-tier terminals		
Without equipotential bonding	Gray	8WH3020-0AE00
	Blue	8WH3020-0AE01
❷ PE two-tier terminals		
	Green-yellow	8WH3020-0CE07

Special accessories

Covers



Width	Color	Article No.
2.2 mm	Gray	8WH9001-1BA00

Compartment partitions





Color	Article No.
Gray	8WH9070-0MA00

See general accessories, from page 14/57 onwards

© Siemens 2022

8WH3 insulation displacement terminals

Isolating terminals

	Terminal size	
	1.5 mm²	2.5 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	16 A	16 A
Max. operational voltage U_{max}	400 V	400 V
AWG	24 ... 16	20 ... 14
Connection capacity, rigid	0.25 ... 1.5 mm²	0.5 ... 2.5 mm²
Connection capacity, flexible with end sleeve	0.25 ... 1.5 mm²	0.5 ... 2.5 mm²
Standard	cULus	cULus
		
Terminals	**Color**		
2	Gray	8WH3000-6AE00	8WH3000-6AF00

Special accessories

Covers



Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9001-2AA00	8WH9000-2AA00

Plug-in zone connectors

	Type	Color	I_{max}	Illuminated display	Article No.	Article No.
	Isolating plugs	Orange	–	–	8WH9040-0DB04	8WH9040-0DB04
	Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
	Fused connectors [1]	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
				Without	8WH9040-3DB08	8WH9040-3DB08
	Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00

[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links.
Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested.
Higher ambient temperatures represent an additional load for the fuse links.
A shift in rated current should therefore be taken into account in such applications.

See general accessories, from page 14/57 onwards

© Siemens 2022





© Siemens 2022

8WH screw terminals

8WH1 through-type terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	32 A	41 A
Max. operational voltage U_{max}	1000 V	1000 V
AWG	26 ... 12	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm	0.6 ... 0.8 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus,	IEC 60947-7-1, IEC 60947-7-2, cULus,

Terminals	Color		
❶ Through-type terminals			
2	Gray	8WH1000-0AF00	8WH1000-0AG00
	Blue	8WH1000-0AF01	8WH1000-0AG01
	Orange	8WH1000-0AF04	8WH1000-0AG04
	Red	8WH1000-0AF02	8WH1000-0AG02
	Black	8WH1000-0AF08	8WH1000-0AG08
	Green	8WH1000-0AF03	–
	Yellow	8WH1000-0AF06	–
❷ PE through-type terminals			
2	Green-yellow	8WH1000-0CF07	8WH1000-0CG07

Special accessories

Covers



Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-1PA00	8WH9000-1PA00

Compartment partitions



Width	Color	Article No.	Article No.
2 mm	Gray	8WH9070-6BA00	8WH9070-6BA00

Reducing combs



Version	Color	Article No.	Article No.
From screw to screw	Turquoise	–	–
From screw to spring	Turquoise	–	–

Warning covers for 8WH1






Image	Color	Article No.	Article No.
Lightning symbol	Yellow	8WH9060-5BA06	8WH9063-5BA06

See general accessories, from page 14/57 onwards

© Siemens 2022



6 mm²	10 mm²	16 mm²	35 mm²	
8.2 mm	10.2 mm	12.2 mm	16 mm	16 mm
57 A	76 A	101 A	150 A	–
1000 V	1000 V	1000 V	1000 V	–
24 ... 8	20 ... 6	16 ... 4	16 ... 1/0	16 ... 2
0.2 ... 10 mm²	0.5 ... 16 mm²	1.5 ... 25 mm²	1.5 ... 50 mm²	1.5 ... 35 mm²
0.2 ... 2.5 mm²	0.5 ... 4 mm²	1 ... 6 mm²	1.5 ... 16 mm²	1.5 ... 16 mm²
0.25 ... 6 mm²	0.5 ... 10 mm²	1 ... 16 mm²	1.5 ... 35 mm²	1.5 ... 35 mm²
0.2 ... 2.5 mm²	0.5 ... 4 mm²	1 ... 6 mm²	1.5 ... 10 mm²	1.5 ... 10 mm²
1.5 ... 1.8 Nm	1.6 ... 1.8 Nm	2.5 ... 3.0 Nm	3.2 ... 3.7 Nm	3.2 ... 3.7 Nm
IEC 60947-7-1, IEC 60947-7-2, cULus,	IEC 60947-7-1, IEC 60947-7-2, cULus,	IEC 60947-7-1, IEC 60947-7-2, cULus,	IEC 60947-7-1, IEC 60947-7-2, cULus,	IEC 60947-7-1, IEC 60947-7-2, cULus,
				
8WH1000-0AH00	8WH1000-0AJ00	8WH1000-0AK00	8WH1000-0AM00	–
8WH1000-0AH01	8WH1000-0AJ01	8WH1000-0AK01	8WH1000-0AM01	–
–	–	–	–	–
8WH1000-0AH02	–	–	–	–
8WH1000-0AH08	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8WH1000-0CH07	8WH1000-0CJ07	8WH1000-0CK07	–	8WH1000-0CM07
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9000-1PA00	8WH9000-1PA00	8WH9076-1PA00	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9070-6BA00	8WH9070-6BA00	–	–	–
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9002-8AC10	–	8WH9002-8EC10	8WH9002-8GC10	8WH9002-8GC10
–	–	8WH9002-8FC10	8WH9002-8HC10	8WH9002-8HC10
Article No.	Article No.	Article No.	Article No.	Article No.
8WH9064-5BA06	8WH9065-5BA06	8WH9066-5BA06	8WH9067-5BA06	8WH9067-5BA06

© Siemens 2022

8WH screw terminals

8WH1 through-type terminals for high-current applications


① ②

	Terminal size				
	50 mm²	70 mm² new	95 mm²	150 mm²	240 mm²
Terminal width	20 mm	20 mm	25 mm	31 mm	36 mm
Max. load current I_{max}	150 A	192 A	232 A	309 A	415 A
Max. operational voltage U_{max}	1000 V	1000 V	1000 V	1000 V	1000 V
AWG	6 ... 0	4 ... 000	4 ... 000	2 ... 300	00 ... 500
Connection capacity, rigid	16 ... 70 mm²	16 ... 95 mm²	25 ... 95 mm²	35 ... 150 mm²	70 ... 240 mm²
Connection capacity, flexible with end sleeve	25 ... 50 mm²	16 ... 70 mm²	35 ... 95 mm²	50 ... 150 mm²	70 ... 185 mm²
Tightening torque	6 ... 8 Nm	8 ... 10 Nm	15 ... 20 Nm	25 ... 30 Nm	25 ... 30 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, IEC 60947-7-2, cULus	IEC 60947-7-1, cULus	IEC 60947-7-1, cULus
					

Terminals	Color					
❶ Through-type terminals						
2	Gray	8WH1000-0AN00	8WH1000-0AP00	8WH1000-0AQ00	8WH1000-0AS00	8WH1000-0AU00
	Blue	8WH1000-0AN01	8WH1000-0AP01	8WH1000-0AQ01	8WH1000-0AS01	8WH1000-0AU01
❷ PE through-type terminals						
2	Green-yellow	8WH1000-0CN07	8WH1000-0CP07	8WH1000-0CQ07	–	–

Special accessories

Tap-off terminal



- When wiring a tap-off with a smaller cross-section, observe the overload and short-circuit strength specified in VDE 0100 Part 430

I_{max}	Cross-section	Article No.	Article No.	Article No.	Article No.	Article No.
57 A	10 mm²	8WH9120-0AA00	–	8WH9120-0BA00	8WH9120-0CA00	8WH9120-0CA00

Insertion profiles



- Evens out the prismatic sleeve base when using flat conductors

	Article No.	Article No.	Article No.	Article No.	Article No.
	8WH9020-3MA00	–	8WH9020-3NA00	8WH9020-3PA00	8WH9020-3PA00

Combs



- Fully insulated, fitted in the clamping sleeve and latched with the terminal enclosure

I_{max}	Number of poles	Article No.	Article No.	Article No.	Article No.	Article No.
232 A	2-pole	–	–	8WH9020-3AA00	8WH9020-3CA00	–
	3-pole	–	–	8WH9020-3BA00	8WH9020-3DA00	–
320 A	2-pole	–	–	–	–	8WH9020-3EA00
	3-pole	–	–	–	–	8WH9020-3FA00

Permanent links




- For cross links
- Screw heads with insulating collar
- Remove partition first





I_{max}	Number of poles	Article No.	Article No.	Article No.	Article No.	Article No.
150 A	2-pole	8WH9020-6HC00	8WH9020-3AH00 new	–	–	–
	3-pole	8WH9020-6HD00	8WH9020-3AJ00 new	–	–	–

See general accessories, from page 14/57 onwards

© Siemens 2022

8WH1 two-tier terminals



	Terminal size	
	2.5 mm²	4 mm²
Terminal width	5.2 mm	6.2 mm
Max. load current I_{max}	28 A	36 A
Max. operational voltage U_{max}	500 V	800 V
AWG	26 ... 12	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm	0.6 ... 0.8 Nm
Standard	cULus,	cULus,
		
		

Version	Color		
❶ Two-tier terminals			
Without equipotential bonding	Gray	8WH1020-0AF00	8WH1020-0AG00
	Blue	8WH1020-0AF01	8WH1020-0AG01
With equipotential bonding	Gray	8WH1025-0AF00	8WH1025-0AG00
❷ PE two-tier terminals			
	Green-yellow	8WH1020-0CF07	8WH1020-0CG07

Special accessories

Covers



Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-1QA00	8WH9000-1QA00

Compartment partitions



Width	Color	Article No.	Article No.
2 mm	Gray	8WH9070-6FA00	8WH9070-6FA00

Spacer plates



- Compensates for tier offset if other terminals are mounted side by side



Width	Color	Article No.	Article No.
2.5 mm	Gray	8WH9160-0AA00	8WH9160-0AA00

See general accessories, from page 14/57 onwards

© Siemens 2022

8WH screw terminals

8WH1 isolating terminals

	Terminal size	
	4 mm²	6 mm²
Terminal width	6.2 mm	8.2 mm
Max. load current I_{max}	20 A	20 A
Max. operational voltage U_{max}	400 V	500 V
AWG	26 ... 10	24 ... 8
Connection capacity, one rigid conductor	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Tightening torque	0.6 ... 0.8 Nm	1.5 ... 1.8 Nm
Standard	cULus,	cULus
		
Terminals	**Color**		
2	Gray	8WH1000-6AG00	8WH1000-6AH00

Special accessories

Plug-in zone connectors

	Type	Color	I_{max}	Illuminated display	Article No.	Article No.
	Isolating plugs	Orange	–	–	8WH9040-0DB04	8WH9040-0DB04
	Through-type connectors	Gray	16 A	–	8WH9020-8AB00	8WH9020-8AB00
	Fused connectors [1]	Black	6.3 A	12 ... 30 V, 1 ... 2.5 mA	8WH9040-3AB08	8WH9040-3AB08
				Without	8WH9040-3DB08	8WH9040-3DB08
	Component connectors	Gray	6 A	–	8WH9040-0BB00	8WH9040-0BB00

[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.


See general accessories, from page 14/57 onwards

© Siemens 2022

8WH1 isolating blade terminals



	Terminal size 4 mm²
Terminal width	6.2 mm
Max. load current I_{max}	20 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 12
Connection capacity, one rigid conductor	0.14 ... 4 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.6 ... 0.8 Nm
Standard	cULus,



Terminals	Color	
2	Gray	8WH1000-6CG00

Special accessories

Warning covers for 8WH1



Image	Color	Article No.
Lightning symbol	Yellow	8WH9063-5BA06

See general accessories, from page 14/57 onwards



© Siemens 2022

8WH screw terminals

8WH1 two-tier terminals with isolating function

① 

② 

	Terminal size 4 mm²	
Terminal width	6.2 mm	6.2 mm
Max. load current I_{max}	38 A	38 A
Max. operational voltage U_{max}	500 V	500 V
AWG	26 ... 10	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 6 mm²	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm²	0.14 ... 6 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.14 ... 1.5 mm²
Tightening torque	0.6 ... 0.8 Nm	0.6 ... 0.8 Nm
Standard	cULus,	cULus,
		

Version	Color		
❶ Isolating terminal			
Isolating terminal in the upper tier	Gray	8WH1020-6AG00	–
❷ Isolating blade			
Isolating blade in the upper tier	Gray	–	8WH1020-6AC00

Special accessories

Covers



Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-1QA00	8WH9000-1QA00

Compartment partitions



Width	Color	Article No.	Article No.
2 mm	Gray	8WH9070-6FA00	8WH9070-6FA00

Spacer plates



- Compensates for tier offset if other terminals are mounted side by side

Width	Color	Article No.	Article No.
2.5 mm	Gray	8WH9160-0AA00	8WH9160-0AA00



See general accessories, from page 14/57 onwards

© Siemens 2022

8WH1 measuring transformer isolating terminals

① 

②

	Terminal size 6 mm²	
Terminal width	8.2 mm	8.2 mm
Rated uninterrupted current I_u	41 A	41 A
Rated insulation voltage U_i	500 V	800 V
AWG	24	8
Connection capacity, rigid	0.5 ... 10 mm²	0.5 ... 10 mm²
Connection capacity, flexible with end sleeve	0.5 ... 6 mm²	0.5 ... 6 mm²
Disconnect slide tightening torque	0.6 ... 0.8 Nm	–
Tightening torque	1.5 ... 1.6 Nm	1.5 ... 1.6 Nm
Standard	cULus, CE	cULus, CE
		

Terminals	Color		
❶ Isolating terminals			
2 recesses for screwing in the test sockets	Gray	8WH1000-7AH00	–
❷ Through-type terminals with identical contour			
2 recesses for screwing in the test sockets	Gray	–	8WH1000-7BH00

Special accessories

Covers



Width	Color	Article No.	Article No.
2.2 mm	Gray	8WH9000-3UA00	8WH9000-3UA00

Disconnecting links



- For bridging two adjacent terminals
- Cannot be used with the bare 8WH9010-0MB12 test socket

Tightening torque	Number of poles	Color	Article No.	Article No.
0.6 ... 0.8 Nm	2-pole	Gray	8WH9021-0AC00	8WH9021-0AC00

Connecting combs, separable



- Consisting of connection wire, spacer sleeves and screws
- For bridging terminals, the connection wire is adjustable
- Cannot be used with the bare 8WH9010-0MB12 test socket

Tightening torque	Number of poles	Color	Article No.	Article No.
0.6 ... 0.8 Nm	10-pole	Gray	8WH9021-0AL00	8WH9021-0AL00

Short-circuiting plugs, fully insulated



- For short-circuiting adjacent terminals
- For simple transformer measurements
- Required when the bare 8WH9010-0MB12 test adapter is used in the measuring transformer terminal

I_{max}	Number of poles	Color	Article No.	Article No.
20 A	2-pole	Black	8WH9010-0BC08	8WH9010-0BC08

Test sockets, insulated



- For screwing into the measuring transformer terminals
- The 8WH9021-0AC00 disconnecting link shall be used for short-circuiting adjacent terminals

Tightening torque	Color	Article No.	Article No.
0.6 ... 0.8 Nm	Green	8WH9010-0MB03	8WH9010-0MB03
	Violet	8WH9010-0MB11	8WH9010-0MB11
	Yellow	8WH9010-0MB06	8WH9010-0MB06

Test sockets, bare



- For screwing into the measuring transformer terminals
- For simple transformer measurements
- For tapping with test plug
- The 8WH9010-0BC08 short-circuiting plug shall be used for short-circuiting adjacent terminals

Tightening torque	Article No.	Article No.
0.6 ... 0.8 Nm	8WH9010-0MB12	8WH9010-0MB12


See general accessories, from page 14/57 onwards

© Siemens 2022

8WH screw terminals

8WH1 fuse terminals

① 

② 

	Terminal size	
	4 mm²	6 mm²
Terminal width	6.2 mm	8.2 mm
Max. load current I_{max}	6.3 A	10 A
Max. operational voltage U_{max}	500 V	630 V
AWG	26 ... 10	24 ... 8
Connection capacity, one rigid conductor	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 6 mm²	0.2 ... 10 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²	0.2 ... 2.5 mm²
Tightening torque	0.6 ... 0.8 Nm	1.5 ... 1.8 Nm
Standard	IEC 60947-7-3, cULus, CB	IEC 60947-7-3, cULus, CB
		

LED	Color			
For 5 × 20 mm G fuse links				
① Without	●	Black	8WH1000-1GG08	–
② AC/DC with LED 10 ... 30 V	●	Black	8WH1000-1KG38	–
② AC/DC with LED 110 ... 250 V	●	Black	8WH1000-1MG88	–
For 6.3 × 32 mm G fuse links (inch fuses)				
① Without	●	Black	–	8WH1000-1HH08
② AC/DC with LED 12 ... 30 V	●	Black	–	8WH1000-1PH38

Special accessories

Plug-in zone connectors



Version	Color	I_{max}	Illuminated display	Article No.	Article No.
Fused connectors [1]	● Schwarz	6,3 A	12 ... 30 V, 1 ... 2,5 mA	8WH9040-3AB08	8WH9040-3AB08
			Without	8WH9040-3DB08	8WH9040-3DB08

Reducing combs



- For connecting terminals from terminal size 6 mm² to 2.5 mm² or 4 mm²

Version	Color	Article No.	Article No.
From screw to screw	● Turquoise	–	8WH9002-8AC10

[1] The G fuse holders must be selected according to the maximum power loss (heat dissipation) of the G fuse links. Depending on the application and method of installation, the heat rise conditions in closed fuse holders must be tested. Higher ambient temperatures represent an additional load for the fuse links. A shift in rated current should therefore be taken into account in such applications.


See general accessories, from page 14/57 onwards

© Siemens 2022

8WH1 two-tier terminals for soldering of components [1)]



	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	28 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm
Standard	cULus,



Terminals	Color	
4	Gray	8WH1020-5LF00

[1)] Supplied without components; the appropriate components (resistors, diodes, capacitors, ...) are to be soldered in by user

Special accessories

Covers



Width	Color	Article No.
2.2 mm	Gray	8WH9000-1QA00

Compartment partitions



Width	Color	Article No.
2 mm	Gray	8WH9070-6FA00

Spacer plates



- Compensates for tier offset if other terminals are mounted side by side

Width	Color	Article No.
2.5 mm	Gray	8WH9160-0AA00

See general accessories, from page 14/57 onwards

© Siemens 2022


8WH screw terminals

8WH1 diode terminals

①

② 


	Terminal size 4 mm²
Terminal width	6.2 mm
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	800 V
Blocking voltage	1300 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 6 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 4 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.6 ... 0.8 Nm
Diode	1N 4007, integrated
Standard	cULus,



Let-through	Color	
① From left to right	Gray	8WH1000-6LG00
② From right to left	Gray	8WH1000-6KG00

Special accessories

Covers



Width	Color	Article No.
2.2 mm	Gray	8WH9000-2PA00

Warning covers new





Image	Color	Article No.
Lightning symbol	Yellow	8WH9063-5CA06


See general accessories, from page 14/57 onwards

© Siemens 2022

8WH1 two-tier diode terminals

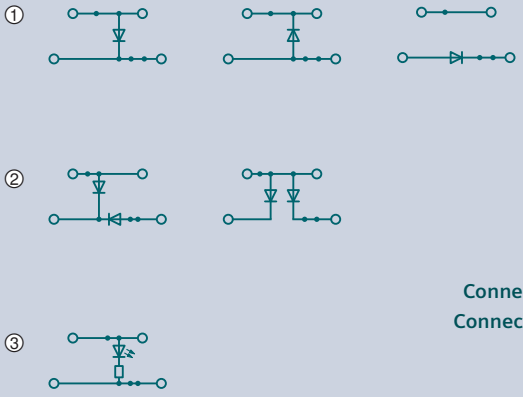

	Terminal size 2.5 mm²
Terminal width	5.2 mm
Max. load current I_{max}	28 A
Uninterrupted limiting current	0.5 A
Max. operational voltage U_{max}	500 V
AWG	26 ... 10
Connection capacity, one rigid conductor	0.14 ... 4 mm²
Connection capacity, two rigid conductors	0.14 ... 1.5 mm²
Connection capacity, one flexible conductor with end sleeve	0.14 ... 2.5 mm²
Connection capacity, two flexible conductors with end sleeve	0.14 ... 1.5 mm²
Tightening torque	0.5 ... 0.6 Nm
Diode	1N 4007, integrated
Standard	cULus,



Type	LED	Color	
❶ With one diode			
Let-through from top to bottom		Gray	8WH1020-5AF00
Let-through from bottom to top		Gray	8WH1020-5BF00
Let-through from bottom left to bottom right		Gray	8WH1020-5DF00
❷ With two diodes			
Let-through from top to bottom left and from bottom right to bottom left		Gray	8WH1020-5FF00
Let-through from top to bottom left and from top to bottom right		Gray	8WH1020-5HF00
❸ With illuminated display			
Let-through from top to bottom	24 V DC	Gray	8WH1020-5JF30

Special accessories

Covers



Width	Color	Article No.
2.2 mm	Gray	8WH9000-1QA00

Compartment partitions



Width	Color	Article No.
2 mm	Gray	8WH9070-6FA00

Spacer plates



- Compensates for tier offset if other terminals are mounted side by side

Width	Color	Article No.
2.5 mm	Gray	8WH9160-0AA00

See general accessories, from page 14/57 onwards

© Siemens 2022

8WH screw terminals

8WH9 shield terminals

	Terminal diameter			
	3 ... 8 mm	3 ... 14 mm	3 ... 20 mm	20 ... 35 mm
Tightening torque	0.6 Nm	0.8 Nm	0.8 Nm	1.5 ... 1.8 Nm
Sheet thickness, mounting plate	1 ... 2 mm	1 ... 2 mm	1 ... 2 mm	1 ... 2 mm
				
Version				
For direct shield attachment on conductive mounting plate				
For connecting cable shield and enclosure ground	8WH9130-0AA00	8WH9130-0BA00	8WH9130-0CA00	8WH9130-0DA00
For 10 × 3 mm busbars				
For connecting cable shield and enclosure ground	8WH9130-0LA00	8WH9130-0MA00	8WH9130-0NA00	8WH9130-0PA00

Special accessories

N conductor support brackets

	Version	Article No.	Article No.	Article No.	Article No.
	Made of molded plastic and conductive connection with retaining screw	8WH9140-0DA00	8WH9140-0DA00	8WH9140-0DA00	8WH9140-0DA00
	For mounting rail with clearance of approx. 30 mm to the busbar	8WH9140-0BA00	8WH9140-0BA00	8WH9140-0BA00	–
	For mounting rail with clearance of approx. 65 mm to the busbar	8WH9140-0CA00	8WH9140-0CA00	8WH9140-0CA00	–

N busbars, 10 × 3 mm new

	Version	Length	Article No.	Article No.	Article No.	Article No.
	Copper, tinned	1000 mm	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12	8WH9030-2AB12

See general accessories, from page 14/57 onwards

© Siemens 2022

Accessories for 8WH terminal blocks

Individual labeling system


Labeling systems for
- Terminal blocks
- Modular installation devices
- Circuit breakers
- Switch disconnectors

The inscription labels can be inscribed with Murrplastik labeling systems or by hand.

The WIN designation facilitates assignment in the inscription software.

Labeling systems available from:
Murrplastik Systemtechnik GmbH
Dieselstraße 10
D-71570 Oppenweiler
Telephone: +49 7191-482-0
email: info@murrplastik.de


Blank labels



- Horizontal and vertical labeling

Version	Terminal width	Designation	Color	Article No.
Front	3.5 mm	WIN 97	White	8WH8112-0AA05
	4.2 mm	WIN 97	White	8WH8112-1AA05
	5.2 and 6.2 mm	WIN 88	White	8WH8112-2AA05
	8.2, 10.2, 12.2 and 16 mm	WIN 40	White	8WH8112-4AA05
Flat	3.5 mm	WIN 97	White	8WH8113-0AA05
	4.2 mm	WIN 180	White	8WH8113-1AA05
	5.2 mm	WIN 182	White	8WH8113-1AA05
	6.2 mm	WIN 184	White	8WH8113-1AA05
	8.2 mm	WIN 186	White	8WH8113-1AA05
	10.2 mm	WIN 188	White	8WH8113-1AA05
	12.2 and 16 mm	WIN 46Z	White	8WH8113-6AA05

Snap-on device labels



- For identification of, e.g. circuit breakers, contactors and control systems

Version	Designation	Color	Article No.
20 × 7 mm, snap-on hooks at side	WIN 95	White	8WH8210-0AA55
20 × 7 mm, snap-on hooks at side	WIN 95	Turquoise	8WH8210-0AA56

Adhesive device labels

- For identification of, e.g. modular installation devices and switch disconnectors

Type	Designation	Color	Article No.
15 × 6 mm	WIN 098	White	8WH8210-0AA35
	WIN 099	Yellow	8WH8210-0AA36
19 × 8 mm	WIN 088	White	8WH8210-0AA45
	WIN 082	Yellow	8WH8210-0AA46

© Siemens 2022

Accessories for 8WH terminal blocks

Standard labeling system

			Terminal size	1.5 mm²	2.5 mm²
			Terminal width	4.2 mm/5.2 mm (8WH3)	5.2 mm/6.2 mm (8WH3)
Front					
	Text alignment	Inscription	Numbering	Article No.	Article No.
	Vertical	Consecutive numbering	1 ... 10 (10×)	8WH8120-1AB05	8WH8120-2AB05
			11 ... 20 (10×)	8WH8120-1AB15	8WH8120-2AB15
			21 ... 30 (10×)	8WH8120-1AB25	8WH8120-2AB25
			31 ... 40 (10×)	8WH8120-1AB35	8WH8120-2AB35
			41 ... 50 (10×)	8WH8120-1AB45	8WH8120-2AB45
			51 ... 60 (10×)	8WH8120-1AB55	8WH8120-2AB55
			61 ... 70 (10×)	8WH8120-1AB65	8WH8120-2AB65
			71 ... 80 (10×)	8WH8120-1AB75	8WH8120-2AB75
			81 ... 90 (10×)	8WH8120-1AB85	8WH8120-2AB85
			91 ... 100 (10×)	8WH8120-1AC05	8WH8120-2AC05
		L1, L2, L3, N, PE	–	–	8WH8120-2AA15
		Custom inscription	–	8WH8120-1XA05-Z Y01	8WH8120-2XA05-Z Y01
	Horizontal	Consecutive numbering	1 ... 10 (10×)	8WH8140-1AB05	8WH8140-2AB05
			11 ... 20 (10×)	8WH8140-1AB15	8WH8140-2AB15
			21 ... 30 (10×)	8WH8140-1AB25	8WH8140-2AB25
			31 ... 40 (10×)	8WH8140-1AB35	8WH8140-2AB35
			41 ... 50 (10×)	–	8WH8140-2AB45
			51 ... 60 (10×)	–	8WH8140-2AB55
			61 ... 70 (10×)	–	8WH8140-2AB65
			71 ... 80 (10×)	–	8WH8140-2AB75
			81 ... 90 (10×)	–	8WH8140-2AB85
			91 ... 100 (10×)	–	8WH8140-2AC05
		Custom inscription	–	8WH8140-1XA05-Z Y01	8WH8140-2XA05-Z Y01
	Blank	–	–	8WH8110-1AA05	8WH8110-2AA05
Flat					
	Text alignment	Inscription	Numbering	Article No.	Article No.
	Vertical	Consecutive numbering	1 ... 10 (10×)	8WH8121-1AB05	8WH8121-2AB05
			11 ... 20 (10×)	8WH8121-1AB15	8WH8121-2AB15
			21 ... 30 (10×)	8WH8121-1AB25	8WH8121-2AB25
			31 ... 40 (10×)	8WH8121-1AB35	8WH8121-2AB35
			41 ... 50 (10×)	8WH8121-1AB45	8WH8121-2AB45
			51 ... 60 (10×)	8WH8121-1AB55	8WH8121-2AB55
			61 ... 70 (10×)	–	8WH8121-2AB65
			71 ... 80 (10×)	–	8WH8121-2AB75
			81 ... 90 (10×)	–	8WH8121-2AB85
			91 ... 100 (10×)	–	8WH8121-2AC05
		Custom inscription	–	8WH8121-1XA05-Z Y01	8WH8121-2XA05-Z Y01
	Horizontal	Consecutive numbering	1 ... 10 (10×)	8WH8141-1AB05	8WH8141-2AB05
			11 ... 20 (10×)	8WH8141-1AB15	8WH8141-2AB15
			21 ... 30 (10×)	8WH8141-1AB25	8WH8141-2AB25
			31 ... 40 (10×)	8WH8141-1AB35	8WH8141-2AB35
			41 ... 50 (10×)	8WH8141-1AB45	8WH8141-2AB45
			51 ... 60 (10×)	–	8WH8141-2AB55
			61 ... 70 (10×)	–	8WH8141-2AB65
			71 ... 80 (10×)	–	8WH8141-2AB75
			81 ... 90 (10×)	–	8WH8141-2AB85
			91 ... 100 (10×)	–	8WH8141-2AC05
		Custom inscription	–	8WH8141-1XA05-Z Y01	8WH8141-2XA05-Z Y01
	Blank	–	–	8WH8111-1AA05	8WH8111-2AA05

© Siemens 2022

4 mm²	6 mm²	10 and 16 mm²	35 mm²
6.2 mm	8.2 mm	10.2 and 12.2 mm	16 mm
Article No.	Article No.	Article No.	Article No.
8WH8120-3AB05	8WH8120-4AB05	8WH8120-5AB05	–
8WH8120-3AB15	8WH8120-4AB15	8WH8120-5AB15	–
8WH8120-3AB25	8WH8120-4AB25	8WH8120-5AB25	–
8WH8120-3AB35	8WH8120-4AB35	8WH8120-5AB35	–
8WH8120-3AB45	8WH8120-4AB45	–	–
8WH8120-3AB55	8WH8120-4AB55	–	–
8WH8120-3AB65	8WH8120-4AB65	–	–
8WH8120-3AB75	8WH8120-4AB75	–	–
8WH8120-3AB85	–	–	–
8WH8120-3AC05	–	–	–
8WH8120-3AA15	8WH8120-4AA15	8WH8120-5AA15	8WH8120-7AA15
8WH8120-3XA05-Z Y01	8WH8120-4XA05-Z Y01	8WH8120-5XA05-Z Y01	8WH8120-7XA05-Z Y01
8WH8140-3AB05	8WH8140-4AB05	8WH8140-5AB05	–
8WH8140-3AB15	8WH8140-4AB15	8WH8140-5AB15	–
8WH8140-3AB25	8WH8140-4AB25	–	–
8WH8140-3AB35	–	–	–
8WH8140-3AB45	–	–	–
8WH8140-3AB55	–	–	–
8WH8140-3AB65	–	–	–
8WH8140-3AB75	–	–	–
8WH8140-3AB85	–	–	–
8WH8140-3AC05	–	–	–
8WH8140-3XA05-Z Y01	8WH8140-4XA05-Z Y01	8WH8140-5XA05-Z Y01	8WH8140-7XA05-Z Y01
8WH8110-3AA05	8WH8110-4AA05	8WH8110-5AA05	8WH8110-7AA05

Article No.	Article No.	Article No.	Article No.
8WH8121-3AB05	8WH8121-4AB05	8WH8121-5AB05	–
8WH8121-3AB15	8WH8121-4AB15	8WH8121-5AB15	–
8WH8121-3AB25	–	8WH8121-5AB25	–
8WH8121-3AB35	–	–	–
8WH8121-3AB45	–	–	–
8WH8121-3AB55	–	–	–
8WH8121-3AB65	–	–	–
8WH8121-3AB75	–	–	–
8WH8121-3AB85	–	–	–
8WH8121-3AC05	–	–	–
8WH8121-3XA05-Z Y01	8WH8121-4XA05-Z Y01	8WH8121-5XA05-Z Y01	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
8WH8141-3XA05-Z Y01	8WH8141-4XA05-Z Y01	8WH8141-5XA05-Z Y01	–
8WH8111-3AA05	8WH8111-4AA05	8WH8111-5AA05	8WH8111-7AA05

© Siemens 2022

Accessories for 8WH terminal blocks

Mounting accessories

Lateral mounting test plugs



- For individual assembly of test plug connectors
- Cannot be used for 8WH3 insulation displacement terminals.

Terminal size	Terminal width	Color	Article No.
2.5 mm²	5.2 mm	Red	8WH9010-0EB02

Spacer plates



- For skipping single terminals for individual test adapter assembly
- Not suitable for 8WH3 insulation displacement terminals

Terminal size	Terminal width	Color	Article No.
2.5 mm²	5.2 mm	Red	8WH9010-2BA02

Terminal strip markers, for end retainers



- Height-adjustable
- For quick-fit end retainers
- Can be provided with two front labels, for terminal width 10.2 mm and terminal strip markers

Labeling field size	Color	Article No.
20 × 8 mm	Gray	8WH9150-1CA00


Test adapters



- When plugged in, finger-safe against accidental direct contact according to EN 50274
- For 4 mm test plugs and terminal blocks with 4.2 mm ... 8.2 mm spacing

Color	Article No.
Gray	8WH9010-0JB00


Quick-fit end retainers



- Can be provided with front labels, for terminal width 5.2 mm and terminal strip markers

Color	Article No.
Gray	8WH9150-0CA00

Reducing combs



- For connecting two through-type terminals
- Cannot be used for 8WH1 through-type terminals and 8WH3 insulation displacement terminals

From terminal size	To terminal size	Color	Article No.
2.5 mm² or 4 mm²	1.5 mm²	Turquoise	8WH9020-0CC10
	6 mm²	Turquoise	8WH9020-0FC10
	10 mm²	Turquoise	8WH9020-0AC10
	16 mm²	Turquoise	8WH9020-0BC10
	35 mm²	Turquoise	8WH9020-0EC10
16 mm²	35 mm²	Turquoise	8WH9020-0DC10

© Siemens 2022

Connecting combs



Terminal size	Terminal width	Max. load current I_{max}	Used for 8WH3	Number of poles	Article No.
1.5 mm²	4.2 mm	17.5 A	Cannot be used	2-pole	8WH9020-6AC10
				3-pole	8WH9020-6AD10
				4-pole	8WH9020-6AE10
				5-pole	8WH9020-6AF10
				10-pole	8WH9020-6AL10
				20-pole	8WH9020-6AS10
2.5 mm²	5.2 mm	24 A	Can be used for terminal size 1.5 mm²	2-pole	8WH9020-6BC10
				3-pole	8WH9020-6BD10
				4-pole	8WH9020-6BE10
				5-pole	8WH9020-6BF10
				10-pole	8WH9020-6BL10
				20-pole	8WH9020-6BS10
				50-pole	8WH9020-6BT10
4 mm²	6.2 mm	32 A	Can be used for terminal size 2.5 mm²	2-pole	8WH9020-6CC10
				3-pole	8WH9020-6CD10
				4-pole	8WH9020-6CE10
				5-pole	8WH9020-6CF10
				10-pole	8WH9020-6CL10
				20-pole	8WH9020-6CS10
				50-pole	8WH9020-6CT10
6 mm²	8.2 mm	41 A	Cannot be used	2-pole	8WH9020-6DC10
				3-pole	8WH9020-6DD10
				4-pole	8WH9020-6DE10
				5-pole	8WH9020-6DF10
				10-pole	8WH9020-6DL10
10 mm²	10.2 mm	57 A	Cannot be used	2-pole	8WH9020-6EC10
16 mm²	12.2 mm	76 A	Cannot be used	2-pole	8WH9020-6FC10
35 mm²	16 mm	101 A	Cannot be used	2-pole	8WH9020-6GC10

© Siemens 2022


8WA1 screw terminals

Through-type terminals


①

② 


	Terminal size	
	2.5 mm²	4 mm²
Terminal width, through-type terminal	6 mm	6.5 mm
Terminal width, PE/PEN through-type terminal	6 mm	7.2 mm
3-pole terminal block width	18 mm	19.5 mm
10-pole terminal block width	61 mm	65.5 mm
Max. load current I_{max}	24 A	32 A
Max. operational voltage U_{max} (cULus, CSA)	600 V	600 V
Rated insulation voltage U_i	800 V	800 V
AWG cULus	22 ... 12	18 ... 10
AWG CSA	18 ... 12	18 ... 10
Connection capacity, rigid	0.5 ... 4 mm²	0.5 ... 6 mm²
Connection capacity, flexible with end sleeve	0.5 ... 2.5 mm²	0.5 ... 4 mm²
Tightening torque	0.5 Nm	0.5 Nm
Standard	IEC 60947-7-1, IEC 60947-7-2, cULus, CSA	IEC 60947-7-1, IEC 60947-7-2, cULus, CSA
















Terminals	Number of poles	Inscription	Color		
❶ Through-type terminal – single terminal					
2	1-pole	Blank	Beige	8WA1011-1DF11	8WA1011-1DG11
			Blue	8WA1011-1BF23	8WA1011-1BG11
			Red	8WA1011-1BF21	8WA1011-1BG21
			Orange	8WA1011-1BF22	8WA1011-1BG22
			Yellow	8WA1011-1BF26	–
			Black	8WA1011-1BF24	8WA1011-1BG24
			Green	8WA1011-1BF25	–
❷ PE/PEN through-type terminal – single terminal					
1	1-pole	Blank	Green-yellow	8WA1011-1PF01	8WA1011-1PG01
2	1-pole	Blank	Green-yellow	8WA1011-1PF00	8WA1011-1PG00
❶ Through-type terminal block					
6	3-pole	Blank	Beige	8WA1011-3DF21	8WA1011-3DG21
20	10-pole	Blank	Beige	8WA1011-0DF21	8WA1011-0DG21
		1 ... 10	Beige	8WA1011-0DF22	8WA1011-0DG22

© Siemens 2022

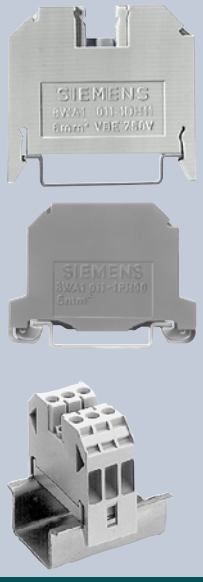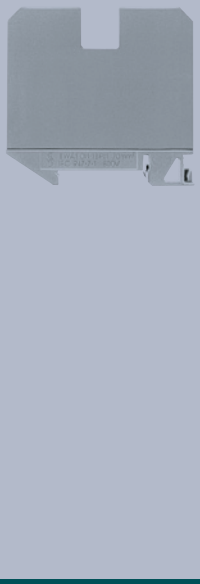6 mm²	16 mm²	35 mm²	70 mm²
8 mm	10 mm	16 mm	25 mm
8 mm	12 mm	16 mm	–
24.5 mm	30 mm	48 mm	–
–	–	–	–
41 A	76 A	125 A	192 A
600 V	600 V	600 V	600 V
800 V	800 V	800 V	800 V
14 ... 8	12 ... 4	10 ... 1	8 ... 3/0
16 ... 8	14 ... 6	12 ... 2	8 ... 1/0
0.7 ... 10 mm²	1.5 ... 16 mm²	4 ... 16 mm²	10 ... 95 mm²
1.5 ... 6 mm²	2.5 ... 16 mm²	4 ... 35 mm²	16 ... 70 mm²
0.8 Nm	1.2 Nm	2.5 ... 3 Nm	6 Nm
IEC 60947-7-1, IEC 60947-7-2,	IEC 60947-7-1, IEC 60947-7-2,	IEC 60947-7-1, IEC 60947-7-2,	IEC 60947-7-1,
			
8WA1011-1DH11	8WA1204	8WA1205	8WA1206
8WA1011-1BH23	8WA1011-1BK11	8WA1011-1BM11	8WA1011-1BP11
–	–	–	–
–	–	–	–
–	–	–	–
8WA1011-1BH24	–	–	–
–	–	–	–
–	–	–	–
8WA1011-1PH00	8WA1011-1PK00	8WA1011-1PM00	–
8WA1011-3DH21	8WA1304	8WA1305	–
–	–	–	–
–	–	–	–

14

© Siemens 2022

8WA1 screw terminals

Through-type terminals

Special accessories

Terminal size	2.5 mm²	4 mm²
Covers		
Version	Article No.	Article No.
 With lightning symbol	8WA1810	8WA1811
 White, facility for labeling	8WA1860	8WA1862
 For connection bars, transparent	8WA1822-7AX01	8WA1822-7AX01
For connection bars, white, inscription possible	8WA1822-7AX03	8WA1822-7AX03
Jumpers		
 Version	Article No.	Article No.
For connection bars	8WA1822-7VF01	8WA1822-7VG00
Disconnecting links		
 • The terminals must be fitted with end plates and must be mounted with the end plates facing each other		
I_n	Article No.	Article No.
Up to 32 A	8WA1865	8WA1865
End retainers, thermoplastic		
 Width	Article No.	Article No.
10 mm	8WA1808	8WA1808
Insulation plate		
	Article No.	Article No.
	8WA1825	8WA1825
Barriers		
 • Between terminals with terminal sizes 2.5 and 6 mm² two 8WH1820 barriers are required		
Width	Article No.	Article No.
2 mm	8WA1820	8WA1820
Connection bars		
 Version	Article No.	Article No.
For two terminals	8WA1895	8WA1850
For three terminals	8WA1896	8WA1851
For four terminals	8WA1897	8WA1852
For ten terminals	8WA1898	8WA1853

See general accessories, from page 14/78 onwards

© Siemens 2022



6 mm²	16 mm²	35 mm²	70 mm²
Article No.	Article No.	Article No.	Article No.
8WA1811	8WA1812	8WA1813	8WA1814
8WA1862	8WA1892	8WA1893	–
8WA1822-7AX01	8WA1822-7AX02	8WA1822-7AX02	–
8WA1822-7AX03	–	–	–
Article No.	Article No.	Article No.	Article No.
8WA1822-7VH00	–	–	–
Article No.	Article No.	Article No.	Article No.
8WA1865	–	–	–
Article No.	Article No.	Article No.	Article No.
8WA1808	8WA1808	8WA1808	8WA1808
Article No.	Article No.	Article No.	Article No.
8WA1825	8WA1822-7TK00	8WA1822-7TK00	–
Article No.	Article No.	Article No.	Article No.
8WA1821	8WA1821	8WA1823	8WA1824
Article No.	Article No.	Article No.	Article No.
8WA1885	8WA1842	8WA1828	8WA1216
8WA1886	8WA1845	8WA1803	–
8WA1887	8WA1848	–	–
8WA1888	8WA1802	8WA1804	–

© Siemens 2022

8WA1 screw terminals

PE through-type terminals, bare



	Terminal size	
	6 mm²	95 mm²
Terminal width	6 mm	16 mm
Terminal length	44 mm	75 mm
Terminal height	25 mm	63 mm
Tightening torque	0.8 Nm	15 ... 20 Nm
Connection capacity, rigid	0.5 ... 10 mm²	–
Connection capacity, flexible with end sleeve	1.5 ... 6 mm²	50 ... 95 mm²
Standard		
		

Terminals	Surface		
PE through-type terminals			
2	Bare	8WA1010-1PH01	8WA1010-1PQ00

Special accessories

Barriers		
	Article No.	Article No.
	8WA1821	–

See general accessories, from page 14/78 onwards

© Siemens 2022

Two-tier terminals

① 

② 

	Terminal size 4 mm²
Terminal width	6.5 mm
Max. load current I_{max}	32 A
Rated insulation voltage U_i	690 V
AWG	18 ... 10
AWG	18 ... 10
Connection capacity, rigid	0.5 ... 6 mm²
Connection capacity, flexible with end sleeve	0.75 ... 4 mm²
Standard	,



Version	Color	
❶ Two-tier terminals without equipotential bonding		
2-pole with two electrically isolated connections	Beige	8WA1011-2DG11
	Blue	8WA1011-2BG11
❷ Two-tier terminals with equipotential bonding		
1-pole	Beige	8WA1011-6DG11
	Blue	8WA1011-6BG11

Special accessories

Covers

	Version	Article No.
	With lightning symbol	8WA1811
	White, facility for labeling	8WA1862
	For connection bars, transparent	8WA1822-7AX01

Jumpers

	Version	Article No.
	For upper tier of 2-pole terminals	8WA1822-7VG00
	For lower tier of 1 and 2-pole terminals	8WA1822-7VG01

Disconnecting links

	Article No.
	8WA1865

End plates

	Article No.
	8WA1817

Insulation plate

	Version	Article No.
	For upper and lower tier	8WA1825

Connection bars

	Version	Type	Article No.
	For upper tier of 2-pole terminals	For two terminals	8WA1850
		For three terminals	8WA1851
		For four terminals	8WA1852
		For ten terminals	8WA1853
	For lower tier of 1 and 2-pole terminals	For two terminals	8WA1835
		For ten terminals	8WA1838

Barriers

	Color	Article No.
	Gray	8WA1823

See general accessories, from page 14/78 onwards

© Siemens 2022

8WA1 screw terminals

Insta or three-tier terminals

① 

② 

③ 

	Terminal size 2.5 mm²
Terminal width	6 mm
Max. load current I_{max}	24 A
Rated insulation voltage U_i between phase conductors	400 V
Rated insulation voltage U_i between phase and protective conductors and for neutral isolating distance	250 V
AWG	22 ... 12
Connection capacity, rigid	0.5 ... 4 mm²
Connection capacity, flexible with end sleeve	0.5 ... 4 mm²
Tightening torque	0.5 Nm
Standard	



Type	Color	
① L, L	Beige	8WA1011-3JF18
② PE, L, L	Beige	8WA1011-3JF16
② PE, L, N	Beige	8WA1011-3JF17
③ PE, L, NT	Beige	8WA1011-3JF20

Special accessories

Covers



Version	Article No.
For connection bars, transparent	8WA1822-7AX01
For connection bars, white	8WA1822-7AX03

Bare infeed terminals, for N busbars



Size	Conductor cross-section	Rated uninterrupted current	Article No.
6 × 6 mm and 10 × 3 mm	Up to 4 mm²	32 A	8WA2867
	Up to 25 mm²	76 A	8WA2868
	Up to 35 mm²	125 A	8WA2870

N busbars, 6 × 6 mm



Version	Length	Rated uninterrupted current	Article No.
For four-field	1109 mm	125 A	8GF9324-2

End retainers, thermoplastic



Width	Article No.
10 mm	8WA1808

Terminal strip labels for end retainers

Version	Article No.
Blank (WIN 67)	8WA8212-0AA65

Insulation carriers



Use	Article No.
For mounting insulated support rails	8WA1857

Labels, blank

Label size	Version	Article No.
5 × 7 mm (WIN 68)	Suitable for plotting	8WA8348-2AY

Connection bars



Version	Type	Article No.
For Insta terminals	For two terminals	8WA1822-7VF02
	For three terminals	8WA1822-7VF03
	For ten terminals	8WA1822-7VF10




Barriers

Version	Color	Article No.
For Insta terminals	Gray	8WA1822-7TH00

See general accessories, from page 14/78 onwards

© Siemens 2022

N conductor isolating and branch terminals

	Terminal size			
	2.5 mm²	4 mm²	6 mm²	16 mm²
Terminal width	6 mm	6.5 mm	8 mm	10 mm
Max. load current I_{max}	24 A	32 A	41 A	76 A
Rated insulation voltage U_i	500 V	500 V	500 V	500 V
AWG	22 ... 12	18 ... 10	14 ... 8	12 ... 4
AWG	22 ... 12	18 ... 10	14 ... 8	–
Connection capacity, rigid	2.5 ... 4 mm²	0.5 ... 6 mm²	0.75 ... 10 mm²	1.5 ... 16 mm²
Connection capacity, flexible with end sleeve	0.5 ... 2.5 mm²	0.75 ... 4 mm²	0.5 ... 6 mm²	1.5 ... 16 mm²
Tightening torque	0.5 Nm	0.5 Nm	0.8 Nm	1.2 Nm
Standard	,	,	,	
				
Terminals	**Color**			
2	Blue	8WA1011-1NF01	8WA1011-1NG31	8WA1011-1NH01	8WA1604

Special accessories

Infeed terminals, for N busbars




Size	Rated uninterrupted current	Article No.	Article No.	Article No.	Article No.
6 × 6 mm and 10 × 3 mm	32 A	8WA2867	8WA2867	–	–
	76 A	8WA2868	8WA2868	8WA2868	8WA2868
	125 A	8WA2870	8WA2870	8WA2870	8WA2870

N busbars, 6 × 6 mm, for four-field



Length	Rated uninterrupted current	Article No.	Article No.	Article No.	Article No.
1109 mm	125 A	8GF9324-2	8GF9324-2	8GF9324-2	8GF9324-2

Label holder



	Article No.	Article No.	Article No.	Article No.
	3TX4210-0J	3TX4210-0J	3TX4210-0J	3TX4210-0J

See general accessories, from page 14/78 onwards

© Siemens 2022

8WA1 screw terminals

Through-type terminals with sectionalizing feature



	Terminal size 2.5 mm²
Terminal width	6 mm
Max. load current I_{max}	10 A
Rated insulation voltage U_i for open isolating distance	380 V AC, 450 V DC
Rated insulation voltage U_i when using barriers	750 V AC, 900 V DC
Connection capacity, rigid	0.25 ... 4 mm²
Connection capacity, flexible without end sleeve	0.5 ... 2.5 mm²
Connection capacity, flexible with end sleeve	0.5 ... 1.5 mm²
Tightening torque	0.5 Nm
Standard	,



Terminals	Version	Color	
2	With 2 holes for Ø 2.3 mm test plug	Gray	8WA1501

Special accessories

Barriers




Color	Article No.
Gray	8WA1820

See general accessories, from page 14/78 onwards

© Siemens 2022

Measuring transformer terminals



	Terminal size 6 mm²		
Terminal width	8 mm	8 mm	8 mm
Max. load current I_{max}	41 A	41 A	41 A
Rated insulation voltage U_i	500 V	500 V	500 V
AWG	14 ... 8	14 ... 8	14 ... 8
AWG	16 ... 10	16 ... 10	16 ... 10
Connection capacity, rigid	0.75 ... 10 mm²	0.75 ... 10 mm²	0.75 ... 10 mm²
Connection capacity, flexible with end sleeve	0.75 ... 10 mm²	0.75 ... 10 mm²	0.75 ... 10 mm²
Tightening torque	0.8 Nm	0.8 Nm	0.8 Nm
Standard	,	,	,
			
Test sockets	**Color**	**❶ Isolating terminal**	**❷ Instrument isolating terminal**	**❸ Through-type terminals with identical contour**
Without test socket	Beige	8WA1011-1MH11	–	8WA1011-1MH10
With test socket	Beige	–	8WA1011-1MH15	–

Special accessories

Covers, for connection bars



Type	Article No.
Transparent	8WA1822-7AX01
White, facility for labeling	8WA1822-7AX03

Test sockets



Diameter	Article No.
4 mm	8WA1822-7PH00

Disconnecting links



- Rated insulation voltage with disconnecting link open according to DIN VDE 0110: 125 V, size C or 250 V size B

Article No.
8WA1822-7VH01

Insulation plate



Article No.
8WA1825

Connecting comb



Number of poles	Article No.
2-pole	8WA1822-7VH22
10-pole, can be shortened as required	8WA7163

Connection bars



Type	Article No.
Two terminals	8WA1885
Three terminals	8WA1886
Four terminals	8WA1887
Ten terminals	8WA1888
Unmounted for ten terminals	8WA1822-7VH10

Barriers



Color	Article No.
Gray	8WA1822-7TH00

See general accessories, from page 14/78 onwards

© Siemens 2022

8WA1 screw terminals

Fuse terminals

① 

② 

	Terminal size 1.5 mm²
Terminal width	10 mm
Max. load current I_{max} when using fuses	6.3 A
Max. load current I_{max} when using the isolating link	16 A
Rated insulation voltage U_i when using fuses	250 V
Rated insulation voltage U_i when using the isolating link	800 V
AWG	18 ... 14
AWG	18 ... 14
Connection capacity, rigid	1 ... 2.5 mm²
Connection capacity, flexible with end sleeve	0.75 ... 1.5 mm²
Tightening torque	0.8 Nm
Standard	,



Version	Color	
For 5 × 25 mm G fuse links		
① Without LED	Beige	8WA1011-1SF12
② With LED 24 V AC/DC	Beige	8WA1011-1SF13
② With LED 230 V AC/DC	Beige	8WA1011-1SF15
For 6.3 × 32 mm G fuse links (inch fuses)		
① Without LED	Beige	8WA1011-1SF30
② With LED 24 V AC/DC	Beige	8WA1011-1SF31
② With LED 120 V AC/110 V DC	Beige	8WA1011-1SF32

Special accessories

5 × 25 mm G fuse links



Type	Breaking capacity	Rated uninterrupted current	Article No.
Quick	Large	1 A	8WA1822-7EF16
		1.6 A	8WA1822-7EF18
		2.5 A	8WA1822-7EF21
		4 A	8WA1822-7EF23
		6.3 A	8WA1822-7EF25
Slow	Small	1 A	8WA1822-7EF76
		1.6 A	8WA1822-7EF78
		2.5 A	8WA1822-7EF81
		4 A	8WA1822-7EF83
		6.3 A	8WA1822-7EF85

Isolating links, 5 × 25 mm



Size	Article No.
5 × 25 mm	8WH9021-0CB12

See general accessories, from page 14/78 onwards

© Siemens 2022

Terminals for self-fitting with components



	Terminal size 1.5 mm²
Terminal width	10 mm
Max. load current I_{max}	6.3 A
Rated insulation voltage U_i	500 V
Connection capacity, rigid	1 ... 2.5 mm²
Connection capacity, flexible with end sleeve	0.75 ... 1.5 mm²
Tightening torque	0.8 Nm



Terminals	Color	
Screw terminal at both ends for 2 conductors each	Gray	8WA1011-1EE00

Special accessories

Plugs for components



Version	Article No.
With PCB and inscription label (20 × 9 mm)	8WA1822-7EE00

See general accessories, from page 14/78 onwards

Diode terminals



	Terminal size 2.5 mm²
Terminal width	6 mm
Max. load current I_{max}	1 A
Rated insulation voltage U_{RRM}	250 V
Peak blocking voltage	1000 V
Connection capacity, rigid	0.5 ... 4 mm²
Connection capacity, flexible without end sleeve	0.5 ... 2.5 mm²
Connection capacity, flexible with end sleeve	0.5 ... 1.5 mm²
Tightening torque	0.5 Nm



Terminals	Version	Color	
2	With 2 holes for Ø 2.3 mm test plug	Gray	8WA1011-1EF20

Special accessories

Barriers




Color	Article No.
Gray	8WA1820

See general accessories, from page 14/78 onwards


© Siemens 2022

8WA1 screw terminals

Two-tier diode terminals

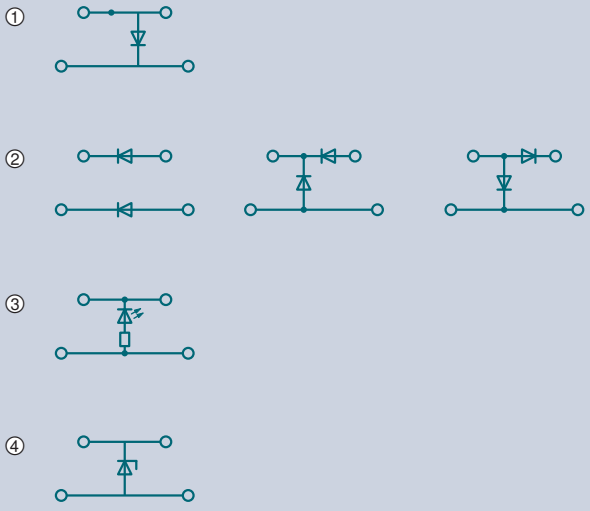

	Terminal size 4 mm²
Terminal width	6.5 mm
Max. load current I_{max}	1 A
Rated insulation voltage U_i	250 V
Let-through current	–
Avalanche voltage U_Z	–
AWG	18 ... 10
Connection capacity, rigid	0.5 ... 6 mm²
Connection capacity, flexible without end sleeve	0.5 ... 4 mm²
Connection capacity, flexible with end sleeve	0.5 ... 4 mm²
Tightening torque	0.5 Nm
Standard	






Type	Bridging	Color	
❶ With one diode			
Let-through from top to bottom	Not possible	Gray	–
❷ With two diodes			
Let-through from top right to top left and from bottom right to bottom left	Not possible	Gray	8WA1011-6EG22
Let-through from top right to top left and from bottom to top	Not possible	Gray	–
Let-through from top left to top right and from top to bottom	Not possible	Gray	–
❸ With red LED			
Without diode for voltage limitation		Gray	–
❹ With Zener diode			
Let-through from bottom to top		Gray	–

Special accessories

End plates		
Color		Article No.
Gray		8WA1817

See general accessories, from page 14/78 onwards

© Siemens 2022

6.5 mm	6.5 mm	6.5 mm
32/1 A	32 A	–
250 V	24 V DC	–
–	–	0.25 A
–	–	2.4 V, ±5%
18 ... 10	18 ... 10	18 ... 10
0.5 ... 6 mm^2	0.5 ... 6 mm^2	0.5 ... 6 mm^2
0.5 ... 4 mm^2	0.5 ... 4 mm^2	0.5 ... 4 mm^2
0.5 ... 4 mm^2	0.5 ... 4 mm^2	0.5 ... 4 mm^2
0.5 Nm	0.5 Nm	0.5 Nm
		
8WA1011-6EG20	–	–
–	–	–
8WA1011-6EG23	–	–
8WA1011-6EG24	–	–
–	8WA1011-6EG25	–
–	–	8WA1011-6EG44


Article No.	Article No.	Article No.
8WA1817	8WA1817	8WA1817

14

© Siemens 2022

8WA2 spring-loaded terminals

Initiator/actuator terminals

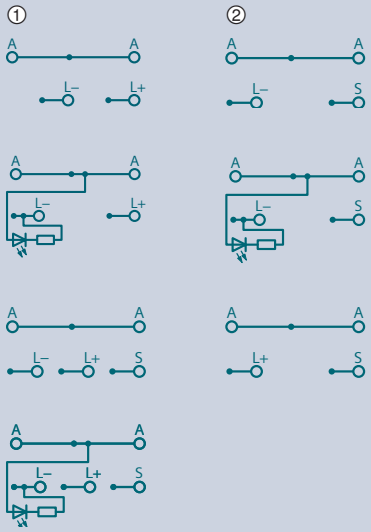

	Terminal size 1.5 mm²
Terminal width	5 mm
Max. load current I_{max}	10 A
Max. operational voltage U_{max}	65 V
Current consumption with LED	4.8 mA
AWG	22 ... 16
AWG	28 ... 16
Connection capacity, rigid	0.08 ... 1.5 mm²
Connection capacity, flexible with end sleeve	0.2 ... 1.5 mm²
Standard	,



Version	Conductors [1]	LED	Color	
❶ Initiator terminal				
PNP	L+, L–, A	–	Light gray	8WA2011-3KE10
		Yellow, 15 ... 30 V DC	Light gray	8WA2011-3KE12
	L+, L–, S, A	–	Light gray	8WA2011-3KE11
		Yellow, 15 ... 30 V DC	Light gray	8WA2011-3KE13
❷ Actuator terminal				
PNP	L–, S, A	–	Light gray	8WA2011-3KE31
		Yellow, 15 ... 30 V DC	Light gray	8WA2011-3KE33

[1] L+ = brown, L– = blue, S (shield) = green, A (output) not colored

Special accessories

Connection module



Version	Width	Height	Color	Article No.
For 8 initiator/actuator terminals and one infeed terminal	47 mm	65 mm	Black	8WA2011-3KE50
For 16 initiator/actuator terminals, one infeed terminal and space for one terminal for further bridging for subsequent module	93 mm	65 mm	Black	8WA2011-3KE51

See general accessories, from page 14/78 onwards

© Siemens 2022

Infeed terminals for initiator/actuator terminals

① L+ L–

② S L+ L–

	Terminal size 1.5 mm²
Terminal width	5 mm
Max. load current I_{max}	10 A
Max. operational voltage U_{max}	65 V
Current consumption with LED	4.8 mA
AWG	22 ... 16
AWG	28 ... 16
Connection capacity, rigid	0.08 ... 1.5 mm²
Connection capacity, flexible with end sleeve	0.2 ... 1.5 mm²
Standard	,



Version	Conductors [1]	LED	Color	
Infeed terminal				
PNP	① L+, L–	–	Orange	8WA2011-3KE01
	② L+, L–, S	–	Orange	8WA2011-3KE00
		Green, 15 ... 30 V DC	Orange	8WA2011-3KE02
NPN	② L+, L–, S	–	Orange	8WA2011-3KE00
	① L+, L–, without ground connection	–	Orange	8WA2011-3KE01

[1] L+ = brown, L– = blue, S (shield) = green, A (output) connection not colored

Special accessories

Connection module



Version	Width	Height	Color	Article No.
For 8 initiator/actuator terminals and one infeed terminal	47 mm	65 mm	Black	8WA2011-3KE50
For 16 initiator/actuator terminals, one infeed terminal and space for one terminal for further bridging for subsequent module	93 mm	65 mm	Black	8WA2011-3KE51

See general accessories, from page 14/78 onwards

© Siemens 2022

Accessories for 8WA terminal blocks

Individual labeling system


Labeling systems for
- Terminal blocks
- Modular installation devices
- Circuit breakers
- Switch disconnectors

The inscription labels can be inscribed with Murrplastik labeling systems or by hand.

The WIN designation facilitates assignment in the inscription software.

Labeling systems available from:
Murrplastik Systemtechnik GmbH
Dieselstraße 10
D-71570 Oppenweiler
Telephone: +49 7191-482-0
email: info@murrplastik.de


Blank labels



- For 8WA1 and 8WA2, individually removable
- Cannot be used for two-tier terminals (lower tier), 8WA1010-1PQ00 flat terminals and 8WA1808 end retainers

Version	Designation	Color	Article No.
5 × 7 mm	WIN 68	White	8WA8850-2AY
5 × 10 mm	WIN 68	White	8WA8851-2AY

Snap-on device labels



- For identification of, e.g. circuit breakers, contactors and control systems

Version	Designation	Color	Article No.
20 × 7 mm, snap-on hooks at side	WIN 95	White	8WH8210-0AA55
		Turquoise	8WH8210-0AA56

Adhesive device labels

- For identification of, e.g. modular installation devices and switch disconnectors

Type	Designation	Color	Article No.
15 × 6 mm	WIN 098	White	8WH8210-0AA35
	WIN 099	Yellow	8WH8210-0AA36
19 × 8 mm	WIN 088	White	8WH8210-0AA45
	WIN 082	Yellow	8WH8210-0AA46

© Siemens 2022

Standard labeling system


Labels, blank (WIN 68)




Text alignment	Label size	Article No.
Vertical	5 × 7 mm	8WA8348-2AY
Horizontal and vertical	5 × 10 mm	8WA8310-2AY

Labels, with inscription

- Label size 5 × 7 mm, font height 2 mm






Text alignment	Inscription	Scope of supply	Article No.
Horizontal	1 ... 5	3 cards each with 13× (1 ... 5) + 1× (1 ... 3)	8WA8360-0BA
	6 ... 10	3 cards each with 13× (6 ... 10) + 1× (6 ... 8)	8WA8360-0BB
	11 ... 15	3 cards each with 13× (11 ... 15) + 1× (11 ... 13)	8WA8360-0BC
	16 ... 20	3 cards each with 13× (16 ... 20) + 1× (16 ... 18)	8WA8360-0BD
	21 ... 25	3 cards each with 13× (21 ... 25) + 1× (21 ... 23)	8WA8360-0BE
	26 ... 30	3 cards each with 13× (26 ... 30) + 1× (26 ... 28)	8WA8360-0BF
	31 ... 35	3 cards each with 13× (31 ... 35) + 1× (31 ... 33)	8WA8360-0BG
	36 ... 40	3 cards each with 13× (36 ... 40) + 1× (36 ... 38)	8WA8360-0BH
	41 ... 45	3 cards each with 13× (41 ... 45) + 1× (41 ... 43)	8WA8360-0BJ
	46 ... 50	3 cards each with 13× (46 ... 50) + 1× (46 ... 48)	8WA8360-0BK
	56 ... 60	3 cards each with 13× (56 ... 60) + 1× (56 ... 58)	8WA8360-0BM
	61 ... 65	3 cards each with 13× (61 ... 65) + 1× (61 ... 63)	8WA8360-0BN
	71 ... 75	3 cards each with 13× (71 ... 75) + 1× (71 ... 73)	8WA8360-0BQ
	76 ... 80	3 cards each with 13× (76 ... 80) + 1× (76 ... 78)	8WA8360-0BR
	81 ... 85	3 cards each with 13× (81 ... 85) + 1× (81 ... 83)	8WA8360-0BS
	91 ... 95	3 cards each with 13× (91 ... 95) + 1× (91 ... 93)	8WA8360-0BU
	96 ... 100	3 cards each with 13× (96 ... 100) + 1× (96 ... 98)	8WA8360-0BV
	1 ... 20	3 cards each with 3× (1 ... 20) + 1× (1 ... 8)	8WA8360-0AB
	1 ... 40	3 cards each with 1× (1 ... 40) + 1× (1 ... 28)	8WA8360-0AC
	41 ... 100	3 cards each with 1× (41 ... 100) + 1× (41 ... 48)	8WA8360-0AD
	1 ... 100	3 cards each with 2× (1 ... 100) + 1× (1 ... 4)	8WA8360-0AE
	101 ... 200	3 cards each with 2× (101 ... 200) + 1× (101 ... 104)	8WA8360-0AF
	201 ... 300	3 cards each with 2× (201 ... 300) + 1× (201 ... 204)	8WA8360-0AG
	A ... T	3 cards each with 3× (A ... T) + 1× (A ... H)	8WA8360-1AA
	U, V, W, X, Y, Z, +, –	3 cards each with 8× (U ... –) + 1× (U ... X)	8WA8360-1AB
	L1, L2, L3, N, PE	3 cards each with 9× (L1 ... PE) + 1× (L1 ... L3)	8WA8360-1AC
	U1, V1, W1, U2, V2, W2	3 cards each with 11× (U1 ... W2) + 1× (U1, V1)	8WA8360-1AD
Vertical	1 ... 5	3 cards each with 13× (1 ... 5) + 1× (1 ... 3)	8WA8361-0BA
	6 ... 10	3 cards each with 13× (6 ... 10) + 1× (6 ... 8)	8WA8361-0BB
	11 ... 15	3 cards each with 13× (11 ... 15) + 1× (11 ... 13)	8WA8361-0BC
	16 ... 20	3 cards each with 13× (16 ... 20) + 1× (16 ... 18)	8WA8361-0BD
	21 ... 25	3 cards each with 13× (21 ... 25) + 1× (21 ... 23)	8WA8361-0BE
	26 ... 30	3 cards each with 13× (26 ... 30) + 1× (26 ... 28)	8WA8361-0BF
	31 ... 35	3 cards each with 13× (31 ... 35) + 1× (31 ... 33)	8WA8361-0BG
	36 ... 40	3 cards each with 13× (36 ... 40) + 1× (36 ... 38)	8WA8361-0BH
	41 ... 45	3 cards each with 13× (41 ... 45) + 1× (41 ... 43)	8WA8361-0BJ
	46 ... 50	3 cards each with 13× (46 ... 50) + 1× (46 ... 48)	8WA8361-0BK
	51 ... 55	3 cards each with 13× (51 ... 55) + 1× (51 ... 53)	8WA8361-0BL
	56 ... 60	3 cards each with 13× (56 ... 60) + 1× (56 ... 58)	8WA8361-0BM
	61 ... 65	3 cards each with 13× (61 ... 65) + 1× (61 ... 63)	8WA8361-0BN
	66 ... 70	3 cards each with 13× (66 ... 70) + 1× (66 ... 68)	8WA8361-0BP
	71 ... 75	3 cards each with 13× (71 ... 75) + 1× (71 ... 73)	8WA8361-0BQ
	76 ... 80	3 cards each with 13× (76 ... 80) + 1× (76 ... 78)	8WA8361-0BR
	81 ... 85	3 cards each with 13× (81 ... 85) + 1× (81 ... 83)	8WA8361-0BS
	86 ... 90	3 cards each with 13× (86 ... 90) + 1× (86 ... 88)	8WA8361-0BT
	91 ... 95	3 cards each with 13× (91 ... 95) + 1× (91 ... 93)	8WA8361-0BU
	96 ... 100	3 cards each with 13× (96 ... 100) + 1× (96 ... 98)	8WA8361-0BV

© Siemens 2022

Accessories for 8WA terminal blocks

Standard labeling system


Labels, with inscription (continued)




- Label size 5 × 7 mm, font height 2 mm

Text alignment	Inscription	Scope of supply	Article No.
Vertical	1 ... 20	3 cards each with 3× (1 ... 20) + 1× (1 ... 8)	8WA8361-0AB
	1 ... 40	3 cards each with 1× (1 ... 40) + 1× (1 ... 28)	8WA8361-0AC
	41 ... 100	3 cards each with 1× (41 ... 100) + 1× (41 ... 48)	8WA8361-0AD
	1 ... 100	3 cards each with 2× (1 ... 100) + 1× (1 ... 4)	8WA8361-0AE
	101 ... 200	3 cards each with 2× (101 ... 200) + 1× (101 ... 104)	8WA8361-0AF
	201 ... 300	3 cards each with 2× (201 ... 300) + 1× (201 ... 204)	8WA8361-0AG
	A ... T	3 cards each with 3× (A ... T) + 1× (A ... H)	8WA8361-1AA
	U, V, W, X, Y, Z, +, –	3 cards each with 8× (U ... –) + 1× (U ... X)	8WA8361-1AB
	L1, L2, L3, N, PE	3 cards each with 9× (L1 ... PE) + 1× (L1 ... L3)	8WA8361-1AC
	U1, V1, W1, U2, V2, W2	3 cards each with 11× (U1 ... W2) + 1× (U1, V1)	8WA8361-1AD

Labels, type 347/348, with inscription





- Label size 5 × 7 mm, font height 2 mm

Text alignment	Inscription	Article No.
Horizontal	L1	8WA8347-2AC
	L2	8WA8347-2AD
	L3	8WA8347-2AE
	N	8WA8347-1AR
	PE	8WA8347-2AH
	L+	8WA8347-2AF
	L–	8WA8347-2AG
Vertical	L1	8WA8348-2AC
	L2	8WA8348-2AD
	L3	8WA8348-2AE
	N	8WA8348-1AR
	MP	8WA8348-2AB
	PE	8WA8348-2AH
	L+	8WA8348-2AF
	L–	8WA8348-2AG
	X	8WA8348-1AG
	Y	8WA8348-1AH

Labels, custom inscriptions

- Label size 5 × 7 mm, font height 2 mm
- Specify required inscription in plain text
- Can only be ordered with the order code -Z Y01

Text alignment	Article No.
Horizontal	8WA8347-0XA-Z Y01
Vertical	8WA8348-0XA-Z Y01


End labeling plates



- Paper label, inscription possible, with transparent cover
- Suitable for 8WA1805, 8WA1808 and 8WA2808 end retainers

Text alignment	Label size	Article No.
Horizontal and vertical	21 × 42 mm	8WA1806

Terminal strip labels



- Paper label, inscription possible, with transparent cover
- Suitable for 8WA1808 end retainers

Text alignment	Type	Article No.
Horizontal	With inscription	8WA8826-0AA
		8WA8826-0AB
		8WA8826-0AC
	Blank (WIN 67)	8WA8212-0AA65

© Siemens 2022

Mounting accessories

End retainers, with screw fixing



- Suitable for 8WA1806 end labeling plate or 8WA8826-0A. terminal strip identification label or 3TX4 210-0H device label or four 8WA88 labels

Modular width	Article No.
10 mm	8WA1808

End retainers, steel



- Suitable for 8WA1806 end label
- An 8WA1820 barrier must be inserted if using end retainers against an 8WA189 connection bar (size 2.5)


Modular width	Article No.
10.3 mm	8WA1805

DIN rails




Version	Material	Standard	Length	Thickness	Article No.
Perforated	Steel, sendzimir-galvanized	EN 60715-35 × 7,5	2 m	1 mm	5ST1145
Non-perforated	Steel, sendzimir-galvanized	EN 60715-35 × 7,5	2 m	1 mm	5ST1141
	Copper	EN 60715-35 × 15	2 m	2.3 mm	8WA7551
	Steel, galvanized, chromated	Similar to EN 50022-35 × 15	2 m	1.5 mm	5ST1142

Spacer brackets




Version	Article No.
For raised mounting of terminal strips	8WA753

Spacers




Version	Drill hole	Article No.
For raised mounting of terminal strips	5.5 mm	8WA752

Mounting brackets



Version	Article No.
For support rails	8WA746

Insulation carriers



Version	Article No.
For insulated mounting of support rails onto plates, frame profiles and DIN rails EN 50022-35	8WA1857

14

© Siemens 2022



Reliable and efficient power supply in infrastructure and industrial applications

The electrical power distribution in buildings, infrastructure and industry is undergoing a transformation. A growing number of electrical loads, fluctuating load conditions and an increasing level of automation pose new challenges for switchboard manufacturers and electrical planners. Availability, safety and efficiency of the power distribution system are becoming more important. This is reflected in detailed standards and regulations and in requirements for company power management.

The planning and operation of electrical power distribution systems are becoming more complex, and the technical demands placed on the underlying systems and products are rising – in particular with respect to flexibility, communication capability and integrability. A data-based engineering process, hardware and software systems, an intelligent data management must all interact smoothly to provide optimum support to dynamic industrial and infrastructure processes.

The basis for a reliable and efficient power supply is provided by our portfolio of power distribution boards and distribution boards with innovative products and systems. A data-based engineering process with SIMARIS software tools, high availability of product-related data support the value chain of the switchboard manufacturer – from planning to documentation of the installation.

© Siemens 2022

Power Distribution Boards, Motor Control Centers and Distribution Boards



All the information you need 15/2
Quick selection guide 15/4
SIVACON and ALPHA distribution systems 15/4
SIMARIS planning tools 15/12
Power distribution boards and motor control centers 15/14
SIVACON S8/SIVACON S4/ALPHA 3200/ ALPHA 3200 Eco system overview 15/14
SIVACON S4 power distribution boards 15/18
System overview 15/18
Frame and enclosure 15/20
Busbar systems 15/41
Section expansion 15/44
Internal separation 15/108
ALPHA UNIVERSAL distribution boards (NF technology) 15/120
ALPHA UNIVERSAL system overview 15/120
ALPHA 800 UNIVERSAL floor-mounted distribution boards 15/122
ALPHA 630 UNIVERSAL wall-mounted distribution boards 15/124
ALPHA 630 UNIVERSAL floor-mounted distribution boards 15/126
ALPHA 125 UNIVERSAL distribution boards 15/130
Assembly kits 15/132
Busbars 15/138
Accessories 15/142
ALPHA distribution boards (DIN technology) 15/150
ALPHA system overview 15/150
ALPHA 1250 floor-mounted distribution boards 15/152
ALPHA 1250 marshaling boxes 15/154
ALPHA 630 floor-mounted distribution boards 15/156
ALPHA 630 marshaling boxes 15/158
ALPHA 400 distribution boards 15/160
ALPHA 160 distribution boards 15/164
Assembly kits 15/166
Quick-assembly kits 15/180
Busbars 15/182
Accessories 15/183
Small distribution boards 15/194
System overview 15/194
ALPHA SIMBOX XL small distribution boards 15/196
ALPHA SIMBOX WP small distribution boards 15/199

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about power distribution boards, motor control centers and distributionboards, please visit our websites
www.siemens.com/sivacon-S8
www.siemens.com/distributionsystems

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Technical basic information
  - SIVACON S4 power distribution boards and ALPHA UNIVERSAL distribution boards **(109767882)**
  - ALPHA distribution systems **(109778911)**
- Brochure
  - SIVACON S8^{plus} – The plus for your business: Intelligent. Flexible. Safe. **(109747937)**

The relevant tender specifications can be found at
www.siemens.com/lowvoltage/tenderspecifications

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- Power Distribution – SIVACON (general) **bit.ly/2m4oSLI**
- Siemens SIVACON S4 power distribution boards up to 4000 A **bit.ly/2krni6h**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- SIVACON S4 power distribution boards **sie.ag/2JUQwE4**
- ALPHA distribution boards **sie.ag/2kURLd8**
- SIMARIS planning tools **sie.ag/2m3oFbS**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

Use the competence and experience of our experts at one of the production locations near you
www.siemens.com/sivaconS8-contact
or call
+49 (9131) 174-3072

Our certified SIVACON Technology Partners are also available to you for questions relating to the high quality of our low-voltage switchboards
www.siemens.com/sivacon-partnerfinder

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services.
You can find your local contacts at
www.siemens.com/lowvoltage/systems/contact

You can find further information on services at
www.siemens.com/service-catalog

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at
www.siemens.com/support-request

... can be found in our online services

Commissioning + operation

SIMARIS planning tools

The SIMARIS planning tools effectively assist you in your planning process. Project-specific IFC data (Building Information Modeling) for cross-package planning is also possible.
www.siemens.com/simaris

SIMARIS configuration

The SIMARIS configuration software supports the engineering process of the SIVACON and ALPHA distribution systems from planning right through to plant documentation.
www.siemens.com/simarisconfig

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Planning manual
  - SIVACON S8 – Technical planning information (107113936)
- Technical Manual
  - ALPHA distribution boards and terminal blocks (26556949)
- Getting Started
  - Dimensioning of small distribution boards for PV systems (104519844)
- Manual
  - SIVACON S4 (25909512)

Your product in detail

The Siemens Industry Online Support (SIOS) portal provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Characteristic curves
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the App Store and Play Store
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Face-to-face or online training

Our training courses can be found at
www.siemens.com/sitrain-lowvoltage

- SIMARIS configuration (WT-LVASIMC)
- ALPHA 3200 low voltage switch boards – technic and software (LV-ALPHAT)
- ALPHA 3200 low voltage switch boards – mounting (LV-ALPHAPB)

Technical overview – Power distribution boards, motor control centers and distribution boards

The fast way to get you to our online services

This page provides you with comprehensive information and links on power distribution boards, motor control centers and distribution boards

www.siemens.com/lowvoltage/product-support (109769089)

© Siemens 2022

SIVACON and ALPHA distribution systems

Power distribution boards




SIVACON S4

Basic data			
Rated current		A	4000 6300 with license
Busbar position			Top, bottom, rear
Overvoltage category			III/IV
Rated impulse withstand voltage U_{imp}		kV	12
Rated insulation voltage U_i		V	1000
Rated operational voltage U_e		V AC	690
Rated peak withstand current I_{pk}		kA	220
Rated short-time current I_{cw} (1 s)		kA	100
Degree of protection according to IEC 60529/EN 60529			IP40 + IPX1/IP55
Form of internal separation			4b
Protection class			I
Color			RAL 7035 (light gray)
Dimensions			
Height		mm	2000 Base 100/200
Width		mm	400 ... 1200
Depth		mm	400 ... 1200
Standards and specifications			
DIN			DIN EN 61439-1/-2
IEC			IEC 61439-1/-2
VDE			VDE 0660-600-1/-2
Operating personnel	Ordinary person		–
	Electrically skilled person		■
Approvals			VDE, EAC
Equipment			
Tested for resistance to internal arcing acc. to EN 61439-2 Supplement 1			–
Active protection against internal arcing			–
Reactive power compensation			–
Other			
Type of installation			Wall/back to back
Type of delivery	Flat pack/individual parts		■
	Pre-assembled without copper		■
	Pre-assembled with copper		■
More information			
			See page 15/18

© Siemens 2022

ALPHA UNIVERSAL distribution boards (NF technology)

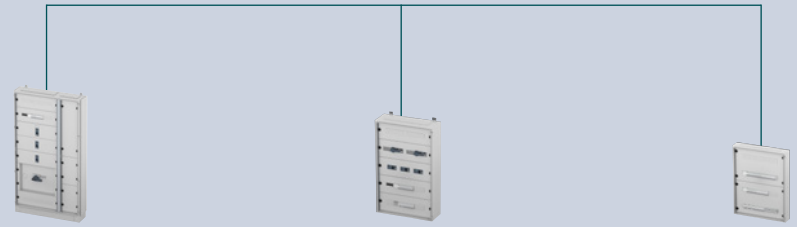

ALPHA 800 UNIVERSAL	ALPHA 630 UNIVERSAL	ALPHA 125 UNIVERSAL
800	630	125
–	–	–
III	III	III
6	6	6
690	690	400
690	690	400
74	53	10
35	25	17
IP30/IP43/IP55	IP30/IP43/IP55	IP30/IP31D/IP43
1	1	1
I	I	I
RAL 7035 (light gray)	RAL 7035 (light gray)	RAL 7035 (light gray)
1800/2000	400/600/800/1000/1200/ 1600/1800/2000	400/600/800/1000/1200
300/600/900	600 + 250/900	600
400	250	140
DIN EN 61439-1/-2	DIN EN 61439-1/-2	DIN EN 61439-1/-3
IEC 61439-1/-2	IEC 61439-1/-2	IEC 61439-1/3
VDE 0660-600-1/-2	VDE 0660-600-1/-2	VDE 0660-600-1/-3
–	–	–
■	■	■
VDE	VDE	VDE
–	–	–
–	–	–
–	–	–
Wall	Wall	Wall
■	■	■
–	–	–
–	–	–
See page 15/122	See page 15/124	See page 15/130

© Siemens 2022

SIVACON and ALPHA distribution systems

Power distribution boards and motor control centers



Power distribution boards



			SIVACON S8	ALPHA 3200	ALPHA 3200 Eco
Basic data					
Rated current		A	7010	3200	3200
Busbar position			Top, rear	Rear	Center
Overvoltage category			IV	III/IV	III/IV
Rated impulse withstand voltage U_{imp}		kV	12 [1]	8	8
Rated insulation voltage U_i		V	1000	1000	1000
Rated operational voltage U_e		V AC	690	690	400
Rated peak withstand current I_{pk}		kA	330	165	165
Rated short-time current I_{cw} (1 s)		kA	150	75	75
Degree of protection according to IEC 60529/EN 60529			IP30 ... IP54	IP40 + IPX1/IP54	IP31/IP54
Form of internal separation			4b	2b	1
Protection class			I	I	I
Color			RAL 7035 (light gray)	RAL 7035 (light gray)	RAL 7035 (light gray)
Dimensions					
Height		mm	2000/2200 Base 100/200	2000 Base 100/200	2000 Base 100/200
Width		mm	200 ... 1400	350 ... 1400	350 ... 1100
Depth		mm	500 ... 1200	600	400/600
Standards and specifications					
DIN			DIN EN 61439-2	DIN EN 61439-1/-2	DIN EN 61439-1/-2
IEC			IEC 61439-2	IEC 61439-1/-2	IEC 61439-1/-2
VDE			VDE 0660-600-2	VDE 0660-600-2	VDE 0660-600-2
Operating personnel	Ordinary person		–	–	–
	Electrically skilled person		■	■	■
Approvals			DNV GL, ASTA, EAC, CCC, DEKRA	–	–
Equipment					
Tested for resistance to internal arcing acc. to EN 61439-2 Supplement 1			■	1 personal protection	–
Active protection against internal arcing			■	–	–
Reactive power compensation			■	■	–
Other					
Type of installation			Wall/back to back/ double-fronted	Wall/back to back	Wall/back to back
Type of delivery	Flat pack/individual parts		■	–	–
	Pre-assembled without copper		■	■	■
	Pre-assembled with copper		■	■	■
More information					
			See page 15/14	See page 15/16	See page 15/16

[1] Depending on the devices used

© Siemens 2022

ALPHA distribution boards (DIN technology)

Small distribution boards








ALPHA 1250	ALPHA 630	ALPHA 400	ALPHA 160	ALPHA SIMBOX XL	ALPHA SIMBOX WP
1250	630	400	160	63	63
–	–	–	–	–	–
III	III	III	II	II	II
8	6	6	6	–	–
690	690	690	690	–	1000
690	690	690	690	400	400
110	76	76	–	–	–
35	34	34	–	–	–
IP55	IP43/IP55	IP31/IP43/IP55	IP31/IP43/IP44	IP30	IP65
–	–	–	–	–	–
I	I/II	I/II	II	II	II
RAL 7035 (light gray)	RAL 7035 (light gray)	RAL 9016 (traffic white)/ RAL 7035 (light gray)	RAL 9016 (traffic white)/ RAL 7035 (light gray)	RAL 9010 (pure white)	RAL 7035 (light gray)
1950 Base 100	1950 Base 100	650/800/950/1100/ 1250/1400	500/650/800/950/1100	1- ... 4-tier	1- ... 4-tier
300/550/800/ 1050/1300	300/550/800/ 1050/1300	300/550/800/ 1050/1300	300/550	305	4 ... 18 MW
400	210/250/320	210	140	88/99	100/140/160
DIN EN 61439-1/-2	DIN EN 61439-1/-2	DIN EN 61439-1/-2/-3	DIN EN 61439-1/-3	DIN 43871	DIN EN 61439-1/-3, DIN 43871
IEC 61439-1/-2	IEC 61439-1/-2	IEC 61439-1/-2/-3	IEC 61439-1/-3	IEC 61439-1/-3	IEC 61439-1/-3
VDE 0660-600-1/-2	VDE 0660-600-1/-2	VDE 0660-600-1/-2/-3	VDE 0660-600-1/-3	DIN VDE 0603	DIN VDE 0603-1, VDE 0660-500/-504
–	–	■	■	■	■
■	■	■	■	■	■
VDE, EAC	VDE, EAC	VDE, EAC	VDE, EAC	VDE, EAC	VDE, EAC
–	–	–	–	–	–
–	–	–	–	–	–
–	–	–	–	–	–
Surface mounting	Surface mounting	Surface mounting/ flush mounting	Surface mounting/ flush mounting	Flush mounting/ hollow wall/ surface mounting	Surface mounting
■	■	■	■	■	■
■	■	■	■	–	–
–	–	–	–	–	–
See page 15/152	See page 15/156	See page 15/160	See page 15/164	See page 15/196	See page 15/199

© Siemens 2022

SIVACON and ALPHA distribution systems

Additional options

To specify the options, add „-Z" to the complete article number and indicate the appropriate order code(s).

8GK.....-.....-.... -Z

Special colors for ALPHA


				Order code		
	RAL 1003, signal yellow	Semi-gloss	Smooth	C	2	7
	RAL 2000, yellow orange	Semi-gloss	Smooth	C	2	5
	RAL 3000, flame red	Silky gloss	Surface structure	C	3	1
	RAL 5005, signal blue	Semi-gloss	Smooth	C	2	3
	RAL 5010, gentian blue	Semi-gloss	Smooth	C	2	4
	RAL 5017, traffic blue	Silky gloss	Surface structure	C	2	2
	RAL 6018, yellow green	Semi-gloss	Smooth	C	2	6
	RAL 7032, pebble gray	Semi-gloss	Surface structure	C	1	3
	RAL 7033, cement gray	Semi-gloss	Surface structure	C	2	8
	RAL 7035, light gray	Semi-gloss	Smooth	C	1	1
			Surface structure	C	1	2
	RAL 7038, agate gray	Semi-gloss	Surface structure	C	1	4
	RAL 9001, cream	Semi-gloss	Smooth	C	2	1
	RAL 9002, gray white	Semi-gloss	Smooth	C	1	8
			Surface structure	C	1	9
		Silky gloss	Smooth	C	2	9
	RAL 9003, signal white	Semi-gloss	Surface structure	C	2	0
	RAL 9005, jet black	Semi-gloss	Smooth	C	1	6
			Surface structure	C	1	7
	RAL 9010, pure white	Semi-gloss	Smooth	C	1	5
			Surface structure	C	3	0
	RAL 9016, traffic white	Semi-gloss	Smooth	C	1	0

© Siemens 2022

© Siemens 2022

SIVACON and ALPHA distribution systems

Applications

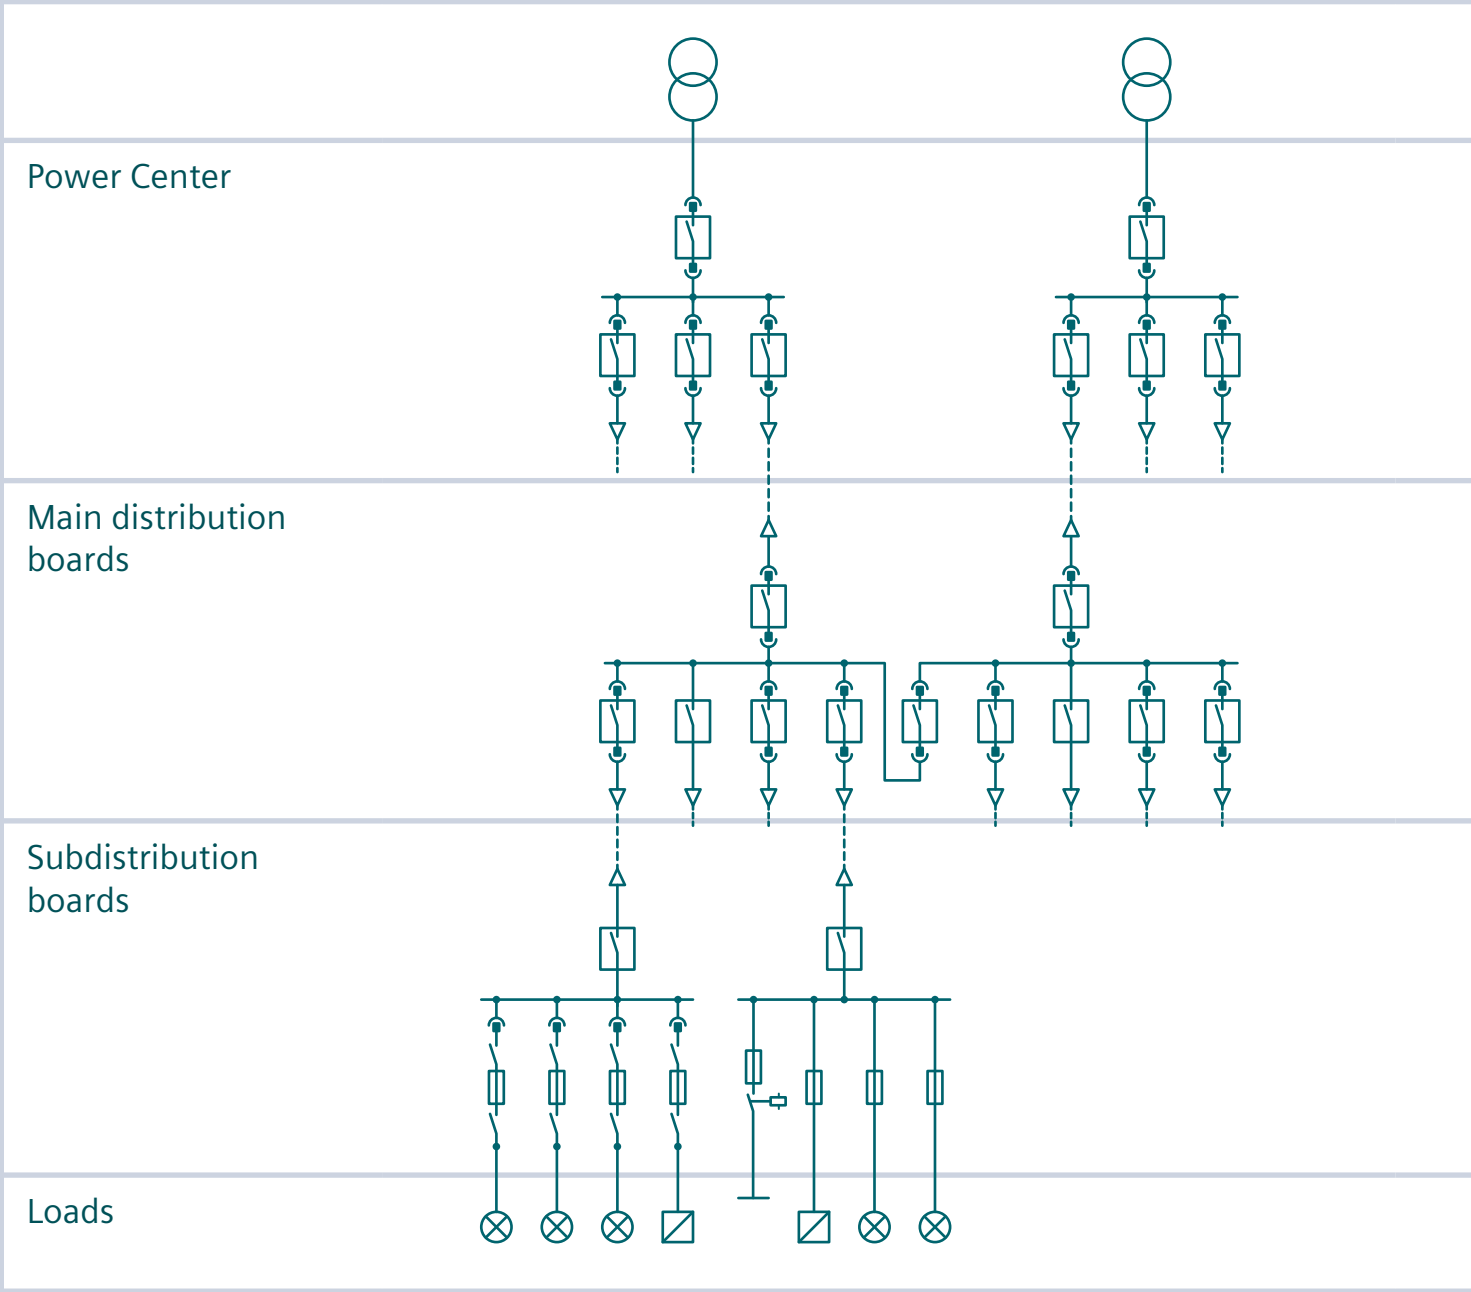

© Siemens 2022

SIVACON S8



SIVACON S8



SIVACON S4



ALPHA 3200



ALPHA 3200 Eco



ALPHA UNIVERSAL (NF technology)




ALPHA (DIN technology)



SIMARIS planning tools

For planning and visualizing the power distribution system

From planning to operation

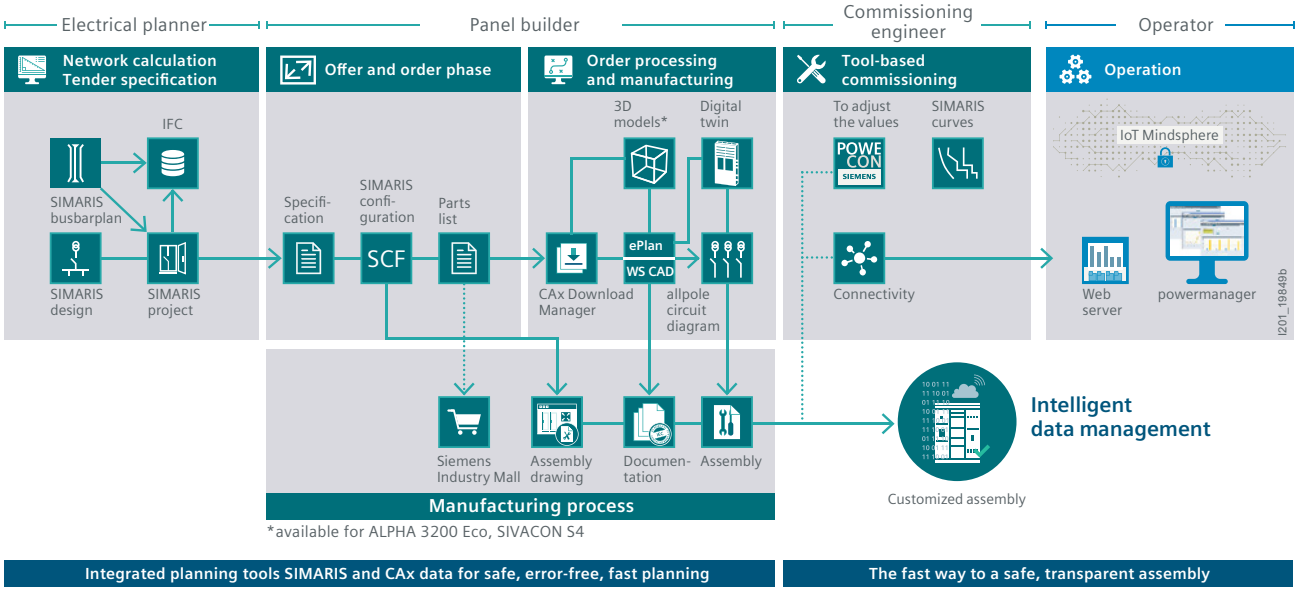


*available for ALPHA 3200 Eco, SIVACON S4

Integrated planning tools SIMARIS and CAx data for safe, error-free, fast planning

The fast way to a safe, transparent assembly

SIMARIS design

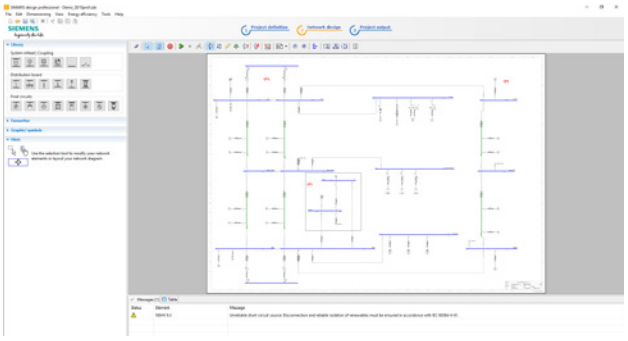


SIMARIS design is a planning tool for quick, effective network calculations and dimensioning of electrical power distribution systems for non-residential and industrial buildings.

- Dimensioning of electrical networks on the basis of real products according to acknowledged rules of technology and the applicable standards (VDE, IEC)
- Automatic selection of the appropriate components from the integrated product database

SIMARIS design forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at:
www.siemens.com/simarisdesign

SIMARIS project

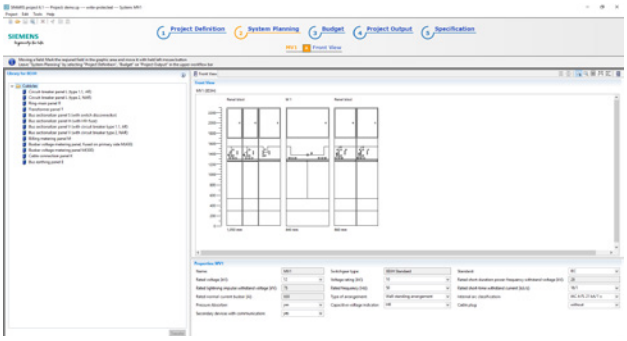


SIMARIS project is a planning tool for fast calculation of space requirements and electrical power distribution system budgets for non-residential and industrial buildings, and for generating specifications automatically.

- Import of projects created in SIMARIS design
- Export of 3D data in IFC 4.x format for BIM (Building Information Modeling)

SIMARIS project forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at:
www.siemens.com/simarisproject

© Siemens 2022

SIMARIS configuration

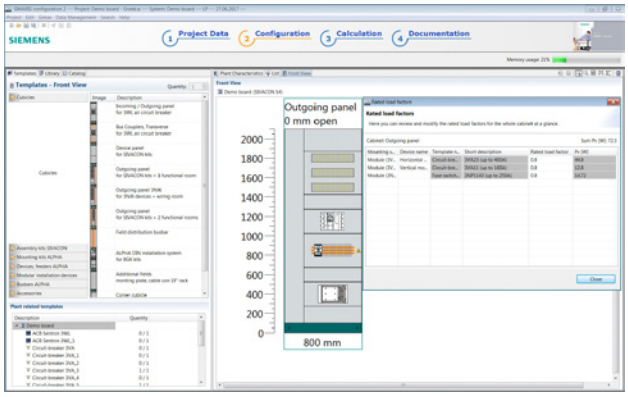


With the configuration software SIMARIS configuration, the SIVACON S8, ALPHA 3200, SIVACON S4 and ALPHA UNIVERSAL power distribution boards as well as the ALPHA distribution boards can be quickly and reliably configured.

- Comprehensive documentation of the installation with design verification acc. to IEC 61439
- Configuration of the devices from the SENTRON portfolio with the exact article numbers and integrated price calculation feature

Free download and further information at:
www.siemens.com/simarisconfig

SIMARIS curves

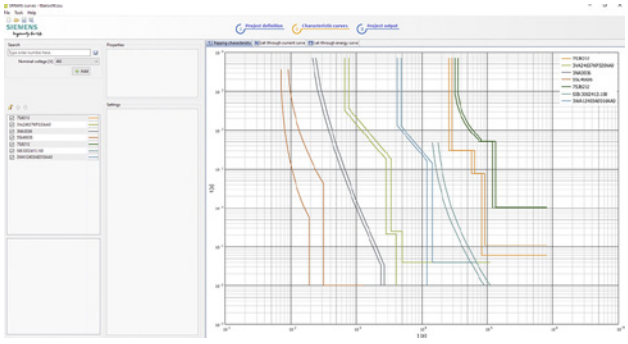

SIMARIS curves is a planning tool for visualizing and evaluating characteristic curves of Siemens low-voltage protection equipment and fuses (IEC) quickly and easily, including the possibility of simulating instrument settings.


- Is available both as a PC version and also as an app for use on a tablet PC or a smartphone

SIMARIS curves forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at:
www.siemens.com/simariscurves


© Siemens 2022

SIVACON S8/SIVACON S4/ALPHA 3200/ ALPHA 3200 Eco system overview

SIVACON S8






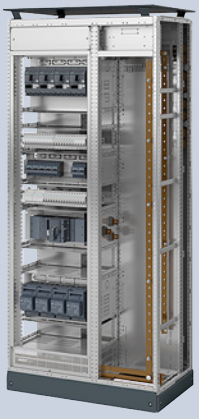



	Circuit breaker design	Fixed-mounted design	In-line design, plugged in
Devices	3WA, 3WL and 3VA	3VA, 3RV, 3NP, 3K... and 5S...	3NJ6
Installation system	Fixed-mounted Withdrawable	Fixed-mounted with front covers	Plug-in
Functions	Infeed, Outgoing feeder, Coupling	Outgoing cable feeders	Outgoing cable feeders
Rated values	6300 A	630 A	630 A
Connection type	Front or rear	Front	Front

SIVACON S4











	Circuit breaker design	Fixed-mounted design	In-line design, plugged in
Devices	3WA	3WA, 3VA, 3NP1, Modular installation devices	3NJ6
Installation system	Fixed-mounted Withdrawable	Fixed-mounted with front covers or modular doors	Plug-in
Functions	Infeed, Outgoing feeder, Coupling)	Infeed Outgoing cable feeders	Outgoing cable feeders
Rated values	4000 A/6300 A with license	2000 A	630 A
Connection type	Front or rear	Front or rear	Front

© Siemens 2022

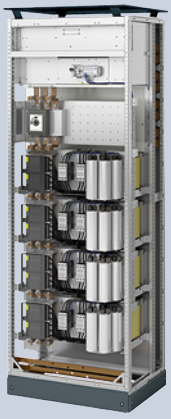
In-line design, fixed-mounted	Reactive power compensation	Active protection against internal arcings	Universal mounting design/ motor control center	Frequency converter technology
3NJ4	Capacitor units, controllers	Internal arcing protection system	3VA, 3RV, 3NP, 3K..., 3R..., 3UF, 3NJ6 and 3LD	SINAMICS G120 (6SL)
Fixed-mounted	Fixed-mounted	Fixed-mounted	Withdrawable Fixed-mounted with compartment doors Plug-in	Fixed-mounted (modules)
Outgoing cable feeders	Central compensation of reactive power	Active protection against internal arcings	Outgoing cable feeders Motor feeders (MCC)	Motor feeders (MCC)
630 A	Without inductor up to 600 kvar With inductor up to 500 kvar	Short-circuit-proof up to 100 kA at 690 V	630 A, 250 kW	132 kW
Front	Front	–	Front or rear	Front

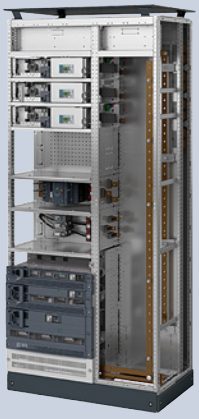



In-line design, fixed-mounted	Section for free configuration
3NJ4	Mounting panel structures
Fixed-mounted	Fixed-mounted
Outgoing cable feeders	Control equipment
630 A	–
Front	Front


© Siemens 2022

SIVACON S8/SIVACON S4/ALPHA 3200/ ALPHA 3200 Eco system overview

ALPHA 3200






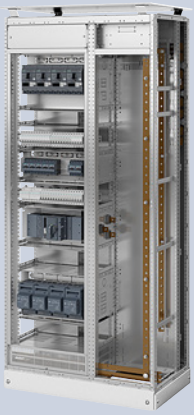



	Circuit breaker design	Fixed-mounted design	In-line design, plugged in
Devices	3WA and 3VA	3VA, 3RV, 3NP, 3K..	3NJ6
Installation system	Fixed-mounted Withdrawable	Fixed-mounted with front covers	Plug-in
Functions	Infeed Outgoing feeder Coupling	Outgoing cable feeders	Outgoing cable feeders
Rated values	3200 A	630 A	630 A
Connection type	Front or rear	Front	Front

ALPHA 3200 Eco










	Circuit breaker design	Molded case circuit breaker design	In-line design, fixed-mounted
Devices	3WA, 3WL10	3VA14 – 3VA15, 3VA24 – 3VA27	3NJ4
Installation system	Fixed-mounted Withdrawable Coupling up to 2000 A	Fixed-mounted	Fixed-mounted
Functions	Infeed Outgoing feeder	Infeed Outgoing feeder	Outgoing cable feeders
Rated values	3200 A	1600 A	630 A
Connection type	Front	Front	Front

© Siemens 2022



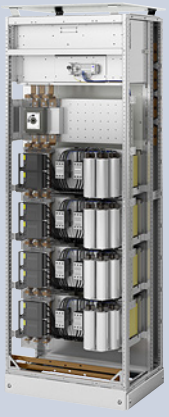

In-line design, fixed-mounted	Reactive power compensation
3NJ4	Capacitor units, controllers
Fixed-mounted	Fixed-mounted
Outgoing cable feeders	Central compensation of reactive power
630 A	Without inductor up to 600 kvar With inductor up to 500 kvar
Front	Front





ALPHA DIN modular installation system	Section for free configuration
ALPHA 8GK	Mounting panel structures
Fixed-mounted	Fixed-mounted
Branch circuits Transformer measurement	Control equipment
630 A	710 W
Front	Front

© Siemens 2022

System overview

SIVACON S4 power distribution boards

Frame and enclosure



Accessories for frame and enclosure



Hinges for covers



Locks




Mech. mounting parts




Compartment ID strips

Busbar systems




Main busbars



Vertical distribution busbars, cascaded



Vertical distribution busbars, non-cascaded



Cable section: N and PE elevations

Section expansion: Main busbar at top/at bottom



3WA
incoming feeder panels



3VA
outgoing feeder panels
3NP1 modular
installation devices



3NJ4
outgoing feeder
panels



3NJ6
outgoing feeder
panels



3WA
coupling panels



Mounting plates



Cable section



Corner sections

Note:
You will find a detailed range of accessories under section expansions.

© Siemens 2022

Section expansion: Main busbar at rear



3WA
incoming feeder panels



3VA
outgoing feeder panels
3NP1 modular
installation devices



3WA
coupling panels




Mounting plates


Internal separation



Form 1
Without separation



Form 2
Separation
+ busbar systems



Form 3
Separation
+ busbar systems
+ device compartments




Form 4
Separation
+ busbar systems
+ device compartments
+ connections

Note:
You will find a detailed range of accessories under section expansions.

© Siemens 2022

Frame

For main busbar at top, at bottom and without

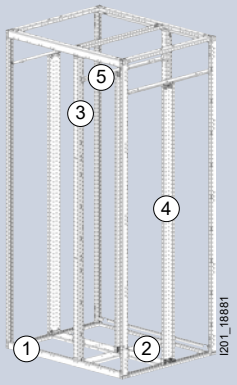

① Frame
② Bottom plate partition crossbar
③ Exterior intermediate upright
④ Interior side upright
⑤ Section division

Position of main busbar

At top
At bottom
Without




Width	Depth	❶ Frame	❷ Bottom plate partition crossbar	❸ Exterior intermediate upright	❹ Interior side upright	❺ Section division
400 mm	400 mm	8PQ1204-4BA01	–	–	8PQ3000-0BA65	–
	600 mm	8PQ1204-6BA01	–	–	8PQ3000-0BA01	–
	800 mm	8PQ1204-8BA01	–	–	8PQ3000-0BA02	–
600 mm	400 mm	8PQ1206-4BA01	–	–	8PQ3000-0BA65	–
	600 mm	8PQ1206-6BA01	–	–	8PQ3000-0BA01	–
	800 mm	8PQ1206-8BA01	–	–	8PQ3000-0BA02	–
800 mm	400 mm	8PQ1208-4BA01	8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA65	8PQ3000-1BA31
	600 mm	8PQ1208-6BA01	8PQ3000-1BA40	8PQ3000-1BA43	8PQ3000-0BA01	8PQ3000-1BA32
	800 mm	8PQ1208-8BA01	2× 8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA02	8PQ3000-1BA34
1000 mm	400 mm	8PQ1201-4BA02	8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA65	8PQ3000-1BA31
	600 mm	8PQ1201-6BA02	8PQ3000-1BA40	8PQ3000-1BA43	8PQ3000-0BA01	8PQ3000-1BA32
	800 mm	8PQ1201-8BA03	2× 8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA02	8PQ3000-1BA34
1200 mm	400 mm	8PQ1202-4BA02	8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA65	8PQ3000-1BA31
	600 mm	8PQ1202-6BA02	8PQ3000-1BA40	8PQ3000-1BA43	8PQ3000-0BA01	8PQ3000-1BA32
	800 mm	8PQ1202-8BA02	2× 8PQ3000-1BA38	8PQ3000-1BA43	8PQ3000-0BA02	8PQ3000-1BA34


15

System overview, page 15/18

© Siemens 2022

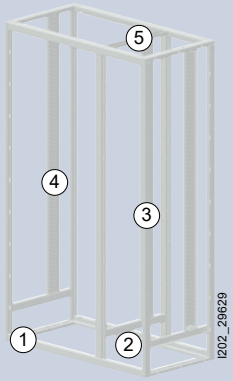


① Frame
② Bottom plate partition crossbar
③ Exterior intermediate upright
④ Interior side upright
⑤ Section division

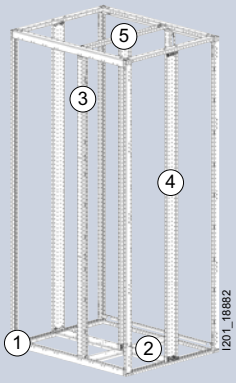

① Frame
② Bottom plate partition crossbar
③ Exterior intermediate upright
④ Interior side upright
⑤ Section division






❹ Interior side upright	❺ Section division	❹ Interior side upright	❺ Section division
8PQ3000-0BA10	–	–	–
8PQ3000-3BA10	–	8PQ3000-0BA03	–
8PQ3000-3BA11	–	8PQ3000-0BA03	–
8PQ3000-0BA10	–	–	–
8PQ3000-3BA10	–	8PQ3000-0BA03	–
8PQ3000-3BA11	–	8PQ3000-0BA03	–
8PQ3000-0BA10	8PQ3000-0BA10	–	–
8PQ3000-3BA10	8PQ3000-3BA47	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-3BA11	8PQ3000-3BA48	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-0BA10	8PQ3000-0BA10	–	–
8PQ3000-3BA10	8PQ3000-3BA47	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-3BA11	8PQ3000-3BA48	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-0BA10	8PQ3000-0BA10	–	–
8PQ3000-3BA10	8PQ3000-3BA47	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-3BA11	8PQ3000-3BA48	8PQ3000-0BA03	8PQ3000-1BA37


System overview, page 15/18

© Siemens 2022

Frame

For main busbar at rear


Position of main busbar | At rear

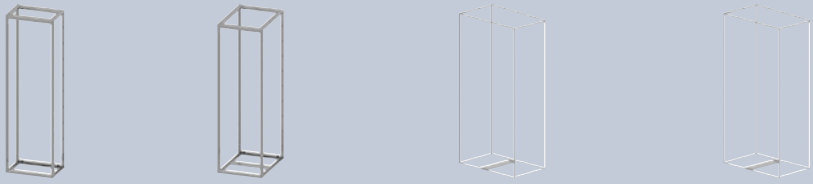

Width	Depth	Position of main busbar	❶ Frame Front		Rear	❷ Bottom plate partition crossbar	
						Depth 400 mm	Depth 600 mm
600 mm	800 mm		8PQ1206-8BA01		–	–	–
	1000 mm		8PQ1206-4BA01	+	8PQ1206-6BA01	–	–
	1200 mm		8PQ1206-4BA01	+	8PQ1206-8BA01	–	–
		Duplex	8PQ1206-4BA01	+	8PQ1206-8BA01	–	–
800 mm	800 mm		8PQ1208-8BA01		–	8PQ3000-1BA38	–
	1000 mm		8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ3000-1BA38	8PQ3000-1BA40
	1200 mm		8PQ1208-4BA01	+	8PQ1208-8BA01	3× 8PQ3000-1BA38	–
		Duplex	8PQ1208-4BA01	+	8PQ1208-8BA01	3× 8PQ3000-1BA38	–
1000 mm	800 mm		8PQ1201-8BA03		–	8PQ3000-1BA38	–
	1000 mm		8PQ1201-4BA02	+	8PQ1201-6BA02	8PQ3000-1BA38	8PQ3000-1BA40
	1200 mm		8PQ1201-4BA02	+	8PQ1201-8BA03	3× 8PQ3000-1BA38	–
		Duplex	8PQ1201-4BA02	+	8PQ1201-8BA03	3× 8PQ3000-1BA38	–

System overview, page 15/18

© Siemens 2022

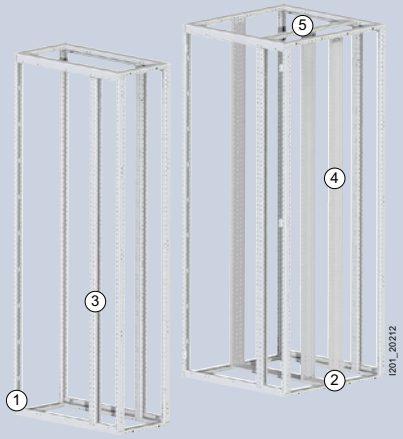

① Frame
② Bottom plate partition crossbar
③ Exterior intermediate upright
④ Interior side upright
⑤ Section division

❸ Exterior intermediate upright	❹ Interior side upright	❺ Section division
–	8PQ3000-0BA03	–
–	8PQ3000-0BA03	–
–	8PQ3000-0BA03	–
–	8PQ3000-0BA03	–
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA36
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37
8PQ3000-1BA43	8PQ3000-0BA03	8PQ3000-1BA37


System overview, page 15/18

© Siemens 2022

Frame


Accessories


Frame reinforcement



Use	Scope of supply	Article No.
For frame widths from 1000 mm	2 units	8PQ9400-0BA35

Crossbars






Version	Width	Crossbar length	Scope of supply	Article No.
–	400 mm	350 mm	2 units	8PQ3000-0BA12
	600 mm	550 mm	2 units	8PQ3000-0BA71
	800 mm	750 mm	2 units	8PQ3000-0BA72
	1000 mm	950 mm	2 units	8PQ3000-0BA84
	1200 mm	1150 mm	2 units	8PQ3000-0BA85
Without uprights	400 mm	300 mm	2 units	8PQ3000-0BA10
	600 mm	500 mm	2 units	8PQ3000-1BA24
	800 mm	700 mm	2 units	8PQ3000-1BA25
With uprights	600 mm	300 mm	2 units	8PQ3000-0BA10
	800 mm	300 mm	2 units	8PQ3000-0BA10


Forming rows of frames





Version	Scope of supply	Article No.
Frame connection	6 units	8PQ1204-4BA05
Set of IP55 seals	5.5 m	8PQ1204-4BA04

Self-tapping screws



Type	Version	Scope of supply	Article No.
Cylinder-head screws	M6 × 10 mm	100 units	8PQ9500-0BA34
	M6 × 16 mm	100 units	8PQ9500-0BA32
	M6 × 20 mm	100 units	8PQ9500-0BA31
Covering caps	M6, RAL 7035	100 units	8PQ9400-0BA14
Countersunk screws	M6 × 12 mm	100 units	8PQ9500-1BA07

Lifting eyebolts (Transport aids)



Version	Scope of supply	Article No.
M12	4 units	8PQ9400-0BA11

Lifting brackets (Transport aids)



Width	Depth	Scope of supply	Article No.
800 mm	–	2 units	8PQ3000-1BA01
850 mm	–	2 units	8PQ3000-2BA38
1000 mm	–	2 units	8PQ3000-1BA02
1200 mm	–	2 units	8PQ3000-1BA03
–	800 mm	2 units	8PQ3000-1BA01
	1000 mm	2 units	8PQ3000-3BA70 new
	1200 mm	2 units	8PQ3000-3BA71 new

15

System overview, page 15/18


© Siemens 2022

System overview, page 15/18


© Siemens 2022

Enclosure

Paneling sections, main busbar at top/at bottom

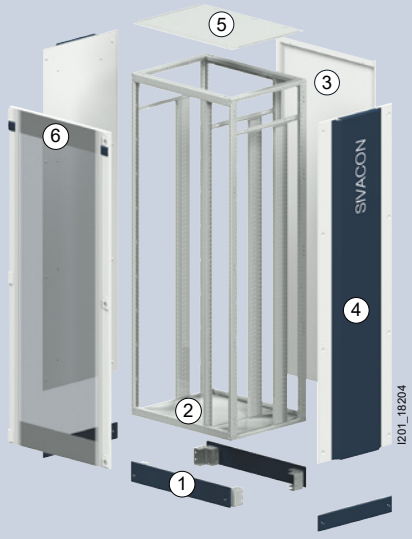




Position of main busbar	At top	At bottom
	❶ Bases	❷ Bottom plates



Width	Depth	Height 100 mm	200 mm	Height 100 mm	IP40 cable entry	IP55	IP20
200 mm	400 mm	–	–	–	–	8PQ2302-4BA04	–
	600 mm	–	–	–	–	8PQ2302-6BA04	–
	800 mm	–	–	–	–	2× 8PQ2302-4BA04	–
400 mm	400 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-4BA01	8PQ2304-4BA06	8PQ2304-4BA05	8PQ2304-4BA14
	600 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-6BA01	8PQ2306-4BA06	8PQ2306-4BA05	8PQ2304-6BA11
	800 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-8BA01	2× 8PQ2304-4BA06	2× 8PQ2304-4BA05	8PQ2304-8BA05
600 mm	400 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01	8PQ2306-4BA06	8PQ2306-4BA05	8PQ2306-4BA10
	600 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-6BA01	8PQ2306-6BA06	8PQ2306-6BA05	8PQ2306-6BA16
	800 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-8BA01	2× 8PQ2306-4BA06	2× 8PQ2306-4BA05	8PQ2306-8BA05
800 mm	400 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-4BA01	8PQ2308-4BA06	8PQ2308-4BA05	8PQ2308-4BA13
	600 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-6BA01	8PQ2308-6BA06	8PQ2308-6BA05	8PQ2308-6BA13
	800 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-8BA01	2× 8PQ2308-4BA06	2× 8PQ2308-4BA05	8PQ2308-8BA10
1000 mm	400 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-4BA01	–	8PQ2301-4BA04	8PQ2301-4BA06
	600 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-6BA01	–	–	8PQ2301-6BA05
	800 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-8BA01	–	2× 8PQ2301-4BA04	8PQ2301-8BA04
1200 mm	400 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-4BA01	–	–	8PQ2302-4BA05
	600 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-6BA01	–	–	8PQ2302-6BA05
	800 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-8BA01	–	–	8PQ2302-8BA04

System overview, page 15/18

© Siemens 2022

❸ Rear panels		❹ Side panels		❺ Top plates			
							
IP40	IP55	IP55	IP55 with design strip	IP40	IP40 cable entry	IPX1 upgrade	IP55
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
8PQ2420-4BA02	8PQ2420-4BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2304-4BA02	8PQ2304-4BA03	8PQ2304-4BA04	8PQ2304-4BA01
8PQ2420-4BA02	8PQ2420-4BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2304-6BA02	8PQ2304-6BA03	8PQ2304-6BA04	8PQ2304-6BA01
8PQ2420-4BA02	8PQ2420-4BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2304-8BA02	8PQ2304-8BA03	8PQ2304-8BA04	8PQ2304-8BA01
8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2306-4BA02	8PQ2306-4BA03	8PQ2306-4BA04	8PQ2306-4BA01
8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2306-6BA02	8PQ2306-6BA03	8PQ2306-6BA04	8PQ2306-6BA01
8PQ2420-6BA02	8PQ2420-6BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2306-8BA02	8PQ2306-8BA03	8PQ2306-8BA04	8PQ2306-8BA01
8PQ2420-8BA02	8PQ2420-8BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2308-4BA02	8PQ2308-4BA03	8PQ2308-4BA04	8PQ2308-4BA01
8PQ2420-8BA02	8PQ2420-8BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2308-6BA02	8PQ2308-6BA03	8PQ2308-6BA04	8PQ2308-6BA01
8PQ2420-8BA02	8PQ2420-8BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2308-8BA02	8PQ2308-8BA03	8PQ2308-8BA04	8PQ2308-8BA01
8PQ2420-1BA02	8PQ2420-1BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2301-4BA02	–	8PQ2301-4BA03	8PQ2301-4BA01
8PQ2420-1BA02	8PQ2420-1BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2301-6BA02	–	8PQ2301-6BA03	8PQ2301-6BA01
8PQ2420-1BA02	8PQ2420-1BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2301-8BA02	–	8PQ2301-8BA03	8PQ2301-8BA01
8PQ2420-2BA02	8PQ2420-2BA01	8PQ2520-4BA02	8PQ2520-4BA01	8PQ2302-4BA02	–	8PQ2302-4BA03	8PQ2302-4BA01
8PQ2420-2BA02	8PQ2420-2BA01	8PQ2520-6BA02	8PQ2520-6BA01	8PQ2302-6BA02	–	8PQ2302-6BA03	8PQ2302-6BA01
8PQ2420-2BA02	8PQ2420-2BA01	8PQ2520-8BA02	8PQ2520-8BA01	8PQ2302-8BA02	–	8PQ2302-8BA03	8PQ2302-8BA01

System overview, page 15/18


© Siemens 2022

Enclosure

Paneling sections, main busbar at top/at bottom

Accessories

Reinforcements for transport



Height	Width/depth	Article No.
100 mm	400 mm	8PQ1014-0BA02
	600 mm	8PQ1016-0BA02
	800 mm	8PQ1018-0BA02
	1000 mm	8PQ1011-1BA01
	1200 mm	8PQ1012-2BA01

System overview, page 15/18


© Siemens 2022



System overview, page 15/18

© Siemens 2022

Enclosure

Paneling sections, main busbar at rear new

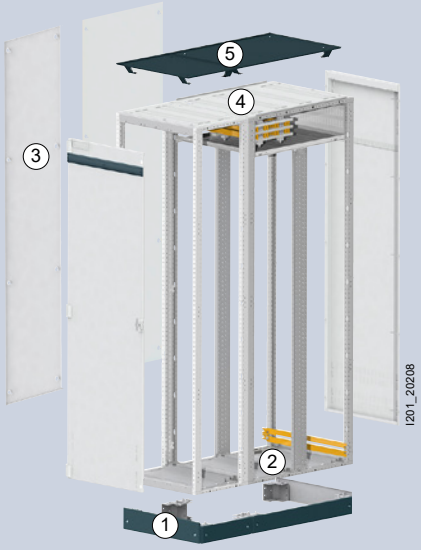


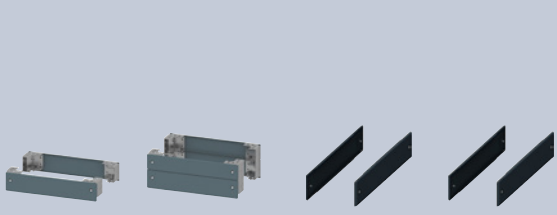❶ Bases				❷ Bottom plates		❸ Side panels	
							

Width	Depth	Height 100 mm	Height 200 mm	Height 100 mm	Height 200 mm	IP55	IP55	IP55	IP55
400 mm	800 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-8BA01	–	2× 8PQ2304-4BA05	–	8PQ2520-8BA02	–
	1000 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-4BA01	8PQ1010-6BA01	8PQ2304-4BA05	+ 8PQ2306-4BA05	8PQ2520-4BA02 +	8PQ2520-6BA02
	1200 mm	8PQ1014-0BA01	8PQ1024-0BA01	8PQ1010-4BA01	8PQ1010-8BA01	3× 8PQ2304-4BA05	–	8PQ2520-4BA02 +	8PQ2520-8BA02
600 mm	800 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-8BA01	–	2× 8PQ2306-4BA05	–	8PQ2520-8BA02	–
	1000 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01	8PQ1010-6BA01	8PQ2306-4BA05	+ 8PQ2306-6BA05	8PQ2520-4BA02 +	8PQ2520-6BA02
	1200 mm	8PQ1016-0BA01	8PQ1026-0BA01	8PQ1010-4BA01	8PQ1010-8BA01	3× 8PQ2306-4BA05	–	8PQ2520-4BA02 +	8PQ2520-8BA02
800 mm	800 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-8BA01	–	2× 8PQ2308-4BA05	–	8PQ2520-8BA02	–
	1000 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-4BA01	8PQ1010-6BA01	8PQ2308-4BA05	+ 8PQ2308-6BA05	8PQ2520-4BA02 +	8PQ2520-6BA02
	1200 mm	8PQ1018-0BA01	8PQ1028-0BA01	8PQ1010-4BA01	8PQ1010-8BA01	3× 8PQ2308-4BA05	–	8PQ2520-4BA02 +	8PQ2520-8BA02
1000 mm	800 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-8BA01	–	2× 8PQ2301-4BA04	–	8PQ2520-8BA02	–
	1000 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-4BA01	8PQ1010-6BA01	8PQ2301-4BA04	+ 8PQ2301-6BA06	8PQ2520-4BA02 +	8PQ2520-6BA02
	1200 mm	8PQ1011-0BA01	8PQ1021-0BA01	8PQ1010-4BA01	8PQ1010-8BA01	3× 8PQ2301-4BA04	–	8PQ2520-4BA02 +	8PQ2520-8BA02
1200 mm	800 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-8BA01	–	4× 8PQ2306-4BA05	–	8PQ2520-8BA02	–
	1000 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-4BA01	8PQ1010-6BA01	2× 8PQ2306-4BA05	2× 8PQ2306-6BA05	8PQ2520-4BA02 +	8PQ2520-6BA02
	1200 mm	8PQ1012-0BA01	8PQ1022-0BA01	8PQ1010-4BA01	8PQ1010-8BA01	6× 8PQ2306-4BA05	–	8PQ2520-4BA02 +	8PQ2520-8BA02

Accessories

Base corner pieces for depths of 1000 mm and 1200 mm



Height	Article No.
100 mm	8PQ1010-1BA01
200 mm	8PQ1020-1BA01

15


System overview, page 15/18

© Siemens 2022

❹ Top plates



❺ Top plate attachment



IP40		IP40	IP55		IP55	IP40 cable entry		IP40 cable entry	IPX1		IPX1
8PQ2304-8BA02		–	8PQ2304-8BA01		–	–		8PQ2304-8BA08	8PQ2304-8BA04		–
8PQ2304-4BA02	+	8PQ2304-6BA02	8PQ2304-4BA01	+	8PQ2304-6BA01	8PQ2304-4BA02	+	8PQ2304-6BA13	8PQ2304-4BA15	+	8PQ2304-6BA12
8PQ2304-4BA02	+	8PQ2304-8BA02	8PQ2304-4BA01	+	8PQ2304-8BA01	8PQ2304-8BA08	+	8PQ2304-4BA16	8PQ2304-4BA15	+	8PQ2304-8BA07
8PQ2306-8BA02		–	8PQ2306-8BA01		–	–		8PQ2306-8BA08	8PQ2306-8BA04		–
8PQ2306-4BA02	+	8PQ2306-6BA02	8PQ2306-4BA01	+	8PQ2306-6BA01	8PQ2306-4BA02	+	8PQ2306-6BA18	8PQ2306-4BA11	+	8PQ2306-6BA17
8PQ2306-4BA02	+	8PQ2306-8BA02	8PQ2306-4BA01	+	8PQ2306-8BA01	8PQ2306-4BA12	+	8PQ2306-8BA08	8PQ2306-4BA11	+	8PQ2306-8BA07
8PQ2308-8BA02		–	8PQ2308-8BA01		–	–		8PQ2308-8BA13	8PQ2308-8BA04		–
8PQ2308-4BA02	+	8PQ2308-6BA02	8PQ2308-4BA01	+	8PQ2308-6BA01	8PQ2308-4BA02	+	8PQ2308-6BA15	8PQ2308-4BA14	+	8PQ2308-6BA14
8PQ2308-4BA02	+	8PQ2308-8BA02	8PQ2308-4BA01	+	8PQ2308-8BA01	8PQ2308-4BA15	+	8PQ2308-8BA13	8PQ2308-4BA14	+	8PQ2308-8BA12
8PQ2301-8BA02		–	8PQ2301-8BA01		–	–		8PQ2301-8BA07	8PQ2301-8BA03		–
8PQ2301-4BA02	+	8PQ2301-6BA02	8PQ2301-4BA01	+	8PQ2301-6BA01	8PQ2301-4BA02	+	8PQ2301-6BA08	8PQ2301-4BA07	+	8PQ2301-6BA07
8PQ2301-4BA02	+	8PQ2301-8BA02	8PQ2301-4BA01	+	8PQ2301-8BA01	8PQ2301-4BA08	+	8PQ2301-8BA07	8PQ2301-4BA07	+	8PQ2301-8BA06
8PQ2302-8BA02		–	8PQ2302-8BA01		-	–		8PQ2302-8BA07	8PQ2302-8BA03		–
8PQ2302-4BA02	+	8PQ2302-6BA02	8PQ2302-4BA01	+	8PQ2302-6BA01	8PQ2302-4BA02	+	8PQ2302-6BA07	8PQ2302-4BA06	+	8PQ2302-6BA06
8PQ2302-4BA02	+	8PQ2302-8BA02	8PQ2302-4BA01	+	8PQ2302-8BA01	8PQ2302-4BA07	+	8PQ2302-8BA07	8PQ2302-4BA06	+	8PQ2302-8BA06

System overview, page 15/18

© Siemens 2022

Enclosure

Paneling sections



Doors							
With double-bit lock				For profile semicylinder			
Hinge	Width	IP40	IP55	IP55 glass doors	IP40	IP55	IP55 glass doors
Left	200 mm	–	–	–	–	–	–
	400 mm	8PQ2197-4BA08	8PQ2197-4BA05	–	8PQ2197-4BA06	8PQ2197-4BA03	–
	600 mm	8PQ2197-6BA06	8PQ2197-6BA03	8PQ2197-6BA10	8PQ2197-6BA04	8PQ2197-6BA01	8PQ2197-6BA07
	800 mm	8PQ2197-8BA06	8PQ2197-8BA03	8PQ2197-8BA10	8PQ2197-8BA04	8PQ2197-8BA01	8PQ2197-8BA07
	1000 mm	8PQ2197-1BA06	8PQ2197-1BA03	8PQ2197-1BA10	8PQ2197-1BA07	8PQ2197-1BA04	8PQ2197-1BA11
Right	200 mm	–	–	–	–	–	–
	400 mm	8PQ2197-4BA11	8PQ2197-4BA10	–	8PQ2197-4BA07	8PQ2197-4BA04	–
	600 mm	8PQ2197-6BA13	8PQ2197-6BA12	8PQ2197-6BA14	8PQ2197-6BA05	8PQ2197-6BA02	8PQ2197-6BA08
	800 mm	8PQ2197-8BA13	8PQ2197-8BA12	8PQ2197-8BA14	8PQ2197-8BA05	8PQ2197-8BA02	8PQ2197-8BA08
	1000 mm	8PQ2197-1BA18	8PQ2197-1BA17	8PQ2197-1BA20	8PQ2197-1BA08	8PQ2197-1BA05	8PQ2197-1BA12

15

Accessories

Double-bit lock or flat cylinder

	Version	Article No.
	Rotary handles with flat cylinder • Incl. key • Identical key type	8PQ9400-0BA07
	Rotary handles with two-way interlocking mechanism	8PQ9400-0BA08
	Coupling bars	8PQ9400-0BA27
	Locking rods	8PQ9400-0BA37
	Bar guides	8PQ9400-0BA36

Profile semicylinders

	Version	Article No.
	Rotary handles for profile semicylinders	8PQ9400-0BA41
	Coupling bars	8PQ9400-0BA28
	Locking rods	8PQ9400-0BA38
	Bar guides	8PQ9400-0BA36
	Profile semicylinders with key • Acc. to DIN 18252/18254 • With identical keys (key number 333)	8PQ9400-0BA26


System overview, page 15/18

© Siemens 2022

Frame paneling	❷ Outer cover	
		
IP30	**IP40**	**IP55**
–	8PQ2197-2BA15	8PQ2197-2BA14
–	8PQ2197-4BA02	8PQ2197-4BA01
8PQ2197-6BA11	–	–
8PQ2197-8BA11	–	–
–	–	–
–	8PQ2197-2BA15	8PQ2197-2BA14
–	8PQ2197-4BA02	8PQ2197-4BA01
8PQ2197-6BA11	–	–
8PQ2197-8BA11	–	–
–	–	–

Door cutouts

Double-bit lock or flat cylinder



Profile semicylinder



System overview, page 15/18

© Siemens 2022

Enclosure

Paneling sections

Accessories

Cubicle keys



Version	Scope of supply	Article No.
3 mm double bit	10 units	8PQ9400-0BA12

Inner door struts



Height	Article No.
1975 mm	8PQ2197-0BA10

Cubicle ID plate



Version	Article No.
SIVACON designed by Siemens	8PQ9400-0BA06

Door hinges



Version	Scope of supply	Article No.
Suitable for modular or section doors	2 units	8PQ9400-0BA55

System overview, page 15/18


© Siemens 2022

System overview, page 15/18

© Siemens 2022

Enclosure

Internal covers

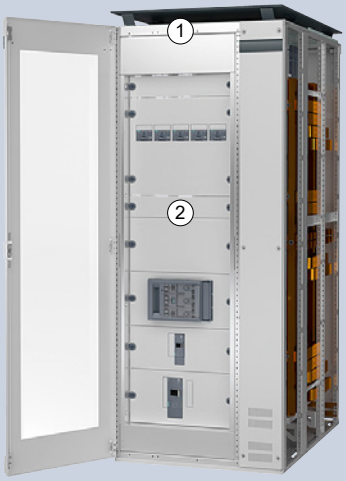

Position of main busbar	At top		Without	
	❶ Masking frames			
				
Width	**Fixed**	**Swivel**	**Fixed**	**Swivel**
600 mm	8PQ2000-6BA03	8PQ2000-6BA02	8PQ2000-6BA04	8PQ2000-6BA01
800 mm	8PQ2000-8BA03	8PQ2000-8BA02	8PQ2000-8BA04	8PQ2000-8BA01

	❷ Covers	
		
Height	**Width 600 mm**	**Width 800 mm**
50 mm	8PQ2005-6BA01	8PQ2005-8BA01
100 mm	8PQ2010-6BA01	8PQ2010-8BA01
150 mm	8PQ2015-6BA02	8PQ2015-8BA02
200 mm	8PQ2020-6BA01	8PQ2020-8BA01
250 mm	8PQ2025-6BA01	8PQ2025-8BA01
300 mm	8PQ2030-6BA01	8PQ2030-8BA01
350 mm	8PQ2035-6BA01	8PQ2035-8BA01
400 mm	8PQ2040-6BA01	8PQ2040-8BA01
500 mm	8PQ2050-6BA01	8PQ2050-8BA01
550 mm	8PQ2055-6BA01	8PQ2055-8BA01
600 mm	8PQ2060-6BA01	8PQ2060-8BA01
650 mm	8PQ2065-6BA01	8PQ2065-8BA01
800 mm	8PQ2080-6BA01	8PQ2080-8BA01

System overview, page 15/18

© Siemens 2022

Accessories

Covers, ventilated



Height	Width	Article No.
100 mm	600 mm	8PQ2010-6BA02
	800 mm	8PQ2010-8BA02

Quick-release lock



Version	Scope of supply	Article No.
SIVACON - Blue green basic	20 units	8PQ9400-0BA54

Hinges for covers




Version	Scope of supply	Article No.
• Hinges, incl. fixing accessories • From a masking frame height of 150 mm	1 set	8PQ2000-0BA08

System overview, page 15/18


© Siemens 2022

Enclosure

Compartment doors

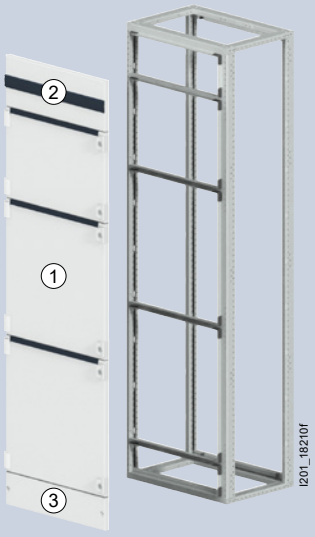

① Device compartments

		Compartment doors		Covers	
					
Width	**Height**	**IP4X**	**IP55 upgrade**	**IP4X**	**IP55 upgrade**
400 mm	50 mm	–	–	8PQ2005-4BA03	8PQ2005-4BA01
	100 mm	–	–	8PQ2010-4BA02	8PQ2010-4BA01
	150 mm	8PQ2015-4BA04	8PQ2015-4BA05	–	–
	200 mm	8PQ2020-4BA01	8PQ2020-4BA03	–	–
	250 mm	8PQ2025-4BA01	8PQ2025-4BA02	–	–
	300 mm	8PQ2030-4BA01	8PQ2030-4BA02	–	–
	350 mm	8PQ2035-4BA01	8PQ2035-4BA02	–	–
	400 mm	8PQ2040-4BA01	8PQ2040-4BA03	–	–
	450 mm	8PQ2045-4BA01	8PQ2045-4BA02	–	–
	500 mm	8PQ2050-4BA01	8PQ2050-4BA02	–	–
	550 mm	8PQ2055-4BA11	8PQ2055-4BA07	–	–
	600 mm	8PQ2060-4BA01	8PQ2060-4BA03	–	–
	650 mm	8PQ2065-4BA01	8PQ2065-4BA02	–	–
	700 mm	8PQ2070-4BA07	8PQ2070-4BA08	–	–
	750 mm	8PQ2072-4BA01	8PQ2075-4BA01	–	–
	800 mm	8PQ2080-4BA01	8PQ2080-4BA04	–	–
600 mm	50 mm	–	–	8PQ2005-6BA04	8PQ2005-6BA03
	100 mm	–	–	8PQ2010-6BA04	8PQ2010-6BA03
	150 mm	8PQ2015-6BA10	8PQ2015-6BA12	–	–
	200 mm	8PQ2020-6BA14	8PQ2020-6BA15	–	–
	250 mm	8PQ2025-6BA07	8PQ2025-6BA08	–	–
	300 mm	8PQ2030-6BA10	8PQ2030-6BA12	–	–
	350 mm	8PQ2035-6BA12	8PQ2035-6BA13	–	–
	400 mm	8PQ2040-6BA12	8PQ2040-6BA13	–	–
	450 mm	8PQ2045-6BA05	8PQ2045-6BA06	–	–
	500 mm	8PQ2050-6BA03	8PQ2050-6BA04	–	–
	550 mm	8PQ2055-6BA04	8PQ2055-6BA06	–	–
	600 mm	8PQ2060-6BA06	8PQ2060-6BA07	–	–
	650 mm	8PQ2065-6BA03	8PQ2065-6BA04	–	–
	700 mm	8PQ2070-6BA03	8PQ2070-6BA04	–	–
	750 mm	8PQ2075-6BA01	8PQ2075-6BA02	–	–
	800 mm	8PQ2080-6BA03	8PQ2080-6BA04	–	–
800 mm	50 mm	–	–	8PQ2005-8BA04	8PQ2005-8BA03
	100 mm	–	–	8PQ2010-8BA04	8PQ2010-8BA03
	150 mm	8PQ2015-8BA05	8PQ2015-8BA07	–	–
	200 mm	8PQ2020-8BA07	8PQ2020-8BA08	–	–
	250 mm	8PQ2025-8BA04	8PQ2025-8BA05	–	–
	300 mm	8PQ2030-8BA05	8PQ2030-8BA06	–	–
	350 mm	8PQ2035-8BA06	8PQ2035-8BA07	–	–
	400 mm	8PQ2040-8BA12	8PQ2040-8BA13	–	–
	450 mm	8PQ2045-8BA03	8PQ2045-8BA04	–	–
	500 mm	8PQ2050-8BA03	8PQ2050-8BA04	–	–
	550 mm	8PQ2055-8BA03	8PQ2055-8BA06	–	–
	600 mm	8PQ2060-8BA04	8PQ2060-8BA05	–	–
	650 mm	8PQ2065-8BA03	8PQ2065-8BA04	–	–
	700 mm	8PQ2070-8BA01	8PQ2070-8BA02	–	–
	750 mm	8PQ2075-8BA01	8PQ2075-8BA02	–	–
	800 mm	8PQ2080-8BA03	8PQ2080-8BA04	–	–


15

System overview, page 15/18

© Siemens 2022

② Head compartments





Width	Height	Doors IP4X	Doors IP55 upgrade	Covers IP4X
Main busbar at top				
400 mm	225 mm	8PQ2022-4BA04	8PQ2022-4BA03	8PQ2022-4BA01
600 mm	225 mm	8PQ2022-6BA04	8PQ2022-6BA02	8PQ2022-6BA01
800 mm	225 mm	8PQ2022-8BA03	8PQ2022-8BA02	8PQ2022-8BA01
Main busbar at bottom				
400 mm	175 mm	–	8PQ2022-4BA03	8PQ2000-4BA02
600 mm	175 mm	–	8PQ2022-6BA02	8PQ2000-6BA08
800 mm	175 mm	–	8PQ2022-8BA02	8PQ2000-8BA08
400 mm	725 mm	8PQ2072-4BA02	8PQ2070-4BA06	–
600 mm	725 mm	8PQ2072-6BA01	8PQ2070-6BA11	–

③ Base compartments




Width	Height	Covers IP4X	Covers IP55 upgrade
Main busbar at top			
400 mm	150 + 25 mm	8PQ2015-4BA01	8PQ2015-4BA03
600 mm	150 + 25 mm	8PQ2000-6BA07	8PQ2015-6BA13
800 mm	150 + 25 mm	8PQ2000-8BA07	8PQ2015-8BA08
Main busbar at bottom			
400 mm	200 + 25 mm	8PQ2020-4BA04	8PQ2020-4BA05
600 mm	200 + 25 mm	8PQ2020-6BA34	8PQ2020-6BA35
800 mm	200 + 25 mm	8PQ2020-8BA17	8PQ2020-8BA18

15

System overview, page 15/18

© Siemens 2022

Enclosure

Compartment doors


Accessories

Door hinges




Version	Scope of supply	Article No.
Hinges, incl. fixing accessories	2 units	8PQ9400-0BA55

Locks




Version	Article No.
Two-way interlocking mechanisms	8PQ9400-0BA40

Handles for compartment doors




Version	Article No.
Without lock	8PQ9400-0BA73
With flat cylinder, identical key type	8PQ9400-0BA72

Compartment ID strip for plug-in plates, H = 17 mm



Width	Scope of supply	Article No.
400 mm	6 units	8PQ5000-3BA42
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46

Inner door struts



Height	Article No.
400 mm	8PQ2040-0BA06
550 mm	8PQ2055-0BA05
600 mm	8PQ2060-0BA14
700 mm	8PQ2070-0BA02
800 mm	8PQ2080-0BA07

Cubicle keys




Version	Scope of supply	Article No.
3 mm double bit	10 units	8PQ9400-0BA12

System overview, page 15/18

© Siemens 2022

Busbar systems


Main busbars

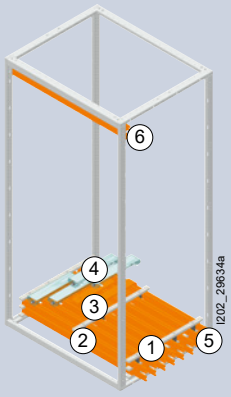

Position	❶ Busbar supports Up to 3200 A	❶ Busbar supports Up to 4000 A	❷ Reinforcement Up to 3200 A	❷ Reinforcement Up to 4000 A	❸ Equipo-tential bonding	❹ Covers	PEN grounding	Arcing fault barriers
							1 set = 10 units	
Top	8PQ4000-0BA04	8PQ4000-0BA60	8PQ4000-0BA37	2× 8PQ4000-0BA37	8PQ4000-0BA62	–	8PQ4000-0BA12	8PQ9400-0BA21
Bottom	8PQ4000-0BA04	8PQ4000-0BA60	8PQ4000-0BA37	2× 8PQ4000-0BA37	8PQ4000-0BA62	4× 8PQ4000-1BA25	8PQ4000-0BA12	8PQ9400-0BA21
Rear	8PQ4000-0BA04 + 8PQ3000-0BA10	8PQ4000-0BA60 + 2× 8PQ3000-0BA10	8PQ4000-0BA37	2× 8PQ4000-0BA37	–	–	8PQ4000-2BA24	8PQ9400-0BA21

Accessories

Connecting lugs



Type	Cross-section	Article No.
❺ Main busbars	20 × 10 mm	8PQ4000-0BA53
	30 × 10 mm	8PQ4000-0BA54
	40 × 10 mm	8PQ4000-0BA56
	50 × 10 mm	8PQ4000-0BA57
❻ PE bar	20 × 5 mm	8PQ4000-0BA52
	30 × 5 mm	
	30 × 10 mm	
	40 × 5 mm	8PQ4000-0BA67
	40 × 10 mm	
	50 × 10 mm	

Protective cover

Type	Article No.
• Main busbar at rear • Mounting width 200 mm	8PQ4000-3BA35 new


15


System overview, page 15/18


© Siemens 2022

Busbar systems

Vertical distribution busbars, cascaded, up to I_{cw} = 65 kA

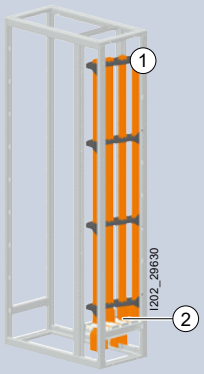

	❶ Busbar supports		❷ Supports
			
Position of main busbar	**30 × 10 mm**	**40 × 10 mm**	
Top	8PQ4000-0BA32	8PQ4000-0BA63	–
Bottom	8PQ4000-0BA32	8PQ4000-0BA63	8PQ4000-1BA23



Accessories

Connection

	Composants	Version	Scope of supply	Article No.
	Busbar clamps	M10	20 units	8PQ9400-0BA02
	Saucer-head bolts	M10 × 35 mm	50 units	8PQ9500-0BA14
		M10 × 45 mm	50 units	8PQ9500-0BA16
		M10 × 55 mm	50 units	8PQ9500-1BA36
		M10 × 65 mm	50 units	8PQ9500-1BA25
	Spring washers	For M10	50 units	8PQ9500-0BA60
	Hexagonal nuts	M10	50 units	8PQ9500-0BA05

Connecting lugs


	Cross-section	Position of vertical distribution busbar	Position of main busbar	Depth	Article No.
	30 × 10 mm	Right	Front	400 mm	8PQ4000-0BA45
				600 mm	8PQ4000-0BA46
				800 mm	8PQ4000-0BA46
			Rear	800 mm	8PQ4000-0BA50
		Left	Front	400 mm	8PQ4000-0BA73
				600 mm	8PQ4000-0BA72
				800 mm	8PQ4000-0BA72
			Rear	800 mm	8PQ4000-0BA70
	40 × 10 mm	Right	Front	400 mm	8PQ4000-0BA47
				600 mm	8PQ4000-0BA48
				800 mm	8PQ4000-0BA48
			Rear	800 mm	8PQ4000-0BA51
		Left	Front	400 mm	8PQ4000-0BA75
				600 mm	8PQ4000-0BA48
				800 mm	8PQ4000-0BA48
			Rear	800 mm	8PQ4000-0BA71


15

System overview, page 15/18

© Siemens 2022

Vertical distribution busbars, non-cascaded, up to I_{cw} = 100 kA



		❶ Busbar supports	❷ Reinforcement	❸ Supports
				
Position of main busbar	**Width**			
Top	200 mm	8PQ4000-2BA25	8PQ4000-0BA37	8PQ4000-0BA78
	400 mm	8PQ4000-2BA26	8PQ4000-0BA37	8PQ4000-0BA61
Bottom	200 mm	8PQ4000-2BA25	8PQ4000-0BA37	–
	400 mm	8PQ4000-2BA26	8PQ4000-0BA37	–
Rear	200 mm	8PQ4000-2BA25	8PQ4000-0BA37	8PQ4000-0BA78

Accessories

Connecting lugs

	Cross-section	Position of main busbar	Depth	Article No.
	20 × 10 mm 30 × 10 mm	Front	400 mm	8PQ4000-0BA38
			600 mm	8PQ4000-0BA40
			800 mm	8PQ4000-0BA40
		Rear	800 mm	8PQ4000-0BA43
	40 × 10 mm 50 × 10 mm	Front	400 mm	8PQ4000-0BA41
			600 mm	8PQ4000-0BA42
			800 mm	8PQ4000-0BA42
		Rear	800 mm	8PQ4000-0BA44


15

System overview, page 15/18


© Siemens 2022

Section expansion

Air circuit breakers 3WA, infeed main busbar at top

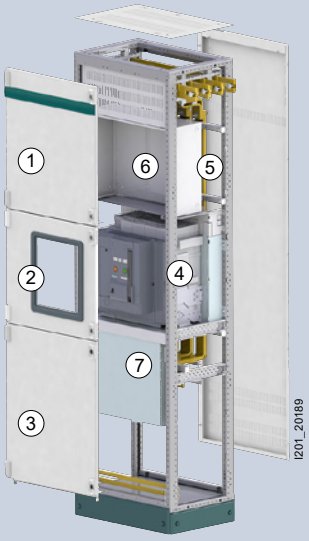

3 and 4-pole

	❶ Head compartment doors		❷ Compartment doors			
			 + 3WA9111-0AP01	 + 3WA9111-0AP03		

Type of mounting	Size	Width	Depth	IP40	IP55 upgrade	IP40	IP55	IP55 upgrade
Fixed-mounted	I	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	II	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
	III	1000 mm	800 mm	8PQ2067-1BA01	8PQ2067-1BA02	8PQ2055-1BA03	8PQ2055-1BA04	8PQ2055-1BA06
Withdraw-able	I	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	II	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
	III	1000 mm	800 mm	8PQ2067-1BA01	8PQ2067-1BA02	8PQ2055-1BA03	8PQ2055-1BA04	8PQ2055-1BA06

System overview, page 15/18

© Siemens 2022

Technical specifications

		Rated operational current I_{ec} in A													
		Ventilated IP40							Non-ventilated IP55						
Size	I_n	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C
I	1600 A	1600	1600	1590	1550	1510	1460	1420	1370	1340	1310	1270	1240	1200	1170
	2000 A	2000	2000	1990	1940	1890	1830	1780	1720	1680	1640	1590	1550	1510	1460
II	2000 A	2000	2000	2000	2000	2000	2000	2000	1960	1920	1870	1820	1780	1730	1670
	3200 A	2850	2790	2720	2650	2580	2510	2430	2260	2210	2160	2100	2050	1990	1930
III	4000 A	4000	4000	4000	4000	3950	3870	3780	3230	3150	3080	3000	2920	2840	2750

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection		❻ Separation 4b	❼ Cable connection	Insulation
IP40	**IP55 upgrade**		**Front**	**Rear**			
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA28	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA30	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA31	8PQ6000-5BA81	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA32	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA33	8PQ6000-5BA83	–
8PQ2075-1BA01	8PQ2075-1BA02	8PQ6000-5BA23	8PQ6000-5BA33	–	8PQ5000-5BA11	8PQ6000-5BA84	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA28	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA30	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA31	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA32	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA33	8PQ6000-5BA83	–
8PQ2075-1BA01	8PQ2075-1BA02	8PQ6000-5BA23	8PQ6000-5BA33	–	8PQ5000-5BA11	8PQ6000-5BA84	–

Accessories

Compartment ID strip for plug-in plates, H = 17 mm



Width	Scope of supply	Article No.
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46
1000 mm	6 units	8PQ5000-3BA47


15

System overview, page 15/18



© Siemens 2022

Section expansion

3WA air circuit breakers, infeed main busbar at bottom

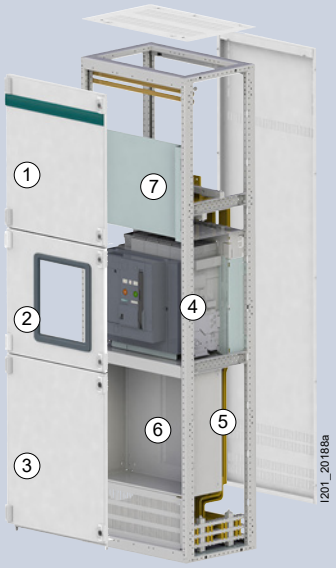

3 and 4-pole

❶ Head compartment doors		❷ Compartment doors				
		 + 3WA9111-0AP01		 + 3WA9111-0AP03		



Type of mounting	Size	Width	Depth	IP40	IP55 upgrade	IP40	IP55	IP55 upgrade
Fixed-mounted	I	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	II	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
Withdraw-able	I	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	II	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06

System overview, page 15/18

© Siemens 2022

Technical specifications

		Rated operational current I_{ec} in A													
		Ventilated IP40							Non-ventilated IP55						
Size	I_n	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C
I	1600 A	1540	1500	1470	1430	1390	1350	1310	1390	1350	1320	1290	1240	1190	1140
	2000 A	1930	1880	1840	1790	1740	1690	1640	1710	1670	1630	1590	1530	1470	1410
II	2000 A	2000	2000	2000	2000	1990	1920	1830	2000	1950	1880	1820	1750	1680	1610
	3200 A	2710	2640	2570	2490	2400	2300	2200	2320	2250	2180	2100	2030	1950	1860

❸ Base compartment doors		❹ Mounting plates	❺ Main busbar connection		❻ Separation 4b	❼ Cable connection	Insulation
							
IP40	**IP55 upgrade**		**Front**	**Rear**			
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA34	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA35	8PQ6000-5BA81	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA36	8PQ6000-5BA81	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA37	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA38	8PQ6000-5BA83	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA34	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	–	8PQ5000-4BA35	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	8PQ6000-6BA75	8PQ6001-1BA00	8PQ5000-4BA36	8PQ6000-5BA82	8PQ6000-7BA28
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	–	8PQ5000-4BA37	8PQ6000-5BA83	–
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	8PQ6000-6BA76	8PQ6001-1BA01	8PQ5000-4BA38	8PQ6000-5BA83	–

15

Accessories

Compartment ID strip for plug-in plates, H = 17 mm




Width	Scope of supply	Article No.
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46

System overview, page 15/18


© Siemens 2022

Section expansion

3WA air circuit breakers, coupling

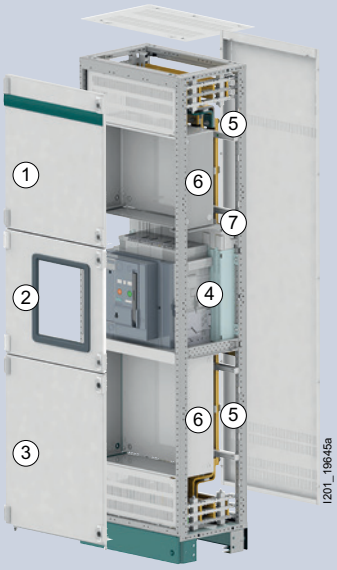

3 and 4-pole


❶ Head compartment doors		❷ Compartment doors				
		 + 3WA9111-0AP01		 + 3WA9111-0AP03		
Type of mounting	**Size**	**Width**	**Depth**	**IP40**	**IP55 upgrade**	**IP4X**	**IP55**	**IP55 upgrade**
Fixed-mounted	I	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	II	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
Withdraw-able	I	600 mm	400 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			600 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
			800 mm	8PQ2067-6BA01	8PQ2067-6BA02	8PQ2055-6BA16	8PQ2055-6BA17	8PQ2055-6BA06
	II	800 mm	600 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06
			800 mm	8PQ2067-8BA01	8PQ2067-8BA02	8PQ2055-8BA08	8PQ2055-8BA10	8PQ2055-8BA06

System overview, page 15/18

© Siemens 2022

Technical specifications

		Rated operational current I_{ec} in A													
		Ventilated IP40							Non-ventilated IP55						
Size	I_n	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C
I	1600 A	1540	1500	1470	1430	1390	1350	1310	1390	1350	1320	1290	1240	1190	1140
	2000 A	1930	1880	1840	1790	1740	1690	1640	1710	1670	1630	1590	1530	1470	1410
II	2000 A	2000	2000	2000	2000	1990	1920	1830	2000	1950	1880	1820	1750	1680	1610
	3200 A	2710	2640	2570	2490	2400	2300	2200	2320	2250	2180	2100	2030	1950	1860

❸ Base compartment doors		❹ Mounting plates	❺ Anschluss HSS	❻ Separation 4b	❼ Uprights
					
IP40	**IP55 upgrade**				
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2× 8PQ6000-6BA75	8PQ5000-5BA12	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2× 8PQ6000-6BA75	8PQ5000-5BA13	2× 8PQ3000-3BA50
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2× 8PQ6000-6BA75	8PQ5000-5BA14	2× 8PQ3000-3BA51
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2× 8PQ6000-6BA76	8PQ5000-5BA15	2× 8PQ3000-3BA50
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2× 8PQ6000-6BA76	8PQ5000-5BA16	2× 8PQ3000-3BA51
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2× 8PQ6000-6BA75	8PQ5000-5BA12	–
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2× 8PQ6000-6BA75	8PQ5000-5BA13	2× 8PQ3000-3BA50
8PQ2075-6BA01	8PQ2075-6BA03	8PQ6000-5BA26	2× 8PQ6000-6BA75	8PQ5000-5BA14	2× 8PQ3000-3BA51
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2× 8PQ6000-6BA76	8PQ5000-5BA15	2× 8PQ3000-3BA50
8PQ2075-8BA01	8PQ2075-8BA03	8PQ6000-5BA24	2× 8PQ6000-6BA76	8PQ5000-5BA16	2× 8PQ3000-3BA51

15

Accessories

Compartment ID strip for plug-in plates, H = 17 mm




Width	Scope of supply	Article No.
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46

System overview, page 15/18




© Siemens 2022

Section expansion


3WA air circuit breakers, connection of section busbar systems

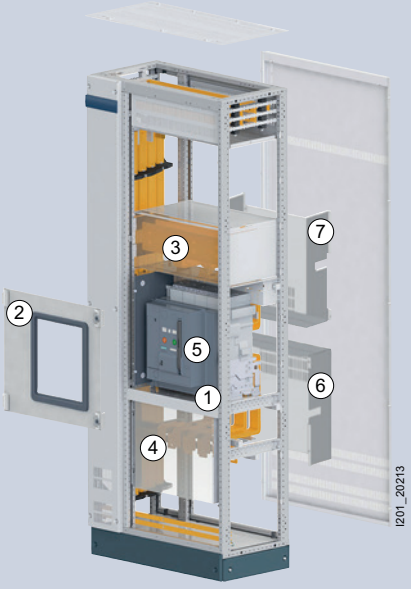

Compartment doors

❶ Mounting plates	❷ Compartment doors					
	 + 3WA9111-0AP01	 + 3WA9111-0AP03				
Type of mounting	**Size**	**Width**	**Number of poles**	**I_n**		**IP40**	**IP55**	**IP55 upgrade**
Fixed-mounted	I	400 mm	3-pole	1600 A	8PQ6000-5BA25	8PQ2055-4BA12	–	–
				2000 A	8PQ6000-5BA25	8PQ2055-4BA12	–	–
		600 mm	4-pole	1600 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06
				2000 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06
Withdrawable	I	400 mm	3-pole	1600 A	8PQ6000-5BA25	8PQ2055-4BA12	–	
				2000 A	8PQ6000-5BA25	8PQ2055-4BA12	–	
		600 mm	4-pole	1600 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06
				2000 A	8PQ6000-5BA26	8PQ2055-6BA16	8PQ2055-6BA17	+ 8PQ2055-6BA06





Covers






❶ Mounting plates	❷ Covers					
	 + 3WA9111-0AP01					
Type of mounting	**Size**	**Width**	**Number of poles**	**I_n**		**IP40**
Fixed-mounted	I	600 mm	3-pole9	1600 A	8PQ6000-3BA31	8PQ2055-6BA05
				2000 A	8PQ6000-3BA31	8PQ2055-6BA05
			4-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA07
				2000 A	8PQ6000-3BA31	8PQ2055-6BA07
		800 mm	3/4-pole	1600 A	8PQ6000-3BA32	8PQ2055-8BA04
				2000 A	8PQ6000-3BA32	8PQ2055-8BA04
Withdrawable	I	600 mm	3-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA05
				2000 A	8PQ6000-3BA31	8PQ2055-6BA05
			4-pole	1600 A	8PQ6000-3BA31	8PQ2055-6BA07
				2000 A	8PQ6000-3BA31	8PQ2055-6BA07
		800 mm	3/4-pole	1600 A	8PQ6000-3BA32	8PQ2055-8BA04
				2000 A	8PQ6000-3BA32	8PQ2055-8BA04

15

System overview, page 15/18

© Siemens 2022

❸ Section busbars	❹ Cable connection	❺ Device compartment	❻ Cable connection	❼ Section busbars
				
		Separation 3b	Separation 4b	Separation 4b
8PQ6000-5BA48	8PQ6000-5BA78	8PQ5000-3BA82	8PQ5000-3BA84	8PQ5000-3BA84
8PQ6000-7BA05	8PQ6000-5BA78	8PQ5000-3BA82	8PQ5000-4BA00	8PQ5000-3BA85
8PQ6000-5BA51	8PQ6000-5BA81	8PQ5000-3BA82	8PQ5000-3BA86	8PQ5000-3BA86
8PQ6000-7BA07	8PQ6000-5BA81	8PQ5000-3BA82	8PQ5000-4BA01	8PQ5000-3BA87
8PQ6000-5BA50	8PQ6000-5BA80	8PQ5000-3BA82	8PQ5000-3BA84	8PQ5000-3BA84
8PQ6000-7BA06	8PQ6000-5BA80	8PQ5000-3BA82	8PQ5000-4BA00	8PQ5000-3BA85
8PQ6000-5BA52	8PQ6000-5BA82	8PQ5000-3BA82	8PQ5000-3BA86	8PQ5000-3BA86
8PQ6000-7BA08	8PQ6000-5BA82	8PQ5000-3BA82	8PQ5000-4BA01	8PQ5000-3BA87


❸ Section busbars	❹ Cable connection	❺ Device compartment	❻ Cable connection	❼ Section busbars
				
		Separation 3b	Separation 4b	Separation 4b
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA08	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA46	8PQ6000-5BA76	8PQ5000-1BA65	8PQ5000-1BA68	8PQ5000-1BA67
8PQ6000-7BA04	8PQ6000-5BA76	8PQ5000-1BA65	8PQ5000-1BA68	8PQ5000-1BA67
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA45	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-7BA03	8PQ6000-5BA75	8PQ5000-0BA07	8PQ5000-0BA30	8PQ5000-0BA14
8PQ6000-5BA46	8PQ6000-5BA76	8PQ5000-1BA66	8PQ5000-1BA68	8PQ5000-1BA67
8PQ6000-7BA04	8PQ6000-5BA76	8PQ5000-1BA66	8PQ5000-1BA68	8PQ5000-1BA67

System overview, page 15/18

© Siemens 2022

Section expansion

3WA air circuit breakers, infeed, fixed-mounted new

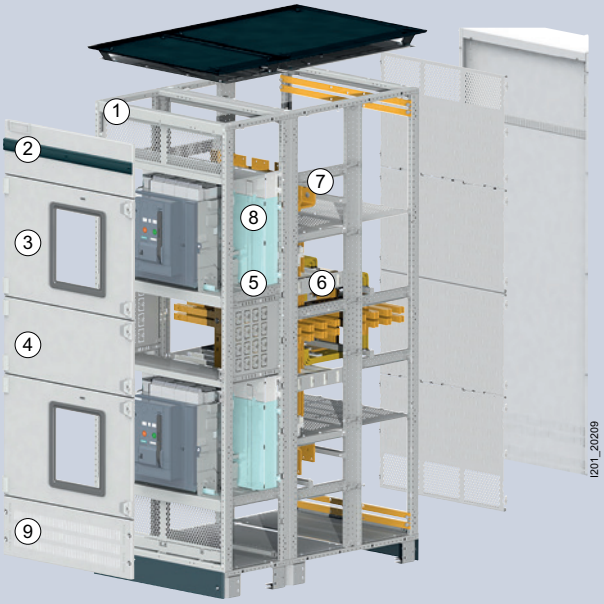

	❶ Frames			❷ Head compart-ments	❸ Compartment doors		
					+ 3WA9111-0AP01	+ 3WA9111-0AP03	
Size	**Width**	**Depth**	**Number of poles**	**At front**	**At rear**	**Covers**	**IP40**	**IP55**	**IP55 upgrade**
I – 2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01	–	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		1000 mm	3-pole	8PQ1204-4BA01 +	8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		1200 mm	3-pole	8PQ1204-4BA01 +	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		1200 mm duplex	3-pole	8PQ1204-4BA01 +	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
	600 mm	800 mm	3/4-pole	8PQ1206-8BA01	–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
		1000 mm	3/4-pole	8PQ1206-4BA01 +	8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
		1200 mm	3/4-pole	8PQ1206-4BA01 +	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
		1200 mm duplex	3/4-pole	8PQ1206-4BA01 +	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
II – 3200 A	800 mm	800 mm	3/4-pole	8PQ1208-8BA01	–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
		1000 mm	3/4-pole	8PQ1208-4BA01 +	8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
		1200 mm	3/4-pole	8PQ1208-4BA01 +	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
		1200 mm duplex	3/4-pole	8PQ1208-4BA01 +	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
III – 4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02 +	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06
III – 5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02 +	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06

Accessories

Frame reinforcement



Size	Depth	Article No.
III	1200 mm	8PQ5000-5BA46

Barrier supports



Size	Depth	Scope of supply	Article No.
I, II, III	1200 mm	1 set = 6 units	8PQ3000-3BA67





Compartment ID strip for plug-in plates, H = 17 mm



Width	Scope of supply	Article No.
400 mm	6 units	8PQ5000-3BA42
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46
1000 mm	6 units	8PQ5000-3BA47

System overview, page 15/18

© Siemens 2022


❹ Auxiliary device compart-ments	❺ Mounting plates	❻ Main busbar connection	❼ Cable connection	❽ Separation			❾ Base compartment covers	
								
Doors				**Device compartment**	**Rear panels**	**Section**	**IP40**	**IP55**
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA48	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA65 + 8PQ6001-0BA61	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA32	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA50	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA67 + 8PQ6001-0BA62	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA36	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA51	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA72 + 8PQ6001-0BA64	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA41	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA74	8PQ6001-0BA82	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA75	8PQ6001-4BA18	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02


System overview, page 15/18

© Siemens 2022

Section expansion

3WA air circuit breakers, infeed, withdrawable new

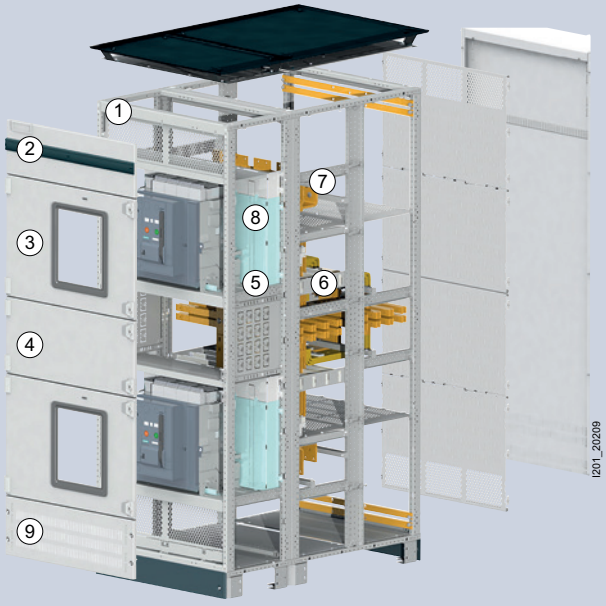

				❶ Frames		❷ Head compartments	❸ Compartment doors		
							 + 3WA9111-0AP01	 + 3WA9111-0AP03	
Size	**Width**	**Depth**	**Number of poles**	**At front**	**At rear**	**Covers**	**IP40**	**IP55**	**IP55 upgrade**
I – 2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01	–	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		1000 mm	3-pole	8PQ1204-4BA01	+ 8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		1200 mm	3-pole	8PQ1204-4BA01	+ 8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
		1200 mm duplex	3-pole	8PQ1204-4BA01	+ 8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–	–
	600 mm	800 mm	3/4-pole	8PQ1204-4BA05	–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
		1000 mm	3/4-pole	8PQ1206-4BA01	+ 8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
		1200 mm	3/4-pole	8PQ1206-4BA01	+ 8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
		1200 mm duplex	3/4-pole	8PQ1206-4BA01	+ 8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17 +	8PQ2055-6BA06
II – 3200 A	800 mm	800 mm	3/4-pole	8PQ1204-4BA05	–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
		1000 mm	3/4-pole	8PQ1208-4BA01	+ 8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
		1200 mm	3/4-pole	8PQ1208-4BA01	+ 8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
		1200 mm duplex	3/4-pole	8PQ1208-4BA01	+ 8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10 +	8PQ2055-8BA06
III – 4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+ 8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06
III – 5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+ 8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06
III – 6300 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+ 8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04 +	8PQ2055-1BA06

Accessories

Frame reinforcement



Size	Depth	Article No.
III	1200 mm	8PQ5000-5BA46

Barrier supports



Size	Depth	Scope of supply	Article No.
I, II, III	1200 mm	1 set = 6 units	8PQ3000-3BA67

Compartment ID strip for plug-in plates, H = 17 mm







Width	Scope of supply	Article No.
400 mm	6 units	8PQ5000-3BA42
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46
1000 mm	6 units	8PQ5000-3BA47

15

System overview, page 15/18

© Siemens 2022


❹ Auxiliary device compartments	❺ Mounting plates	❻ Main busbar connection	❼ Cable connection	❽ Separation			❾ Base compartment covers	
								
Doors				Device compartment	Rear panels	Section	IP40	IP55
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA48	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA30	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	8PQ6001-0BA66 + 8PQ6001-0BA61	8PQ6001-0BA77	8PQ5000-3BA82	8PQ5000-5BA21	8PQ5000-5BA32	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA50	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA34	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68 + 8PQ6001-0BA61	8PQ6001-0BA78	8PQ5000-3BA82	8PQ5000-5BA22	8PQ5000-5BA36	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA51	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA38	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	8PQ6001-0BA73 + 8PQ6001-0BA61	8PQ6001-0BA81	8PQ5000-3BA81	8PQ5000-5BA23	8PQ5000-5BA41	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA74	8PQ6001-0BA83	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA75	8PQ6001-0BA83	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	8PQ6001-0BA76	8PQ6001-0BA84	8PQ5000-1BA74	8PQ5000-5BA24	8PQ5000-5BA43	8PQ2000-1BA04	8PQ2000-1BA02


System overview, page 15/18

© Siemens 2022

Section expansion

3WA air circuit breakers, coupling panels, fixed-mounted new

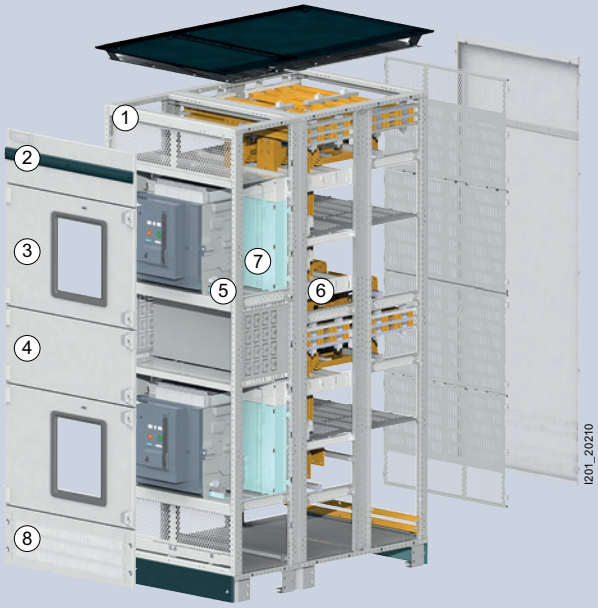

	❶ Frame		❷ Head compartments	❸ Compartment doors		
				 + 3WA9111-0AP01	 + 3WA9111-0AP03	

Size	Width	Depth	Number of poles	At front		At rear	Covers	IP40	IP55		IP55 upgrade
I – 2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01		–	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		1000 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		1200 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		1200 mm duplex	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
	600 mm	800 mm	3/4-pole	8PQ1206-8BA01		–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
		1000 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
		1200 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
		1200 mm duplex	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
II – 3200 A	800 mm	800 mm	3/4-pole	8PQ1208-8BA01		–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
		1000 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
		1200 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
		1200 mm duplex	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
III – 4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
III – 5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06

Accessories

Frame reinforcement



Size	Depth	Article No.
III	1200 mm	8PQ5000-5BA46

Barrier supports



Size	Depth	Scope of supply	Article No.
I, II, III	1200 mm	1 set = 6 units	8PQ3000-3BA67

Compartment ID strip for plug-in plates, H = 17 mm







Width	Scope of supply	Article No.
400 mm	6 units	8PQ5000-3BA42
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46
1000 mm	6 units	8PQ5000-3BA47

15

System overview, page 15/18

© Siemens 2022


❹ Auxiliary device compartments	❺ Mounting plates	❻ Main busbar connection	❼ Separation			❽ Base compartment covers	
							
Doors			**Device compartment**	**Rear panels**	**Section**	**IP40**	**IP55**
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA65	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA65	8PQ5000-3BA82	8PQ5000-5BA52	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA65	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA65 + 8PQ6001-0BA61	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA33	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA67	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA67	8PQ5000-3BA82	8PQ5000-5BA53	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA67	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA67 + 8PQ6001-0BA62	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA37	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA72	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA72	8PQ5000-3BA81	8PQ5000-5BA54	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA72	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA72 + 8PQ6001-0BA64	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA42	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	2× 8PQ6001-0BA74	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	2× 8PQ6001-0BA75	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02

System overview, page 15/18

© Siemens 2022

Section expansion

3WA air circuit breakers, coupling panels, withdrawable new

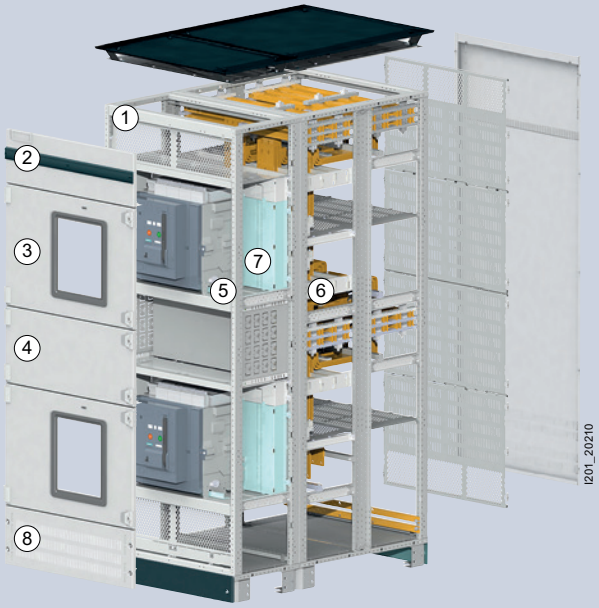



Size	Width	Depth	Number of poles	❶ Frame: At front		❶ Frame: At rear	❷ Head compartments: Covers	❸ Compartment door: IP40	❸ Compartment door: IP55		❸ Compartment door: IP55 upgrade
I – 2000 A	400 mm	800 mm	3-pole	8PQ1204-8BA01		–	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		1000 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-6BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		1200 mm	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
		1200 mm duplex	3-pole	8PQ1204-4BA01	+	8PQ1204-8BA01	8PQ2025-4BA03	8PQ2055-4BA12	–		–
	600 mm	800 mm	3/4-pole	8PQ1206-8BA01		–	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
		1000 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-6BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
		1200 mm	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
		1200 mm duplex	3/4-pole	8PQ1206-4BA01	+	8PQ1206-8BA01	8PQ2025-6BA25	8PQ2055-6BA16	8PQ2055-6BA17	+	8PQ2055-6BA06
II – 3200 A	800 mm	800 mm	3/4-pole	8PQ1208-8BA01		–	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
		1000 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-6BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
		1200 mm	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
		1200 mm duplex	3/4-pole	8PQ1208-4BA01	+	8PQ1208-8BA01	8PQ2025-8BA16	8PQ2055-8BA08	8PQ2055-8BA10	+	8PQ2055-8BA06
III – 4000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
III – 5000 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06
III – 6300 A	1000 mm	1200 mm	3/4-pole	8PQ1201-4BA02	+	8PQ1201-8BA03	8PQ2025-1BA01	8PQ2055-1BA03	8PQ2055-1BA04	+	8PQ2055-1BA06

Accessories

Frame reinforcement



Size	Depth	Article No.
III	1200 mm	8PQ5000-5BA46

Barrier supports



Size	Depth	Scope of supply	Article No.
I, II, III	1200 mm	1 set = 6 units	8PQ3000-3BA67





Compartment ID strip for plug-in plates, H = 17 mm



Width	Scope of supply	Article No.
400 mm	6 units	8PQ5000-3BA42
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46
1000 mm	6 units	8PQ5000-3BA47

System overview, page 15/18

© Siemens 2022

❹ Auxiliary device compart-ments	❺ Mounting plates	❻ Main busbar connection	❼ Separation			❽ Base compartment covers	
							
Doors			Device compartment	Rear panels	Section	IP40	IP55
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA66	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA66	8PQ5000-3BA82	8PQ5000-5BA52	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA66	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA31	8PQ2000-4BA06	–
8PQ2035-4BA01	8PQ6000-5BA25	2× 8PQ6001-0BA66 + 8PQ6001-0BA61	8PQ5000-3BA82	8PQ5000-5BA25	8PQ5000-5BA33	8PQ2000-4BA06	–
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA68	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA68	8PQ5000-3BA82	8PQ5000-5BA53	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	2× 8PQ6001-0BA68	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-6BA12	8PQ6000-5BA26	8PQ6001-0BA68 + 8PQ6001-0BA62	8PQ5000-3BA82	8PQ5000-5BA26	8PQ5000-5BA35	8PQ2000-6BA13	8PQ2000-6BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA73	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA73	8PQ5000-3BA81	8PQ5000-5BA54	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA73	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA40	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-8BA06	8PQ6000-5BA24	2× 8PQ6001-0BA73 + 8PQ6001-0BA64	8PQ5000-3BA81	8PQ5000-5BA27	8PQ5000-5BA42	8PQ2000-8BA13	8PQ2000-8BA11
8PQ2035-1BA01	8PQ6000-8BA70	2× 8PQ6001-0BA74	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	2× 8PQ6001-0BA75	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02
8PQ2035-1BA01	8PQ6000-8BA70	2× 8PQ6001-0BA76	8PQ5000-1BA74	8PQ5000-5BA28	8PQ5000-5BA44	8PQ2000-1BA04	8PQ2000-1BA02

System overview, page 15/18

© Siemens 2022

Section expansion


3WA air circuit breakers, accessories

Busbar holders



	Size	Width	Number of poles	Scope of supply	Article No.
	I	600 mm	4-pole	4 units	8PQ6000-4BA35
		800 mm	4-pole	4 units	8PQ6000-4BA37
	II	600 mm	3-pole	4 units	8PQ6000-4BA36
		800 mm	4-pole	4 units	8PQ6000-4BA38
	III	1000 mm	4-pole	4 units	8PQ6000-4BA40

Busbar connections



	Size	Width	Number of poles	Scope of supply	Article No.
For use with SIVACON 8PS	I	600 mm	4-pole	1 unit	8PQ3000-1BA70
		800 mm	4-pole	1 unit	8PQ3000-1BA71
	II	600 mm	3-pole	1 unit	8PQ3000-1BA70
		800 mm	4-pole	1 unit	8PQ3000-1BA71
	III	1000 mm	4-pole	1 unit	8PQ3000-1BA72

Cable brackets



	Size	Width	Scope of supply	Article No.
	I	400 mm	5 units	8PQ3000-0BA41
		600 mm	5 units	8PQ3000-0BA42
		800 mm	5 units	8PQ3000-0BA43
	II	600 mm	5 units	8PQ3000-0BA42
		800 mm	5 units	8PQ3000-0BA43
	III	1000 mm	4 units	8PQ3000-3BA68

System overview, page 15/18


© Siemens 2022

System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, 3-pole

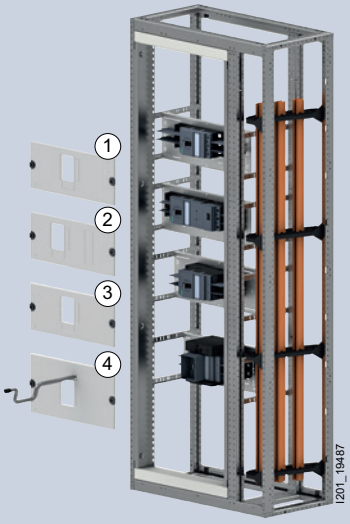


❶ Fixed-mounted version



Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
			–	–	■	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
			–	–	■	8PQ6000-8BA02	8PQ2015-8BA11
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA03	8PQ2015-6BA28
			–	–	■	8PQ6000-8BA03	8PQ2015-6BA28
		800 mm	■	■	–	8PQ6000-8BA07	8PQ2020-8BA20
			–	–	■	8PQ6000-8BA07	8PQ2020-8BA20
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA23	8PQ2020-6BA41
			–	–	■	8PQ6000-8BA23	8PQ2020-6BA41
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14

System overview, page 15/18

© Siemens 2022

❷ Fixed-mounted version with RCD		❸ Plug-in version		❹ Withdrawable version [2]	
					
Device holders	**Covers**	**Device holders**	**Covers**	**Device holders**	**Covers**
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA03 [1]	8PQ2015-6BA30	8PQ6000-8BA04	8PQ2015-6BA28	8PQ6000-8BA04	8PQ2025-6BA21
8PQ6000-8BA03	8PQ2015-6BA30	8PQ6000-8BA04	8PQ2015-6BA28	–	–
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2025-8BA12
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2025-6BA22
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2025-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2025-6BA22
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2025-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2025-6BA22
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2025-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2035-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2035-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–


[1] For applications >415 V, front mounted rotary operating mechanism or motorized operating mechanism required for compliance with creepage distances and clearances.
[2] Guide frame with direct operating mechanism only

System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, 4-pole

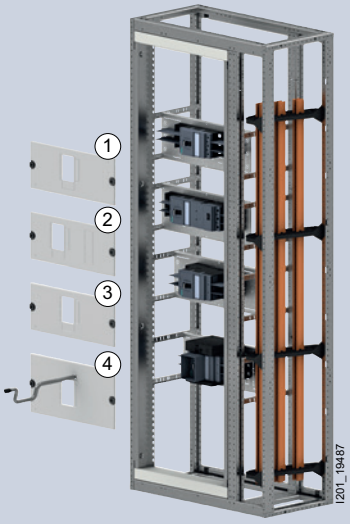

❶ Fixed-mounted version






Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA01	8PQ2015-6BA26
			–	–	■	8PQ6000-8BA01	8PQ2015-6BA26
		800 mm	■	■	–	8PQ6000-8BA02	8PQ2015-8BA11
			–	–	■	8PQ6000-8BA02	8PQ2015-8BA11
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA05	8PQ2020-6BA36
			–	–	■	8PQ6000-8BA05	8PQ2020-6BA36
		800 mm	■	■	–	8PQ6000-8BA07	8PQ2020-8BA20
			–	–	■	8PQ6000-8BA07	8PQ2020-8BA20
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA08	8PQ2020-6BA38
			–	–	■	8PQ6000-8BA08	8PQ2020-6BA38
		800 mm	■	■	–	8PQ6000-8BA10	8PQ2020-8BA21
			–	–	■	8PQ6000-8BA10	8PQ2020-8BA21
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA25	8PQ2025-6BA23
			–	–	■	8PQ6000-8BA25	8PQ2025-6BA23
		800 mm	■	■	–	8PQ6000-8BA27	8PQ2025-8BA14
			–	–	■	8PQ6000-8BA27	8PQ2025-8BA14

15

System overview, page 15/18

© Siemens 2022

❷ Fixed-mounted version with RCD		❸ Plug-in version		❹ Withdrawable version [2]	
					
Device holders	**Covers**	**Device holders**	**Covers**	**Device holders**	**Covers**
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA01	8PQ2015-6BA27	8PQ6000-8BA01	8PQ2015-6BA26	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA02	8PQ2015-8BA11	8PQ6000-8BA02	8PQ2015-8BA11	–	–
8PQ6000-8BA05 [1]	8PQ2020-6BA37	8PQ6000-8BA06	8PQ2020-6BA36	8PQ6000-8BA06	8PQ2030-6BA25
8PQ6000-8BA05 [1]	8PQ2020-6BA37	8PQ6000-8BA06	8PQ2020-6BA36	–	–
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2030-8BA12
8PQ6000-8BA07	8PQ2020-8BA20	8PQ6000-8BA07	8PQ2020-8BA20	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
–	–	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2030-8BA15
–	–	8PQ6001-1BA02	8PQ2025-8BA18	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2030-6BA26
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2030-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2030-6BA26
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2030-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	8PQ6000-8BA08	8PQ2030-6BA26
8PQ6000-8BA11	8PQ2020-6BA40	8PQ6000-8BA08	8PQ2020-6BA38	–	–
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2030-8BA13
8PQ6000-8BA10	8PQ2020-8BA21	8PQ6000-8BA10	8PQ2020-8BA21	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2035-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–
–	–	–	–	–	–
–	–	–	–	–	–
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	8PQ6001-1BA02	8PQ2035-8BA15
8PQ6000-8BA27	8PQ2025-8BA14	8PQ6001-1BA02	8PQ2025-8BA18	–	–


[1] For applications >415 V, front mounted rotary operating mechanism or motorized operating mechanism required for compliance with creepage distances and clearances.
[2] Guide frame with direct operating mechanism only

System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, 3-pole

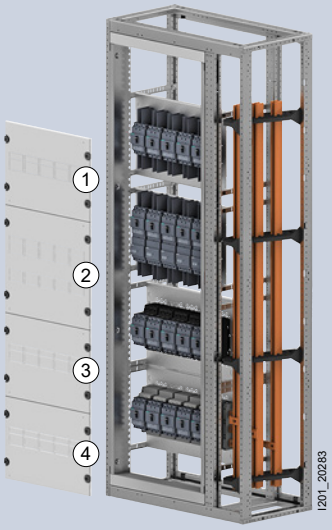





❶ Fixed-mounted version



Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA33	8PQ2035-6BA26
		800 mm	■	■	–	8PQ6000-8BA47	8PQ2035-8BA16
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA33	8PQ2035-6BA26
			–	–	■	8PQ6000-8BA33	8PQ2035-6BA26
		800 mm	■	■	–	8PQ6000-8BA47	8PQ2035-8BA16
			–	–	■	8PQ6000-8BA47	8PQ2035-8BA16
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA35	8PQ2040-6BA26
			–	–	■	8PQ6000-8BA35	8PQ2040-6BA26
		800 mm	■	■	–	8PQ6000-8BA43	8PQ2040-8BA23
			–	–	■	8PQ6000-8BA43	8PQ2040-8BA23
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2050-6BA11
			–	–	■	8PQ6000-8BA54	8PQ2050-6BA11
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2050-8BA14
			–	–	■	8PQ6000-8BA57	8PQ2050-8BA14
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2050-6BA11
			–	–	■	8PQ6000-8BA54	8PQ2050-6BA11
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2050-8BA14
			–	–	■	8PQ6000-8BA57	8PQ2050-8BA14
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA50	8PQ2045-8BA11
			–	–	■	8PQ6000-8BA50	8PQ2045-8BA15
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA50	8PQ2045-8BA11
			–	–	■	8PQ6000-8BA50	8PQ2045-8BA15
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA50	8PQ2045-8BA11
			–	–	■	8PQ6000-8BA50	8PQ2045-8BA15
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2045-6BA12
			–	–	■	8PQ6000-8BA54	8PQ2045-6BA12
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2045-8BA13
			–	–	■	8PQ6000-8BA57	8PQ2045-8BA13
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA54	8PQ2045-6BA12
			–	–	■	8PQ6000-8BA54	8PQ2045-6BA12
		800 mm	■	■	–	8PQ6000-8BA57	8PQ2045-8BA13
			–	–	■	8PQ6000-8BA57	8PQ2045-8BA13

System overview, page 15/18

© Siemens 2022


❷ Fixed-mounted version with RCD		❸ Plug-in version		❹ 8US design	
					
Device holders	**Covers**	**Device holders**	**Covers**	**Device holders**	**Covers**
–	–	–	–	8PQ6000-8BA33	8PQ2035-6BA26
–	–	–	–	8PQ6000-8BA40	8PQ2035-8BA20
8PQ6000-8BA33	8PQ2045-6BA08	8PQ6000-8BA33	8PQ2035-6BA26	8PQ6000-8BA33	8PQ2035-6BA26
8PQ6000-8BA33	8PQ2045-6BA08	8PQ6000-8BA33	8PQ2035-6BA26	8PQ6000-8BA33	8PQ2035-6BA26
8PQ6000-8BA47	8PQ2045-8BA08	8PQ6000-8BA47	8PQ2035-8BA16	8PQ6000-8BA40	8PQ2035-8BA20
8PQ6000-8BA47	8PQ2045-8BA08	8PQ6000-8BA47	8PQ2035-8BA16	8PQ6000-8BA40	8PQ2035-8BA20
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6000-8BA36	8PQ2040-6BA26	8PQ6000-8BA36	8PQ2040-6BA26
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6000-8BA36	8PQ2040-6BA26	8PQ6000-8BA36	8PQ2040-6BA26
8PQ6000-8BA43	8PQ2050-8BA12	8PQ6000-8BA44	8PQ2040-8BA23	8PQ6000-8BA41	8PQ2040-8BA23
8PQ6000-8BA43	8PQ2050-8BA12	8PQ6000-8BA44	8PQ2040-8BA23	8PQ6000-8BA41	8PQ2040-8BA23
–	–	8PQ6000-8BA56	8PQ2055-6BA22	–	–
–	–	8PQ6000-8BA56	8PQ2055-6BA22	–	–
–	–	8PQ6000-8BA60	8PQ2055-8BA15	–	–
–	–	8PQ6000-8BA60	8PQ2055-8BA15	–	–
–	–	8PQ6000-8BA56	8PQ2055-6BA22	–	–
–	–	8PQ6000-8BA56	8PQ2055-6BA22	–	–
–	–	8PQ6000-8BA60	8PQ2055-8BA15	–	–
–	–	8PQ6000-8BA60	8PQ2055-8BA15	–	–
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6000-8BA38	8PQ2045-6BA11	8PQ6000-8BA38	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6000-8BA38	8PQ2045-6BA13	8PQ6000-8BA38	8PQ2045-6BA13
8PQ6000-8BA50	8PQ2055-8BA11	8PQ6000-8BA51	8PQ2045-8BA11	8PQ6000-8BA42	8PQ2045-8BA11
8PQ6000-8BA50	8PQ2055-8BA13	8PQ6000-8BA51	8PQ2045-8BA15	8PQ6000-8BA42	8PQ2045-8BA15
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6000-8BA38	8PQ2045-6BA11	8PQ6000-8BA38	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6000-8BA38	8PQ2045-6BA13	8PQ6000-8BA38	8PQ2045-6BA13
8PQ6000-8BA50	8PQ2055-8BA11	8PQ6000-8BA51	8PQ2045-8BA11	8PQ6000-8BA42	8PQ2045-8BA11
8PQ6000-8BA50	8PQ2055-8BA13	8PQ6000-8BA51	8PQ2045-8BA15	8PQ6000-8BA42	8PQ2045-8BA15
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6000-8BA38	8PQ2045-6BA11	8PQ6000-8BA38	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6000-8BA38	8PQ2045-6BA13	8PQ6000-8BA38	8PQ2045-6BA13
8PQ6000-8BA50	8PQ2055-8BA11	8PQ6000-8BA51	8PQ2045-8BA11	8PQ6000-8BA42	8PQ2045-8BA11
8PQ6000-8BA50	8PQ2055-8BA13	8PQ6000-8BA51	8PQ2045-8BA15	8PQ6000-8BA42	8PQ2045-8BA15
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12	–	–
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12	–	–
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13	–	–
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13	–	–
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12	–	–
8PQ6000-8BA55	8PQ2060-6BA25	8PQ6000-8BA56	8PQ2045-6BA12	–	–
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13	–	–
8PQ6000-8BA58	8PQ2060-8BA07	8PQ6000-8BA60	8PQ2045-8BA13	–	–

System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, 4-pole

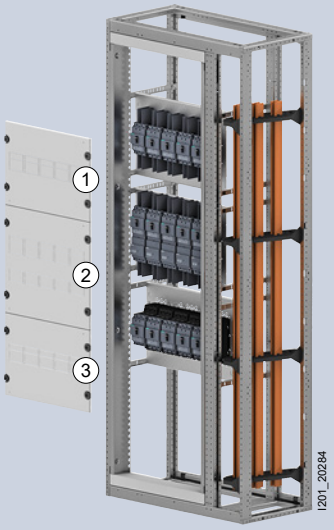



❶ Fixed-mounted version



Type	I_n	Width	Operating mechanism			Device holders	Covers
			Direct	Rotary	Motorized		
3VA10	100 A	600 mm	■	■	–	8PQ6000-8BA34	8PQ2035-6BA27
		800 mm	■	■	–	8PQ6000-8BA48	8PQ2035-8BA17
3VA11	160 A	600 mm	■	■	–	8PQ6000-8BA34	8PQ2035-6BA27
			–	–	■	8PQ6000-8BA34	8PQ2035-6BA27
		800 mm	■	■	–	8PQ6000-8BA48	8PQ2035-8BA17
			–	–	■	8PQ6000-8BA48	8PQ2035-8BA17
3VA12	250 A	600 mm	■	■	–	8PQ6000-8BA35	8PQ2040-6BA26
			–	–	■	8PQ6000-8BA35	8PQ2040-6BA26
		800 mm	■	■	–	8PQ6000-8BA45	8PQ2040-8BA24
			–	–	■	8PQ6000-8BA45	8PQ2040-8BA24
3VA13	400 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2050-6BA12
			–	–	■	8PQ6000-8BA64	8PQ2050-6BA12
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2050-8BA15
			–	–	■	8PQ6000-8BA61	8PQ2050-8BA15
3VA14	630 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2050-6BA12
			–	–	■	8PQ6000-8BA64	8PQ2050-6BA12
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2050-8BA15
			–	–	■	8PQ6000-8BA61	8PQ2050-8BA15
3VA20	100 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA52	8PQ2045-8BA12
			–	–	■	8PQ6000-8BA52	8PQ2045-8BA16
3VA21	160 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA52	8PQ2045-8BA12
			–	–	■	8PQ6000-8BA52	8PQ2045-8BA16
3VA22	250 A	600 mm	■	■	–	8PQ6000-8BA37	8PQ2045-6BA11
			–	–	■	8PQ6000-8BA37	8PQ2045-6BA13
		800 mm	■	■	–	8PQ6000-8BA52	8PQ2045-8BA12
			–	–	■	8PQ6000-8BA52	8PQ2045-8BA16
3VA23	400 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2045-6BA14
			–	–	■	8PQ6000-8BA64	8PQ2045-6BA14
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2045-8BA14
			–	–	■	8PQ6000-8BA61	8PQ2045-8BA14
3VA24	630 A	600 mm	■	■	–	8PQ6000-8BA64	8PQ2045-6BA14
			–	–	■	8PQ6000-8BA64	8PQ2045-6BA14
		800 mm	■	■	–	8PQ6000-8BA61	8PQ2045-8BA14
			–	–	■	8PQ6000-8BA61	8PQ2045-8BA14

System overview, page 15/18

© Siemens 2022


❷ Fixed-mounted version with RCD		❸ Plug-in version	
			
Device holders	**Covers**	**Device holders**	**Covers**
–	–	–	–
–	–	–	–
8PQ6000-8BA34	8PQ2045-6BA10	8PQ6000-8BA34	8PQ2035-6BA27
8PQ6000-8BA34	8PQ2045-6BA10	8PQ6000-8BA34	8PQ2035-6BA27
8PQ6000-8BA48	8PQ2045-8BA10	8PQ6000-8BA48	8PQ2035-8BA17
8PQ6000-8BA48	8PQ2045-8BA10	8PQ6000-8BA48	8PQ2035-8BA17
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6000-8BA36	8PQ2040-6BA26
8PQ6000-8BA35	8PQ2050-6BA10	8PQ6000-8BA36	8PQ2040-6BA26
8PQ6000-8BA45	8PQ2050-8BA13	8PQ6000-8BA46	8PQ2040-8BA24
8PQ6000-8BA45	8PQ2050-8BA13	8PQ6000-8BA46	8PQ2040-8BA24
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA63	8PQ2055-8BA16
–	–	8PQ6000-8BA63	8PQ2055-8BA16
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA66	8PQ2055-6BA23
–	–	8PQ6000-8BA63	8PQ2055-8BA16
–	–	8PQ6000-8BA63	8PQ2055-8BA16
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6000-8BA38	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6000-8BA38	8PQ2045-6BA13
8PQ6000-8BA52	8PQ2055-8BA12	8PQ6000-8BA53	8PQ2045-8BA12
8PQ6000-8BA52	8PQ2055-8BA14	8PQ6000-8BA53	8PQ2045-8BA16
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6000-8BA38	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6000-8BA38	8PQ2045-6BA13
8PQ6000-8BA52	8PQ2055-8BA12	8PQ6000-8BA53	8PQ2045-8BA12
8PQ6000-8BA52	8PQ2055-8BA14	8PQ6000-8BA53	8PQ2045-8BA16
8PQ6000-8BA37	8PQ2055-6BA20	8PQ6000-8BA38	8PQ2045-6BA11
8PQ6000-8BA37	8PQ2055-6BA21	8PQ6000-8BA38	8PQ2045-6BA13
8PQ6000-8BA52	8PQ2055-8BA12	8PQ6000-8BA53	8PQ2045-8BA12
8PQ6000-8BA52	8PQ2055-8BA14	8PQ6000-8BA53	8PQ2045-8BA16
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA65	8PQ2060-6BA26	8PQ6000-8BA66	8PQ2045-6BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14
8PQ6000-8BA62	8PQ2060-8BA08	8PQ6000-8BA63	8PQ2045-8BA14

System overview, page 15/18

© Siemens 2022

Section expansion

3VA molded case circuit breakers, Standard rail mounting

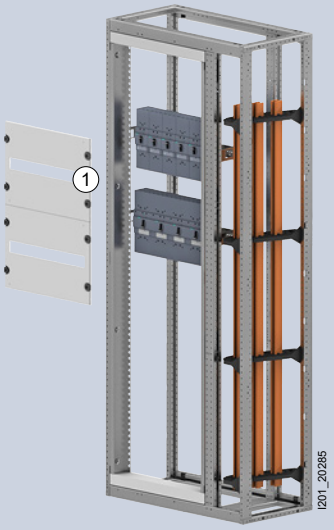

3-pole


Type	I_n	No. of switches/ breakers	Width	Height	Operating mechanism		
					Direct	Rotary	Motorized
3VA10	100 A	5	600 mm	350 mm	■	–	–
		8	800 mm	350 mm	■	–	–
3VA11	160 A	4	600 mm	350 mm	■	–	–
		5	800 mm	350 mm	■	–	–

4-pole

Type	I_n	No. of switches/ breakers	Width	Height	Operating mechanism		
					Direct	Rotary	Motorized
3VA10	100 A	4	600 mm	350 mm	■	–	–
		6	800 mm	350 mm	■	–	–
3VA11	160 A	3	600 mm	350 mm	■	–	–
		4	800 mm	350 mm	■	–	–

Accessories

Cable duct fastening



Version	Article No.
Mounting brackets	8PQ6000-0BA16

Blanking strips



Types	Article No.
12 MW (1 MW = 18 mm)	8GK9910-0KK00
Length 1 m	8GK9910-0KK01

System overview, page 15/18

© Siemens 2022

❶ Standard rail mounting




Device holders	Covers
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18

❶ Standard rail mounting





Device holders	Covers
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18
8PQ6000-3BA36	8PQ2035-6BA28
8PQ6000-3BA37	8PQ2035-8BA18

System overview, page 15/18

© Siemens 2022

Section expansion

3VA molded case circuit breakers, compartment door with door mounted rotary operator

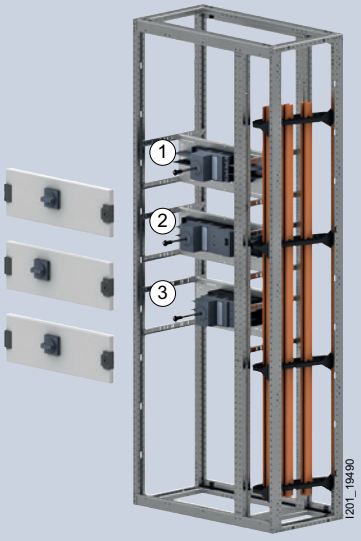

3-pole

			❶ Fixed-mounted version		❷ Fixed-mounted version with RCD	
Type	I_n	Width	Device holders	Compartment doors	Device holders	Compartment doors
3VA10	100 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	–	–
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	–	–
3VA11	160 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	8PQ6000-8BA01	8PQ2015-6BA33
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	8PQ6000-8BA02	8PQ2015-8BA12
3VA12	250 A	600 mm	8PQ6000-8BA03	8PQ2015-6BA34	8PQ6000-8BA03	8PQ2015-6BA35
		800 mm	8PQ6000-8BA07	8PQ2020-8BA22	8PQ6000-8BA07	8PQ2020-8BA22
3VA13	400 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA14	630 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA20	100 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA21	160 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA22	250 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA23	400 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15
3VA24	630 A	600 mm	8PQ6000-8BA23	8PQ2020-6BA46	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15

4-pole

			❶ Fixed-mounted version		❷ Fixed-mounted version with RCD	
Type	I_n	Width	Device holders	Compartment doors	Device holders	Compartment doors
3VA10	100 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	–	–
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	–	–
3VA11	160 A	600 mm	8PQ6000-8BA01	8PQ2015-6BA31	8PQ6000-8BA01	8PQ2015-6BA33
		800 mm	8PQ6000-8BA02	8PQ2015-8BA12	8PQ6000-8BA02	8PQ2015-8BA12
3VA12	250 A	600 mm	8PQ6000-8BA05	8PQ2020-6BA42	8PQ6000-8BA05	8PQ2020-6BA43
		800 mm	8PQ6000-8BA07	8PQ2020-8BA22	8PQ6000-8BA07	8PQ2020-8BA22
3VA13	400 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA14	630 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	–	–
3VA20	100 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA21	160 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA22	250 A	600 mm	8PQ6000-8BA08	8PQ2020-6BA44	8PQ6000-8BA11	8PQ2020-6BA45
		800 mm	8PQ6000-8BA10	8PQ2020-8BA23	8PQ6000-8BA10	8PQ2020-8BA23
3VA23	400 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15
3VA24	630 A	600 mm	8PQ6000-8BA25	8PQ2025-6BA24	–	–
		800 mm	8PQ6000-8BA27	8PQ2025-8BA15	8PQ6000-8BA27	8PQ2025-8BA15

System overview, page 15/18

© Siemens 2022

❸ Plug-in version




Device holders	Compartment doors
–	–
–	–
8PQ6000-8BA01	8PQ2015-6BA31
8PQ6000-8BA02	8PQ2015-8BA12
8PQ6000-8BA04	8PQ2015-6BA34
8PQ6000-8BA07	8PQ2020-8BA22
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23

❸ Plug-in version




Device holders	Compartment doors
–	–
–	–
8PQ6000-8BA01	8PQ2015-6BA31
8PQ6000-8BA02	8PQ2015-8BA12
8PQ6000-8BA06	8PQ2020-6BA42
8PQ6000-8BA07	8PQ2020-8BA22
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
8PQ6000-8BA08	8PQ2020-6BA44
8PQ6000-8BA10	8PQ2020-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23
–	–
8PQ6001-1BA02	8PQ2025-8BA23

Accessories

Compartment ID strip for plug-in plates, H = 17 mm



Width	Scope of supply	Article No.
600 mm	6 units	8PQ5000-3BA43
800 mm	6 units	8PQ5000-3BA46


15

System overview, page 15/18

© Siemens 2022

Section expansion


3VA molded case circuit breakers, internal separation – front connection

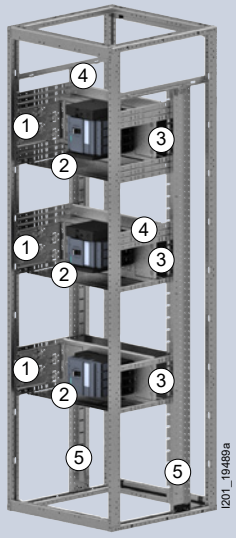

3-pole, width 600 mm

❶ Cable connection

4 units




Type	I_n	Height		Operating mechanism			
				Direct	Rotary	Motorized	
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28 + 8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28 + 8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28 + 8PQ5000-0BA05
3VA12	250 A	150 mm	Fixed-mounted	■	■		8PQ6000-8BA12
				–	–	■	8PQ6000-8BA13
			Plug-in	■	■	–	8PQ6000-8BA13
				–	–	■	8PQ6000-8BA12
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA12
3VA13	400 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA20
3VA14	630 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA20
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30
3VA21	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 + 8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30 + 8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16
				–	–	■	8PQ6000-8BA17
			Plug-in	■	■	–	8PQ6000-8BA17
				–	–	■	8PQ6000-8BA16
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA16
3VA23	400 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA20
				–	–	■	8PQ6000-8BA18
3VA24	630 A	200 mm	Fixed-mounted	■	■	■	8PQ6000-8BA20
				–	–	–	8PQ6000-8BA18

15

System overview, page 15/18

© Siemens 2022


	❷ Separation, horizontal	❸ Separation, rear	❹ Increase in module height	Horizontal separation with increase in module height
				
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	–	–
	8PQ5000-2BA61	8PQ5000-4BA40	2× 8PQ5000-4BA60	2× 8PQ5000-4BA68
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	8PQ5000-4BA62	8PQ5000-4BA70
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	8PQ5000-4BA62	8PQ5000-4BA70
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	8PQ5000-4BA62	8PQ5000-4BA70
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–
	8PQ5000-2BA61	8PQ5000-4BA41	–	–

System overview, page 15/18

© Siemens 2022

Section expansion


3VA molded case circuit breakers, internal separation – front connection

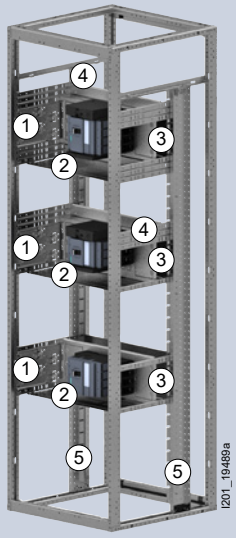

3-pole, width 800 mm

❶ Cable connection

4 units




Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28 +	8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28 +	8PQ5000-0BA05
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA14	
3VA13	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	
3VA14	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	
3VA20	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30 +	8PQ5000-0BA05
3VA21	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30 +	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30 +	8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16	
				–	–	■	8PQ6000-8BA17	
			Plug-in	■	■	■	8PQ6000-8BA17	
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA16	
3VA23	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	
3VA24	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22	
				–	–	■	8PQ6000-8BA21	
			Plug-in	■	■	■	8PQ6000-8BA21	
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22	

15

System overview, page 15/18

© Siemens 2022


	❷ Separation, horizontal	❸ Separation, rear	❹ Increase in module height
			
	8PQ5000-2BA62	–	–
	8PQ5000-2BA62	–	–
	8PQ5000-2BA62	–	–
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA61 + 8PQ5000-4BA71
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA63 + 8PQ5000-4BA72
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA63 + 8PQ5000-4BA72
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	–
	8PQ5000-2BA62	8PQ5000-4BA48	8PQ5000-4BA63 + 8PQ5000-4BA72
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	–
	8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72

System overview, page 15/18

© Siemens 2022

Section expansion


3VA molded case circuit breakers, internal separation – front connection

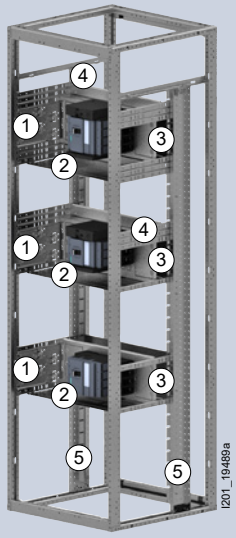

4-pole, width 600 mm

❶ Cable connection


4 units



Type	I_n	Height		Operating mechanism			Terminals		
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA12	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA14		
				–	–	■	8PQ6000-8BA15		
			Plug-in	■	■	–	8PQ6000-8BA15		
				–	–	■	8PQ6000-8BA14		
		300 mm	Withdrawable	■	–	■	8PQ6000-8BA14		
3VA13	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
3VA14	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
3VA20	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	–	8PQ5000-2BA30	+	8PQ5000-0BA05
				–	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA21	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	–	8PQ5000-2BA30	+	8PQ5000-0BA05
				–	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16		
				–	–	■	8PQ6000-8BA17		
			Plug-in	■	■	–	8PQ6000-8BA17		
				–	–	■	8PQ6000-8BA17		
		200 mm	Withdrawable	■	–	■	8PQ6000-8BA17		
3VA23	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
3VA24	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		

System overview, page 15/18

© Siemens 2022


	❷ Separation, horizontal	❸ Separation, rear	❹ Increase in module height
			 
4th pole			
	8PQ5000-2BA61	8PQ5000-4BA40	–
	8PQ5000-2BA61	8PQ5000-4BA40	–
	8PQ5000-2BA61	8PQ5000-4BA40	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	2× 8PQ5000-4BA60 + 2× 8PQ5000-4BA68
	8PQ6000-2BA61	8PQ5000-4BA42	–
	8PQ6000-2BA61	8PQ5000-4BA42	–
	8PQ6000-2BA61	8PQ5000-4BA42	–
	8PQ6000-2BA61	8PQ5000-4BA42	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	2× 8PQ5000-4BA62 + 2× 8PQ5000-4BA70
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	–
	8PQ5000-2BA61	8PQ5000-4BA41	2× 8PQ5000-4BA62 + 2× 8PQ5000-4BA70
+ 8PQ5000-4BA58	8PQ5000-2BA61	8PQ5000-4BA41	–
+ 8PQ5000-4BA58	8PQ5000-2BA61	8PQ5000-4BA41	–
+ 8PQ5000-4BA58	8PQ5000-2BA61	8PQ5000-4BA41	–
+ 8PQ5000-4BA58	8PQ5000-2BA61	8PQ5000-4BA41	–
+ 8PQ5000-4BA58	8PQ5000-2BA61	8PQ5000-4BA41	2× 8PQ5000-4BA62 + 2× 8PQ5000-4BA70
	8PQ5000-2BA61	8PQ5000-4BA42	–
	8PQ5000-2BA61	8PQ5000-4BA42	–
	8PQ5000-2BA61	8PQ5000-4BA42	–
	8PQ5000-2BA61	8PQ5000-4BA42	–
	8PQ5000-2BA61	8PQ5000-4BA42	–

System overview, page 15/18

© Siemens 2022

Section expansion


3VA molded case circuit breakers, internal separation – front connection

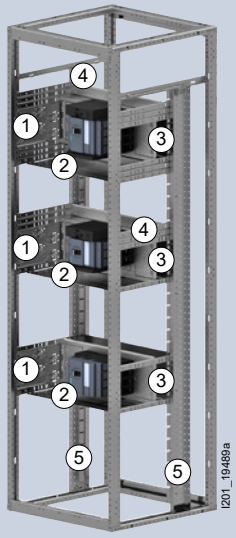

4-pole, width 800 mm

❶ Cable connection

4 units




Type	I_n	Height		Operating mechanism			Terminals		
				Direct	Rotary	Motorized			
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA28	+	8PQ5000-0BA05
3VA12	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA14		
				–	–	■	8PQ6000-8BA15		
			Plug-in	■	■	–	8PQ6000-8BA15		
				–	–	■	8PQ6000-8BA14		
		300 mm	Withdrawable	■	–	■	8PQ6000-8BA14		
3VA13	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
		300 mm	Withdrawable	■	–	–	8PQ6000-8BA22		
3VA14	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
			Withdrawable	■	–	–	8PQ6000-8BA22		
3VA20	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA21	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
			Plug-in	■	■	■	8PQ5000-2BA30	+	8PQ5000-0BA05
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	+	8PQ5000-0BA05
3VA22	250 A	200 mm	Fixed-mounted	■	■	–	8PQ6000-8BA16		
				–	–	■	8PQ6000-8BA17		
			Plug-in	■	■		8PQ6000-8BA17		
				–	–	■	8PQ6000-8BA16		
		250 mm	Withdrawable	■	–	■	8PQ6000-8BA16		
3VA23	400 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		
			Plug-in	■	■	■	8PQ6000-8BA21		
3VA24	630 A	250 mm	Fixed-mounted	■	■	–	8PQ6000-8BA22		
				–	–	■	8PQ6000-8BA21		

15

System overview, page 15/18

© Siemens 2022

		❷ Separation, horizontal	❸ Separation, rear	❹ Increase in module height
				
	4th pole			
		8PQ5000-2BA62	–	–
		8PQ5000-2BA62	–	–
		8PQ5000-2BA62	–	–
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	2× 8PQ5000-4BA61 + 2× 8PQ5000-4BA71
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	8PQ5000-4BA63 + 8PQ5000-4BA72
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	–
		8PQ5000-2BA62	8PQ5000-4BA48	2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72
+	8PQ5000-4BA58	8PQ5000-2BA62	8PQ5000-4BA48	–
+	8PQ5000-4BA58	8PQ5000-2BA62	8PQ5000-4BA48	–
+	8PQ5000-4BA58	8PQ5000-2BA62	8PQ5000-4BA48	–
+	8PQ5000-4BA58	8PQ5000-2BA62	8PQ5000-4BA48	–
+	8PQ5000-4BA58	8PQ5000-2BA62	8PQ5000-4BA48	2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–
		8PQ5000-2BA62	8PQ5000-4BA50	–

System overview, page 15/18

© Siemens 2022

Section expansion

3VA molded case circuit breakers, internal separation – front connection

Accessories

❺ Plug-in rails




Equipment height	Busbar system	Article No.
1600 mm	Top	8PQ3000-0BA82
1800 mm	Rear or without	8PQ3000-0BA83

Protective bellows



Version	Scope of supply	Article No.
For connecting terminal	4 units	8PQ9400-0BA71

Cable entries



Version	Scope of supply	Article No.
Cables with diam. up to 20 mm Ø Installation = 25.5 mm	20 units	8PQ9400-0BA16

System overview, page 15/18


© Siemens 2022


System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, internal separation – rear connection

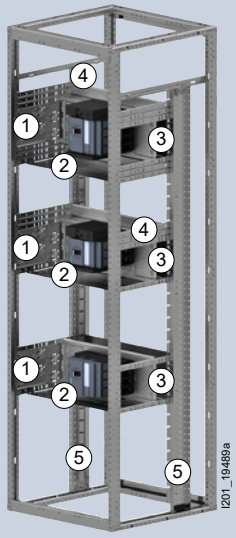

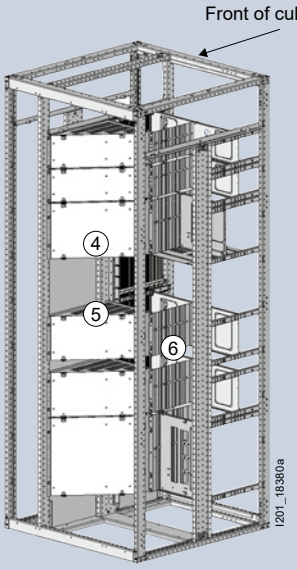

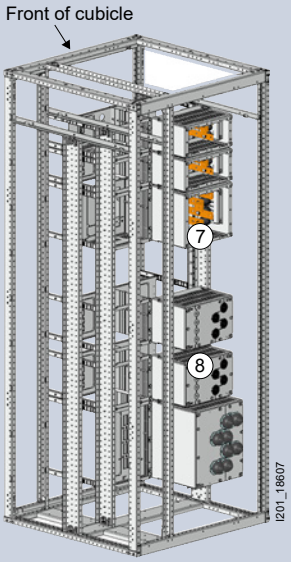





3-pole, width 600 mm

❶ Separation, lateral	❷ Separation, horizontal
	

Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61
3VA11	160 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61
			Plug-in	■	–	–	8PQ5000-2BA28	8PQ5000-2BA61
3VA12	250 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA28	8PQ5000-2BA61
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA28	8PQ5000-2BA61
3VA13	400 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61
3VA14	630 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		250 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA23	400 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61
3VA24	630 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA31	8PQ5000-2BA61

System overview, page 15/18

© Siemens 2022


❸ Increase in module height	❹ Vertical busbar separation	❺ Segment covers	❻ Support plates	❼ Connection compartments	❽ Cable entries
					
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA15	8PQ5000-3BA71
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA15	8PQ5000-3BA71
2× 8PQ5000-4BA60 + 2× 8PQ5000-4BA68	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA15	8PQ5000-3BA71
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
8PQ5000-4BA62 + 8PQ5000-4BA70	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
8PQ5000-4BA62 + 8PQ5000-4BA70	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-8BA30	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-8BA30	8PQ5000-3BA72
8PQ5000-4BA62 + 8PQ5000-4BA70	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-8BA30	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA18	8PQ5000-3BA73


System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, internal separation – rear connection

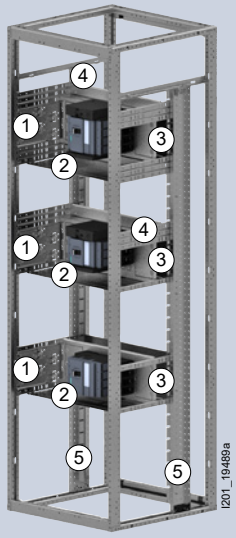

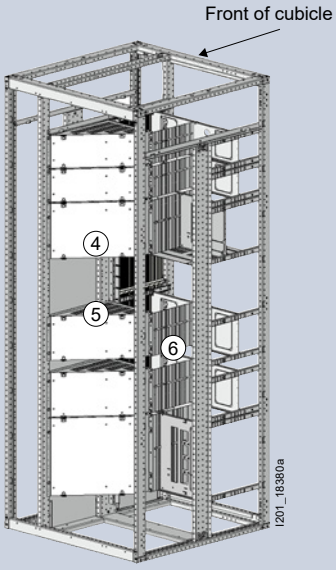

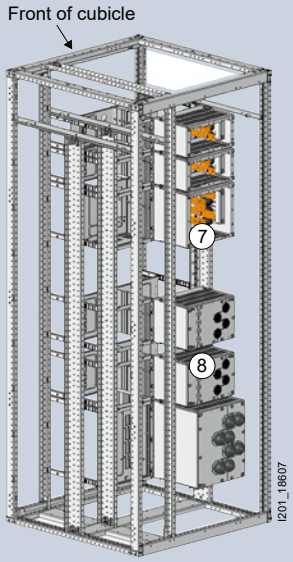







4-pole, width 600 mm

❶ Separation, lateral	❷ Separation, horizontal
	

Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	8PQ5000-2BA61
			Plug-in	■	■	–	8PQ5000-2BA28	8PQ5000-2BA61
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA61
		300 mm	Withdrawable	■	–	■	8PQ5000-2BA30	8PQ5000-2BA61
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA61

System overview, page 15/18

© Siemens 2022


❸ Increase in module height	❹ Vertical busbar connection	❺ Segment covers	❻ Support plates	❼ Connection compartments	❽ Cable entries
					
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA52	8PQ5000-3BA63	8PQ5000-4BA73	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72
2× 8PQ5000-4BA60 + 2× 8PQ5000-4BA68	8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
2× 8PQ5000-4BA62 + 2× 8PQ5000-4BA70	8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
2× 8PQ5000-4BA62 + 2× 8PQ5000-4BA70	8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA53	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72
2× 8PQ5000-4BA62 + 2× 8PQ5000-4BA70	8PQ5000-3BA55	8PQ5000-3BA63	8PQ5000-4BA74	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA54	8PQ5000-3BA63	8PQ5000-4BA75	8PQ6000-5BA20	8PQ5000-3BA74


System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, internal separation – rear connection

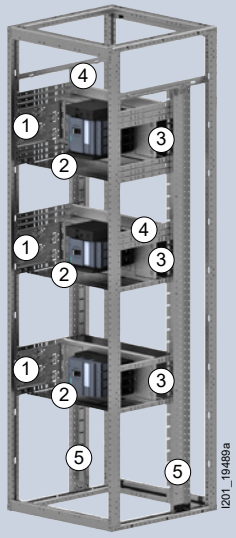

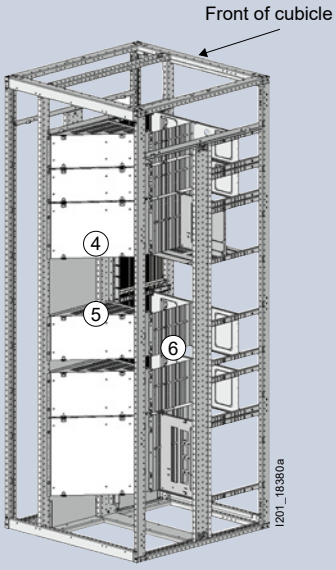

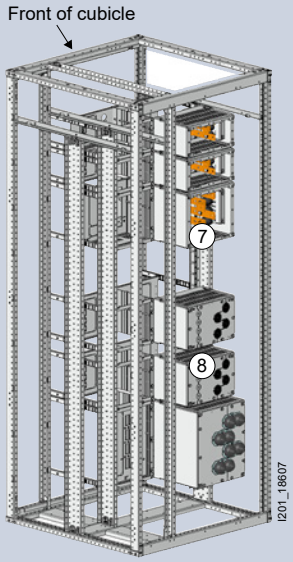





3-pole, width 800 mm

❶ Separation, lateral	❷ Separation, horizontal
	

Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	–	–	8PQ5000-2BA28	8PQ5000-2BA62
3VA11	160 A	150 mm	Fixed-mounted	■	–	–	8PQ5000-2BA28	8PQ5000-2BA62
			Plug-in	■	–	–	8PQ5000-2BA28	8PQ5000-2BA62
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		250 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62

System overview, page 15/18

© Siemens 2022

❸ Increase in module height	❹ Vertical busbar connection	❺ Segment covers	❻ Support plates	❼ Connection compartments	❽ Cable entries
					
–	8PQ5000-3BA57	8PQ5000-3BA64	8PQ5000-4BA76	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA57	8PQ5000-3BA64	8PQ5000-4BA76	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA57	8PQ5000-3BA64	8PQ5000-4BA76	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
8PQ5000-4BA61 + 8PQ5000-4BA71	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-8BA30	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-8BA30	8PQ5000-3BA72
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-8BA30	8PQ5000-3BA72
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74


15


System overview, page 15/18


© Siemens 2022

Section expansion

3VA molded case circuit breakers, internal separation – rear connection

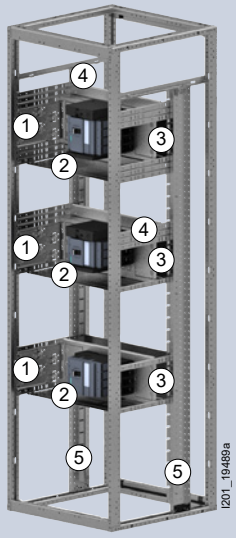

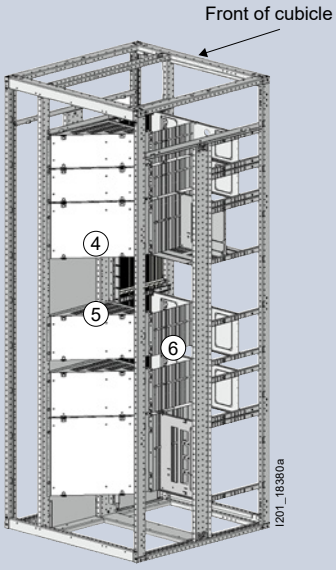

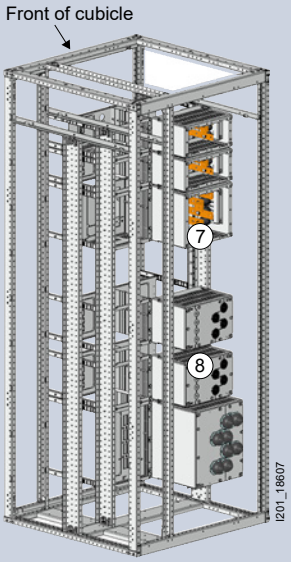







4-pole, width 800 mm

❶ Separation, lateral	❷ Separation, horizontal
	

Type	I_n	Height		Operating mechanism				
				Direct	Rotary	Motorized		
3VA10	100 A	150 mm	Fixed-mounted	■	■	–	8PQ5000-2BA28	8PQ5000-2BA62
3VA11	160 A	150 mm	Fixed-mounted	■	■	■	8PQ5000-2BA28	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA28	8PQ5000-2BA62
3VA12	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA13	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
3VA14	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
3VA20	100 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA21	160 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA22	250 A	200 mm	Fixed-mounted	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA30	8PQ5000-2BA62
		300 mm	Withdrawable	■	–	–	8PQ5000-2BA30	8PQ5000-2BA62
3VA23	400 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
		350 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62
3VA24	630 A	250 mm	Fixed-mounted	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
			Plug-in	■	■	■	8PQ5000-2BA33	8PQ5000-2BA62
		350 mm	Withdrawable	■	–	–	8PQ5000-2BA33	8PQ5000-2BA62

System overview, page 15/18

© Siemens 2022

❸ Increase in module height	❹ Vertical busbar connection	❺ Segment covers	❻ Support plates	❼ Connection compartments	❽ Cable entries
					
–	8PQ5000-3BA57	8PQ5000-3BA64	8PQ5000-4BA76	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA57	8PQ5000-3BA64	8PQ5000-4BA76	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA57	8PQ5000-3BA64	8PQ5000-4BA76	8PQ6000-5BA13	8PQ5000-4BA80
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
2× 8PQ5000-4BA61 + 2× 8PQ5000-4BA71	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
8PQ5000-4BA63 + 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA14	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72	8PQ5000-3BA58	8PQ5000-3BA64	8PQ5000-4BA77	8PQ6000-5BA17	8PQ5000-3BA72
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
–	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74
2× 8PQ5000-4BA63 + 2× 8PQ5000-4BA72	8PQ5000-3BA60	8PQ5000-3BA64	8PQ5000-4BA78	8PQ6000-5BA20	8PQ5000-3BA74

System overview, page 15/18

© Siemens 2022

Section expansion

3VA molded case circuit breakers, internal separation – rear connection

Accessories

❺ Plug-in rails



Equipment height	Busbar system	Article No.
1600 mm	Top	8PQ3000-0BA82
1800 mm	Rear or without	8PQ3000-0BA83

System overview, page 15/18


© Siemens 2022



System overview, page 15/18

© Siemens 2022

Section expansion

3K switch disconnectors

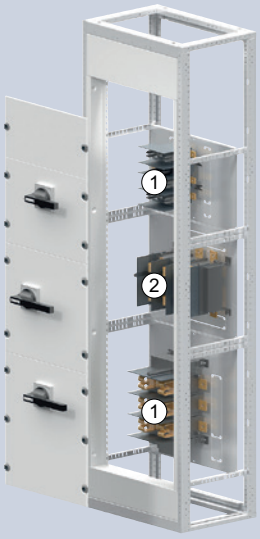

			❶ Horizontal			
			3-pole		4-pole	
						
Switching devices	**Width**	**Height**	**Device holders**	**Covers**	**Device holders**	**Covers**
3KL50/3KL52	600 mm	250 mm	–	–	–	–
		300 mm	8PQ6000-2BA65	8PQ2030-6BA06	8PQ6000-2BA65	8PQ2030-6BA06
3KL55/3KL57	600 mm	350 mm	8PQ6000-2BA71	8PQ2035-6BA08	8PQ6000-2BA71	8PQ2035-6BA08
3KL61	600 mm	450 mm	–	–	–	–
		550 mm	8PQ6000-2BA50	8PQ2055-6BA02	8PQ6000-2BA50	8PQ2055-6BA02
3KL711/3KA711	600 mm	200 mm	8PQ6000-2BA52	8PQ2020-6BA10	8PQ6000-2BA52	8PQ2020-6BA10
	800 mm	200 mm	–	–	–	–
3KL712/3KA712	600 mm	250 mm	8PQ6000-2BA55	8PQ2025-6BA03	8PQ6000-2BA55	8PQ2025-6BA03
	800 mm	250 mm	–	–	–	–
3KL713/3KA713	600 mm	300 mm	8PQ6000-2BA58	8PQ2030-6BA04	8PQ6000-2BA58	8PQ2030-6BA04
	800 mm	300 mm	–	–	–	–
3KL714/3KA714	600 mm	350 mm	8PQ6000-2BA62	8PQ2035-6BA06	8PQ6000-2BA62	8PQ2035-6BA06
	800 mm	350 mm	–	–	–	–
3KL715/3KA715 [1]	600 mm	450 mm	8PQ6000-2BA67	8PQ2045-6BA02	8PQ6000-2BA67	8PQ2045-6BA02
	800 mm	450 mm	–	–	–	–


[1] Due to the size of its handle, the 3KA715 disconnector can be used only up to 1250 A/35 kA when installed horizontally.
Due to the size of its handle, the 1250 A/50 kA 3KA715 disconnector requires an additional 200 mm cover.

System overview, page 15/18


© Siemens 2022

❷ Vertical

3-pole

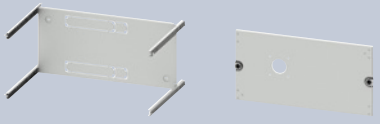

4-pole

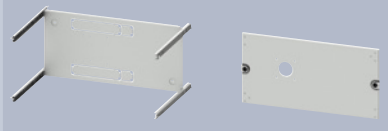


Device holders	Covers	Device holders	Covers
8PQ6000-2BA66	8PQ2025-6BA05	8PQ6000-2BA66	8PQ2025-6BA05
–	–	–	–
8PQ6000-2BA72	8PQ2035-6BA10	8PQ6000-2BA72	8PQ2035-6BA10
8PQ6000-2BA51	8PQ2045-6BA01	–	–
–	–	–	–
8PQ6000-2BA53	8PQ2020-6BA11	8PQ6000-2BA53	8PQ2020-6BA11
8PQ6000-2BA54	8PQ2020-8BA04	8PQ6000-2BA54	8PQ2020-8BA04
8PQ6000-2BA56	8PQ2025-6BA04	8PQ6000-2BA56	8PQ2025-6BA04
8PQ6000-2BA57	8PQ2025-8BA02	8PQ6000-2BA57	8PQ2025-8BA02
8PQ6000-2BA60	8PQ2030-6BA05	8PQ6000-2BA60	8PQ2030-6BA05
8PQ6000-2BA61	8PQ2030-8BA02	8PQ6000-2BA61	8PQ2030-8BA02
8PQ6000-2BA63	8PQ2035-6BA07	8PQ6000-2BA63	8PQ2035-6BA07
8PQ6000-2BA64	8PQ2035-8BA04	8PQ6000-2BA64	8PQ2035-8BA04
8PQ6000-2BA68	8PQ2045-6BA03	8PQ6000-2BA68	8PQ2045-6BA03
8PQ6000-2BA70	8PQ2045-8BA01	8PQ6000-2BA70	8PQ2045-8BA01



System overview, page 15/18

© Siemens 2022

Section expansion

3NP1 fuse switch disconnectors, 3-pole

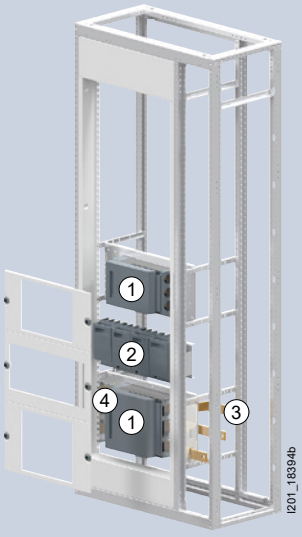

	❶ Horizontal		❸ Section busbars	❹ Cable connection
				

Switching device	Fuse	I_n	Width	Device holders	Covers		Form 3
3NP1143	NH1	250 A	600 mm	8PQ6000-3BA75	8PQ2025-6BA16	8PQ6000-5BA68	8PQ6000-5BA72
3NP1153	NH2	400 A	600 mm	8PQ6000-3BA75	8PQ2025-6BA17	8PQ6000-5BA70	8PQ6000-5BA73
3NP1163	NH3	630 A	600 mm	8PQ6000-3BA77	8PQ2030-6BA22	8PQ6000-5BA71	8PQ6000-5BA74

3NP1 fuse switch disconnectors see page 8/94

System overview, page 15/18

© Siemens 2022

❷ Vertical





Switching device	Fuse	I_n	Width	No. of switches/ breakers	Device holders	Covers
3NP1123	NH000	160 A	600 mm	4	8PQ6000-3BA78	8PQ2025-6BA18
			800 mm	6	8PQ6000-3BA82	8PQ2025-8BA10
3NP1133	NH00	160 A	600 mm	4	8PQ6000-3BA78	8PQ2030-6BA23
			800 mm	5	8PQ6000-3BA82	8PQ2030-8BA11

System overview, page 15/18

© Siemens 2022

Section expansion

3NJ4 fuse switch disconnectors, 3-pole



				Device holders		Busbar holders		Covers
Size	**I_n**	**Width**	**No. of switches/breakers**					
NH1 – NH3	630 A	600 mm	4× 100 mm	8PQ6000-2BA48	2×	3NJ5974-0AB		8PQ2000-6BA06
		800 mm	6× 100 mm	8PQ6000-2BA48	2×	3NJ5974-0AB		8PQ2000-8BA06

Accessories

Blanking covers





Size	Width	Article No.
NH 00	50 mm	3NJ4912-2AA00
NH 1, 2, 3	100 mm	3NJ4912-2BA00

3NJ4 fuse switch disconnectors see page 8/102

System overview, page 15/18

© Siemens 2022


Compartment doors	Separation		
			
	Form 3b	horizontal	
8PQ2080-6BA10	8PQ5000-1BA70	8PQ5000-2BA61	+ 8PQ5000-2BA63
8PQ2080-8BA05	8PQ5000-1BA71	8PQ5000-2BA62	+ 8PQ5000-2BA63


System overview, page 15/18

© Siemens 2022

Section expansion

3NJ6 switch disconnectors with fuses, 3 and 4-pole

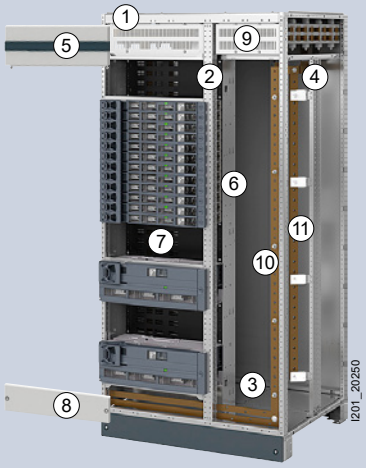

							Device compartment		
		❶ Frame	❷ Exterior intermediate uprights	❸ Bottom plate partition cross-bars	❹ Uprights	❺ Head compartment covers	❻ 3NJ6 assembly kit	❼ Cover Distribution busbar	
									
Width	**Depth**								
Device compartment 600 mm + Cable compartment 400 mm									
1000 mm	400 mm	8PQ1201-4BA02	8PQ3000-1BA43	1× 8PQ3000-1BA38	8PQ3000-0BA65	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
	600 mm	8PQ1201-6BA02	8PQ3000-1BA43	1× 8PQ3000-1BA40	8PQ3000-0BA01	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
	800 mm	8PQ1201-8BA03	8PQ3000-1BA43	2× 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
	800 mm duplex	8PQ1201-8BA03	8PQ3000-1BA43	2× 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
Device compartment 600 mm + Cable compartment 600 mm									
1200 mm	400 mm	8PQ1202-4BA02	8PQ3000-1BA43	1× 8PQ3000-1BA38	8PQ3000-0BA65	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
	600 mm	8PQ1202-6BA02	8PQ3000-1BA43	1× 8PQ3000-1BA40	8PQ3000-0BA01	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
	800 mm	8PQ1202-8BA02	8PQ3000-1BA43	2× 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	
	800 mm duplex	8PQ1202-8BA02	8PQ3000-1BA43	2× 8PQ3000-1BA38	8PQ3000-0BA02	8PQ2022-6BA01	8PQ3000-1BA48 +	6x 3NJ6916-4EA00	

Accessories

Device compartments



Höhe	Article No.
200 mm	8PQ3000-1BA50
400 mm	8PQ3000-1BA51

Blanking covers






Höhe	Article No.
50 mm	3NJ6900-4CB00

System overview, page 15/18


Technical specifications, distribution busbar

	Rated operational current I_n, ventilated in A						
Cross-section	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C
60 × 10 mm	1680	1640	1600	1560	1520	1480	1430
80 × 10 mm	2260	2210	2155	2100	2045	1985	1925

Device compartment		Cable compartment						
❽ Base compartment covers	❾ Separation main busbar	❾ Separation main busbar	❿ PE Elevation	⓫ N/PEN connection	⓬ Section doors with double-bit lock		for profile semicylinder	
								
					left	right	left	right
8PQ2000-6BA07	8PQ3000-1BA44	8PQ3000-0BA67	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA45	8PQ3000-0BA52	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA46	8PQ3000-0BA55	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA47	8PQ3000-0BA58	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-4BA08	8PQ2197-4BA11	8PQ2197-4BA06	8PQ2197-4BA07
8PQ2000-6BA07	8PQ3000-1BA44	8PQ3000-0BA68	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05
8PQ2000-6BA07	8PQ3000-1BA45	8PQ3000-0BA53	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05
8PQ2000-6BA07	8PQ3000-1BA46	8PQ3000-0BA56	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05
8PQ2000-6BA07	8PQ3000-6BA07	8PQ3000-0BA60	8PQ4000-2BA23	8PQ4000-2BA22	8PQ2197-6BA06	8PQ2197-6BA13	8PQ2197-6BA04	8PQ2197-6BA05

15

Terminal covers, form 4b





Size	Article No.
NH 00	3NJ6923-1DA00
NH 1	3NJ6933-1DA01
NH 2–3	3NJ6943-1DA00
4th pole for all sizes	3NJ6904-1DA00


3NJ63 switch disconnectors with fuses see page 8/134

System overview, page 15/18

© Siemens 2022

Section expansion

Modular installation devices

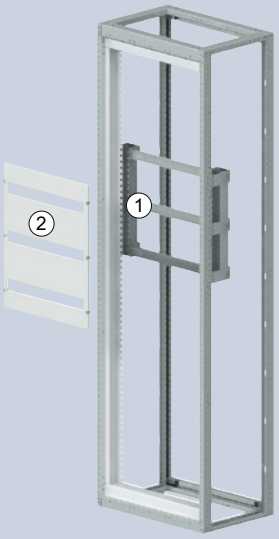

Internal covers

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	1× 24	150 mm	150 mm	1× 8PQ6000-3BA36	8PQ2015-6BA07
		200 mm	200 mm	1× 8PQ6000-3BA36	8PQ2020-6BA12
800 mm	1× 35	150 mm	150 mm	1× 8PQ6000-3BA37	8PQ2015-8BA03
		200 mm	200 mm	1× 8PQ6000-3BA37	8PQ2020-8BA05

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	2× 24	150 mm	300 mm	2× 8PQ6000-3BA36	8PQ2030-6BA07
		200 mm	400 mm	2× 8PQ6000-3BA36	8PQ2040-6BA10
800 mm	2× 35	150 mm	300 mm	2× 8PQ6000-3BA37	8PQ2030-8BA03
		200 mm	400 mm	2× 8PQ6000-3BA37	8PQ2040-8BA10

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	3× 24	150 mm	450 mm	3× 8PQ6000-3BA36	8PQ2045-6BA04
		200 mm	600 mm	3× 8PQ6000-3BA36	8PQ2060-6BA04
800 mm	3× 35	150 mm	450 mm	3× 8PQ6000-3BA37	8PQ2045-8BA02
		200 mm	600 mm	3× 8PQ6000-3BA37	8PQ2060-8BA02

Compartment doors

Width	MW	Tier spacing	Height	❶ Device holders	❷ Covers
600 mm	1× 24	200 mm	200 mm	1 × 8PQ6000-6BA52	8PQ2020-6BA28
800 mm	1× 35	200 mm	200 mm	1 × 8PQ6000-6BA53	8PQ2020-8BA14

Accessories

Cable duct fastening		
	Version	Article No.
	Mounting brackets	8PQ6000-0BA16
Blanking strips		
	Types	Article No.
	12 MW (1 MW = 18 mm)	8GK9910-0KK00
	Length 1 m	8GK9910-0KK01


15

System overview, page 15/18

© Siemens 2022

Section expansion

Cable section

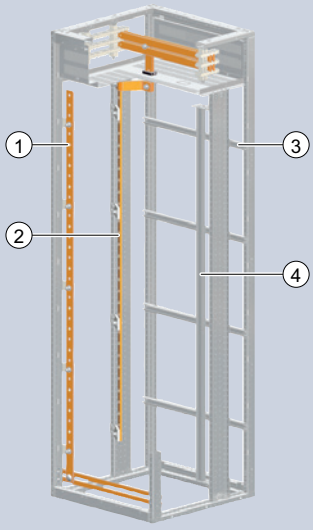

❶ PE bars



Version	Scope of supply	Article No.
Busbar supports	5 units	8PQ4000-2BA23



Version	Scope of supply	Article No.
Frame connection	6 units	8PQ4000-0BA82



Version	Scope of supply	Article No.
PE connection, cable	6 units	8PQ4000-2BA58 new



Version	Scope of supply	Article No.
Spacer	2 units	8PQ4000-3BA01 new

❷ N/PEN connection



Version	Article No.
Busbar supports and connection terminals	8PQ4000-2BA22

❸ Cable fixtures



Version	Scope of supply	Article No.
Holders	10 units	8PQ3000-0BA73




Version	Width	Depth	Scope of supply	Article No.
C 30 x 15 mm	350 mm	–	5 units	8PQ3000-0BA38
	400 mm	–	5 units	8PQ3000-0BA41
	600 mm	–	5 units	8PQ3000-0BA42
	800 mm	–	5 units	8PQ3000-0BA43
	–	400 mm	5 units	8PQ3000-0BA38

❹ DIN rail outgoing terminals



Version	Scope of supply	Article No.
Universal brackets	10 units	8PQ9400-0BA01




Length	DIN rail	Article No.
1600 mm	35 mm	8PQ9600-0BA01

System overview, page 15/18

© Siemens 2022



Section expansion

Corner sections

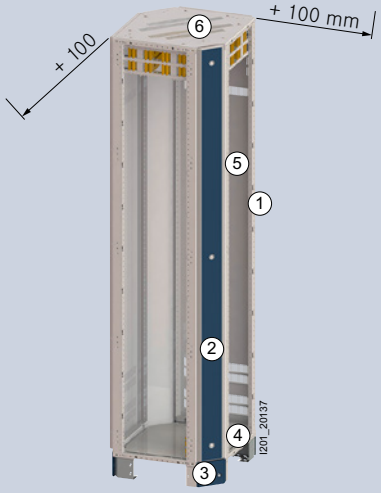

Position of main busbar

At top


❶ Frames	❷ Conversion kits	❸ Base corner pieces		❹ Base plates
				

Depth				Height 100 mm	200 mm	IP55
400 mm	8PQ1204-4BA01	+	8PQ1200-0BA03	8PQ1010-0BA04	8PQ1024-4BA01	8PQ2304-4BA12
600 mm	8PQ1206-6BA01	+	8PQ1200-0BA03	8PQ1010-0BA05	8PQ1026-6BA01	8PQ2306-6BA12
800 mm	8PQ1208-8BA01	+	8PQ1200-0BA03	8PQ1018-8BA01	8PQ1028-8BA01	8PQ2308-8BA08

System overview, page 15/18

© Siemens 2022

At bottom

	❺ Rear panels		❻ Top plates		
					
IP20	**IP40**	**IP55**	**IP40**	**IP55**	**IPX1**
8PQ2300-4BA25	2× 8PQ2420-4BA02	2× 8PQ2420-4BA01	8PQ2304-4BA10	8PQ2304-4BA08	8PQ2304-4BA11
8PQ2300-6BA27	2× 8PQ2420-6BA02	2× 8PQ2420-6BA01	8PQ2306-6BA10	8PQ2306-6BA08	8PQ2306-6BA11
8PQ2300-8BA14	2× 8PQ2420-8BA02	2× 8PQ2420-8BA01	8PQ2308-8BA06	8PQ2308-8BA05	8PQ2308-8BA07

System overview, page 15/18

© Siemens 2022

Section expansion



Mounting plates




	❶ Double section doors – with double-bit lock		❶ Double section doors – for profile semicylinders		❷ Inner doors	Inner door struts
						
Width	**IP40**	**IP55**	**IP40**	**IP55**		
600 mm	–	–	–	–	8PQ2000-6BA05	2× 8PQ2080-0BA07
800 mm	–	–	–	–	8PQ2000-8BA05	2× 8PQ2080-0BA07
1000 mm (600 + 400 mm)	8PQ2197-1BA14	8PQ2197-1BA13	8PQ2197-1BA16	8PQ2197-1BA15	8PQ2000-1BA01	2× 8PQ2080-0BA07
1200 mm (600 + 600 mm)	8PQ2197-2BA11	8PQ2197-2BA10	8PQ2197-2BA13	8PQ2197-2BA12	–	–


System overview, page 15/18

© Siemens 2022

Position of main busbar	At top		At rear	
			Without	
	❸ Mounting plates	❹ Connecting panels	❸ Mounting plates	❹ Connecting panels
				
Width				
400 mm	8PQ3000-0BA33	8PQ3000-1BA10	8PQ3000-0BA32	8PQ3000-1BA08
600 mm	8PQ3000-0BA35	8PQ3000-1BA10	8PQ3000-0BA34	8PQ3000-1BA08
800 mm	8PQ3000-0BA37	8PQ3000-1BA10	8PQ3000-0BA36	8PQ3000-1BA08
1000 mm	8PQ3000-1BA06	8PQ3000-1BA10	8PQ3000-1BA04	8PQ3000-1BA08
1200 mm	8PQ3000-1BA07	8PQ3000-1BA10	8PQ3000-1BA05	8PQ3000-1BA08


Modular mounting plates





Height	Width 400 mm	600 mm	800 mm
150 mm	8PQ3000-2BA60	8PQ3000-2BA62	8PQ3000-2BA64
200 mm	8PQ3000-2BA17	8PQ3000-1BA56	8PQ3000-1BA58
250 mm	–	8PQ3000-3BA63	8PQ3000-3BA64
300 mm	8PQ3000-2BA66	8PQ3000-2BA51	8PQ3000-2BA53
400 mm	8PQ3000-2BA18	8PQ3000-1BA61	8PQ3000-1BA63
550 mm	8PQ3000-3BA65	8PQ3000-3BA07	8PQ3000-3BA08
600 mm	8PQ3000-2BA21	8PQ3000-1BA65	8PQ3000-1BA67
800 mm	8PQ3000-2BA23	8PQ3000-1BA26	8PQ3000-1BA28

Cable entries



Version	Scope of supply	Article No.
Cables with diam. up to 20 mm Ø installation = 25.5 mm	20 units	8PQ9400-0BA16

Position of main busbar	At top	At rear
		Without
	❺ Uprights	
		
Depth		
600 mm	8PQ3000-0BA01	8PQ3000-0BA03
800 mm	8PQ3000-0BA02	8PQ3000-0BA03

System overview, page 15/18


© Siemens 2022


Internal separation

Quick selection guide

Form 1

No internal separation

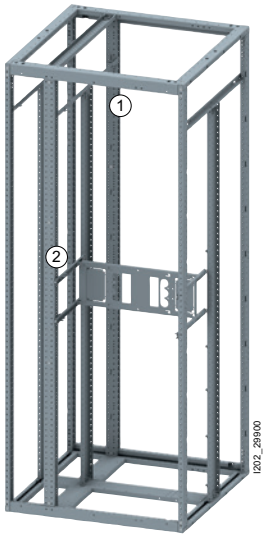


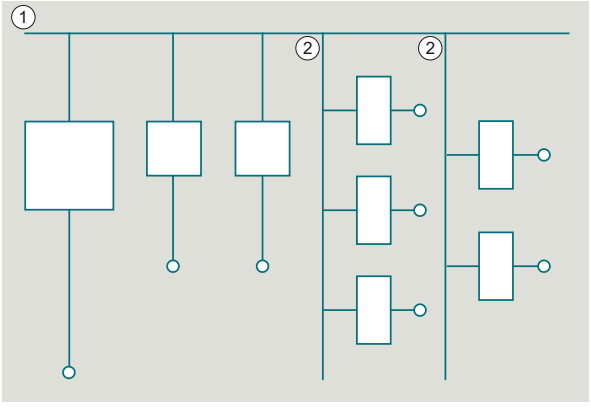


Functional unit Connection

Form 2b

Separation
+ Main busbar ①
+ Vertical busbar ②

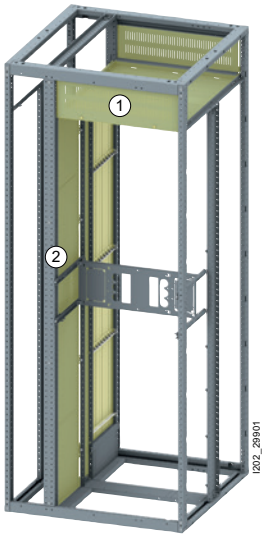

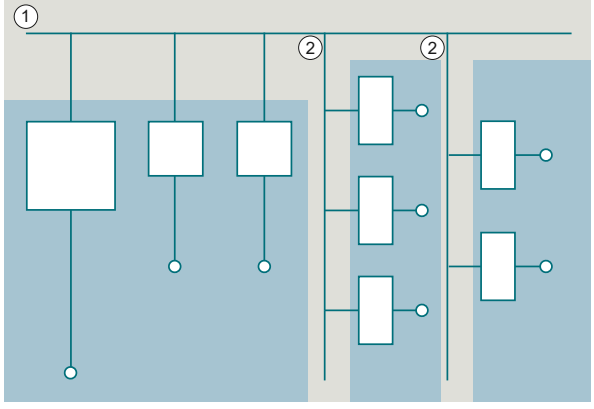

Functional unit Connection


System overview, page 15/18


© Siemens 2022

Form 3b

Separation

+ Main busbar ①
+ Vertical busbar ②
+ Device compartments (functional units) ③

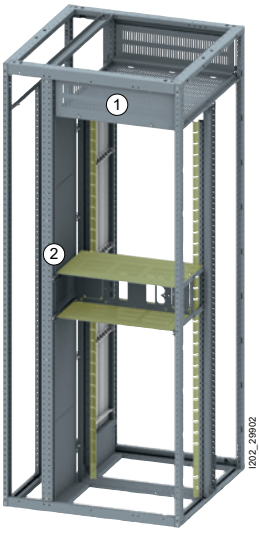

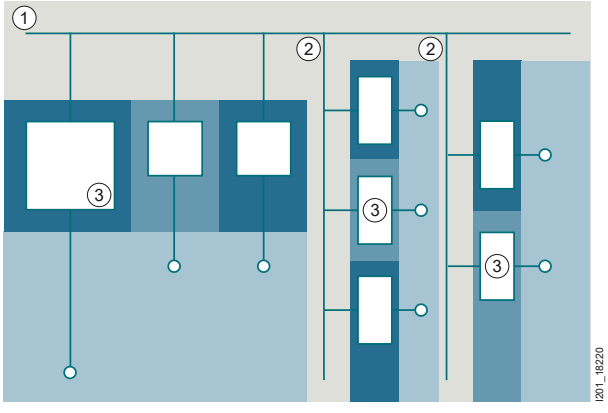



Functional unit Connection

Form 4b

Separation

+ Main busbar ①
+ Vertical busbar ②
+ Device compartments (functional units) ③
+ Connections ④

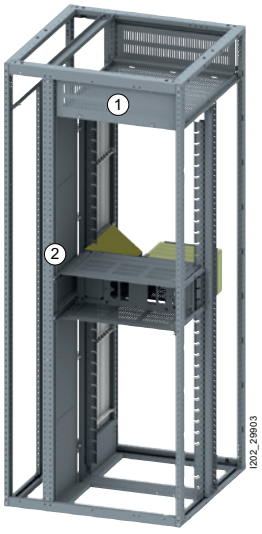

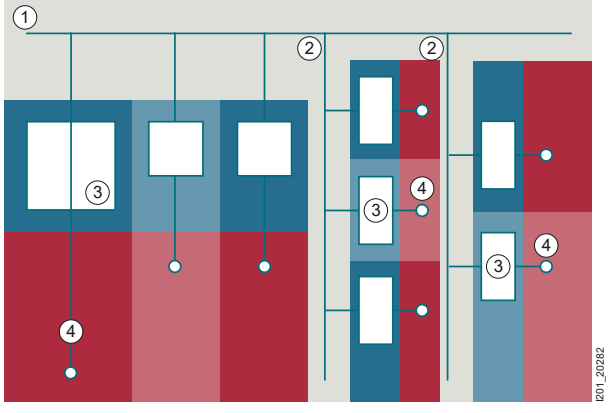

Functional unit Connection


15

System overview, page 15/18

© Siemens 2022


Internal separation

Main busbar at top/at bottom, form 2b

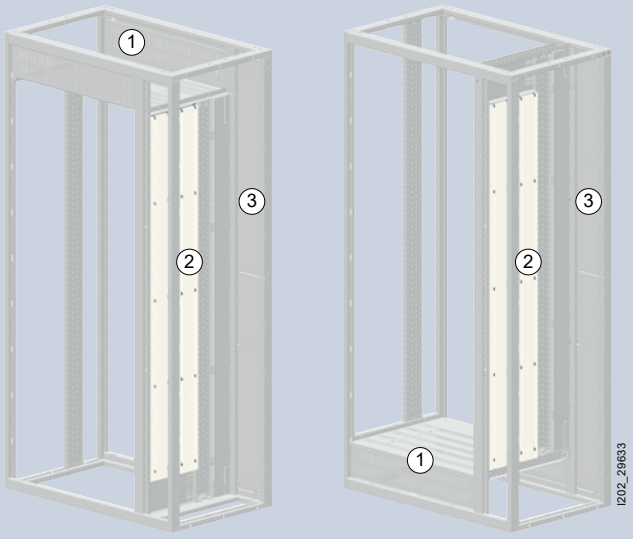

Position of main busbar At top

Main busbars

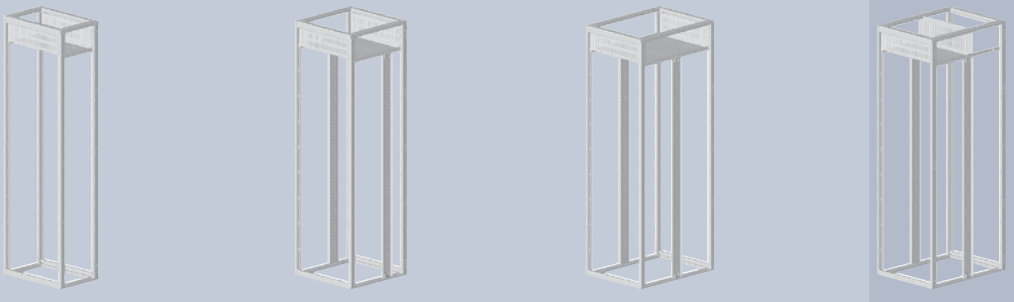

Width	Depth 400 mm	600 mm	800 mm	Depth 800 mm
200 mm	8PQ3000-1BA52	8PQ3000-1BA53	8PQ3000-1BA55	8PQ3000-1BA54
350 mm	8PQ3000-2BA68	8PQ3000-2BA71	8PQ3000-2BA75	8PQ3000-2BA73
400 mm	8PQ3000-0BA67	8PQ3000-0BA52	8PQ3000-0BA58	8PQ3000-0BA55
600 mm	8PQ3000-0BA68	8PQ3000-0BA53	8PQ3000-0BA60	8PQ3000-0BA56
800 mm	8PQ3000-0BA70	8PQ3000-0BA54	8PQ3000-0BA61	8PQ3000-0BA57
850 mm	8PQ3000-2BA70	8PQ3000-2BA72	8PQ3000-2BA76	8PQ3000-2BA74
1000 mm	8PQ3000-1BA13	8PQ3000-1BA14	8PQ3000-1BA20	8PQ3000-1BA17
1200 mm	8PQ3000-1BA15	8PQ3000-1BA16	8PQ3000-1BA21	8PQ3000-1BA18

System overview, page 15/18

© Siemens 2022

At bottom






Depth		
400 mm	600 mm	800 mm
–	–	–
8PQ3000-3BA13	8PQ3000-3BA22	8PQ3000-3BA31
8PQ3000-3BA14	8PQ3000-3BA23	8PQ3000-3BA32
8PQ3000-3BA15	8PQ3000-3BA24	8PQ3000-3BA33
8PQ3000-3BA16	8PQ3000-3BA25	8PQ3000-3BA34
8PQ3000-3BA17	8PQ3000-3BA26	8PQ3000-3BA35
8PQ3000-3BA18	8PQ3000-3BA27	8PQ3000-3BA36
8PQ3000-3BA20	8PQ3000-3BA28	8PQ3000-3BA37


System overview, page 15/18

© Siemens 2022

Internal separation

Main busbar at top/at bottom, form 2b

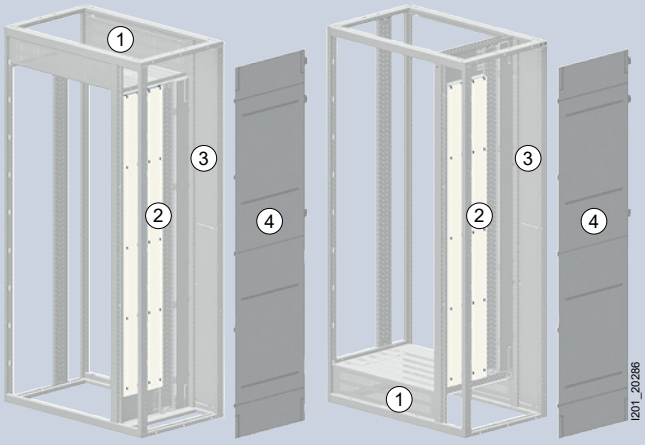

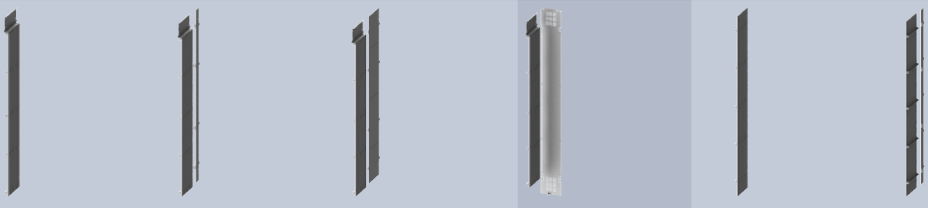Position of main busbar	At top			Without		
	❷ Vertical busbar					
						
Width	**Depth**			**Depth**	**Depth**	
	400 mm	**600 mm**	**800 mm**	**800 mm**	**400 mm**	**600 mm**
200 mm	8PQ4000-0BA05	8PQ4000-0BA07	8PQ4000-0BA64	8PQ4000-0BA02	8PQ4000-0BA06	8PQ4000-0BA03
400 mm	8PQ4000-0BA05	8PQ4000-0BA07	8PQ4000-0BA64	8PQ4000-0BA01	8PQ4000-0BA06	8PQ4000-0BA03

System overview, page 15/18

© Siemens 2022


	❸ Touch protection covers	❹ Vertical separation between sections		
				
	Rear	Depth		
800 mm		400 mm	600 mm	800 mm
8PQ4000-0BA76	8PQ3000-2BA50	8PQ3000-0BA15	8PQ3000-0BA16	2× 8PQ3000-0BA15
8PQ4000-0BA76	8PQ3000-0BA51	8PQ3000-0BA15	8PQ3000-0BA16	2× 8PQ3000-0BA15

System overview, page 15/18

© Siemens 2022

Internal separation


Main busbar at rear, form 2b new

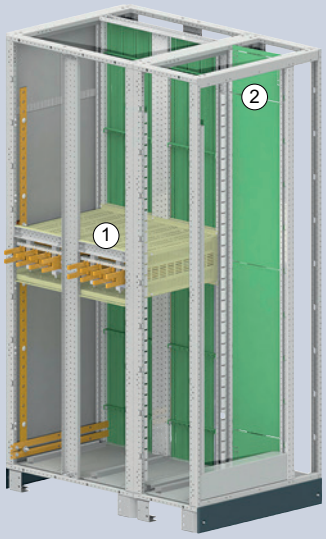

Position of main busbar

At top | Center

❶ Main busbar




Width	Depth				Depth	
	800 mm	1000 mm	1200 mm	1200 mm duplex	800 mm	1000 mm
800 mm	8PQ3000-0BA60	8PQ3000-0BA53	8PQ3000-0BA60	8PQ3000-0BA60	8PQ3000-3BA53	8PQ3000-3BA53
1000 mm	8PQ3000-0BA61	8PQ3000-0BA54	8PQ3000-0BA61	8PQ3000-0BA61	8PQ3000-3BA54	8PQ3000-3BA54

Position of vertical busbar

At top | Center

❷ Vertical busbar






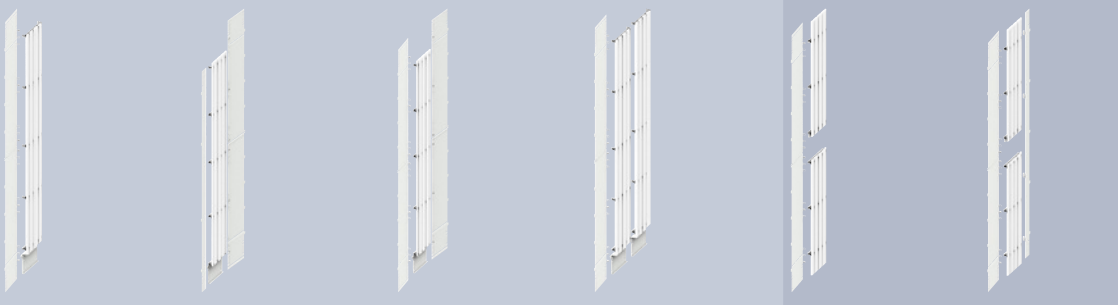


Width	Depth				Depth	
	800 mm	1000 mm	1200 mm	1200 mm duplex	800 mm	1000 mm
800 mm	8PQ4000-2BA51	8PQ4000-2BA53	8PQ4000-2BA55	8PQ4000-2BA57	8PQ4000-2BA60	8PQ4000-2BA61
1000 mm	8PQ4000-2BA51	8PQ4000-2BA53	8PQ4000-2BA55	8PQ4000-2BA57	8PQ4000-2BA60	8PQ4000-2BA61

System overview, page 15/18

© Siemens 2022

At bottom

Depth		Depth			
1200 mm	1200 mm duplex	800 mm	1000 mm	1200 mm	1200 mm duplex
8PQ3000-3BA53	8PQ3000-3BA58	8PQ3000-3BA33	8PQ3000-3BA24	8PQ3000-3BA33	8PQ3000-3BA33
8PQ3000-3BA54	8PQ3000-3BA60	8PQ3000-3BA34	8PQ3000-3BA25	8PQ3000-3BA34	8PQ3000-3BA34

At bottom

Barrier supports

1 set = 6 units










Depth		Depth				Depth
1200 mm	1200 mm duplex	800 mm	1000 mm	1200mm	1200 mm duplex	1200 mm duplex
8PQ4000-2BA62	8PQ4000-2BA56	8PQ4000-2BA51	8PQ4000-2BA53	8PQ4000-2BA55	8PQ4000-2BA57	8PQ3000-3BA67
8PQ4000-2BA62	8PQ4000-2BA56	8PQ4000-2BA51	8PQ4000-2BA53	8PQ4000-2BA55	8PQ4000-2BA57	8PQ3000-3BA67

System overview, page 15/18

© Siemens 2022

Internal separation




Modular kits, form 3b

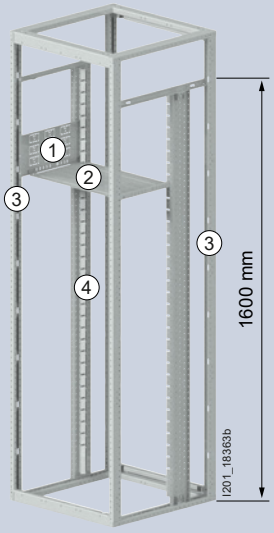

	❶ Separation, lateral				❷ Separation, horizontal	
	Kit version support rail		Kit version crossbar			
						
Height	**I_n**	**Assembly kits**	**I_n**	**Assembly kits**	**Width 400 mm**	**600 mm**
50 mm		–		–	–	–
100 mm		8PQ5000-2BA27		–	8PQ5000-3BA44	8PQ5000-2BA61
150 mm		8PQ5000-2BA28		–	8PQ5000-3BA44	8PQ5000-2BA61
200 mm	≤250 A	8PQ5000-2BA30		–	8PQ5000-3BA44	8PQ5000-2BA61
	≥400 A	8PQ5000-2BA31		–	8PQ5000-3BA44	8PQ5000-2BA61
250 mm	≤250 A	8PQ5000-2BA32		–	8PQ5000-3BA44	8PQ5000-2BA61
	≥400 A	8PQ5000-2BA33		–	8PQ5000-3BA44	8PQ5000-2BA61
300 mm	≤250 A	8PQ5000-2BA34		–	8PQ5000-3BA44	8PQ5000-2BA61
	≥400 A	8PQ5000-2BA35		–	8PQ5000-3BA44	8PQ5000-2BA61
350 mm		8PQ5000-2BA36		–	8PQ5000-3BA44	8PQ5000-2BA61
400 mm		8PQ5000-2BA37	≥800 A	8PQ5000-3BA50	8PQ5000-3BA44	8PQ5000-2BA61
450 mm		8PQ5000-2BA38	≥800 A	8PQ5000-2BA65	8PQ5000-3BA44	8PQ5000-2BA61
500 mm		8PQ5000-2BA40	≥800 A	8PQ5000-2BA66	8PQ5000-3BA44	8PQ5000-2BA61
550 mm		8PQ5000-2BA41		–	8PQ5000-3BA44	8PQ5000-2BA61
600 mm		8PQ5000-2BA42	≥800 A	8PQ5000-2BA48	8PQ5000-3BA44	8PQ5000-2BA61
650 mm		8PQ5000-2BA43		–	8PQ5000-3BA44	8PQ5000-2BA61
700 mm		8PQ5000-2BA44	≥800 A	8PQ5000-2BA50	8PQ5000-3BA44	8PQ5000-2BA61
800 mm		8PQ5000-2BA45		–	8PQ5000-3BA44	8PQ5000-2BA61

System overview, page 15/18

© Siemens 2022

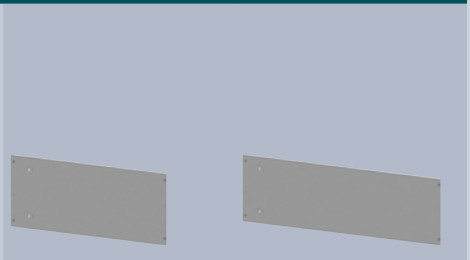	❸ Support rails	❹ Plug-in rails		❺ Rear	
					
Width 800 mm		**Height 1600 mm**	**1800 mm**	**Width 600 mm**	**800 mm**
–	–	–	–	8PQ5000-2BA51	8PQ5000-2BA67
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-2BA52	8PQ5000-2BA68
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA40	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA41	8PQ5000-4BA48
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA41	8PQ5000-4BA48
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA42	8PQ5000-4BA50
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA42	8PQ5000-4BA50
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA43	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA43	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA44	8PQ5000-4BA51
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA45	8PQ5000-4BA52
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA46	8PQ5000-4BA53
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	–	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	8PQ5000-4BA47	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	–	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	–	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	–	–
8PQ5000-2BA62	8PQ5000-2BA63	8PQ3000-0BA82	8PQ3000-0BA83	–	–

System overview, page 15/18

© Siemens 2022

Internal separation

Accessories

Connecting terminals



I_n	Busbar	Scope of supply	Article No.
–	–	4 units	8PQ5000-0BA05



250 A	2× 25 × 5 mm	2 units	8PQ5000-0BA72




400 A	30 × 10 mm	4 units	8PQ5000-0BA73
630 A	40 × 10 mm	4 units	8PQ5000-0BA74

Protective bellows




Version	Scope of supply	Article No.
For connecting terminal	4 units	8PQ9400-0BA71

Self-tapping screws – frame



Type	Version	Scope of supply	Article No.
Cylinder-head screws	M6 × 10 mm	100 units	8PQ9500-0BA34
	M6 × 16 mm	100 units	8PQ9500-0BA32
	M6 × 20 mm	100 units	8PQ9500-0BA31
Covering caps	M6, RAL 7035	100 units	8PQ9400-0BA14
Countersunk screws	M6 × 12 mm	100 units	8PQ9500-1BA07

Standardized parts - electrical connections



Type	Version	Scope of supply	Article No.
Saucer-head bolts	M10 × 35 mm	50 units	8PQ9500-0BA14
	M10 × 45 mm	50 units	8PQ9500-0BA16
	M10 × 55 mm	50 units	8PQ9500-1BA36
	M10 × 65 mm	50 units	8PQ9500-1BA25



Hexagonal nuts	For M10	50 units	8PQ9500-0BA05



Spring washers	For M10	50 units	8PQ9500-0BA60



Plain washers	For M10	50 units	8PQ9500-0BA67



Lock washers	For M10	50 units	8PQ9500-0BA50

15

System overview, page 15/18


© Siemens 2022

Lifting eyebolts (Transport aids)




Type	Scope of supply	Article No.
Lifting eyebolts	4 units	8PQ9400-0BA11

Lifting eyebolts (Transport aids)




Width	Depth	Scope of supply	Article No.
800 mm	–	2 units	8PQ3000-1BA01
850 mm	–	2 units	8PQ3000-2BA38
1000 mm	–	2 units	8PQ3000-1BA02
1200 mm	–	2 units	8PQ3000-1BA03
–	800 mm	2 units	8PQ3000-1BA01
	1000 mm	2 units	8PQ3000-3BA70 new
	1200 mm	2 units	8PQ3000-3BA71 new

Cable entries




Version	Scope of supply	Article No.
Cables with diam. up to 20 mm Ø installation = 25.5 mm	20 units	8PQ9400-0BA16



Version	Scope of supply	Article No.
Cables with diam. 14 ... 38 mm Ø installation = 46 mm	6 units	8PQ9400-0BA33

Other




Length	Scope of supply	Article No.
200 mm Torx bits	2 units	8PQ9400-0BA10



Universal mounting brackets	10 units	8PQ9400-0BA01

Extended delivery options



- After prior consultation with ALPHA-support.ic@siemens.com

Version	Description	Article No.
Pre-assembled solutions	Based on SIMARIS configuration • In various expansion stages • Mechanically with or without copper insert	8PQ9998-0BA20-Z
Copper for system sections	Drawings from SIMARIS	8PQ9998-0BA30-Z

15

System overview, page 15/18

© Siemens 2022

ALPHA UNIVERSAL system overview

Distribution boards, assembly kits and accessories

ALPHA UNIVERSAL 800



ALPHA UNIVERSAL 630



Unequipped distribution boards



ALPHA 800




ALPHA 630




ALPHA 125

Assembly kits




For molded case circuit breakers



For switch disconnectors



For fuse switch disconnectors



For modular installation devices



For front cover with cutout

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

ALPHA UNIVERSAL 125



Busbars



Cu busbars



Busbar supports


Accessories



Bases



Crossbars



Partitions



Front covers



Locking systems

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

ALPHA 800 UNIVERSAL floor-mounted distribution boards

Rated current 800 A

					Unequipped distribution boards
				Degree of protection	IP30/IP55



Height		Depth	Width		Protection class I
Outside	Inside	Outside	Outside	Inside	
1850 mm	1800 mm	400 mm	350 mm	300 mm	8GK2420-6KK14
			650 mm	600 mm	8GK2420-6KK24
			950 mm	900 mm	8GK2420-6KK34
2050 mm	2000 mm	400 mm	350 mm	300 mm	8GK2420-7KK14
			650 mm	600 mm	8GK2420-7KK24
			950 mm	900 mm	8GK2420-7KK34

Accessories

Sheet-steel doors



Types	Width	Cubicle height	Cubicle width	Unequipped distribution boards Article No.
Standard	–	1800 mm	300 mm	8GK9515-8KK11
			600 mm	8GK9515-8KK21
			900 mm	8GK9515-8KK31
		2000 mm	300 mm	8GK9515-8KK12
			600 mm	8GK9515-8KK22
			900 mm	8GK9515-8KK32
For cable compartment	250 mm	1800 mm	900 mm	8GK9515-8KK41
		2000 mm	900 mm	8GK9515-8KK42


Transparent doors





Types	Cubicle height	Cubicle width	Article No.
Standard	1800 mm	300 mm	8GK9505-8KK12
		600 mm	8GK9505-8KK21
		900 mm	8GK9505-8KK31
	2000 mm	300 mm	8GK9505-8KK10
		600 mm	8GK9505-8KK22
		900 mm	8GK9505-8KK32
Giugiaro design	1800 mm	600 mm	8GK9507-8KK21
		900 mm	8GK9507-8KK31
	2000 mm	600 mm	8GK9507-8KK22
		900 mm	8GK9507-8KK32

Double doors







Types	Width	Cubicle height	Cubicle width	Article No.
Made of sheet steel	600 + 250 mm	1800 mm	900 mm	8GK9515-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9515-8KK22 + 8GK9515-8KK42
Transparent door + sheet-steel door	600 + 250 mm	1800 mm	900 mm	8GK9505-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9505-8KK22 + 8GK9515-8KK42
Transparent door in Giugiaro design + sheet-steel door	600 + 250 mm	1800 mm	900 mm	8GK9507-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9507-8KK22 + 8GK9515-8KK42

15

System overview, page 15/120

© Siemens 2022

Accessories

Vertical profile bars for compartment/busbars




	Cubicle height	Cubicle width	Unequipped distribution boards Article No.
	1800 mm	300/600/900 mm	8GK9200-8KK00
	2000 mm	300/600/900 mm	8GK9200-8KK01

Front covers for cabling compartment



Height	Width	Cubicle height	Cubicle width	Article No.
800 + 1000 mm	250/300 mm	1800 mm	300 mm	8GK9607-5KK10 + 8GK9607-7KK10
			900 mm	8GK9606-5KK10 + 8GK9606-7KK10
1000 + 1000 mm	250/300 mm	2000 mm	300 mm	8GK9607-7KK10 + 8GK9607-7KK10
			900 mm	8GK9606-7KK10 + 8GK9606-7KK10

Bases



Color	Height	Cubicle height	Cubicle width	Article No.
Blue-green	100 mm	1800/2000 mm	300 mm	8GK9906-0KK15
			600 mm	8GK9906-0KK25
			900 mm	8GK9906-0KK35

Side panels




Color	Cubicle height	Cubicle width	Article No.
RAL 7035 (pair)	1800 mm	300/600/900 mm	8GK9200-8KK04
	2000 mm	300/600/900 mm	8GK9200-8KK05
Blue-green	1800 mm	300/600/900 mm	8GK9200-8KK07
	2000 mm	300/600/900 mm	8GK9200-8KK08


Supports



Types	Height	Article No.
Mounting stays (pair)	1600 mm	8GK6850-0KK02
	1800 mm	8GK6850-0KK03
	2000 mm	8GK6850-0KK04
Rear universal supports	1800 mm	8GK6850-0KK05
	2000 mm	8GK6850-0KK06

Crossbars





Types	Article No.
Upper crossbar	8GK6850-0KK00
Lateral crossbar	8GK6850-0KK01
Adapter for installation of assembly kits in the cabling compartment, width 250 mm (2 units)	8GK9920-0KK01



15

System overview, page 15/120

© Siemens 2022

ALPHA 630 UNIVERSAL wall-mounted distribution boards

Rated current 630 A

					Flat pack	Unequipped distribution boards	Distribution boards with built-in distribution board panels
				Degree of protection	IP43	IP30/IP55	IP55
							
Height		Depth	Width		Protection class I	Protection class I	Protection class I
Outside	Inside	Outside	Outside	Inside			
450 mm	400 mm	250 mm	650 mm	600 mm	8GK2100-0KS23	–	–
650 mm	600 mm	250 mm	650 mm	600 mm	8GK2100-1KS23	8GK2124-1KK23	–
850 mm	800 mm	250 mm	650 mm	600 mm	8GK2100-2KS23	8GK2124-2KK23	8GK9988-0KL00
1050 mm	1000 mm	250 mm	650 mm	600 mm	8GK2100-3KS23	8GK2124-3KK23	8GK9988-0KL01
			950 mm	900 mm	8GK2100-3KL23	8GK2124-3KK33	–
1250 mm	1200 mm	250 mm	650 mm	600 mm	8GK2100-4KS23	8GK2124-4KK23	8GK9988-0KL02
			950 mm	900 mm	8GK2100-4KL23	8GK2124-4KK33	–

Accessories

				Flat pack IP43	Unequipped distribution boards IP55
Sheet-steel doors					
	Types	Cubicle height	Cubicle width	Article No.	Article No.
	Standard	400 mm	600 mm	8GK9515-3KK20	–
		600 mm	600 mm	8GK9515-4KK20	8GK9515-4KK20
		800 mm	600 mm	8GK9515-5KK20	8GK9515-5KK23
		1000 mm	600 mm	8GK9515-6KK20	8GK9515-6KK23
			900 mm	8GK9515-6KK30	8GK9515-6KK33
		1200 mm	600 mm	8GK9515-7KK20	8GK9515-7KK23
			900 mm	8GK9515-7KK30	8GK9515-7KK33
	For cable compartment	1000 mm	900 mm	8GK9515-6KK40	8GK9515-6KK43
		1200 mm	900 mm	8GK9515-7KK40	8GK9515-7KK33
			600 + 300 mm	–	8GK9515-7KK43
Transparent doors					
	Types	Cubicle height	Cubicle width	Article No.	Article No.
	Standard	400 mm	600 mm	8GK9505-3KK20	–
		600 mm	600 mm	8GK9505-4KK20	8GK9505-4KK20
		800 mm	600 mm	8GK9505-5KK20	8GK9505-5KK23
		1000 mm	600 mm	8GK9505-6KK20	8GK9505-6KK23
			900 mm	8GK9505-6KK30	8GK9505-6KK33
		1200 mm	600 mm	8GK9505-7KK20	8GK9505-7KK23
			900 mm	8GK9505-7KK30	8GK9505-7KK33
	Giugiaro design	400 mm	600 mm	8GK9507-2KK23	–
		600 mm	600 mm	8GK9507-4KK23	8GK9507-4KK23
		800 mm	600 mm	8GK9507-5KK23	8GK9507-5KK23
		1000 mm	600 mm	8GK9507-7KK23	8GK9507-7KK23
			900 mm	8GK9507-7KK33	8GK9507-7KK33
		1200 mm	600 mm	8GK9507-8KK23	8GK9507-8KK23
			900 mm	8GK9507-8KK33	8GK9507-8KK33

System overview, page 15/120

© Siemens 2022

Accessories

Double doors

	Types	Width	Cubicle height	Cubicle width	Flat pack IP43 Article No.	Unequipped distribution boards IP55 Article No.
	Made of sheet steel	600 + 250 mm [1]	1000 mm	900 mm	8GK9515-6KK20 + 8GK9515-6KK40	8GK9515-6KK23 + 8GK9515-6KK43
			1200 mm	900 mm	8GK9515-7KK20 + 8GK9515-7KK40	8GK9515-7KK23 + 8GK9515-7KK43
	Transparent door + sheet-steel door	600 + 250 mm	1000 mm	900 mm	8GK9505-6KK20 + 8GK9515-6KK40	8GK9505-6KK23 + 8GK9515-6KK43
			1200 mm	900 mm	8GK9505-7KK20 + 8GK9515-7KK40	8GK9505-7KK23 + 8GK9515-7KK43
	Transparent door in Giugiaro design + sheet-steel door	600 + 250 mm [1]	1600 mm	900 mm	8GK9507-7KK23 + 8GK9515-6KK40	8GK9507-7KK23 + 8GK9515-6KK43
			1800 mm	900 mm	8GK9507-8KK23 + 8GK9515-7KK40	8GK9507-8KK23 + 8GK9515-7KK43


Vertical profile bars for cabling compartment

	Cubicle height	Cubicle width	Article No.	Article No.
	1000 mm	900 mm	8GK9125-7KK01	8GK9125-7KK01
	1200 mm	900 mm	8GK9127-8KK01	8GK9127-8KK01


Front covers for cabling compartment

	Height	Width	Cubicle height	Cubicle width	Article No.	Article No.
	1000 mm	250/300 mm	1000 mm	900 mm	8GK9606-7KK10	8GK9606-7KK10
	600 + 600 mm	250/300 mm	1200 mm	900 mm	8GK9606-4KK10 + 8GK9606-4KK10	8GK9606-4KK10 + 8GK9606-4KK10

Bases

	Color	Height	Cubicle height	Cubicle width	Article No.	Article No.
	Blue-green	100 mm	600/1200 mm	600 mm	8GK9906-0KK23	8GK9906-0KK23
			1000/1200 mm	900 mm	8GK9906-0KK33	8GK9906-0KK33

Covers for cable entry and cable duct

	Cubicle height	Cubicle width	Article No.	Article No.
	600/1200 mm	600 mm	8GK9920-0KK41	8GK9920-0KK41
	1000/1200 mm	900 mm	8GK9920-0KK42	8GK9920-0KK42

Side panels

	Color	Cubicle height	Cubicle width	Article No.	Article No.
	Blue-green	600 mm	600 mm	–	8GK9122-4KK01
		800 mm	600 mm	–	8GK9122-5KK01
		1000 mm	600/900 mm	–	8GK9122-6KK01
		1200 mm	600/900 mm	–	8GK9122-7KK01

[1] For distribution boards with a width of 900 mm with double door and vertical profile bar

15

System overview, page 15/120

© Siemens 2022

ALPHA 630 UNIVERSAL floor-mounted distribution boards

Rated current 630 A

					Flat pack	Unequipped distribution boards	Control cabinet with built-in assembly kits for modular installation devices	With assembly kit for 3VL molded case circuit breakers
				Degree of protection	IP43	IP30/IP55	IP55	IP55
								
Height		Depth	Width		Protection class I	Protection class I	Protection class I	Protection class I
Outside	Inside	Outside	Outside	Inside				
1650 mm	1600 mm	250 mm	350 mm	300 mm	8GK2300-5KL13	8GK2325-5KK13	–	–
			650 mm	600 mm	8GK2300-5KL23	8GK2325-5KK23	–	–
			950 mm	900 mm	8GK2300-5KL43	8GK2325-5KK43	–	–
1850 mm	1800 mm	250 mm	350 mm	300 mm	8GK2300-6KL13	8GK2325-6KK13	–	–
			650 mm	600 mm	8GK2300-6KL23	8GK2325-6KK23	8GK2348-7KL00	8GK2348-7KL01
			950 mm	900 mm	8GK2300-6KL43	8GK2325-6KK43	–	–
2050 mm	2000 mm	250 mm	350 mm	300 mm	8GK2300-7KL13	8GK2325-7KK13	–	–
			650 mm	600 mm	8GK2300-7KL23	8GK2325-7KK23	–	–
			950 mm	900 mm	8GK2300-7KL43	8GK2325-7KK43	–	–

System overview, page 15/120

© Siemens 2022

System overview, page 15/120

© Siemens 2022

ALPHA 630 UNIVERSAL floor-mounted distribution boards

Rated current 630 A

Accessories

Sheet-steel doors

Types	Width	Cubicle height	Cubicle width	Flat pack Article No.	Unequipped distribution boards Article No.
Standard	–	1600 mm	300 mm	8GK9515-8KK10	8GK9515-8KK10
			600 mm	8GK9515-8KK20	8GK9515-8KK20
			900 mm	8GK9515-8KK30	8GK9515-8KK30
		1800 mm	300 mm	8GK9515-8KK11	8GK9515-8KK11
			600 mm	8GK9515-8KK21	8GK9515-8KK21
			900 mm	8GK9515-8KK31	8GK9515-8KK31
		2000 mm	300 mm	8GK9515-8KK12	8GK9515-8KK12
			600 mm	8GK9515-8KK22	8GK9515-8KK22
			900 mm	8GK9515-8KK32	8GK9515-8KK32
For cable compartment	250 mm	1600 mm	900 mm	8GK9515-8KK40	8GK9515-8KK40
		1800 mm	900 mm	8GK9515-8KK41	8GK9515-8KK41
		2000 mm	900 mm	8GK9515-8KK42	8GK9515-8KK42

Transparent doors

Types	Cubicle height	Cubicle width	Article No.	Article No.
Standard	1600 mm	300 mm	8GK9505-8KK11	8GK9505-8KK11
		600 mm	8GK9505-8KK20	8GK9505-8KK20
		900 mm	8GK9505-8KK30	8GK9505-8KK30
	1800 mm	300 mm	8GK9505-8KK12	8GK9505-8KK12
		600 mm	8GK9505-8KK21	8GK9505-8KK21
		900 mm	8GK9505-8KK31	8GK9505-8KK31
	2000 mm	300 mm	8GK9505-8KK10	8GK9505-8KK10
		600 mm	8GK9505-8KK22	8GK9505-8KK22
		900 mm	8GK9505-8KK32	8GK9505-8KK32
Giugiaro design	1600 mm	600 mm	8GK9507-8KK20	8GK9507-8KK20
		900 mm	8GK9507-8KK30	8GK9507-8KK30
	1800 mm	600 mm	8GK9507-8KK21	8GK9507-8KK21
		900 mm	8GK9507-8KK31	8GK9507-8KK31
	2000 mm	600 mm	8GK9507-8KK22	8GK9507-8KK22
		900 mm	8GK9507-8KK32	8GK9507-8KK32

Double doors

Types	Width	Cubicle height	Cubicle width	Article No.	Article No.
Made of sheet steel	600 + 250 mm	1600 mm	900 mm	8GK9515-8KK20 + 8GK9515-8KK40	8GK9515-8KK20 + 8GK9515-8KK40
		1800 mm	900 mm	8GK9515-8KK21 + 8GK9515-8KK41	8GK9515-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9515-8KK22 + 8GK9515-8KK42	8GK9515-8KK22 + 8GK9515-8KK42
Transparent door + sheet-steel door	600 + 250 mm	1600 mm	900 mm	8GK9505-8KK20 + 8GK9515-8KK40	8GK9505-8KK20 + 8GK9515-8KK40
		1800 mm	900 mm	8GK9505-8KK21 + 8GK9515-8KK41	8GK9505-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9505-8KK22 + 8GK9515-8KK42	8GK9505-8KK22 + 8GK9515-8KK42
Transparent door in Giugiaro design + sheet-steel door	600 + 250 mm	1600 mm	900 mm	8GK9507-8KK20 + 8GK9515-8KK40	8GK9507-8KK20 + 8GK9515-8KK40
		1800 mm	900 mm	8GK9507-8KK21 + 8GK9515-8KK41	8GK9507-8KK21 + 8GK9515-8KK41
		2000 mm	900 mm	8GK9507-8KK22 + 8GK9515-8KK42	8GK9507-8KK22 + 8GK9515-8KK42

Vertical profile bars for cabling compartment

Cubicle height	Cubicle width	Article No.	Article No.
1600 mm	900 mm	8GK9125-8KK11	8GK9125-8KK11
1800 mm	900 mm	8GK9125-8KK12	8GK9125-8KK12
2000 mm	900 mm	8GK9125-8KK13	8GK9125-8KK13

15

System overview, page 15/120

© Siemens 2022


Accessories

Front covers for cabling compartment




Height	Width	Cubicle height	Cubicle width	Flat pack Article No.	Unequipped distribution boards Article No.
800 + 800 mm	250/300 mm	1600 mm	300 mm	8GK9607-5KK10 + 8GK9607-5KK10	8GK9607-5KK10 + 8GK9607-5KK10
			900 mm	8GK9606-5KK10 + 8GK9606-5KK10	8GK9606-5KK10 + 8GK9606-5KK10
800 + 1000 mm	250/300 mm	1800 mm	300 mm	8GK9607-5KK10 + 8GK9607-7KK10	8GK9607-5KK10 + 8GK9607-7KK10
			900 mm	8GK9606-5KK10 + 8GK9606-7KK10	8GK9606-5KK10 + 8GK9606-7KK10
1000 + 1000 mm	250/300 mm	2000 mm	300 mm	8GK9607-7KK10 + 8GK9607-7KK10	8GK9607-7KK10 + 8GK9607-7KK10
			900 mm	8GK9606-7KK10 + 8GK9606-7KK10	8GK9606-7KK10 + 8GK9606-7KK10

Bases



Color	Height	Cubicle height	Cubicle width	Article No.	Article No.
Blue-green	100 mm	1600/2000 mm	300 mm	8GK9906-0KK13	8GK9906-0KK13
		1600/2000 mm	600 mm	8GK9906-0KK23	8GK9906-0KK23
		1600/2000 mm	900 mm	8GK9906-0KK33	8GK9906-0KK33

Covers for cable entry and cable duct



	Cubicle height	Cubicle width	Article No.	Article No.
	1600/2000 mm	300 mm	8GK9920-0KK40	8GK9920-0KK40
	1600/2000 mm	600 mm	8GK9920-0KK41	8GK9920-0KK41
	1600/2000 mm	900 mm	8GK9920-0KK42	8GK9920-0KK42

Side panels



Color	Cubicle height	Cubicle width	Article No.	Article No.
RAL 7035 (pair)	1600 mm	300/600/900 mm	8GK9120-8KK00	8GK9122-8KK03
	1800 mm	300/600/900 mm	8GK9120-8KK01	8GK9122-8KK04
	2000 mm	300/600/900 mm	8GK9120-8KK02	8GK9122-8KK05

15

System overview, page 15/120

© Siemens 2022

ALPHA UNIVERSAL 125 distribution boards


Rated current 125 A

	Surface-mounting distribution boards		Flush-mounting distribution boards	
	With sheet-steel door	With transparent door	With sheet-steel door	With transparent door
Degree of protection	IP43	IP43	IP31D	IP31D
				

Height		Depth	Width		Tiers				
Outside	Inside	Outside	Outside	Inside	(MW = 18 mm)	Protection class I	Protection class I	Protection class I	Protection class I
450 mm	400 mm	140 mm	660 mm	600 mm	48 (2× 24)	8GK2042-0KL21	8GK2042-0KM21	–	–
650 mm	600 mm	140 mm	660 mm	600 mm	72 (3× 24)	8GK2042-1KL21	8GK2042-1KM21	–	–
800 mm	850 mm	140 mm	660 mm	600 mm	96 (4× 24)	8GK2042-2KL21	8GK2042-2KM21	–	–
1050 mm	1000 mm	140 mm	660 mm	600 mm	120 (5× 24)	8GK2042-3KL21	8GK2042-3KM21	–	–
1250 mm	1200 mm	140 mm	660 mm	600 mm	144 (6× 24)	8GK2042-4KL21	8GK2042-4KM21	–	–
508 mm	400 mm	140 mm	718 mm	600 mm	48 (2× 24)	–	–	8GK2043-0KL21	8GK2043-0KM21
708 mm	600 mm	140 mm	718 mm	600 mm	72 (3× 24)	–	–	8GK2043-1KL21	8GK2043-1KM21
908 mm	800 mm	140 mm	718 mm	600 mm	96 (4× 24)	–	–	8GK2043-2KL21	8GK2043-2KM21
1108 mm	1000 mm	140 mm	718 mm	600 mm	120 (5× 24)	–	–	8GK2043-3KL21	8GK2043-3KM21
1308 mm	1200 mm	140 mm	718 mm	600 mm	144 (6× 24)	–	–	8GK2043-4KL21	8GK2043-4KM21

Accessories

Front covers



- With quick-lock screws and integrated grounding connection

Type	Height	Width	Article No.
Closed	50 mm	600 mm	8GK9620-1KK20
	100 mm	600 mm	8GK9621-1KK20
	150 mm	600 mm	8GK9622-1KK20
	200 mm	600 mm	8GK9623-1KK20
	400 mm	600 mm	8GK9622-2KK20
	600 mm	600 mm	8GK9622-4KK20
	800 mm	600 mm	8GK9622-5KK20
For modular installation devices	150 mm	600 mm	8GK9608-1KK22
	200 mm	600 mm	8GK9608-1KK20
	300 mm	600 mm	8GK9608-2KK22
	400 mm	600 mm	8GK9608-2KK20
	450 mm	600 mm	8GK9608-3KK22
	600 mm	600 mm	8GK9608-4KK20

DIN rails for modular installation devices



Width	Article No.
600 mm	8GK9920-0KK11

Holders for cable duct



Width	Article No.
600 mm	8GK9920-0KK20

Grounding bars, PE



Width	Article No.
600 mm (20 × 5 mm²)	8GK9920-0KK10

System overview, page 15/120

© Siemens 2022

Hinges for covers



Version	Article No.
For hinged covers	8GK9120-0KK11

Hinges for covers



Version	Scope of supply	Article No.
Hinge, incl. fixing accessories	1 set	8PQ2000-0BA08

Rotary handles



Version	Color	Article No.
Plastic	Black	8GK9560-0KK04
Lockable	Black	8GK9560-0KK13

Profile semicylinders E012



Version	Article No.
Insert and key 8GK9560	8GK9560-0KK07

Rotary handles for profile semicylinders



Version	Article No.
For 40 mm profile semicylinders	8GK9560-0KK06

Quick-lock screws for ALPHA cabinets with ¼ turn



Scope of supply	Article No.
20 units	8GK9562-0KK00

15

System overview, page 15/120

© Siemens 2022

Assembly kits


For 3VA molded case circuit breakers

						Horizontal	
							
Switches/breakers				**Distribution board**		**With RCD module**	**Without RCD module**
Type	**Rated current**	**Quantity**	**Rotary operating mechanism**	**Height outside**	**Width outside**	**Infeed side**	
3VA10.. and 3VA11..	100 A/160 A	1	–	200 mm	600 mm	8GK6735-2KK23	8GK6730-2KK23
					900 mm	8GK6735-2KK33	8GK6730-2KK33
			■	200 mm	600 mm	–	8GK6733-2KK23
					900 mm	–	8GK6733-2KK33
3VA12..	250 A	1	–	200 mm	600 mm	8GK6736-2KK23	8GK6721-2KK23
					900 mm	8GK6736-2KK33	8GK6721-2KK33
			■	200 mm	600 mm	–	8GK6734-2KK23
					900 mm	–	8GK6734-2KK33
3VA20.. and 3VA22..	100 A/250 A	1	–	200 mm	600 mm	8GK6725-2KK23	8GK6720-2KK23
					900 mm	8GK6725-2KK33	8GK6720-2KK33
			■	200 mm	600 mm	–	8GK6723-2KK23
					900 mm	–	8GK6723-2KK33
3VA23.. and 3VA24..	400 A/630 A	1	–	400 mm	600 mm	–	8GK6740-4KK23
					900 mm	8GK6745-4KK23	8GK6740-4KK33

System overview, page 15/120

© Siemens 2022

Vertical

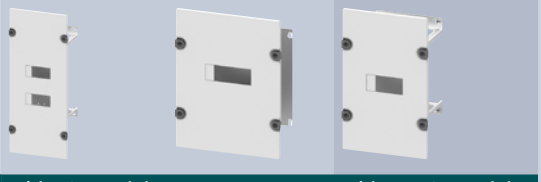

Switches/breakers				Distribution board		With RCD module		Without RCD module
Type	Rated current	Quantity	Motorized operating mechanism	Height outside	Width outside	Infeed side	At side	
3VA10.. and 3VA11..	100 A/160 A	1	–	200 mm	300 mm	–	–	8GK6731-2KK13
				400 mm	250 mm	–	–	8GK6730-4KK43
					300 mm	–	8GK6731-6KK13	8GK6730-4KK13
				600 mm	250 mm	8GK6735-4KK43	–	–
					300 mm	8GK6735-6KK13	–	–
			■	400 mm	300 mm	–	8GK6738-6KK13	8GK6734-4KK13
				600 mm	300 mm	8GK6736-6KK13	–	–
		3	–	200 mm	600 mm	–	–	8GK6731-2KK23
				400 mm	600 mm	–	8GK6731-6KK23	8GK6730-4KK23
					900 mm	–	–	8GK6731-6KK33
				600 mm	600 mm	8GK6735-6KK23	–	–
			■	200 mm	600 mm	–	–	8GK6734-4KK23
				400 mm	600 mm	–	8GK6737-6KK23	–
					900 mm	–	8GK6737-6KK33	–
				600 mm	600 mm	8GK6736-6KK23	–	–
		5	–	200 mm	900 mm	–	–	8GK6731-2KK33
				400 mm	900 mm	–	–	8GK6730-4KK33
			■	200 mm	900 mm	–	–	8GK6734-4KK33
				600 mm	900 mm	8GK6736-6KK33	–	–
3VA12..	250 A	1	–	400 mm	300 mm	–	–	8GK6721-4KK13
				600 mm	250 mm	8GK6732-6KK13	–	8GK6730-6KK13
					300 mm	–	8GK6722-6KK13	8GK6721-6KK13
		3	–	400 mm	600 mm	–	–	8GK6721-4KK23
				600 mm	600 mm	–	8GK6724-6KK23	8GK6721-6KK23
			■	400 mm	600 mm	–	–	8GK6722-6KK23
				600 mm	600 mm	–	8GK6723-6KK23	–
		5	–	400 mm	900 mm	–	–	8GK6721-4KK33
				600 mm	900 mm	–	8GK6724-6KK33	8GK6721-6KK33
			■	400 mm	900 mm	–	–	8GK6722-6KK33
				600 mm	900 mm	–	8GK6723-6KK33	–
3VA20.. and 3VA22..	100 A/250 A	1	–	400 mm	300 mm	–	–	8GK6720-4KK13
				600 mm	300 mm	8GK6725-6KK13	–	–
		3	–	400 mm	600 mm	–	–	8GK6720-4KK23
				600 mm	600 mm	8GK6725-6KK23	–	–
			■	400 mm	600 mm	–	–	8GK6724-4KK23
		5	–	400 mm	900 mm	–	–	8GK6720-4KK33
				600 mm	900 mm	8GK6725-6KK33	–	–
			■	400 mm	900 mm	–	–	8GK6724-4KK33
3VA23.. and 3VA24..	400 A/630 A	1	–	600 mm	300 mm	–	–	8GK6740-6KK13
		2	–	600 mm	600 mm	8GK6745-6KK23	–	8GK6740-6KK23
		3	–	600 mm	900 mm	8GK6745-6KK33	–	8GK6740-6KK33


System overview, page 15/120

© Siemens 2022

Assembly kits

For 3KA7 switch disconnectors

Vertical



Switches/breakers			Distribution board			
Type	**Description**	**Quantity**	**Height outside**	**Width outside**	**Depth**	
3KA7	3KA711 size 1 max. 125 A	1	200 mm	600 mm	–	8GK6400-2KK20
			400 mm	250 mm [1]	–	8GK6400-4KK10
				300 mm [2]	–	8GK6400-4KK11
		3	200 mm	900 mm	–	8GK6400-2KK30
	3KA712 size 2 max. 250 A	1	400 mm	250 mm [1]	–	8GK6401-4KK10
				300 mm [2]	–	8GK6401-4KK12
				600 mm	–	8GK6400-4KK20
		3	400 mm	900 mm	–	8GK6400-4KK30
	3KA713 size 3 max. 400 A	1	400 mm	600 mm	–	8GK6401-4KK20
		3	400 mm	900 mm	–	8GK6400-4KK31
3KA7/3KL7	3KA7/3KL711 size 1 max. 125 A	1	400 mm	250 mm	250 mm	8GK6430-4KK03
				300 mm	250 mm	8GK6430-4KK14
		2	200 mm	600 mm	250 mm	8GK6430-4KK24
				900 mm	250 mm	8GK6430-4KK34
	3KA7/3KL712 size 2 max. 250 A	1	400 mm	250 mm	400 mm	8GK6431-4KK04
				300 mm	400 mm	8GK6431-4KK14
		2	400 mm	600 mm	250 mm	8GK6431-4KK24
				900 mm	250 mm	8GK6431-4KK34
	3KA7/3KL713 size 3 max. 400 A	1	400 mm	600 mm	400 mm	8GK6432-4KK24
				900 mm	400 mm	8GK6432-4KK34
	3KA7/3KL714 size 4 max. 630 A	1	400 mm	600 mm	400 mm	8GK6433-4KK24
			400 mm	900 mm	400 mm	8GK6433-4KK34


[1] In order to use box width 250 mm in the ALPHA 630 UNIVERSAL as a switchgear compartment, the following bars are required:
8GF9655 (height 1000 mm),
8GF9656 (height 1200 mm),
8GF9650 (height 1600 mm),
8GF9658 (height 1800 mm),
8GF9654 (height 2000 mm).
In order to use box width 250 mm in the ALPHA 800 UNIVERSAL as a switchgear compartment, you must order side supports and, for each assembly kit, a pair of crossbars 8GK9920-0KK01.

[2] In order to use cubicle width 300 mm in the ALPHA 630 UNIVERSAL as a switchgear compartment, you require the following inner supports:
8GK9126-8KK03 (height 1600 mm),
8GK9126-8KK04 (height 1800 mm),
8GK9126-8KK05 (height 2000 mm).
In order to use cubicle width 300 mm in the ALPHA 800 UNIVERSAL as a switchgear compartment, you must order the following side supports:
8GK6850-0KK02 (height 1600 mm),
8GK6850-0KK03 (height 1800 mm),
8GK6850-0KK04 (height 2000 mm).

© Siemens 2022

For 3KF switch disconnectors with fuses

Vertical



Switches/breakers				Distribution board			
Type	Rated current	Operating mechanism in center	Door-coupling rotary operating mechanism	Height	Width	Depth	
2× 3KF1	80 A	■	–	200 mm	600 mm	250 mm	8GK6431-2KK23
					900 mm	250 mm	8GK6431-2KK33
2× 3KF2	160 A	■	–	200 mm	600 mm	250 mm	8GK6432-2KK23
					900 mm	250 mm	8GK6432-2KK33
2× 3KF1/3KF2 or 1× 3KF3/3KF4	400 A	–	■	400 mm	600 mm	400 mm	8GK6431-4KK33
					900 mm	400 mm	8GK6432-4KK33

For 3KD switch disconnectors

Vertical




Switches/breakers				Distribution board		
Size	Rated current	Quantity	Door-coupling rotary operating mechanism	Height outside	Width outside	
1/2/3	63 A/250 A/400 A	1/1	■	400 mm	250 mm	8GK6430-4KK13
1/2/3/4	63 A/250 A/400 A/630 A	2/1	■	400 mm	600 mm	8GK6430-4KK23
1/2/3/4	63 A/250 A/400 A/630 A	2	■	400 mm	900 mm	8GK6430-4KK33

System overview, page 15/120

© Siemens 2022

Assembly kits

For modular installation devices



Switches/breakers		Distribution board		
No. of tiers	MW	Height outside	Width outside	
1	12	200 mm	300 mm	8GK6352-2KK13
	24	150 mm	600 mm	8GK6302-1KK23
		200 mm	600 mm	8GK6352-2KK23
	36	150 mm	900 mm	8GK6302-1KK33
		200 mm	900 mm	8GK6352-2KK33

Accessories

DIN rails



Version	Width	No. of tiers	Article No.
For mounting modular devices at various depths	600 mm	1	8GF9670
	900 mm	1	8GF9671


Depth adapters 9 mm



Version	Width	No. of tiers	MW	Article No.
For linking 5SY and 5SJ on DIN rails, L 360 mm	600 mm	1	20	8GF9670-1

© Siemens 2022

For front cover with cutout



Switches/breakers		Distribution board		
No. of tiers	MW	Height outside	Width outside	
1	24	150 mm	600 mm	8GK9608-1KK22
	24	200 mm	600 mm	8GK9608-1KK20
	36	150 mm	900 mm	8GK9608-1KK32
		200 mm	900 mm	8GK9608-1KK30
2	48	300 mm	600 mm	8GK9608-2KK22
		400 mm	600 mm	8GK9608-2KK20
	72	300 mm	900 mm	8GK9608-2KK32
		400 mm	900 mm	8GK9608-2KK30
		450 mm	600 mm	8GK9608-3KK22
		600 mm	600 mm	8GK9608-4KK20
	108	600 mm	900 mm	8GK9608-4KK30


Accessories

DIN rails



Version	Width	No. of tiers	Article No.
For mounting modular devices at various depths	600 mm	1	8GF9670
	900 mm	1	8GF9671

Depth adapters 9 mm



Version	Width	No. of tiers	MW	Article No.
For linking 5SY and 5SJ on DIN rails, L 360 mm	600 mm	1	20	8GF9670-1

15






System overview, page 15/120

© Siemens 2022

Busbars





For ALPHA 800/630 UNIVERSAL distribution boards

Vertical installation of rear busbars (single bars only)

Version		Width 600/900 mm	For a spacing of 150 mm, width 600/900 mm	Recessed, width 600/900 mm	Width 300 mm	Recessed, width 300 mm
Busbar supports:		8GF5764/65 (width 600 mm) 8GF5766/67 (width 900 mm)	8GF5762/63	8GF5764/65 (width 600 mm) 8GF5766/67 (width 900 mm)	8GF5768/70	8GF5768/70
Supplements:	Rear universal supports	8GK6850-0KK05/06 (2 units)	8GK6850-0KK05/06 (2 units)	8GK6850-0KK05/06 (1 unit)	–	–

Horizontal busbars (single bars only)


Version		Front	Recessed	Front, with steps	Recessed, with steps
Busbar supports:		8GF5762/63	8GF5762/63	8GF5760/61	8GF5760/61
Supplements:	Support plate	8GF9652 (width 600 mm) 8GF9653 (width 900 mm)	8GF9652 (width 600 mm) 8GF9653 (width 900 mm)	8GK9920-0KK35 (width 600 mm) 8GK9920-0KK36 (width 900 mm)	8GF9652 (width 600 mm) 8GF9653 (width 900 mm)
	Rear universal supports	–	–	8GK6850-0KK05/06 (2 units)	–

System overview, page 15/120

© Siemens 2022





For ALPHA 800 UNIVERSAL distribution boards

Horizontal busbars at top (double bars only)



Version		
Busbar supports	With support plate	8GK9750-0KK02
	Without support plate	8PQ4000-1BA12
Supplements		If there is no support 8GK9750-0KK02 mounted onto the side of the cabling compartment, you will need to order an upper crossbar 8GK6850-0KK00.

Vertical busbars, for sides

Version		Double busbar with steps	Single busbar with steps	Double busbar	Busbar
Busbar supports:		8GK9750-0KK01	8GF5760/61	8GK9750-0KK02	8GF5762/63
Supplements	Lateral crossbar	8GK6850-0KK01	8GK6850-0KK01	8GK6850-0KK01	8GK6850-0KK01

15

System overview, page 15/120

© Siemens 2022

Busbars



Busbar cross-section	Length	Article No. ALPHA 630	Article No. ALPHA 800
Copper busbars			
15 × 5	2000 mm	8GF5751	8GF5751
	1300 mm	8GF5771	8GF5771
20 × 5	2000 mm	8GF5737	8GF5737
	1300 mm	8GF5772	8GF5772
30 × 5	2000 mm	8GF5742	8GF5742
	1300 mm	8GF5773	8GF5773
30 × 10	2000 mm	8GF5752	8GF5752
	1300 mm	8GF5774	8GF5774



Busbar cross-section	Length	Width	Article No. ALPHA 630	Article No. ALPHA 800
Copper grounding bars				
20 × 5	1300/2000 mm	600 mm	8GK9920-0KK10	8GK9920-0KK10
		900 mm	8GK9920-0KK13	8GK9920-0KK13

Busbar supports




Busbar cross-section	Width	Number of poles	Busbar center-to-center spacing	Article No. ALPHA 630	Article No. ALPHA 800
Vertical, at side/horizontal, at front, graded					
15/20/30 × 5	600/900 mm	4-pole	50 mm	8GF5760	8GF5760
30 × 10	600/900 mm	4-pole	50 mm	8GF5761	8GF5761
15/20/30 × 10	600/900 mm	4-pole	50 mm	–	8GK9750-0KK01
20/30 × 10	600/900 mm	4-pole	50 mm	–	8GK9750-0KK02




Busbar cross-section	Width	Number of poles		Article No. ALPHA 630	Article No. ALPHA 800
Vertical					
15/20/30 × 5	300 mm	4-pole	50 mm	8GF5768	8GF5768
30 × 10	300 mm	4-pole	50 mm	8GF5770	8GF5770



Busbar cross-section	Width	Number of poles		Article No. ALPHA 630	Article No. ALPHA 800
Vertical, at rear					
15/20/30 × 5	600 mm	4-pole	50 mm	8GF5764	8GF5764
	900 mm	4-pole	50 mm	8GF5766	8GF5766
30 × 10	600 mm	4-pole	50 mm	8GF5765	8GF5765
	900 mm	4-pole	50 mm	8GF5767	8GF5767



Busbar cross-section	Width	Number of poles		Article No. ALPHA 630	Article No. ALPHA 800
Horizontal, at front [1]					
15/20/30 × 5	300/600/900 mm	4-pole	50 mm	8GF5762	8GF5762
30 × 10	300/600/900 mm	4-pole	50 mm	8GF5763	8GF5763
	600/900 mm	4-pole	50 mm	–	8GK9608-1KK22



Busbar cross-section	Width	Number of poles		Article No. ALPHA 630	Article No. ALPHA 800
Horizontal, at top					
20/30 × 10	600/900 mm	4-pole	50 mm	–	8GK9750-0KK02
				–	8PQ4000-1BA12

[1] Can be mounted directly on equipment racks with a clearance of 525 mm (width 600 mm) and 825 mm (width 900 mm).

15

System overview, page 15/120

© Siemens 2022

Other accessories

Set of screws/bolts for slotted bars




Cross-section	Outer thread	Tightening torque	ALPHA 630 Article No.	ALPHA 800 Article No.
15/20/30 × 5	M6	8 Nm	8GF5891	8GF5891
30 × 10	M8	20 Nm	8GF5892	8GF5892

Crossbars for installation of support



Version	Width	ALPHA 630 Article No.	ALPHA 800 Article No.
For 8GF5762, 8GF5760, 8GF5763, 8GK9608-1KK22	600 mm	8GF9652	8GF9652
	900 mm	8GF9653	8GF9653
For 8GF5760	600 mm	8GK9920-0KK35	8GK9920-0KK35
	900 mm	8GK9920-0KK36	8GK9920-0KK36
For 8GK9750-0KK02	400 mm	–	8GK6850-0KK00
For 8GF5760, 8GF5768, 8GF5761, 8GF5770, 8GK9750-0KK01, 8GK9750-0KK02	400 mm	–	8GK6850-0KK01

Transparent cover




Version	Width	ALPHA 630 Article No.	ALPHA 800 Article No.
For horizontal busbars, at front	600 mm	8GK9920-0KK37	8GK9920-0KK37
	900 mm	8GK9920-0KK38	8GK9920-0KK38

Connecting kit for double bars



Version	Current	ALPHA 630 Article No.	ALPHA 800 Article No.
Connecting kit for upper horizontal bars – vertical busbars	800 A	–	8GK9790-0KK00
Connecting kit for upper horizontal busbars	800 A	–	8GK9790-0KK01

Holder for grounding bar



ALPHA 630 Article No.	ALPHA 800 Article No.
–	8GK9750-0KK00

15


System overview, page 15/120

© Siemens 2022

Accessories


Covers and holders

Covers for mounting measuring instruments



Measuring devices	Type	Height	Width	Article No.	125	630	800
72 × 72	2 instruments + 2 selectors	200 mm	600 mm	8GK9610-1KK20	■	■	■
			900 mm	8GK9610-1KK30	■	■	■
	4 instruments + 1 selector	200 mm	600 mm	8GK9611-1KK20	■	■	■
			900 mm	8GK9611-1KK30	■	■	■
96 × 96	2 instruments + 2 selectors	200 mm	600 mm	8GK9612-1KK20	■	■	■
			900 mm	8GK9612-1KK30	■	■	■
	4 instruments + 1 selector	200 mm	600 mm	8GK9613-1KK20	■	■	■
			900 mm	8GK9613-1KK30	■	■	■

Covers for pushbuttons and indicator lights



Height	Width	Article No.	125	630	800
200 mm	600 mm	8GK9630-1KK20	■	■	■
	900 mm	8GK9631-1KK20	■	■	■

Non-transparent covers




Height	Width	Article No.	125	630	800
50 mm	600 mm	8GK9620-1KK20	■	■	■
	900 mm	8GK9620-1KK30	■	■	■
100 mm	600 mm	8GK9621-1KK20	■	■	■
	900 mm	8GK9621-1KK30	■	■	■
150 mm	600 mm	8GK9622-1KK20	■	■	■
	900 mm	8GK9622-1KK30	■	■	■
200 mm	300 mm	8GK9607-1KK10	■	■	■
	600 mm	8GK9623-1KK20	■	■	■
	900 mm	8GK9623-1KK30	■	■	■
400 mm	250 mm	8GK9606-2KK10	■	■	■
	300 mm	8GK9607-2KK10	■	■	■
	600 mm	8GK9622-2KK20	■	■	■
	900 mm	8GK9622-2KK30	■	■	■
600 mm	250 mm	8GK9606-4KK10	■	■	■
	300 mm	8GK9607-4KK10	■	■	■
	600 mm	8GK9622-4KK20	■	■	■
	900 mm	8GK9622-4KK30	■	■	■
800 mm	250 mm	8GK9606-5KK10	■	■	■
	300 mm	8GK9607-5KK10	■	■	■
	600 mm	8GK9622-5KK20	■	■	■
	900 mm	8GK9622-5KK30	■	■	■
1000 mm	250 mm	8GK9606-7KK10	■	■	■
	300 mm	8GK9607-7KK10	■	■	■

Deep-drawn covers 25 mm

Height	Width	Article No.	125	630	800
800 mm	600 mm	8GK9635-5KK20	■	■	■
	900 mm	8GK9635-5KK30	■	■	■
1000 mm	600 mm	8GK9636-7KK20	■	■	■
	900 mm	8GK9636-7KK30	■	■	■

Deep-drawn front covers 35 mm




Height	Width	Article No.	125	630	800
200 mm	600 mm	8GK9605-1KK20	■	■	■
	900 mm	8GK9605-1KK30	■	■	■
400 mm	600 mm	8GK9605-2KK20	■	■	■
	900 mm	8GK9605-2KK30	■	■	■
600 mm	600 mm	8GK9605-4KK20	■	■	■
	900 mm	8GK9605-4KK30	■	■	■

15

System overview, page 15/120

© Siemens 2022

Covers and holders



Covers with ventilation openings IP30

Height	Width	Article No.	125	630	800
200 mm	600 mm	8GK9632-1KK20	■	■	■
	900 mm	8GK9633-1KK20	■	■	■



Holders for horizontal cable ducts/horizontal busbars (pair)

Width	Article No.	125	630	800
600 mm	8GF9652	■	■	■
900 mm	8GF9653	■	■	■



Horizontal crossbars with steps (pair)

Width	Article No.	125	630	800
600 mm	8GK9920-0KK35	■	■	■
900 mm	8GK9920-0KK36	■	■	■



Support rails (pair)

- ALPHA 630 UNIVERSAL vertical/horizontal busbar support, with steps
- Vertical side terminal strip (not suitable for use in ALPHA 800 UNIVERSAL)

Height	Article No.	125	630	800
1000 mm	8GF9655	■	■	■
1200 mm	8GF9656	■	■	■
1600 mm	8GF9650	■	■	■
1800 mm	8GF9658	■	■	■
2000 mm	8GF9654	■	■	■



Inner supports

- For using cubicle B 300 as a switchgear compartment in ALPHA 630 UNIVERSAL (not suitable for use in ALPHA 800 UNIVERSAL)

Height	Article No.	125	630	800
1600 mm	8GK9126-8KK03	■	■	■
1800 mm	8GK9126-8KK04	■	■	■
2000 mm	8GK9126-8KK05	■	■	■

System overview, page 15/120

© Siemens 2022

Accessories

Mounting plates and inner subdivisions

Modular mounting plates



- ALPHA 800 UNIVERSAL: for mounting on side supports or on the base of the cabinet

Height	Width	Article No.	125	630	800
200 mm	600 mm	8GF7155	■	■	■
	900 mm	8GF7158	■	■	■
400 mm	600 mm	8GF7156	■	■	■
	900 mm	8GF7160	■	■	■
600 mm	600 mm	8GF7157	■	■	■
	900 mm	8GF7161	■	■	■

Recessed modular mounting plates



- ALPHA 800 UNIVERSAL: for mounting on two rear supports or on the rear panel of the cabinet with one rear support

Height	Width	Article No.	125	630	800
200 mm	600 mm	8GF9676	■	■	■
	900 mm	8GF9680	■	■	■
400 mm	600 mm	8GF9677	■	■	■
	900 mm	8GF9681	■	■	■
600 mm	600 mm	8GF9678	■	■	■
	900 mm	8GF9682	■	■	■


2 mm mounting plates for electrotechnical use with height and width of the cabinet



- ALPHA 800 UNIVERSAL: Plates that are not as high as the cabinet can be mounted using side supports and holders 8GF9652/3

Height	Width	Article No.	125	630	800
600 mm	600 mm	8GK9535-4KK21	■	■	■
800 mm	600 mm	8GK9535-5KK21	■	■	■
1000 mm	600 mm	8GK9536-7KK21	■	■	■
	900 mm	8GK9536-7KK31	■	■	■
1200 mm	600 mm	8GK9537-8KK21	■	■	■
	900 mm	8GK9537-8KK31	■	■	■
1600 mm	600 mm	8GK9535-8KK23	■	■	■
	900 mm	8GK9535-8KK26	■	■	■
1800 mm	600 mm	8GK9535-8KK24	■	■	■
	900 mm	8GK9535-8KK34	■	■	■
2000 mm	600 mm	8GK9535-8KK25	■	■	■
	900 mm	8GK9535-8KK35	■	■	■

Adjustable depth brackets for mounting plates



Distribution board depth	Article No.	125	630	800
250 mm	8GK9930-0KK03		■	

Partitions for ALPHA 630 UNIVERSAL





Mounting	Height	Width	Article No.	125	630	800
Horizontal	–	250 mm	8GK9525-0KK03		■	
		300 mm	8GK9525-0KK13		■	
		600 mm	8GK9525-0KK23		■	
		900 mm	8GK9525-0KK33		■	
Vertical	800 mm	–	8GK9525-5KK03		■	
	1000 mm	–	8GK9525-6KK03		■	
	1200 mm	–	8GK9525-7KK03		■	
	1600 mm	–	8GK9525-8KK03		■	
	1800 mm	–	8GK9525-8KK13		■	
	2000 mm	–	8GK9525-8KK23		■	


15


System overview, page 15/120

© Siemens 2022

Mounting plates and inner subdivisions

Partitions for ALPHA 800 UNIVERSAL cabinets in form 2b








Mounting	Height	Width	Article No.	125	630	800
Horizontal subdivisions between devices	–	300 mm	8GK9526-0KK06			■
		600 mm	8GK9526-0KK07			■
		900 mm	8GK9526-0KK08			■
Horizontal subdivisions between upper busbar compartment and devices	–	250 mm	8GK9527-0KK05			■
		300 mm	8GK9526-0KK03			■
		600 mm	8GK9526-0KK04			■
		900 mm	8GK9526-0KK05			■
Vertical subdivisions between the switchgear compartment and busbar compartment	1600 mm	600 mm	8GK9526-0KK00			■
	1800 mm	600 mm	8GK9526-0KK01			■
	2000 mm	600 mm	8GK9526-0KK02			■

Transparent covers



Width	Article No.	125	630	800
250 mm	8GK9527-0KK03	■	■	■
300 mm	8GK9527-0KK00	■	■	■
600 mm	8GK9527-0KK01	■	■	■
900 mm	8GK9527-0KK02	■	■	■


System overview, page 15/120

© Siemens 2022

Accessories

Holders for terminal strips and locking systems

DIN rails for terminal blocks



Type	Height	Width	Article No.	125	630	800
Horizontal	–	600 mm	8GF9672	■	■	■
		900 mm	8GF9674	■	■	■
Horizontal, recessed	–	600 mm	8GF9673	■	■	■
		900 mm	8GF9675	■	■	■
Vertical with 3 mounting rails	200 mm	600 mm	8GF7175	■	■	■
	400 mm	600 mm	8GF7176	■	■	■
Vertical with 5 mounting rails	–	900 mm	8GF7178	■	■	■
	400 mm	900 mm	8GF7180	■	■	■


Holder for vertical terminal strips in side compartment L = 900 mm



- ALPHA 800 UNIVERSAL: Each holder must be mounted onto a lateral crossbar

Width	Article No.	125	630	800
600/900 mm	8GF9683	■	■	■

Mounting brackets



Version	Width	Article No.	125	630	800
For angular mounting of the terminal blocks	600/900 mm	8WA746	■	■	■

Holders for DIN rails


Version	Scope of supply	Width	Article No.	125	630	800
For mounting the terminal strip vertically in the cabling compartment	4 units	600/900 mm	8GK9920-0KK28	■	■	■

Standard locking devices for wall-mounted distribution boards



Material	Width	Article No.	125	630	800
Made of plastic, black (spare part)	600/900 mm	8GK9560-0KK04	■	■	■

Seals for standard locking devices



Degree of protection	Width	Article No.	125	630	800
IP55	600/900 mm	8GK9560-0KK05	■	■	■

Rotary handle locking mechanism



- For wall-mounted distribution boards, IP43 and IP55, semicylinder insert possible for E012

Width	Article No.	125	630	800
600/900 mm	8GK9560-0KK06	■	■	■

Profile semicylinders E012



- Insert and key

Width	Article No.	125	630	800
600/900 mm	8GK9560-0KK07	■	■	■

Locking systems for floor-mounted distribution boards



Type	Width	Article No.	125	630	800
Espagnolette lock with pushbutton (spare part)	600/900 mm	8GK9561-0KK01	■	■	■
Insert for profile semicylinder with key	600/900 mm	8GK9561-0KK02	■	■	■
Profile semicylinder, 40 mm with lock E012 (for use only with espagnolette lock)	600/900 mm	8GK9561-0KK00	■	■	■

15

System overview, page 15/120

© Siemens 2022

Other accessories

Assembly kit for mounting flat pack cabinets for self-assembly, IP43



Height	Article No.	125	630	800
400 mm	8GK9126-3KK00	■	■	■
600 mm	8GK9126-4KK00	■	■	■
800 mm	8GK9126-5KK00	■	■	■
1000 mm	8GK9126-6KK00	■	■	■
1200 mm	8GK9126-7KK00	■	■	■
1600 mm	8GK9126-8KK00	■	■	■
1800 mm	8GK9126-8KK01	■	■	■
2000 mm	8GK9126-8KK02	■	■	■

Z-shaped crossbar for lifting the flat pack for self-assembly



Height	Article No.	125	630	800
600 mm	8GK9127-0KK01	■	■	■
900 mm	8GK9127-0KK02	■	■	■
1200 mm	8GK9127-0KK03	■	■	■
1500 mm	8GK9127-0KK04	■	■	■
1800 mm	8GK9127-0KK05	■	■	■

Z-shaped crossbar for mounting and vertical linking of wall-mounted distribution boards




Height	Article No.	125	630	800
1200 mm	8GK9920-0KK43	■	■	■
1400 mm	8GK9920-0KK44	■	■	■
1600 mm	8GK9920-0KK45	■	■	■
1800 mm	8GK9920-0KK46	■	■	■

Flange plates for flat pack delivery (optional)



Height	Article No.	125	630	800
300 mm	8GK9120-0KK10	■	■	■
600 mm	8GK9120-0KK20	■	■	■

Ventilation grilles – side panels




Scope of supply	Article No.	125	630	800
4 units	8GK9120-0KK30	■	■	■

Spare part hinges for doors for wall/floor-mounted distribution boards



Scope of supply	Article No.	125	630	800
2 units	8GK9920-0KK24	■	■	■

Hinges for front covers



Scope of supply	Article No.	125	630	800
10 units	8GK9120-0KK11	■	■	■

Hinges for covers



	Article No.	125	630	800
	8PQ2000-0BA08	■	■	■


15

System overview, page 15/120

© Siemens 2022

Accessories

Other accessories

					125	630	800
Quick-lock screws for ALPHA cabinets with ¼ turn							
	Scope of supply			Article No.			
	20 units			8GK9562-0KK00	■	■	■
Mounting kit for modular distribution boards, IP55 (incl. seal)							
				Article No.			
				8GK9920-0KK31	■	■	■
Self-tapping screws M6 × 10							
	Scope of supply			Article No.			
	10 units			8GF9662	■	■	■
Captive nuts M6							
	Scope of supply			Article No.			
	100 units			8GF9643	■	■	■
Transport eyebolts							
	Scope of supply			Article No.			
	4 units			8GF9660	■	■	■
Key for double-bit interlocking mechanism							
				Article No.			
				8GD9290	■	■	■
Siemens nameplate							
	Material	Version	Color	Article No.			
SIEMENS	Aluminum	Self-adhesive	Petrol	8GD9084	■	■	■
	Sticker, foil	Self-adhesive	Petrol	8GF9661	■	■	■
Circuit diagram pockets							
	Types		Depth	Article No.			
	DIN A3, made of sheet steel		10 mm	8GK9910-0KK22	■	■	■
	DIN A4, transparent sleeve, adhered all-over		10 mm	8GK9910-0KK23	■	■	■
	DIN A4, made of plastic		30 mm	8GD9132	■	■	■
	DIN A4, large pack, made of plastic		30 mm	8GK9910-1KK24	■	■	■
Blanking cover for modular installation devices							
	Version			Article No.			
	For 12 modular widths (1 MW=18 mm)			8GK9910-0KK00	■	■	■
Cover strips							
	Length			Article No.			
	1 m			8GK9910-0KK01	■	■	■
Spare brackets for flat pack assembly							
	Scope of supply			Article No.			
	2 units			8GK9920-0KK26	■	■	■
Failsafe kit ALPHA							
	• Self-tapping screws, captive nuts, hinges for covers, covers etc.						
				Article No.			
				8GK9920-0KK32	■	■	■
Wall-mounting brackets							
				Article No.			
				8GK9920-0KK33	■	■	■

15

System overview, page 15/120

© Siemens 2022


System overview, page 15/120

© Siemens 2022


ALPHA system overview

Distribution boards, assembly kits and accessories

ALPHA 1250

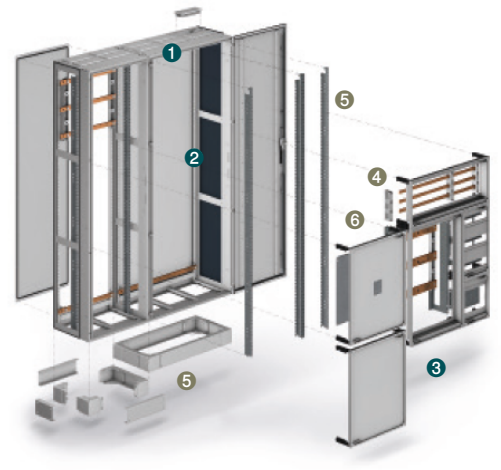

ALPHA 630

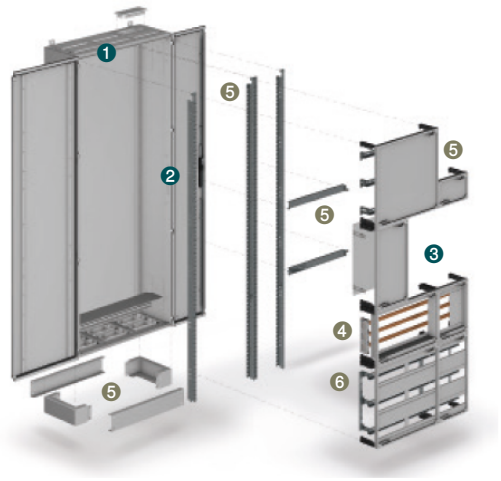

❶ Unequipped distribution boards


ALPHA 1250


ALPHA 630



ALPHA 630


ALPHA 400


ALPHA 160


ALPHA SIMBOX XL and WP

❷ Quick-assembly kits


ALPHA 1250/630/400


ALPHA 160

❸ Assembly kits


For modular installation devices


For terminal blocks


For fuse switch disconnectors


For switch disconnectors


For molded case circuit breakers


For busbar-adaptable units


Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

ALPHA 400



ALPHA 160

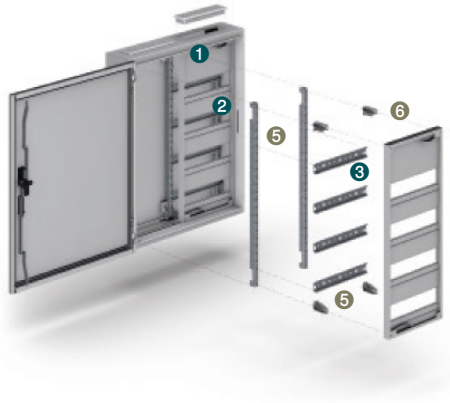

❹ Busbars



Cu busbars




Busbar supports

❺ Mechanical accessories




Bases



Stays



Crossbars



Partitions



Front covers




Locking system

❻ Electrical accessories



N and PE terminals



Connection terminals



N/PE bars



Flanges



Cable entries



Cable holders

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

ALPHA 1250 floor-mounted distribution boards

Rated current 1250 A

						Unequipped distribution boards	Unequipped distribution boards for isolating transformers	
						With open side panel	With open side panel	With closed side panel
				Degree of protection		IP55	IP30	IP30
								
Height		Depth	Tiers	Width		Protection class I	Protection class I	Protection class I
Outside	Inside	Outside	(MW = 18 mm)	Outside	Inside			
1950 mm	1800 mm	400 mm	max. 12 MW	300 mm	250 mm	8GK1423-8KK15	8GK1483-8KP15	8GK1483-8KN15
				550 mm	500 mm	8GK1423-8KK25	8GK1483-8KP25	8GK1483-8KN25
				800 mm	750 mm	8GK1423-8KK35	8GK1483-8KP35	8GK1483-8KN35
				1050 mm	1000 mm	8GK1423-8KK45	8GK1483-8KP45	8GK1483-8KN45
				1300 mm	1250 mm	8GK1423-8KK55	–	–

Accessories

Spare part doors



Height	Cubicle width	Door version	Door width	Article No.
1950 mm	300 mm	Complete	300 mm	8GK9513-8KK10
	550 mm	Complete	550 mm	8GK9513-8KK20
	800 mm	Left	525 mm	8GK9513-8KK30
		Right	275 mm	8GK9513-8KK40
	1050 mm	Left	525 mm	8GK9513-8KK30
		Right	525 mm	8GK9513-8KK50
	1300 mm	Left	775 mm	8GK9513-8KK60
		Right	525 mm	8GK9513-8KK50

Side panels, modular distribution board



Depth	Article No.
400 mm	8GK9520-0KK05


Assembly kits for masking frame for front cover



- For mounting the mounting stays at the rear of the modular distribution board

Height	Width	Article No.
1800 mm	250 mm	8GK9913-0KK10
	500 mm	8GK9913-0KK20
	750 mm	8GK9913-0KK30
	1000 mm	8GK9913-0KK40
	1250 mm	8GK9913-0KK50

Flange plates with rubber sleeve



- For lower flange opening (sheet steel closed)

Number of rubber sleeves	Article No.
1	8GK9100-0KK14
2	8GK9100-0KK15
3	8GK9100-0KK16
4	8GK9100-0KK17

15

System overview, page 15/150

© Siemens 2022

Busbar supports




- Busbar spacing 100/185 mm

Type	Article No.
With matching support plate for mounting on the rear panel	8GK9720-0KK00
Without support plate for mounting on the busbar (no fixing to the cabinet enclosure)	8GK9720-0KK01

PEN bar holders and N/PE busbar supports


Type	Article No.
PEN bar holder	8GK9721-0KK00

Pin insulator for N busbar



Version	Article No.
1P with M10 female thread and holder	8GK9110-0KK00

Crossbar N/PEN pin insulators and/or holders for PEN bars



Width	Article No.
250 mm	8GK4854-0KK10
500 mm	8GK4854-0KK20
750 mm	8GK4854-0KK30
1000 mm	8GK4854-0KK40
1250 mm	8GK4854-0KK50

Longitudinal stays



Height	Depth	Article No.
1800 mm	250/320/400 mm	8GK4853-8KK02

System overview, page 15/150

© Siemens 2022

ALPHA 1250 marshaling boxes

Rated current 630 A

				Marshaling boxes
			Degree of protection	IP43
				
Height Outside	**Depth Outside**	**Width Outside**	**Inside**	**Protection class I**
500 mm	400 mm	300 mm	250 mm	8GK1383-1KK15
		550 mm	500 mm	8GK1383-1KK25
		800 mm	750 mm	8GK1383-1KK35
		1050 mm	1000 mm	8GK1383-1KK45
		1300 mm	1250 mm	8GK1383-1KK55
650 mm	400 mm	300 mm	250 mm	8GK1383-2KK15
		550 mm	500 mm	8GK1383-2KK25
		800 mm	750 mm	8GK1383-2KK35
		1050 mm	1000 mm	8GK1383-2KK45
		1300 mm	1250 mm	8GK1383-2KK55

System overview, page 15/150

© Siemens 2022

System overview, page 15/150

© Siemens 2022

ALPHA 630 floor-mounted distribution boards

Rated current 630 A

	Unequipped distribution boards Welded and riveted
Degree of protection	IP44



Height		Depth	Tiers/MW	Width		Protection class I	Protection class II
Outside	Inside	Outside		Outside	Inside		
1950 mm	1800 mm	210 mm	12/144	300 mm	250 mm	8GK1322-8KA12	8GK1332-8KA12
			24/288	550 mm	500 mm	8GK1322-8KA22	8GK1332-8KA22
			36/432	800 mm	750 mm	8GK1322-8KA32	8GK1332-8KA32
			48/576	1050 mm	1000 mm	8GK1322-8KA42	8GK1332-8KA42
			60/720	1300 mm	1250 mm	8GK1322-8KA52	8GK1332-8KA52
		250 mm	12/144	300 mm	250 mm	–	–
			24/288	550 mm	500 mm	–	–
			36/432	800 mm	750 mm	–	–
			48/576	1050 mm	1000 mm	–	–
			60/720	1300 mm	1250 mm	–	–
		320 mm	12/144	300 mm	250 mm	–	–
			24/288	550 mm	500 mm	–	–
			36/432	800 mm	750 mm	–	–
			48/576	1050 mm	1000 mm	–	–
			60/720	1300 mm	1250 mm	–	–

Accessories

Spare part doors



Height	Cubicle width	Door version	Door width	Article No.
1950 mm	300 mm	Complete	300 mm	8GK9513-8KK10
	550 mm	Complete	550 mm	8GK9513-8KK20
	800 mm	Left	525 mm	8GK9513-8KK30
		Right	275 mm	8GK9513-8KK40
	1050 mm	Left	525 mm	8GK9513-8KK30
		Right	525 mm	8GK9513-8KK50
	1300 mm	Left	775 mm	8GK9513-8KK60
		Right	525 mm	8GK9513-8KK50

Side panels, modular distribution board



Depth	Article No.
250/320 mm	8GK9520-0KK03

Assembly kits for masking frame for front cover



Height	Width	Article No.
1800 mm	250 mm	8GK9913-0KK10
	500 mm	8GK9913-0KK20
	750 mm	8GK9913-0KK30
	1000 mm	8GK9913-0KK40
	1250 mm	8GK9913-0KK50

System overview, page 15/150

© Siemens 2022

With closed side panel		With open side panel	Flat pack	
IP55		IP55	IP43	
				
Protection class I	**Protection class II**	**Protection class I**	**Protection class I**	**Protection class II**
–	–	–	8GK1302-8KK12	8GK1312-8KK12
–	–	–	8GK1302-8KK22	8GK1312-8KK22
–	–	–	8GK1302-8KK32	8GK1312-8KK32
–	–	–	8GK1302-8KK42	8GK1312-8KK42
–	–	–	8GK1302-8KK52	8GK1312-8KK52
8GK1323-8KN13	8GK1333-8KN13	8GK1323-8KP13	–	–
8GK1323-8KN23	8GK1333-8KN23	8GK1323-8KP23	–	–
8GK1323-8KN33	8GK1333-8KN33	8GK1323-8KP33	–	–
8GK1323-8KN43	8GK1333-8KN43	8GK1323-8KP43	–	–
8GK1323-8KN53	8GK1333-8KN53	8GK1323-8KP53	–	–
8GK1323-8KN14	8GK1333-8KN14	8GK1323-8KP14	–	–
8GK1323-8KN24	8GK1333-8KN24	8GK1323-8KP24	–	–
8GK1323-8KN34	8GK1333-8KN34	8GK1323-8KP34	–	–
8GK1323-8KN44	8GK1333-8KN44	8GK1323-8KP44	–	–
8GK1323-8KN54	8GK1333-8KN54	8GK1323-8KP54	–	–

System overview, page 15/150

© Siemens 2022

ALPHA 630 marshaling boxes

Rated current 630 A

				Marshaling boxes	
			Degree of protection	IP43	IP55
					
Height Outside	Depth Outside	Width Outside	Inside	Protection class I	Protection class I
350 mm	210 mm [1]	300 mm	250 mm	8GK1382-0KK12	–
		550 mm	500 mm	8GK1382-0KK22	–
		800 mm	750 mm	8GK1382-0KK32	–
		1050 mm	1000 mm	8GK1382-0KK42	–
		1300 mm	1250 mm	8GK1382-0KK52	–
	250 mm	300 mm	250 mm	–	8GK1383-0KK13
		550 mm	500 mm	–	8GK1383-0KK23
		800 mm	750 mm	–	8GK1383-0KK33
		1050 mm	1000 mm	–	8GK1383-0KK43
		1300 mm	1250 mm	–	8GK1383-0KK53
	320 mm	300 mm	250 mm	–	8GK1383-0KK14
		550 mm	500 mm	–	8GK1383-0KK24
		800 mm	750 mm	–	8GK1383-0KK34
		1050 mm	1000 mm	–	8GK1383-0KK44
		1300 mm	1250 mm	–	8GK1383-0KK54
500 mm	250 mm	300 mm	250 mm	–	8GK1383-1KK13
		550 mm	500 mm	–	8GK1383-1KK23
		800 mm	750 mm	–	8GK1383-1KK33
		1050 mm	1000 mm	–	8GK1383-1KK43
		1300 mm	1250 mm	–	8GK1383-1KK53
	320 mm	300 mm	250 mm	–	8GK1383-1KK14
		550 mm	500 mm	–	8GK1383-1KK24
		800 mm	750 mm	–	8GK1383-1KK34
		1050 mm	1000 mm	–	8GK1383-1KK44
		1300 mm	1250 mm	–	8GK1383-1KK54
650 mm	250 mm	300 mm	250 mm	–	8GK1383-2KK13
		550 mm	500 mm	–	8GK1383-2KK23
		800 mm	750 mm	–	8GK1383-2KK33
		1050 mm	1000 mm	–	8GK1383-2KK43
		1300 mm	1250 mm	–	8GK1383-2KK53
	320 mm	300 mm	250 mm	–	8GK1383-2KK14
		550 mm	500 mm	–	8GK1383-2KK24
		800 mm	750 mm	–	8GK1383-2KK34
		1050 mm	1000 mm	–	8GK1383-2KK44
		1300 mm	1250 mm	–	8GK1383-2KK54

[1] For flat pack distribution boards only

15

System overview, page 15/150

© Siemens 2022

System overview, page 15/150

© Siemens 2022

ALPHA 400 distribution boards

Rated current 400 A

						Surface-mounting distribution boards Flat pack	
					Degree of protection	IP43	
							
Height		**Depth**	**Tiers**	**Width**		**Protection class I**	**Protection class II**
Outside	**Inside**	**Outside**	**(MW = 18 mm)**	**Outside**	**Inside**		
500 mm	450 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	–	–
				550 mm	500 mm	–	–
650 mm	600 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1102-2KK12	8GK1112-2KK12
				550 mm	500 mm	8GK1102-2KK22	8GK1112-2KK22
				800 mm	750 mm	8GK1102-2KK32	8GK1112-2KK32
				1050 mm	1000 mm	8GK1102-2KK42	8GK1112-2KK42
800 mm	750 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1102-3KK12	8GK1112-3KK12
				550 mm	500 mm	8GK1102-3KK22	8GK1112-3KK22
				800 mm	750 mm	8GK1102-3KK32	8GK1112-3KK32
				1050 mm	1000 mm	8GK1102-3KK42	8GK1112-3KK42
950 mm	900 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1102-4KK12	8GK1112-4KK12
				550 mm	500 mm	8GK1102-4KK22	8GK1112-4KK22
				800 mm	750 mm	8GK1102-4KK32	8GK1112-4KK32
				1050 mm	1000 mm	8GK1102-4KK42	8GK1112-4KK42
				1300 mm	1250 mm	8GK1102-4KK52	8GK1112-4KK52
1100 mm	1050 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1102-5KK12	8GK1112-5KK12
				550 mm	500 mm	8GK1102-5KK22	8GK1112-5KK22
				800 mm	750 mm	8GK1102-5KK32	8GK1112-5KK32
				1050 mm	1000 mm	8GK1102-5KK42	8GK1112-5KK42
				1300 mm	1250 mm	8GK1102-5KK52	8GK1112-5KK52
1250 mm	1200 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1102-6KK12	8GK1112-6KK12
				550 mm	500 mm	8GK1102-6KK22	8GK1112-6KK22
				800 mm	750 mm	8GK1102-6KK32	8GK1112-6KK32
				1050 mm	1000 mm	8GK1102-6KK42	8GK1112-6KK42
				1300 mm	1250 mm	8GK1102-6KK52	8GK1112-6KK52
1400 mm	1350 mm	210 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1102-7KK12	8GK1112-7KK12
				550 mm	500 mm	8GK1102-7KK22	8GK1112-7KK22
				800 mm	750 mm	8GK1102-7KK32	8GK1112-7KK32
				1050 mm	1000 mm	8GK1102-7KK42	8GK1112-7KK42
				1300 mm	1250 mm	8GK1102-7KK52	8GK1112-7KK52

System overview, page 15/150

© Siemens 2022

Unequipped distribution boards				Flush-mounting distribution boards Unequipped distribution boards
IP44		IP55		IP31
				
Protection class I	**Protection class II**	**Protection class I**	**Protection class II**	**Protection class I**
8GK1122-1KA12	–	–	–	–
8GK1122-1KA22	–	–	–	–
8GK1122-2KA12	8GK1132-2KA12	–	–	–
8GK1122-2KA22	8GK1132-2KA22	–	–	–
8GK1122-2KA32	8GK1132-2KA32	–	–	–
8GK1122-2KA42	8GK1132-2KA42	–	–	–
8GK1122-3KA12	8GK1132-3KA12	–	–	–
8GK1122-3KA22	8GK1132-3KA22	–	–	8GK1121-3KK22
8GK1122-3KA32	8GK1132-3KA32	–	–	8GK1121-3KK32
8GK1122-3KA42	8GK1132-3KA42	–	–	–
8GK1122-4KA12	8GK1132-4KA12	8GK1123-4KA12	8GK1133-4KA12	–
8GK1122-4KA22	8GK1132-4KA22	8GK1123-4KA22	8GK1133-4KA22	8GK1121-4KK22
8GK1122-4KA32	8GK1132-4KA32	8GK1123-4KA32	8GK1133-4KA32	8GK1121-4KK32
8GK1122-4KA42	8GK1132-4KA42	8GK1123-4KA42	8GK1133-4KA42	–
8GK1122-4KA52	8GK1132-4KA52	8GK1123-4KA52	8GK1133-4KA52	–
8GK1122-5KA12	8GK1132-5KA12	8GK1123-5KA12	8GK1133-5KA12	–
8GK1122-5KA22	8GK1132-5KA22	8GK1123-5KA22	8GK1133-5KA22	–
8GK1122-5KA32	8GK1132-5KA32	8GK1123-5KA32	8GK1133-5KA32	–
8GK1122-5KA42	8GK1132-5KA42	8GK1123-5KA42	8GK1133-5KA42	–
8GK1122-5KA52	8GK1132-5KA52	8GK1123-5KA52	8GK1133-5KA52	–
8GK1122-6KA12	8GK1132-6KA12	8GK1123-6KA12	8GK1133-6KA12	–
8GK1122-6KA22	8GK1132-6KA22	8GK1123-6KA22	8GK1133-6KA22	8GK1121-6KK22
8GK1122-6KA32	8GK1132-6KA32	8GK1123-6KA32	8GK1133-6KA32	8GK1121-6KK32
8GK1122-6KA42	8GK1132-6KA42	8GK1123-6KA42	8GK1133-6KA42	–
8GK1122-6KA52	8GK1132-6KA52	8GK1123-6KA52	8GK1133-6KA52	–
8GK1122-7KA12	8GK1132-7KA12	8GK1123-7KA12	8GK1133-7KA12	–
8GK1122-7KA22	8GK1132-7KA22	8GK1123-7KA22	8GK1133-7KA22	8GK1121-7KK22
8GK1122-7KA32	8GK1132-7KA32	8GK1123-7KA32	8GK1133-7KA32	8GK1121-7KK32
8GK1122-7KA42	8GK1132-7KA42	8GK1123-7KA42	8GK1133-7KA42	–
8GK1122-7KA52	8GK1132-7KA52	8GK1123-7KA52	8GK1133-7KA52	–

System overview, page 15/150

© Siemens 2022

ALPHA 400 distribution boards

Rated current 400 A

Accessories



Spare part doors

Height	Cubicle width	Door version	Door width	Article No.
950 mm	300 mm	Complete	300 mm	8GK9510-6KK10
	550 mm	Complete	550 mm	8GK9510-6KK20
	800 mm	Left	525 mm	8GK9510-6KK31
		Right	275 mm	8GK9510-6KK42
	1050 mm	Left	525 mm	8GK9510-6KK31
		Right	525 mm	8GK9510-6KK52
	1300 mm	Left	775 mm	8GK9510-6KK51
		Right	525 mm	8GK9510-6KK52
1100 mm	300 mm	Complete	300 mm	8GK9510-7KK10
	550 mm	Complete	550 mm	8GK9510-7KK20
	800 mm	Left	525 mm	8GK9510-7KK31
		Right	275 mm	8GK9510-7KK32
	1050 mm	Left	525 mm	8GK9510-7KK31
		Right	525 mm	8GK9510-7KK42
	1300 mm	Left	775 mm	8GK9510-7KK41
		Right	525 mm	8GK9510-7KK42
1250 mm	300 mm	Complete	300 mm	8GK9510-8KK10
	550 mm	Complete	550 mm	8GK9510-8KK20
	800 mm	Left	525 mm	8GK9510-8KK31
		Right	275 mm	8GK9510-8KK32
	1050 mm	Left	525 mm	8GK9510-8KK31
		Right	525 mm	8GK9510-8KK52
	1300 mm	Left	775 mm	8GK9510-8KK41
		Right	525 mm	8GK9510-8KK52
1400 mm	300 mm	Complete	300 mm	8GK9510-8KK16
	550 mm	Complete	550 mm	8GK9510-8KK26
	800 mm	Left	525 mm	8GK9510-8KK37
		Right	275 mm	8GK9510-8KK38
	1050 mm	Left	525 mm	8GK9510-8KK37
		Right	525 mm	8GK9510-8KK58
	1300 mm	Left	775 mm	8GK9510-8KK47
		Right	525 mm	8GK9510-8KK58

System overview, page 15/150

© Siemens 2022

System overview, page 15/150

© Siemens 2022

ALPHA 160 distribution boards

Rated current 160 A

Surface-mounting distribution boards
Unequipped distribution boards

Degree of protection IP44



Height		Depth	Tiers	Width		Protection class II
Outside	Inside	Outside	(MW = 18 mm)	Outside	Inside	
500 mm	450 mm	140 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1032-1KK11
				550 mm	500 mm	8GK1032-1KK21
				800 mm	750 mm	8GK1032-1KK31
650 mm	600 mm	140 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1032-2KK11
				550 mm	500 mm	8GK1032-2KK21
				800 mm	750 mm	8GK1032-2KK31
				1050 mm	1000 mm	8GK1032-2KK41
800 mm	750 mm	140 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1032-3KK11
				550 mm	500 mm	8GK1032-3KK21
				800 mm	750 mm	8GK1032-3KK31
				1050 mm	1000 mm	8GK1032-3KK41
950 mm	900 mm	140 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1032-4KK11
				550 mm	500 mm	8GK1032-4KK21
				800 mm	750 mm	8GK1032-4KK31
				1050 mm	1000 mm	8GK1032-4KK41
1100 mm	1050 mm	140 mm	12 + 1 MW mountable	300 mm	250 mm	8GK1032-5KK11
				550 mm	500 mm	8GK1032-5KK21
				800 mm	750 mm	8GK1032-5KK31
				1050 mm	1000 mm	8GK1032-5KK41

Flush-mounting distribution boards new
Unequipped distribution boards

Degree of protection IP31



Height		Depth	Tiers	Width		Protection class II
Outside	Inside	Outside	(MW = 18 mm)	Outside	Inside	
558 mm	450 mm	140 mm	12 + 1 MW mountable	358 mm	250 mm	8GK1031-1KK10
				608 mm	500 mm	8GK1031-1KK20
708 mm	600 mm	140 mm	12 + 1 MW mountable	358 mm	250 mm	8GK1031-2KK10
				608 mm	500 mm	8GK1031-2KK20
				858 mm	750 mm	8GK1031-2KK30
858 mm	750 mm	140 mm	12 + 1 MW mountable	358 mm	250 mm	8GK1031-3KK10
				608 mm	500 mm	8GK1031-3KK20
				858 mm	750 mm	8GK1031-3KK30
				1108 mm	1000 mm	8GK1031-3KK40
1008 mm	900 mm	140 mm	12 + 1 TE montierbar	358 mm	250 mm	8GK1031-4KK10
				608 mm	500 mm	8GK1031-4KK20
				858 mm	750 mm	8GK1031-4KK30
				1108 mm	1000 mm	8GK1031-4KK40
1158 mm	1050 mm	140 mm	12 + 1 MW mountable	358 mm	250 mm	8GK1031-5KK10
				608 mm	500 mm	8GK1031-5KK20
				858 mm	750 mm	8GK1031-5KK30

15

System overview, page 15/150

© Siemens 2022

Distribution boards with built-in distribution board panels

Tier spacing 125 mm with N/PE plug-in terminal	Tier spacing 150 mm without N/PE plug-in terminal new	Tier spacing 150 mm terminal blocks at top new	Tier spacing 125 mm multimedia field new
IP44	IP44	IP44	IP44
			
Protection class II	**Protection class II**	**Protection class II**	**Protection class II**
8GK1052-1KK11	8GK1062-1KK11	–	–
8GK1052-1KK21	8GK1062-1KK21	–	–
8GK1052-1KK31	8GK1062-1KK31	–	–
8GK1052-2KK11	8GK1062-2KK11	–	–
8GK1052-2KK21	8GK1062-2KK21	–	8GK1072-2KK21
8GK1052-2KK31	8GK1062-2KK31	–	–
8GK1052-2KK41	8GK1062-2KK41	–	–
8GK1052-3KK11	8GK1062-3KK11	8GK1082-3KK11	–
8GK1052-3KK21	8GK1062-3KK21	8GK1082-3KK21	–
8GK1052-3KK31	8GK1062-3KK31	8GK1082-3KK31	8GK1072-3KK31
8GK1052-3KK41	8GK1062-3KK41	8GK1082-3KK41	–
8GK1052-4KK11	8GK1062-4KK11	8GK1082-4KK11	–
8GK1052-4KK21	8GK1062-4KK21	8GK1082-4KK21	–
8GK1052-4KK31	8GK1062-4KK31	8GK1082-4KK31	–
8GK1052-4KK41	8GK1062-4KK41	8GK1082-4KK41	–
8GK1052-5KK11	8GK1062-5KK11	8GK1082-5KK11	–
8GK1052-5KK21	8GK1062-5KK21	8GK1082-5KK21	–
8GK1052-5KK31	8GK1062-5KK31	8GK1082-5KK31	–
8GK1052-5KK41	8GK1062-5KK41	8GK1082-5KK41	–

Distribution boards with built-in distribution board panels


Tier spacing 125 mm with N/PE plug-in terminal	Tier spacing 150 mm without N/PE plug-in terminal	Tier spacing 150 mm terminal blocks at top	Tier spacing 125 mm multimedia field
IP31	IP31	IP31	IP31
			
Protection class II	**Protection class II**	**Protection class II**	**Protection class II**
8GK1051-1KK10	8GK1061-1KK10	–	–
8GK1051-1KK20	8GK1061-1KK20	–	–
8GK1051-2KK10	8GK1061-2KK10	–	–
8GK1051-2KK20	8GK1061-2KK20	–	–
8GK1051-2KK30	8GK1061-2KK30	–	–
8GK1051-3KK10	8GK1061-3KK10	8GK1081-3KK10	–
8GK1051-3KK20	8GK1061-3KK20	8GK1081-3KK20	8GK1072-3KK20
8GK1051-3KK30	8GK1061-3KK30	8GK1081-3KK30	8GK1072-3KK30
8GK1051-3KK40	8GK1061-3KK40	8GK1081-3KK40	–
8GK1051-4KK10	8GK1061-4KK10	8GK1081-4KK10	–
8GK1051-4KK20	8GK1061-4KK20	8GK1081-4KK20	–
8GK1051-4KK30	8GK1061-4KK30	8GK1081-4KK30	8GK1072-4KK30
8GK1051-4KK40	8GK1061-4KK40	8GK1081-4KK40	–
8GK1051-5KK10	8GK1061-5KK10	8GK1081-5KK10	–
8GK1051-5KK20	8GK1061-5KK20	8GK1081-5KK20	–
8GK1051-5KK30	8GK1061-5KK30	8GK1081-5KK30	–

System overview, page 15/150

© Siemens 2022

Assembly kits

For modular installation devices

				ALPHA 1250/630/400		ALPHA 160	
			Tier spacing	125 mm	150 mm	125 mm	150 mm
							
Quantity tiers	**MW**	**Height outside**	**Width outside**				
1	12	150 mm	250 mm	–	8GK4351-1KK12	–	8GK4351-1KK11
	24	150 mm	500 mm	–	8GK4351-1KK22	–	8GK4351-1KK21
	36	150 mm	750 mm	–	8GK4351-1KK32	–	–
2	24	300 mm	250 mm	8GK4301-2KK12	8GK4351-2KK12	8GK4301-2KK11	8GK4351-2KK11
	48	300 mm	500 mm	8GK4301-2KK22	8GK4351-2KK22	8GK4301-2KK21	8GK4351-2KK21
	72	300 mm	750 mm	–	8GK4351-2KK32	–	–
3	36	450 mm	250 mm	8GK4301-3KK12	8GK4351-3KK12	8GK4301-3KK11	8GK4351-3KK11
	72	450 mm	500 mm	8GK4301-3KK22	8GK4351-3KK22	8GK4301-3KK21	8GK4351-3KK21
	108	450 mm	750 mm	–	8GK4351-3KK32	–	–
4	48	600 mm	250 mm	8GK4301-4KK12	8GK4351-4KK12	8GK4301-4KK11	8GK4351-4KK11
	96	600 mm	500 mm	8GK4301-4KK22	8GK4351-4KK22	8GK4301-4KK21	8GK4351-4KK21
	144	600 mm	750 mm	–	8GK4351-4KK32	–	–

For terminal blocks

		ALPHA 1250/630/400		ALPHA 160
				
Height outside	**Width outside**	**Horizontal**	**Vertical**	**Horizontal**
150 mm	250 mm	8GK4401-1KK12	–	8GK4401-1KK11
	500 mm	–	–	8GK4401-1KK21
300 mm	250 mm	8GK4401-2KK12	8GK4402-2KK12	8GK4401-2KK11
	500 mm	8GK4401-2KK22	8GK4402-2KK22	8GK4401-2KK21
	750 mm	8GK4401-2KK32	8GK4402-2KK32	–
450 mm	250 mm	8GK4401-3KK12	8GK4402-3KK12	–
	500 mm	8GK4401-3KK22	8GK4402-3KK22	–
	750 mm	8GK4401-3KK32	8GK4402-3KK32	–
600 mm	250 mm	–	8GK4402-4KK12	–
	500 mm	–	8GK4402-4KK22	–
	750 mm	–	8GK4402-4KK32	–

System overview, page 15/150

© Siemens 2022

With mounting plates

Mounting plates			Assembly kit		ALPHA 1250/630/400	ALPHA 160
Height	Width	Front cover	Height outside	Width outside		
						
245 mm	207.5 mm	Closed	300 mm	250 mm	8GK4451-2KK12	8GK4451-2KK11
	457.5 mm	Closed	300 mm	500 mm	8GK4451-2KK22	–
	707.5 mm	Closed	300 mm	750 mm	8GK4451-2KK32	–
395 mm	207.5 mm	Closed	450 mm	250 mm	8GK4451-3KK12	8GK4451-3KK11
	457.5 mm	Closed	450 mm	500 mm	8GK4451-3KK22	–
	707.5 mm	Closed	450 mm	750 mm	8GK4451-3KK32	–
545 mm	207.5 mm	Closed	600 mm	250 mm	8GK4451-4KK12	8GK4451-4KK11
	457.5 mm	Closed	600 mm	500 mm	8GK4451-4KK22	–
	707.5 mm	Closed	600 mm	750 mm	8GK4451-4KK32	–

With mounting plates, perforated new

Mounting plates			Assembly kit		ALPHA 1250/630/400
Height	Width	Front cover	Height outside	Width outside	
					
149 mm	245 mm	Closed	150 mm	250 mm	8GK4452-1KK12
299 mm	245 mm	Closed	300 mm	250 mm	8GK4452-2KK12
449 mm	243 mm	Closed	450 mm	250 mm	8GK4452-3KK12
899 mm	243 mm	Closed	900 mm	250 mm	8GK4452-6KK12

For unequipped panels

		ALPHA 1250/630/400			ALPHA 160
					
Height outside	Width outside	Standard	With inspection window	With deep-drawn cover 40 mm	Standard
75 mm	250 mm	8GK4501-0KK12	–	–	–
	500 mm	8GK4501-0KK22	–	–	–
150 mm	250 mm	8GK4501-1KK12	–	–	8GK4501-1KK11
	500 mm	8GK4501-1KK22	–	–	8GK4501-1KK21
	750 mm	8GK4501-1KK32	–	–	–
300 mm	250 mm	8GK4501-2KK12	8GK4500-2KK12	8GK4501-2KK13	8GK4501-2KK11
	500 mm	8GK4501-2KK22	8GK4500-2KK22	8GK4501-2KK23	8GK4501-2KK21
	750 mm	8GK4501-2KK32	–	8GK4501-2KK33	–
450 mm	250 mm	8GK4501-3KK12	8GK4500-3KK12	8GK4501-3KK13	8GK4501-3KK11
	500 mm	8GK4501-3KK22	8GK4500-3KK22	8GK4501-3KK23	8GK4501-3KK21
	750 mm	8GK4501-3KK32	–	8GK4501-3KK33	–
600 mm	250 mm	8GK4501-4KK12	8GK4500-4KK12	–	8GK4501-4KK11
	500 mm	8GK4501-4KK22	8GK4500-4KK22	–	8GK4501-4KK21
	750 mm	8GK4501-4KK32	–	–	–
750 mm	250 mm	8GK4501-5KK12	–	–	–
	500 mm	8GK4501-5KK22	–	–	–
	750 mm	8GK4501-5KK32	–	–	–

System overview, page 15/150

© Siemens 2022

Assembly kits

For 3NP1 fuse switch disconnectors

				ALPHA 1250/630/400	
					
LV HRC fuse Size	**Switches/breakers Quantity**	**Distribution board Height outside**	**Width outside**	**Mounting on support plate**	**on busbars [1)]**
00/000	2	300 mm	250 mm	8GK4550-2KK12	8GK4650-2KK12
		450 mm	250 mm	–	8GK4650-3KK12
	4	300 mm	500 mm	8GK4550-2KK22	8GK4650-2KK22
		450 mm	500 mm	–	8GK4650-3KK22
1	1	450 mm	250 mm	8GK4550-3KK12	8GK4651-3KK12
	2	450 mm	500 mm	8GK4550-3KK22	8GK4651-3KK22
2	1	450 mm	250 mm	8GK4551-3KK12	8GK4652-3KK12
3	1	450 mm	500 mm	8GK4551-3KK22	–

[1)] For busbar support 8GK9711-0KK03

Accessories

Cover 3NP1123 ... size 000



- Required for size 000 fuse switch disconnectors

Article No.
8GK9912-0KK00

Busbar supports





Busbar center-to-center spacing	Number of poles	Article No.
60 mm	1-pole	8GK9710-0KK00
	2-pole	8GK9710-0KK01
	3-pole	8GK9711-0KK03
	4-pole	8GK9670-0KK00
40 mm	5-pole	8GK9650-0KK00

System overview, page 15/150

© Siemens 2022

For 3NJ4 fuse switch disconnectors in in-line design

					ALPHA 1250/630/400	
				Busbar center-to-center spacing	100 mm	185 mm
						
Switches/breakers	**Number of 3NJ4 disconnectors**		**Distribution board**			**Distribution board depth**
Size	**With screw fixing**	**With fixing claws**	**Height outside**	**Width outside**		**min. 320 mm**
Assembly kits for 3NJ4 fuse switch disconnectors						
NH00	4	3	600 mm	250 mm	8GK4751-4KK13	–
	9	8	600 mm	500 mm	8GK4751-4KK23	–
	14	13	600 mm	750 mm	8GK4751-4KK33	–
NH1 ... NH3	2	–	750 mm	250 mm	–	8GK4752-5KK15
	4	3	750 mm	500 mm	–	8GK4752-5KK25
	7	6	750 mm	750 mm	–	8GK4752-5KK35


Accessories

Blanking covers



Switching device size	Busbar center-to-center spacing	Height	Width	Article No.
NH00	100 mm	299 mm	50 mm	3NJ4912-2CA00
NH1 ... NH3	185 mm	699 mm	50 mm	3NJ4912-2AA00
			100 mm	3NJ4912-2BA00

Ready-to-install copper bars



Switching device size	Distribution board width outside	Article No.
NH00	250 mm	8GK9735-1KK10
	500 mm	8GK9735-1KK20
	750 mm	8GK9735-1KK30
NH1 ... NH3	250 mm	8GK9735-2KK10
	500 mm	8GK9735-2KK20
	750 mm	8GK9735-2KK30

15

System overview, page 15/150

© Siemens 2022

Assembly kits

For SR60 busbar-adaptable units

	ALPHA 1250/630/400
Busbar center-to-center spacing	60 mm



Height outside	Width outside	
300 mm	250 mm	8GK4801-2KK13
	500 mm	8GK4801-2KK23
	750 mm	8GK4801-2KK33
450 mm	250 mm	8GK4801-3KK13
	500 mm	8GK4801-3KK23
	750 mm	8GK4801-3KK33

Accessories

Supports for blanking covers



Article No.
8US1922-2EA00

Blanking covers



Article No.
8US1922-2EB00



Blanking covers

Width	Article No.
195 mm	8GK9910-0KK08 new

System overview, page 15/150

© Siemens 2022

For bus-mounting fuse bases, for mounting on busbar systems


				ALPHA 1250/630/400	
			Busbar system	SR60, 60 mm	8US, 60 mm
					
Number of poles		**Height**	**Width**		
3P	**4P**	**outside**	**outside**		
■	–	300 mm	250 mm	8GK4801-2KK12	–
		450 mm	250 mm	8GK4801-3KK12	–
	■	300 mm	250 mm	–	8GK4800-2KK12
			500 mm	–	8GK4800-2KK22
			750 mm	–	8GK4800-2KK32

Accessories

Blanking covers

Width	Article No.
195 mm	8GK9910-0KK08 new

Holding plates



- For 4-pole busbar supports for mounting in section with height of 300 mm

Article No.
8GK9711-0KK07 new

15

System overview, page 15/150


© Siemens 2022

Assembly kits

For 3KF switch disconnectors with fuses

							ALPHA 1250/630/400	
						Operating mechanism	Front operating mechanism, center	Door-coupling rotary operating mechanism (mounted in the front cover)
								
Switches/breakers				**Distribution board**				
Size	**Rated current**	**3P**	**4P**	**Height outside**	**Width outside**	**Depth outside**		
3KF1	80 A	■	■	300 mm	250 mm	≥210 mm	8GK4722-2KK10	–
3KF2	160 A	■	■	300 mm	500 mm	≥210 mm	8GK4723-2KK10	–
3KF3 ... 3KF4	400 A	■	■	300 mm	500 mm	≥320 mm	–	8GK4722-2KK20

For 3KD switch disconnectors

								ALPHA 1250/630/400	
							Operating mechanism	Direct operating mechanism	Door-coupling rotary operating mechanism (mounted in the front cover)
									
Switches/breakers					**Distribution board**				
Size	**Rated current**	**Quantity**	**3P**	**4P**	**Height outside**	**Width outside**	**Depth outside**		
1	16 ... 63 A	2	■	–	300 mm	250 mm	210 mm	8GK4720-2KK10	–
2	80 ... 200 A	1	■	■	300 mm	250 mm	210 mm	8GK4720-2KK10	–
3	200 ... 400 A	1	■	■	300 mm	250 mm	210 mm	8GK4721-2KK10	–
3 ... 4	200 ... 800 A	1	■	■	450 mm	500 mm	≥250 mm	–	8GK4720-3KK20

System overview, page 15/150

© Siemens 2022

For 3KA switch disconnectors on support plate

							ALPHA 1250/630/400	
						Operating mechanism	Direct operating mechanism	Direct operating mechanism
								
Switches/breakers					**Distribution board**			
Size	**Rated current**	**Quantity**	**3P**	**4P**	**Height outside**	**Width outside**		
3KA 50/51/52/53	63 A/80 A/ 125 A/160 A	1	■	–	300 mm	250 mm	8GK4707-3KK17	–
3KA 55/57/58	250 A/400 A/ 630 A	1	■	■	300 mm	500 mm	–	8GK4707-4KK27

15

System overview, page 15/150

© Siemens 2022

Assembly kits

For 3VL molded case circuit breakers

ALPHA 1250/630/400



Switches/breakers						Distribution board		Standard
Size	Type	Rated current	Quantity	3P	4P	Height outside	Width outside	
3VL1	3VL160X	16 ... 160 A	1	■	■	300 mm	250 mm	8GK4701-2KK12
						450 mm	250 mm	8GK4701-3KK12
3VL2	3VL160	50 ... 160 A	1	■	■	300 mm	250 mm	8GK4701-2KK12
						450 mm	250 mm	8GK4701-3KK12
3VL3	3VL250	200 ... 250 A	1	■	■	450 mm	250 mm	8GK4701-3KK12
3VL4	3VL400	200 ... 400 A	1	■	■	600 mm	250 mm	8GK4702-4KK12
						750 mm	250 mm	–
3VL5	3VL630	315 ... 630 A	1	■	–	600 mm	250 mm	8GK4703-4KK13
			1	■	■	600 mm	500 mm	8GK4704-4KK13
			1	■	–	600 mm	500 mm	–
			1	–	■	600 mm	500 mm	–
3VL6	3VL800	800 A	1	■	–	600 mm	250 mm	8GK4704-4KK15
			1	■	■	600 mm	500 mm	8GK4704-4KK25
3VL7	3VL1250	1000 ... 1250 A	1	■	■	600 mm	500 mm	8GK4705-4KK25
3VL8	3VL1600	1600 A	1	■	■	600 mm	500 mm	8GK4705-4KK25

System overview, page 15/150

© Siemens 2022

	
With RCD module mounted	**For installation with front-operated rotary operating mechanism**
–	–
8GK4720-3KK10	8GK4722-3KK10
–	–
8GK4721-3KK10	8GK4722-3KK10
8GK4721-3KK10	8GK4722-3KK10
–	8GK4722-4KK10
8GK4720-5KK10	–
–	–
–	–
–	8GK4723-4KK10
–	8GK4721-4KK20
–	–
–	–
–	–
–	–

System overview, page 15/150

© Siemens 2022

Assembly kits

For 3VA molded case circuit breakers, 3-pole and 4-pole

ALPHA 1250/630/400



Switches/breakers						Distribution board		
Size	Rated current	Quantity	Direct operating mechanism	Rotary operating mechanism	Motorized operating mechanism	Height outside	Width outside	
3VA10.., 3VA11..	100 ... 160 A	1	■	–	■	300 mm [1]	250 mm	8GK4731-2KK12 [4]
						450 mm	250 mm	8GK4730-2KK12 [4]
			–	■	–	300 mm [1]	250 mm	8GK4733-2KK12
				–	■	300 mm [1]	250 mm	–
						450 mm	250 mm	–
		3	■	–	–	300 mm [1]	500 mm	8GK4731-2KK22
						450 mm	500 mm	8GK4730-2KK22
			–	■	–	300 mm [1]	500 mm	8GK4733-2KK22
				–	■	300 mm [1]	500 mm	–
						450 mm	500 mm	–
3VA12	250 A	1	■	–	–	300 mm	250 mm	8GK4732-2KK12
						450 mm	250 mm	8GK4733-3KK10
			–	■	–	300 mm	250 mm	8GK4735-2KK12
				–	■	300 mm	250 mm	–
						450 mm	250 mm	–
						600 mm	250 mm	–
		3	■	–	–	300 mm	500 mm	8GK4732-2KK22
						450 mm	500 mm	8GK4731-3KK20
			–	■	–	300 mm	500 mm	8GK4735-2KK22
				–	■	300 mm	500 mm	–
3VA20.., 3VA22..	100 ... 250 A	1	■	–	–	300 mm	250 mm	8GK4730-3KK10
			–	■	–	300 mm	250 mm	8GK4736-2KK12
				–	■	600 mm	250 mm	–
		3	■	–	–	300 mm	500 mm	8GK4730-3KK20
			–	■	–	300 mm	500 mm	8GK4736-2KK22
				–	■	600 mm	500 mm	–
3VA23.., 3VA24..	400 ... 630 A	1	■	–	–	450 mm	250 mm	8GK4730-4KK12
							500 mm	8GK4730-4KK22
			–	■	–	450 mm	500 mm	8GK4733-4KK22
				–	■	450 mm	250 mm	–
							500 mm	–
						600 mm	250 mm	–
							500 mm	–

[1] For insulated connection only
[2] Distribution board depth at least 250 mm
[3] Distribution board depth at least 320 mm
[4] With side mounted motorized operating mechanism

15

System overview, page 15/150

© Siemens 2022





	With RCD module Infeed side	At side	With RCD module Infeed side	At side
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4734-2KK12 [2]	–	–	–	–
–	8GK4731-3KK12 [4]	8GK4731-3KK10	8GK4734-3KK12 [2]	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4734-2KK22 [2]	–	–	–	–
–	8GK4731-3KK22	–	8GK4734-3KK22 [2]	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4735-3KK10 [2]	–	–	–	–
–	–	–	–	8GK4733-4KK10 [2]
–	8GK4732-4KK10	–	8GK4736-4KK12	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4732-3KK20 [2]	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	8GK4735-4KK12	–	–	–
–	–	–	–	–
–	–	–	–	–
–	8GK4735-4KK22	–	8GK4736-4KK22 [3]	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
8GK4734-4KK12 [3]	–	–	–	–
8GK4734-4KK22 [3]	–	–	–	–
–	8GK4731-4KK12	–	–	–
–	8GK4731-4KK22	–	–	–

System overview, page 15/150


© Siemens 2022

Assembly kits


For meter mounting without top and bottom terminal compartment

		ALPHA 630
		
Height outside	**Width outside**	
450 mm	250 mm	8GE3713-4

For meter mounting with top and bottom terminal compartment

		ALPHA ZS	
		Meter support plate	Covers
			
Height	**Width**		**Top/bottom terminal compartment**
150 mm	250 mm	–	8GS4006-0
300 mm	250 mm	–	8GS4006-5
450 mm	250 mm	8GS4007-4	–

Accessories


Supports for front cover	
	**Article No.**
	8GS4018-8

DIN rails	
	**Article No.**
	8GS4010-6

© Siemens 2022

Front covers for measuring devices

Use	Height outside	Width outside	Cutout dimensions	ALPHA 1250/630/400
1× measuring device 96 × 96 mm	300 mm	500 mm	92 × 92 mm	8GK4500-2KK20



For cable connections to the door

Height	Width	Diameter	ALPHA 1250/630/400
150 mm	250 mm	M20	8GK4500-1KK12
	500 mm	M20	8GK4500-1KK22



System overview, page 15/150

© Siemens 2022

Quick-assembly kits

For modular installation devices and terminal blocks

					ALPHA 1250/630/400	
				Tier spacing	125 mm	
						
Height outside	Width outside	No. of tiers	Terminals	MW	With N/PE bar	With 2 N/PE bars
For modular installation devices						
450 mm	250 mm	3	–	36	–	–
600 mm	250 mm	4	–	48	8GK4001-4KK11	–
	500 mm	8	–	96	8GK4001-4KK22	–
750 mm	250 mm	5	–	60	8GK4001-5KK11	–
	500 mm	10	–	120	8GK4001-5KK22	–
900 mm	250 mm	6	–	72	8GK4001-6KK11	8GK4003-6KK11
	500 mm	12	–	144	8GK4001-6KK22	–
1050 mm	250 mm	7	–	84	8GK4001-7KK11	8GK4003-7KK11
	500 mm	14	–	168	8GK4001-7KK22	–
1200 mm	250 mm	8	–	96	8GK4001-8KK12	8GK4003-8KK12
	500 mm	16	–	192	8GK4001-8KK22	–
1350 mm	250 mm	9	–	108	8GK4002-8KK12	8GK4003-8KK13
	500 mm	18	–	216	8GK4002-8KK22	–
For modular installation devices and terminal blocks						
900 mm	250 mm	2	4	48	–	–
	500 mm	4	8	96	–	–
	750 mm	6	12	144	–	–
1050 mm	250 mm	2	5	60	–	–
	500 mm	4	10	120	–	–
	750 mm	6	15	180	–	–
1200 mm	250 mm	2	6	72	–	–
	500 mm	4	12	144	–	–
	750 mm	6	18	216	–	–
1350 mm	250 mm	3	6	72	–	–
	500 mm	6	12	144	–	–
	750 mm	9	18	216	–	–

System overview, page 15/150

© Siemens 2022

	ALPHA 160	
150 mm	125 mm	150 mm
		
Without N/PE bar	**With N/PE bar**	**Without N/PE bar**
–	8GK4001-3KK11	8GK4051-3KK11
–	8GK4001-4KK11	8GK4051-4KK11
–	–	–
–	8GK4001-5KK11	8GK4051-5KK11
–	–	–
8GK4051-6KK11	8GK4001-6KK11	8GK4051-6KK11
8GK4101-6KK22	–	–
8GK4051-7KK11	8GK4001-7KK11	8GK4051-7KK11
8GK4101-7KK22	–	–
8GK4101-8KK12	–	–
8GK4101-8KK22	–	–
8GK4102-8KK12	–	–
8GK4102-8KK22	–	–
8GK4100-6KK12	–	–
8GK4100-6KK22	–	–
8GK4100-6KK32	–	–
8GK4100-7KK12	–	–
8GK4100-7KK22	–	–
8GK4100-7KK32	–	–
8GK4100-8KK12	–	–
8GK4100-8KK22	–	–
8GK4100-8KK32	–	–
8GK4110-8KK12	–	–
8GK4110-8KK22	–	–
8GK4110-8KK32	–	–

System overview, page 15/150

© Siemens 2022

Busbars

For ALPHA 1250/630/400 distribution boards

Cu busbars



Cross-section	Current	Length	Article No.
12 × 5 mm	250 A	250 mm	8GK9731-0KK10
		500 mm	8GK9731-0KK20
		750 mm	8GK9731-0KK30
		1000 mm	8GK9731-0KK40
		1250 mm	8GK9731-0KK50
20 × 5 mm	320 A	250 mm	8GK9733-0KK10
		500 mm	8GK9733-0KK20
		750 mm	8GK9733-0KK30
		1000 mm	8GK9733-0KK40
		1250 mm	8GK9733-0KK50
30 × 5 mm	450 A	250 mm	8GK9735-0KK10
		500 mm	8GK9735-0KK20
		750 mm	8GK9735-0KK30
		1000 mm	8GK9735-0KK40
		1250 mm	8GK9735-0KK50
30 × 10 mm	630 A	250 mm	8GK9736-0KK10
		500 mm	8GK9736-0KK20
		750 mm	8GK9736-0KK30
		1000 mm	8GK9736-0KK40
		1250 mm	8GK9736-0KK50

Busbar supports

Version	Use	Busbar center-to-center spacing	Article No.
1-pole	For Cu busbars 12 × 5 (10) mm, 20 × 5 (10) mm, 30 × 5 (10) mm	–	8GK9710-0KK00
2-pole	For Cu busbars 12 × 5 (10) mm, 20 × 5 (10) mm, 30 × 5 (10) mm	60 mm	8GK9710-0KK01
3-pole	For Cu busbars 12 × 5 (10) mm, 20 × 5 (10) mm, 30 × 5 (10) mm, Bus-mounting fuse bases and 3NP4076 switch disconnectors in conjunction with assembly kits	60 mm	8GK9711-0KK03
4-pole	For Cu busbars 12 × 5 (10) mm, 30 × 5 (10) mm	60 mm	8GK9670-0KK00
5-pole	For Cu busbars 12 × 5 (10) mm 3NP fuse switch disconnectors	40 mm	8GK9650-0KK00


System overview, page 15/150

© Siemens 2022

Accessories

For ALPHA 1250/630/400/160 distribution boards

			1250	630	400	160
Wall-mounting rails						
	• For all wall-mounted distribution boards					
	Length	**Article No.**				
	250 mm	8GK9912-0KK10			■	■
	500 mm	8GK9912-0KK20			■	■
	750 mm	8GK9912-0KK30			■	■
	1000 mm	8GK9912-0KK40			■	■
	1250 mm	8GK9912-0KK50			■	■
Cabinet mounting lugs, flat						
	**Use**	**Article No.**				
	For mounting and fixing a distribution board directly against the wall without a clearance (1 set = 4 units)	8GK9910-0KK36		■	■	■
	For connecting 2 distribution boards and for mounting and fixing a distribution board directly against the wall without a clearance (8GK9910-0KK36 additionally required for the ends) 1 set = 2 units	8GK9910-0KK37		■	■	■
Wall mounting lug, standard						
	• 1 set = 4 units					
		Article No.				
		8GK9920-0KK33	■	■	■	■
Hollow wall set						
	Use	**Article No.**				
	For mounting flush-mounting distribution boards in hollow walls	8GK9910-0KK28			■	■
M12 transport eyebolts						
		**Article No.**				
		8GK9918-0KK00	■	■	■	■
Ventilation grilles for side panel						
		**Article No.**				
		8GK9120-0KK30	■	■	■	

Bases for flat pack floor-mounted distribution boards				
	**Height outside**	**Depth**	**Width**	**Article No.**
	100 mm	210 mm	300 mm	8GK9901-0KK12 ■
			550 mm	8GK9901-0KK22 ■
			800 mm	8GK9901-0KK32 ■
			1050 mm	8GK9901-0KK42 ■
			1300 mm	8GK9901-0KK52 ■

15

System overview, page 15/150

© Siemens 2022

Accessories


For ALPHA 1250/630/400/160 distribution boards

Bases for pre-assembled (welded) floor-mounted distribution boards









Height outside	Depth	Width	Article No.	1250	630	400	160
100 mm	210 mm	300 mm	8GK9901-0KA12	■	■		
		550 mm	8GK9901-0KA22	■	■		
		800 mm	8GK9901-0KA32	■	■		
		1050 mm	8GK9901-0KA42	■	■		
		1300 mm	8GK9901-0KA52	■	■		
	250 mm	300 mm	8GK9900-0KK13	■	■		
		550 mm	8GK9900-0KK23	■	■		
		800 mm	8GK9900-0KK33	■	■		
		1050 mm	8GK9900-0KK43	■	■		
		1300 mm	8GK9900-0KK53	■	■		
	320 mm	300 mm	8GK9900-0KK14	■	■		
		550 mm	8GK9900-0KK24	■	■		
		800 mm	8GK9900-0KK34	■	■		
		1050 mm	8GK9900-0KK44	■	■		
		1300 mm	8GK9900-0KK54	■	■		
	400 mm	300 mm	8GK9902-0KK13	■	■		
		550 mm	8GK9902-0KK23	■	■		
		800 mm	8GK9902-0KK33	■	■		
		1050 mm	8GK9902-0KK43	■	■		
		1300 mm	8GK9902-0KK53	■	■		

Partitions, vertical

- For the visual and spatial separation of different potentials





Cubicle depth	Height	Article No.				
140 mm	450 mm	8GK9001-3KK01				■
	600 mm	8GK9001-4KK01				■
	750 mm	8GK9001-5KK01				■
	900 mm	8GK9001-6KK01				■
	1050 mm	8GK9001-7KK01				■
210 mm	300 mm	8GK9301-2KK01		■	■	
	450 mm	8GK9301-3KK01		■	■	
	600 mm	8GK9101-4KK01		■	■	
	750 mm	8GK9101-5KK01		■	■	
	900 mm	8GK9101-6KK01		■	■	
	1050 mm	8GK9101-7KK01		■	■	
	1200 mm	8GK9101-8KK01		■	■	
	1350 mm	8GK9102-8KK01		■	■	
250/320 mm	1800 mm	8GK9520-8KK00		■		
400 mm	1800 mm	8GK9521-8KK00	■			

System overview, page 15/150

© Siemens 2022

Partitions, horizontal



- For the visual and spatial separation of different potentials

Cubicle depth	Width	Article No.	1250	630	400	160
140 mm	250 mm	8GK9002-0KK10				■
210 mm	250 mm	8GK9103-0KK10		■	■	
	500 mm	8GK9103-0KK20		■	■	
	750 mm	8GK9103-0KK30		■	■	
250/320 mm	250 mm	8GK9520-0KK10		■		
	500 mm	8GK9520-0KK20		■		
400 mm	250 mm	8GK9520-0KK30	■			

Mounting plates



Cubicle Height	Cubicle Width	Mounting plates Height	Mounting plates Width	Article No.	1250	630	400	160
600 mm	250 mm	596 mm	243 mm	8GK9531-4KK10			■	
	500 mm	596 mm	493 mm	8GK9531-4KK20			■	
750 mm	250 mm	685 mm	243 mm	8GK9531-5KK10			■	
	500 mm	685 mm	493 mm	8GK9531-5KK20			■	
900 mm	250 mm	835 mm	243 mm	8GK9531-6KK10			■	
	500 mm	835 mm	493 mm	8GK9531-6KK20			■	
1050 mm	250 mm	985 mm	243 mm	8GK9531-7KK10			■	
	500 mm	985 mm	493 mm	8GK9531-7KK20			■	
1200 mm	250 mm	1135 mm	243 mm	8GK9531-8KK10			■	
	500 mm	1135 mm	493 mm	8GK9531-8KK20			■	
1350 mm	250 mm	1285 mm	243 mm	8GK9532-8KK10			■	
	500 mm	1285 mm	493 mm	8GK9532-8KK20			■	
1800 mm	250 mm	1680 mm	242 mm	8GK9533-0KK10	■	■		
	500 mm	1680 mm	492 mm	8GK9533-0KK20	■	■		
	750 mm	1680 mm	742 mm	8GK9533-0KK30	■	■		
	1000 mm	1680 mm	992 mm	8GK9533-0KK40	■	■		
	1250 mm	1680 mm	1242 mm	8GK9533-0KK50	■	■		

Mounting plates for telecommunication units

- Made of perforated steel plate
- With insert nuts and quick-locking technology

Cubicle Height	Cubicle Width	Mounting plates Height	Mounting plates Width	Article No.	1250	630	400	160
900 mm	250 mm	835 mm	243 mm	8GS4016-1			■	
1050 mm	250 mm	985 mm	243 mm	8GS4016-2			■	
1200 mm	250 mm	1135 mm	243 mm	8GS4016-3			■	
1350 mm	250 mm	1285 mm	243 mm	8GS4016-4			■	

Longitudinal stays



- In order to mount the assembly kits in unequipped distribution boards, 2 longitudinal stays are required for each assembly kit width
- 1 set = 2 stays

Cubicle depth	Length	Article No.	1250	630	400	160
210 mm	300 mm	8GK4855-2KK02		■		
	450 mm	8GK4851-3KK00				■
	600 mm	8GK4851-4KK00			■	■
	750 mm	8GK4851-5KK00			■	■
	900 mm	8GK4851-6KK00			■	■
	1050 mm	8GK4851-7KK00			■	■
	1200 mm	8GK4851-8KK00			■	
	1350 mm	8GK4852-8KK00			■	
	1800 mm	8GK4853-8KK00		■		
250 mm, 320 mm, 400 mm	1800 mm	8GK4853-8KK02	■	■		

15

System overview, page 15/150

© Siemens 2022

Accessories

For ALPHA 1250/630/400/160 distribution boards

Stay supports



- For depth of 210 mm when mounting stays are to be shifted forward by 55 mm
- Necessary whenever DIN rails are mounted directly on the stays

Article No.	1250	630	400	160
8GK9910-0KK38			■	

Universal brackets



Article No.	1250	630	400	160
8GK9910-0KK05	■	■		

Connecting kits for longitudinal stays



Depth	Article No.	1250	630	400	160
250/320 mm	8GK9910-0KK32	■	■	■	

Crossbars



Width	Article No.	1250	630	400	160
500 mm	8GK4853-0KK20	■	■	■	
750 mm	8GK4853-0KK30	■	■	■	

Front cover, closed



Tier spacing	Height	Width	Article No.	1250	630	400	160
150 mm	75 mm	250 mm	8GK9601-0KK10	■	■	■	■
	150 mm	250 mm	8GK9601-1KK10	■	■	■	■
		500 mm	8GK9601-1KK20	■	■	■	■
		750 mm	8GK9601-1KK30	■	■	■	■
	300 mm	250 mm	8GK9601-2KK10	■	■	■	■
		500 mm	8GK9601-2KK20	■	■	■	■
		750 mm	8GK9601-2KK30	■	■	■	■
	450 mm	250 mm	8GK9601-3KK10	■	■	■	■
		500 mm	8GK9601-3KK20	■	■	■	■
		750 mm	8GK9601-3KK30	■	■	■	■
	600 mm	250 mm	8GK9601-4KK10	■	■	■	■
		500 mm	8GK9601-4KK20	■	■	■	■
		750 mm	8GK9601-4KK30	■	■	■	■

Front cover with cutout




Height	Width	Tiers	MW	Article No.	1250	630	400	160
150 mm	250 mm	1	12	8GK9601-1KK11	■	■	■	■
	500 mm	1	24	8GK9601-1KK21	■	■	■	■
	750 mm	1	36	8GK9601-1KK31	■	■	■	■
300 mm	250 mm	2	24	8GK9601-2KK11	■	■	■	■
	500 mm	2	48	8GK9601-2KK21	■	■	■	■
	750 mm	2	72	8GK9601-2KK31	■	■	■	■
450 mm	250 mm	3	36	8GK9601-3KK11	■	■	■	■
	500 mm	3	72	8GK9601-3KK21	■	■	■	■
	750 mm	3	108	8GK9601-3KK31	■	■	■	■
600 mm	250 mm	4	48	8GK9601-4KK11	■	■	■	■
	500 mm	4	96	8GK9601-4KK21	■	■	■	■
	750 mm	4	144	8GK9601-4KK31	■	■	■	■

System overview, page 15/150

© Siemens 2022

Supports for front cover



- Plastic

Version	Length	Mounting	Article No.	1250	630	400	160
Spare part	117 mm	Standard	8GK9910-0KK30	■	■	■	
	54 mm	Standard	8GK9910-0KK20				■
Large pack	117 mm	For 15 mm DIN rail directly onto the DIN-rail holder	8GK9910-0KK31	■	■	■	
	61.5 mm	For 15 mm DIN rail directly onto the stays	8GK9910-0KK24	■	■	■	

Assembly tool for supports



- For short and long version
- With ergonomic handle

Article No.	1250	630	400	160
8GK9910-0KK27	■	■	■	■

Support extensions




Length	Article No.	1250	630	400	160
7.5 mm	8GK9911-0KK03	■	■	■	■

Quick-lock screws for front cover



Material	Color	Article No.	1250	630	400	160
Plastic	RAL 7035 (light gray)	8GK9910-0KK26	■	■	■	■

Spare part door hinges



- For wall/floor-mounted distribution boards
- 1 set = 2 units

Version	Article No.	1250	630	400	160
Door hinges prior to 2019 (1 piece)	8GK9920-0KK24	■	■	■	■



Door hinges from 2019 onwards (2 pieces)	8GK9920-1KK24	■	■	■	■

Circuit diagram pockets

Version	Format	Depth	Article No.	1250	630	400	160
Sheet steel	DIN A3	10 mm	8GK9910-0KK22	■	■	■	■
Transparent sleeve, adhered all-over	DIN A4		8GK9910-0KK23	■	■	■	■
Plastic	DIN A4	30 mm	8GD9132	■	■	■	■
Plastic, large pack	DIN A4	30 mm	8GK9910-1KK24	■	■	■	■

Siemens nameplate

Material	Version	Color	Article No.	1250	630	400	160
Aluminum	Self-adhesive	Petrol	8GD9084	■	■	■	■
Sticker	Self-adhesive	Petrol	8GF9661	■	■	■	■


15

System overview, page 15/150

© Siemens 2022

Accessories





For ALPHA 1250/630/400/160 distribution boards

			1250	630	400	160
IP43/IP55 locking systems for wall-mounted distribution boards						
	Version	**Article No.**				
	Standard locking device with rotary handle	8GK9560-0KK04			■	■
	Retrofit kit for standard locking device with degree of protection IP44	8GK9560-0KK05			■	■
	Rotary handle locking device for profile cylinders (E012 or Senat tumbler)	8GK9560-0KK06			■	■
	Rotary handle, lockable, incl. E012 lock and two keys	8GK9560-0KK13			■	■
	Rotary handle incl. double-bit interlocking mechanism	8GK9561-0KK04 new			■	
Locking systems for floor-mounted distribution boards						
	Version	**Article No.**				
	Rotary handle, recessable, with pushbutton technique	8GK9561-0KK01	■	■		
	Lock insert for installation of profile semicylinder	8GK9561-0KK02	■	■		
Profile semicylinder for locks						
	Use / **Version**	**Article No.**				
	Wall-mounted distribution boards — With E012 lock and two keys	8GK9560-0KK07			■	■
	With Senat tumbler and two keys	8GK9560-0KK08			■	■
	With 3-mm pin as double-bit lock	8GK9560-0KK10			■	■
	Floor-mounted distribution boards — With E012 lock and two keys	8GK9561-0KK00	■	■		
	With Senat tumbler and two keys	8GK9560-0KK03	■	■		

15

System overview, page 15/150

© Siemens 2022

			1250	630	400	160
Spare keys						
	**Version**	**Article No.**				
	For double-bit interlocking mechanism	8GD9290	■	■		
	For E012 lock	8GF9390-2	■	■	■	■
Connecting kits for distribution boards, IP43/IP55						
	• For side-by-side mounting of enclosures • Comprising: screws, washers, nuts and 10 m roll of sealing strip					
		Article No.				
		8GK9920-0KK31		■	■	
		8GK9920-0KK50	■			
Extra-deep brackets						
	• For recessed installation of DIN rails					
		Article No.				
		8GK9910-0KK34	■	■	■	
Extra-deep brackets, depth-adjustable						
		**Article No.**				
		8GK9911-0KK01	■	■	■	
Drop-down brackets, universal						
		**Article No.**				
		8GK9911-0KK02	■	■	■	
DIN rails, lowered						
	**Width**	**Article No.**				
	250 mm	8GK9910-0KK35	■	■	■	
	500 mm	8GK9910-0KK40	■	■	■	
	750 mm	8GK9910-0KK41	■	■	■	
15 mm DIN rails						
	**Width**	**Article No.**				
	250 mm	8GK9910-1KK10	■	■		
	500 mm	8GK9910-1KK20	■	■		
	750 mm	8GK9910-1KK30	■	■		
	1000 mm	8GK9910-1KK40	■	■		
	1250 mm	8GK9910-1KK50	■	■		
DIN-rail holders for 15 mm DIN rail						
	• Comprising a left and a right holder					
	Version	**Type**	**Article No.**			
	Long	For 1 DIN rail	8GK9910-1KK81	■	■	■
		For 2 DIN rails	8GK9910-1KK83	■	■	■
		For 3 DIN rails	8GK9910-1KK84	■	■	■
		For 4 DIN rails	8GK9910-1KK85	■	■	■

15


System overview, page 15/150

© Siemens 2022

Accessories

For ALPHA 1250/630/400/160 distribution boards

Iso supports



- For insulated DIN-rail assembly

Type	Article No.	1250	630	400	160
4 mm	8GK9911-0KK07	■	■	■	■
31.5 mm	8GK9911-0KK05	■	■	■	
55.5 mm	8GK9911-0KK06	■	■	■	

Screws M5 × 10, self-tapping



- Large pack: 500 units

Article No.	1250	630	400	160
8GK9911-0KK00	■	■	■	■

Crossbars for mounting vertical busbar systems



Width	Article No.	1250	630	400	160
250 mm	8GK9911-1KK00	■	■	■	
500 mm	8GK9911-1KK01	■	■	■	
750 mm	8GK9911-1KK02	■	■	■	

Blanking strips



Type	Color	Article No.	1250	630	400	160
For 12 MW (1 MW = 18 mm)	RAL 7035 (light gray)	8GK9910-0KK00	■	■	■	■
Length 1 m w/o pressure-relief joint, to cut to length	RAL 7035 (light gray)	8GK9910-0KK01	■	■	■	

Blanking plugs

Diameter	Article No.	1250	630	400	160
6 mm	8GK9910-0KK06	■	■	■	■
11 mm	8GK9910-0KK07	■	■	■	■

N terminals



- For snap-on mounting onto the DIN rail
- For distributing the neutral conductor when using several RCCBs
- 2× screw terminal, conductor cross-section max. 16 mm²
- 14× plug-in terminal, conductor cross-section max. 4 mm²

Article No.	1250	630	400	160
8GS4034-1	■	■	■	■


PE terminals



- For snap-on mounting onto the DIN rail
- 2× screw terminal, conductor cross-section max. 16 mm²
- 14× plug-in terminal, conductor cross-section max. 4 mm²

Article No.	1250	630	400	160
8GS4034-2	■	■	■	■

N/PE terminals



- For snap-on mounting onto the DIN rail
- For distributing the neutral conductor when using several RCCBs
- 1× screw terminal, conductor cross-section max. 16 mm², per PE and N potential
- 7× plug-in terminal, conductor cross-section max. 4 mm², per PE and N potential

Article No.	1250	630	400	160
8GS4034-3	■	■	■	■

N/N terminals





- For snap-on mounting onto the DIN rail
- For distributing the neutral conductor when using several RCCBs
- 1× screw terminal, conductor cross-section max. 16 mm², per PE and N potential
- 7× plug-in terminal, conductor cross-section max. 4 mm², per PE and N potential

Article No.	1250	630	400	160
8GS4034-4	■	■	■	■

System overview, page 15/150

© Siemens 2022

					1250	630	400	160
Terminals for circular conductors								
	Busbar thickness	**Conductor cross-section**		**Article No.**				
	5 mm	1.5 ... 16 mm²		8US1921-2AA00	■	■	■	
		1.5 ... 35 mm²		8US1921-2AB00	■	■	■	
		16 ... 70 mm²		8US1921-2AC00	■	■	■	
		16 ... 120 mm²		8US1921-2AD00	■	■	■	
Terminals for circular conductors								
	Busbar thickness	**Conductor cross-section**		**Article No.**				
	10 mm	1.5 ... 16 mm²		8US1921-2BA00	■	■	■	
		1.5 ... 35 mm²		8US1921-2BB00	■	■	■	
		16 ... 70 mm²		8US1921-2BC00	■	■	■	
		16 ... 120 mm²		8US1921-2BD00	■	■	■	
Terminals with bases made of glass-fiber reinforced polyester resin								
	Incoming cables		**Outgoing cables**		**Article No.**			
	Quantity	**Cross-section**	**Quantity**	**Cross-section**				
	1	6 ... 70 mm²	1	6 ... 70 mm²	8JK401	■	■	■
		4 ... 35 mm²	3	4 ... 35 mm²	8JH4044	■	■	■
		50 ... 240 mm²	1	50 ... 240 mm²	8JK4061	■	■	■
	2	50 ... 240 mm²	2	50 ... 185 mm²	8JK406	■	■	■

15

System overview, page 15/150

© Siemens 2022

Accessories

For ALPHA 1250/630/400/160 distribution boards

Incoming and outgoing terminal for busbars

Busbar Dimensions	Quantity	Conductor cross-section	Description	Article No.	1250	630	400	160
16 × 3 mm	1	1.5 … 16 mm²		8JH4122	■	■	■	
		10 … 35 mm²		8JH4124	■	■	■	
6 × 6 mm	1	16 … 35 mm²	Can be retrofitted without dismantling the busbar	8JH4114	■	■	■	
20 × 8 mm	1 or 2	50 … 240 mm²	1 conductor per clamping point	8JK3171	■	■	■	

Incoming and outgoing terminal for busbars

Busbar Dimensions	Quantity	Conductor cross-section	Description	Article No.	1250	630	400	160
–	–	–	2 conductors per clamping point	8JK3172	■	■	■	
12 × 5 mm	1	10 … 35 mm²		8JH4104	■	■	■	
		16 … 70 mm²		8JH4105	■	■	■	
	2	16 … 35 mm²		8JH4105	■	■	■	

N/PE bars as plug-in terminals

- For mounting on longitudinal stays at a 30° inclination

Type	Connections	Article No.				
PE bar	6 screw connections 2.5 … 16 mm² and 21 screw connections 1.5 … 4 mm²	8GK9910-0KK11				■
PE + N bar	PE bar: 6 screw connections 2.5 … 16 mm² and 21 screw connections 1.5 … 4 mm² N bar: 2 screw connections 2.5 … 16 mm² and 10 screw connections 1.5 … 4 mm²	8GK9910-0KK12				■

Terminal with ceramic base

Incoming cables		Outgoing cables		Article No.				
Quantity	Cross-section	Quantity	Cross-section					
1	4 … 35 mm²	1	4 … 35 mm²	8JH404	■	■	■	■

Cable clamping rail

- For strain relief
- C profile 30 × 15 mm

Width	Article No.				
250 mm	8GK9911-0KK10	■	■	■	
500 mm	8GK9911-0KK20	■	■	■	
750 mm	8GK9911-0KK30	■	■	■	
1000 mm	8GK9911-0KK40	■	■	■	
1250 mm	8GK9911-0KK50	■	■	■	

System overview, page 15/150


© Siemens 2022

Cable holders



Use	Version	Article No.	1250	630	400	160
For DIN rail	Height 45 mm, width 40 mm	8GK9910-0KK80	■	■	■	
For mounting in 5-mm hole	Clip with cable tie	8GK9910-0KK81	■	■	■	

Cable flange for cable entry






Type	Degree of protection	Cable routing	Article No.	1250	630	400	160
1-component flange	IP43	Bottom	8GK9100-0KK00	■	■	■	
2-component flange		Top/bottom	8GK9000-0KK02				■
2-component flange	IP55	Top/bottom	8GK9100-0KK01	■	■	■	
Bushing flange		Busbar system	8GK9100-0KK10	■	■	■	

Cable flange for cable entry (only protection class I)



Version	Degree of protection	Cable diameter	Article No.	1250	630	400	160
Blank flange	IP43		8GK9100-0KK02	■	■	■	
	IP55		8GK9100-0KK03	■	■	■	
Sheet steel, without knockouts	IP55		8GK9100-0KK04	■			
Flange, incl. 1 cable support sleeve	IP55	14 ... 65 mm	8GK9100-0KK05	■	■	■	
Flange, incl. 2 cable support sleeves	IP55	14 ... 65 mm	8GK9100-0KK06	■	■	■	

Rubber cable entries






- For inserting in 38 mm diameter knockouts (= Pg29)
- Degree of protection IP65

Quantity	Cable diameter	Article No.	1250	630	400	160
1	12 ... 29 mm	8HP1805	■	■	■	■
2	6 ... 15 mm	8HP1806	■	■	■	■
3	4 ... 12.5 mm	8HP1807	■	■	■	■
4	4 ... 12 mm	8HP1808	■	■	■	■

Cable entries for cable entry plate



- For 8HP1520 cable entry plates

Cable diameter	Article No.	1250	630	400	160
14 ... 65 mm	8HC6900	■	■	■	■

Breathers, PG 16



- For distribution boards in an outdoor climate to avoid condensate
- Degree of protection IP54

Article No.	1250	630	400	160
8HE8541	■	■	■	■

15

System overview, page 15/150

© Siemens 2022

System overview

Small distribution boards ALPHA

SIMBOX XL



SIMBOX WP



© Siemens 2022

ALPHA SIMBOX XL



Flush-mounting and hollow-wall distribution boards



Surface-mounting distribution boards



Multimedia distribution boards

Accessories



Terminal strips



RCCB terminals



Door locking kit



Mounting aid for flush mounting

ALPHA SIMBOX WP



Surface-mounting distribution boards

Accessories



Covers



N/PE terminal strips



Inner partitions



Safety cylinder locks

Note:
You will find a detailed range of accessories with the basic units.

© Siemens 2022

ALPHA SIMBOX XL small distribution boards

Flush-mounting and hollow-wall distribution boards, rated current up to 63 A

	Complete supply	Project supply
Degree of protection	IP30	IP30
		

Recess dimensions			Type	Protection class II	Protection class II	
Width	Depth	Height			Wall-recessed box	Expansion package
Flush-mounting distribution boards						
359 mm	88 mm	393 mm	1-tier	8GB5012-1KM	8GB5212-1KM01	8GB5212-3KM01
		518 mm	2-tier	8GB5024-1KM	8GB5224-1KM01	8GB5224-3KM01
		643 mm	3-tier	8GB5036-1KM	8GB5236-1KM01	8GB5236-3KM01
		768 mm	4-tier	8GB5048-1KM	8GB5248-1KM01	8GB5248-3KM01
Hollow-wall distribution boards						
323 mm	88 mm	355 mm	1-tier	8GB5012-4KM	8GB5212-2KM01	8GB5212-4KM01
		480 mm	2-tier	8GB5024-4KM	8GB5224-2KM01	8GB5224-4KM01
		605 mm	3-tier	8GB5036-4KM	8GB5236-2KM01	8GB5236-4KM01
		730 mm	4-tier	8GB5048-4KM	8GB5248-2KM01	8GB5248-4KM01

Accessories

Terminal strips with plug-in terminals



Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 25 + 14 × 4 mm²	PE = 3 × 25 + 14 × 14 mm²	8GB5016-5KM
N/N	N1 = 3 × 25 + 14 × 4 mm²	N2 = 3 × 25 + 14 × 14 mm²	8GB5017-5KM
N	N = 6 × 25 + 28 × 4 mm²		8GB5020-5KM
PE	PE = 6 × 16 + 28 × 5 mm²		8GB5021-5KM

Terminal strips with screw terminals



Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 16 + 14 × 10 mm²	PE = 3 × 16 + 14 × 10 mm²	8GB5008-5KM
N/N	N1 = 3 × 16 + 14 × 10 mm²	N2 = 3 × 16 + 14 × 10 mm²	8GB5015-5KM
N	N = 6 × 16 + 28 × 10 mm²		8GB5010-5KM
PE	PE = 6 × 16 + 28 × 10 mm²		8GB5011-5KM

RCCB terminals



Use	Potential	Article No.
For distributing the neutral conductor to two RCCBs	N = 3 × 16 + 2 × 10 mm²	8GB5005-5KM

Door locking kit




Use	Feature	Article No.
For snapping into door handle	With two keys	8GB5006-5KM

Blanking strips



Width	Feature	Color	Article No.
12 MW	Increased flame protection up to 850 °C	White	8GB4683

Mounting aid for flush mounting



Use	Article No.
For flush-mounting and hollow-wall distribution boards	8GB5013-5KM

System overview, page 15/194

© Siemens 2022

Surface-mounting distribution boards, rated current up to 63 A

				Distribution boards without door	Metal doors, white	Plastic doors, white
			Degree of protection	IP30	IP30	IP30
						
External dimensions			**Type**	**Protection class II**	**Protection class II**	**Protection class II**
Width	**Depth**	**Height**				
Surface-mounting distribution boards						
305 mm	99 mm	250 mm	1-tier	8GB5012-0KM	8GB5001-5KM	8GB5001-5KM01
		375 mm	2-tier	8GB5024-0KM	8GB5002-5KM	8GB5002-5KM01
		515 mm	3-tier	8GB5036-0KM	8GB5003-5KM	8GB5003-5KM01
		640 mm	4-tier	8GB5048-0KM	8GB5004-5KM	8GB5004-5KM01

Accessories

Terminal strips with plug-in terminals



Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 25 + 14 × 4 mm²	PE = 3 × 25 + 14 × 14 mm²	8GB5016-5KM
N/N	N1 = 3 × 25 + 14 × 4 mm²	N2 = 3 × 25 + 14 × 14 mm²	8GB5017-5KM
N	N = 6 × 25 + 28 × 4 mm²		8GB5020-5KM
PE	PE = 6 × 16 + 28 × 5 mm²		8GB5021-5KM

Terminal strips with screw terminals



Type	Potential 1	Potential 2	Article No.
N/PE	N = 3 × 16 + 14 × 10 mm²	PE = 3 × 16 + 14 × 10 mm²	8GB5008-5KM
N/N	N1 = 3 × 16 + 14 × 10 mm²	N2 = 3 × 16 + 14 × 10 mm²	8GB5015-5KM
N	N = 6 × 16 + 28 × 10 mm²		8GB5010-5KM
PE	PE = 6 × 16 + 28 × 10 mm²		8GB5011-5KM

RCCB terminals



Use	Potential	Article No.
For distributing the neutral conductor to two RCCBs	N = 3 × 16 + 2 × 10 mm²	8GB5005-5KM

Door locking kit



Use	Feature	Article No.
For snapping into door handle	With two keys	8GB5006-5KM

Blanking strips



Width	Feature	Color	Article No.
12 MW	Increased flame protection up to 850 °C	White	8GB4683

15

System overview, page 15/194

© Siemens 2022

ALPHA SIMBOX XL small distribution boards

Multimedia distribution boards, rated current up to 63 A

	Surface-mounting distribution boards
Degree of protection	IP30



Recess dimensions			Type	Protection class II
Width	Depth	Height		
Hollow-wall/flush-mounting distribution boards				
323 mm	88 mm	605 mm	3-tier	8GB5036-3KM01
		730 mm	4-tier	8GB5048-3KM01
Surface-mounting distribution boards				
323 mm	88 mm	605 mm	3-tier	8GB5036-3KM00
		730 mm	4-tier	8GB5048-3KM00

Accessories

Connecting lugs		
	Use	Article No.
	For installing several distribution boards in a row, vertically or horizontally	8GB5025-5KM

System overview, page 15/194

© Siemens 2022

ALPHA SIMBOX WP small distribution boards

Surface-mounting distribution boards, rated current up to 63 A


	Unequipped surface-mounting distribution boards
Degree of protection	IP65



Type	External dimensions			Protection class II
	Height	Width	Depth	
Surface-mounting distribution boards				
1-tier	210 mm	143 mm	100 mm	8GB1371-0
		215 mm	100 mm	8GB1371-1
	260 mm	298 mm	140 mm	8GB1371-2
	285 mm	410 mm	140 mm	8GB1371-3
2-tier	420 mm	298 mm	140 mm	8GB1372-2
	463 mm	410 mm	140 mm	8GB1372-3
3-tier	655 mm	410 mm	140 mm	8GB1373-3
4-tier	878 mm	410 mm	160 mm	8GB1374-3

Accessories

Covers



- For connection of conduit and cable duct entries
- Snap-on mounting

MW	Article No.
12	8GB2051-0
18	8GB2051-1


N/PE terminal strips



- For snapping onto device holder

MW	Potential 1	Potential 2	Article No.
8	N = 1 × 25 + 7 × 10 mm²	PE = 1 × 25 + 7 × 10 mm²	8GB2052-0
12	N = 3 × 25 + 10 × 10 mm²	PE = 3 × 25 + 10 × 10 mm²	8GB2052-1
18	N = 5 × 25 + 14 × 10 mm²	PE = 5 × 25 + 14 × 10 mm²	8GB2052-2

Inner partitions, horizontal



MW	Article No.
12	8GB2053-0
18	8GB2053-1

Front covers

MW	Article No.
12	8GB2054-0
18	8GB2054-1

Safety cylinder locks



Material	Scope of supply	Article No.
Metal	With key	8GB2055-0

Blanking strips



Type	Color	Article No.
For 12 MW (1 MW = 18 mm)	RAL 7035 (light gray)	8GK9910-0KK00

15

System overview, page 15/194

© Siemens 2022



Power distribution in the age of digitalization

Take advantage of the benefits of digitalization at every step of the project with the SIVACON 8PS busbar trunking systems – from planning to installation on up to operation.

SIMARIS software tools provide efficient support for your planning: among other advantages, you can configure the SIVACON 8PS busbars with SIMARIS busbarplan. A digital twin of the busbar runs is created from the BIM data. The BusbarCheck app assists you during installation.

Energy data and power with plug-and-work: Our innovative powerline technology makes this possible for SIVACON 8PS busbar trunking systems – efficient and reliable.
Energy data is simply transferred to the automation and energy management systems, as well as to cloud-based systems (IoT). Data and electricity travel the same path via the conductor circuits and phases of the BD2, LD, LData and LI busbar trunking systems.

© Siemens 2022

Busbar Trunking Systems



All the information you need 16/2

Quick selection guide 16/4

SIVACON 8PS busbar trunking systems 16/4

Planning and installation tools 16/6

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about busbar trunking systems, please visit our website **www.siemens.com/sivacon-8PS**

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information
www.siemens.com/lowvoltage/product-support

- Brochure
  - Energy and data successfully put on track **(109747761)**
- Catalog
  - LV 70 · 2019 – SIVACON 8PS busbar trunking systems – BD01, BD2 up to 1250 A **(109744546)**

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Siemens YouTube channel

- SIVACON power distribution (general) **bit.ly/2m4oSLI**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- SIVACON 8PS **sie.ag/2lXpCT1**
- SIMARIS planning tools **sie.ag/2m3oFbS**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

Order support for SIVACON 8PS – BD01 and BD2 **www.siemens.com/LV70**

Configurators

Configure your SIVACON 8PS BD01 or BD2 busbar trunking system in the **Industry Mall**

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at **www.siemens.com/sivacon8PS-contact**

You can find further information on services at **www.siemens.com/service-catalog**

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at **www.siemens.com/support-request**

© Siemens 2022

... can be found in our online services

Commissioning + operation

SIMARIS planning tools

The SIMARIS planning tools effectively assist you in your planning process. Project-specific IFC data (Building Information Modeling) for cross-package planning is also possible.
www.siemens.com/simaris

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the App Store and Play Store
You will find further information under:
www.siemens.com/support-app

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Planning manual
  - Planning with SIVACON 8PS (109478425)

Face-to-face or online training

Our training courses can be found at
www.power-academy.siemens.com


Technical overview – Busbar trunking systems


The fast way to get you to our online services

This page provides you with comprehensive information and links on busbar trunking systems
www.siemens.com/lowvoltage/product-support (109769090)

© Siemens 2022

SIVACON 8PS busbar trunking systems



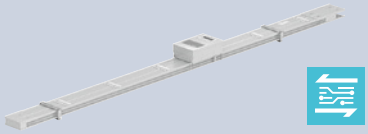


Busbar trunking systems	BD01	BD2
Basic data		
System description	Flexible power supply in workshops and production plants for skilled trades and businesses and commercial enterprises	The universal solution for high power levels in a small space, especially in offices and in industrial transfer lines
Typical applications	• Workshops and production plants • Supermarkets • Data centers • High-rise buildings • Trade fair buildings • Automotive industry • Marine applications • eMobility	• Workshops and production plants • Production industry • Do-it-yourself centers • Data centers • High-rise buildings • Foodstuffs industry • Trade fair buildings • Hospitals • Automotive industry • Marine applications • eMobility
Basic data		
Rated insulation voltage U_i	400 V AC	690 V AC
Rated operational voltage U_e	400 V AC	690 V AC
Degree of protection	IP54, IP55	IP52, IP55
Rated current I_{nA}	40 ... 160 A	160 ... 1250 A
Rated peak withstand current I_{pk}	Up to 15.3 kA	Up to 90 kA
Rated short-time withstand current I_{cw} (1 s)	Up to 2.5 kA	Up to 34 kA
Number of conductors	4 (PE = enclosure)	5
Connection technology	Connecting flange with built-in expansion compensation	With built-in expansion compensation, bolt-type terminal
Outgoing feeders and junctions		
Tap-off point	On one side every 0.5 or 1 m	On one side every 0.5 m, on two sides offset every 0.25 m
Tap-off unit	Up to 63 A	Up to 530 A
Material		
Conductors	Aluminum/Copper	Aluminum or copper
Enclosures (trunking unit, feeder unit)	Sheet steel zinc-plated and painted	Sheet steel zinc-plated and painted
Communication		
Data transmission	data line	powerline, data line
Approvals/Certificates		
Approvals	EAC	EAC
Certificates	• DNV GL • Environmental Product Declaration (EPD)	• DNV GL • Environmental Product Declaration (EPD)

[1] IP66 for pure energy transfer runs without outgoing feeders.

Data transfer with powerline technology

© Siemens 2022



LD

The proven high-current busbar for industry and special applications

- Automotive industry
- Production industry
- Foodstuffs industry
- Trade fair buildings
- Wind power plants
- Semiconductor production
- Marine applications
- eMobility

1000 V AC
1000 V AC
IP34, IP54
1100 ... 5000 A
Up to 286 kA
Up to 116 kA
4, 5
Bolt-type terminal connection with hook and bolt connection

On one side every 1 m
Up to 1250 A

Aluminum or copper
Sheet steel zinc-plated and painted

powerline, data line

EAC
- DNV GL
- Environmental Product Declaration (EPD)



LData

Efficient and reliable power supply for today and tomorrow's data centers

- Data centers


600 V AC
600 V AC
Trunking units: IP21
Tap-off units: IP21, IP41
1000 ... 2500 A
Min. 84 KA
Min. 40 kA
5
Direct hook and bolt connection (LD technology)

Can be plugged in anywhere along the system
Up to 250 A

Aluminum, nickel and tin-coated
Sheet steel, tin-coated and powder-coated, black (RAL9017)

powerline, data line

–



LI

An integrated solution for safe and efficient infrastructure power supply – for example in multi-story buildings and industrial applications

- Data centers
- High-rise buildings
- Production industry
- Chemicals industry
- Airports
- Trade fair buildings
- Hospitals
- Do-it-yourself centers
- Shopping malls
- Supermarkets
- eMobility


1000 V AC
1000 V AC
IP55, IP66 [1)]
800 ... 6300 A
Up to 330 kA
Up to 150 kA
4 ... 6 conductors (incl. 200% N or add. clean earth)
Hook and bolt connection with shear nut

Up to 3 for every 3 m (per side)
Up to 1250 A

Aluminum or copper
Aluminum painted

powerline, data line

EAC
- Environmental Product Declaration (EPD)



LR

The reliable busbar for a high degree of protection in harsh environments, for example for networking of building sections outdoors or for power supply in tunnels

- Chemicals industry
- Oil and gas
- Tunnels and subways
- Outdoor applications

1000 V AC
1000 V AC
IP68
400 ... 6300 A
Up to 275 kA
Up to 125 kA
3 and PEN or 3, N and PE
Bolt terminal block

On one side every 1 m
On request

Aluminum or copper
Epoxy resin

–

EAC
- DNV GL
- SEISMIC Qualification Certificate (earthquake test)
- ATEX
- Product Environmental Profile (PEP)


16

© Siemens 2022

Planning and installation tools


For planning, visualization and installation of busbar trunking systems

From planning to commissioning

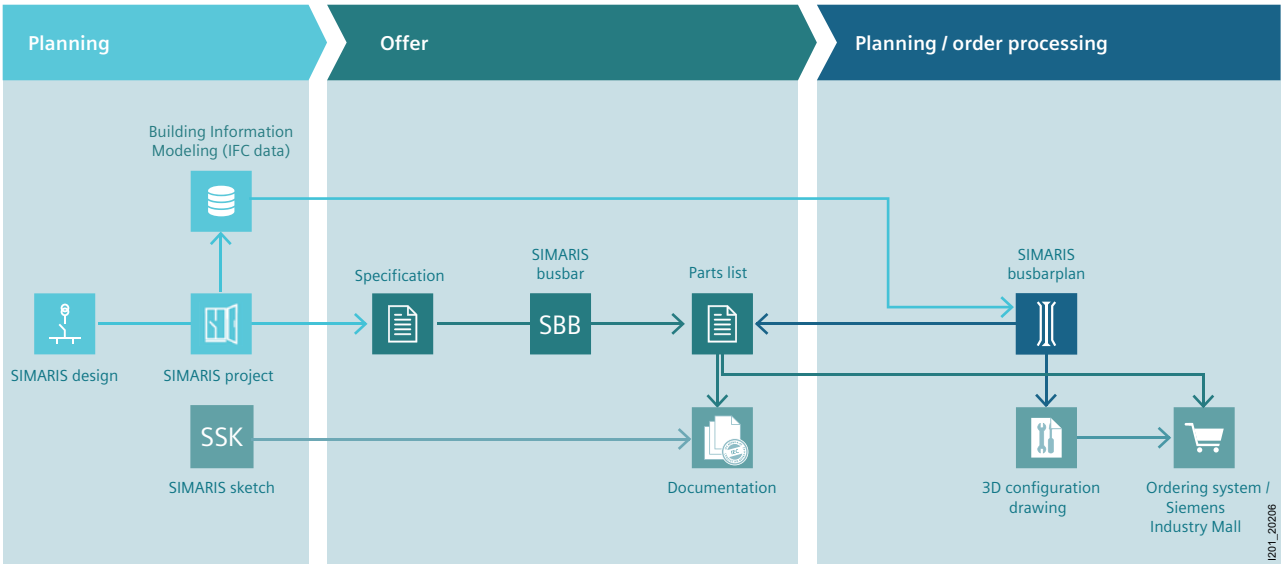

© Siemens 2022

SIMARIS design

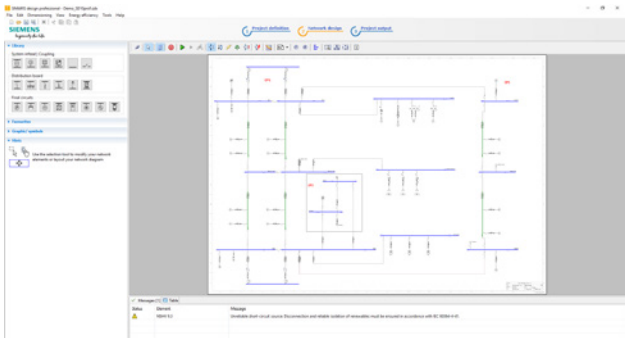


SIMARIS design is a planning tool for fast and efficient grid calculation and dimensioning of electrical power distribution for special-purpose and industrial buildings.

- Dimensioning of electrical networks on the basis of real products according to acknowledged rules of technology and the applicable standards (VDE, IEC)
- Automatic selection of the appropriate components from the stored product database

SIMARIS design forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simarisdesign**

SIMARIS project

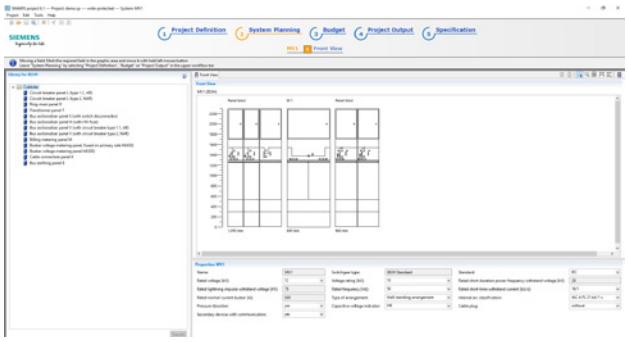

SIMARIS project is a planning tool used to quickly determine the necessary space requirements and the budget for electrical energy distribution for special-purpose and industrial buildings and for automatic generation of specifications.

- Import into projects created with SIMARIS design
- Export of 3D data in IFC 4.x format for BIM (Building Information Modeling)

SIMARIS project forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simarisproject**

SIMARIS Toolbox (online)



The SIMARIS Toolbox is a platform for provision of online tools for assisting electrical installation planners. It includes, for example:

- EMC Busbar (tool for calculating magnetic field strength in the vicinity of SIVACON 8PS busbar trunking systems)

SIMARIS Toolbox forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simaristoolbox**

SIMARIS busbarplan



The new SIMARIS busbarplan planning tool supports BIM-compliant 3D configuration of SIVACON 8PS busbar trunking systems.

- Plugin based on the BIM Autodesk REVIT software (Export in IFC format possible)
- Version for planners and for Siemens project engineers

SIMARIS busbarplan forms part of SIMARIS Suite.
Free download of the SIMARIS Suite and further information at: **www.siemens.com/simarisbusbarplan**

© Siemens 2022

Planning and installation tools

For planning, visualization and installation of busbar trunking systems

BusbarCheck app



BusbarCheck is an installation app to use for easy and high-quality installation and documentation.

- Detailed explanation of all steps
- Written record and proper documentation for better and easier evaluation of the installation
- Can be used by all installation companies and SIVACON 8PS busbar trunking installations in Germany and in other selected countries

Free download from:
App Store and **Play Store**

SIMARIS sketch



SIMARIS sketch is a software tool for quick and easy planning and visualization of busbar trunking systems.

- Representation of complex building structures
- Presentation of complete projects directly in 3D
- Export of parts lists as Excel files and graphics for preparation of orders

Free download and further information available at:
www.siemens.com/simarissketch

IFC data




BIM simplifies the planning process. While the simple exchange of relevant building data between the planners and the facility manager ensures high quality and reduces costs, the digital twin for power distribution fits in seamlessly with the overall structure – for efficient planning, performance and maintenance.

www.siemens.com/bim-eplanning

© Siemens 2022

© Siemens 2022

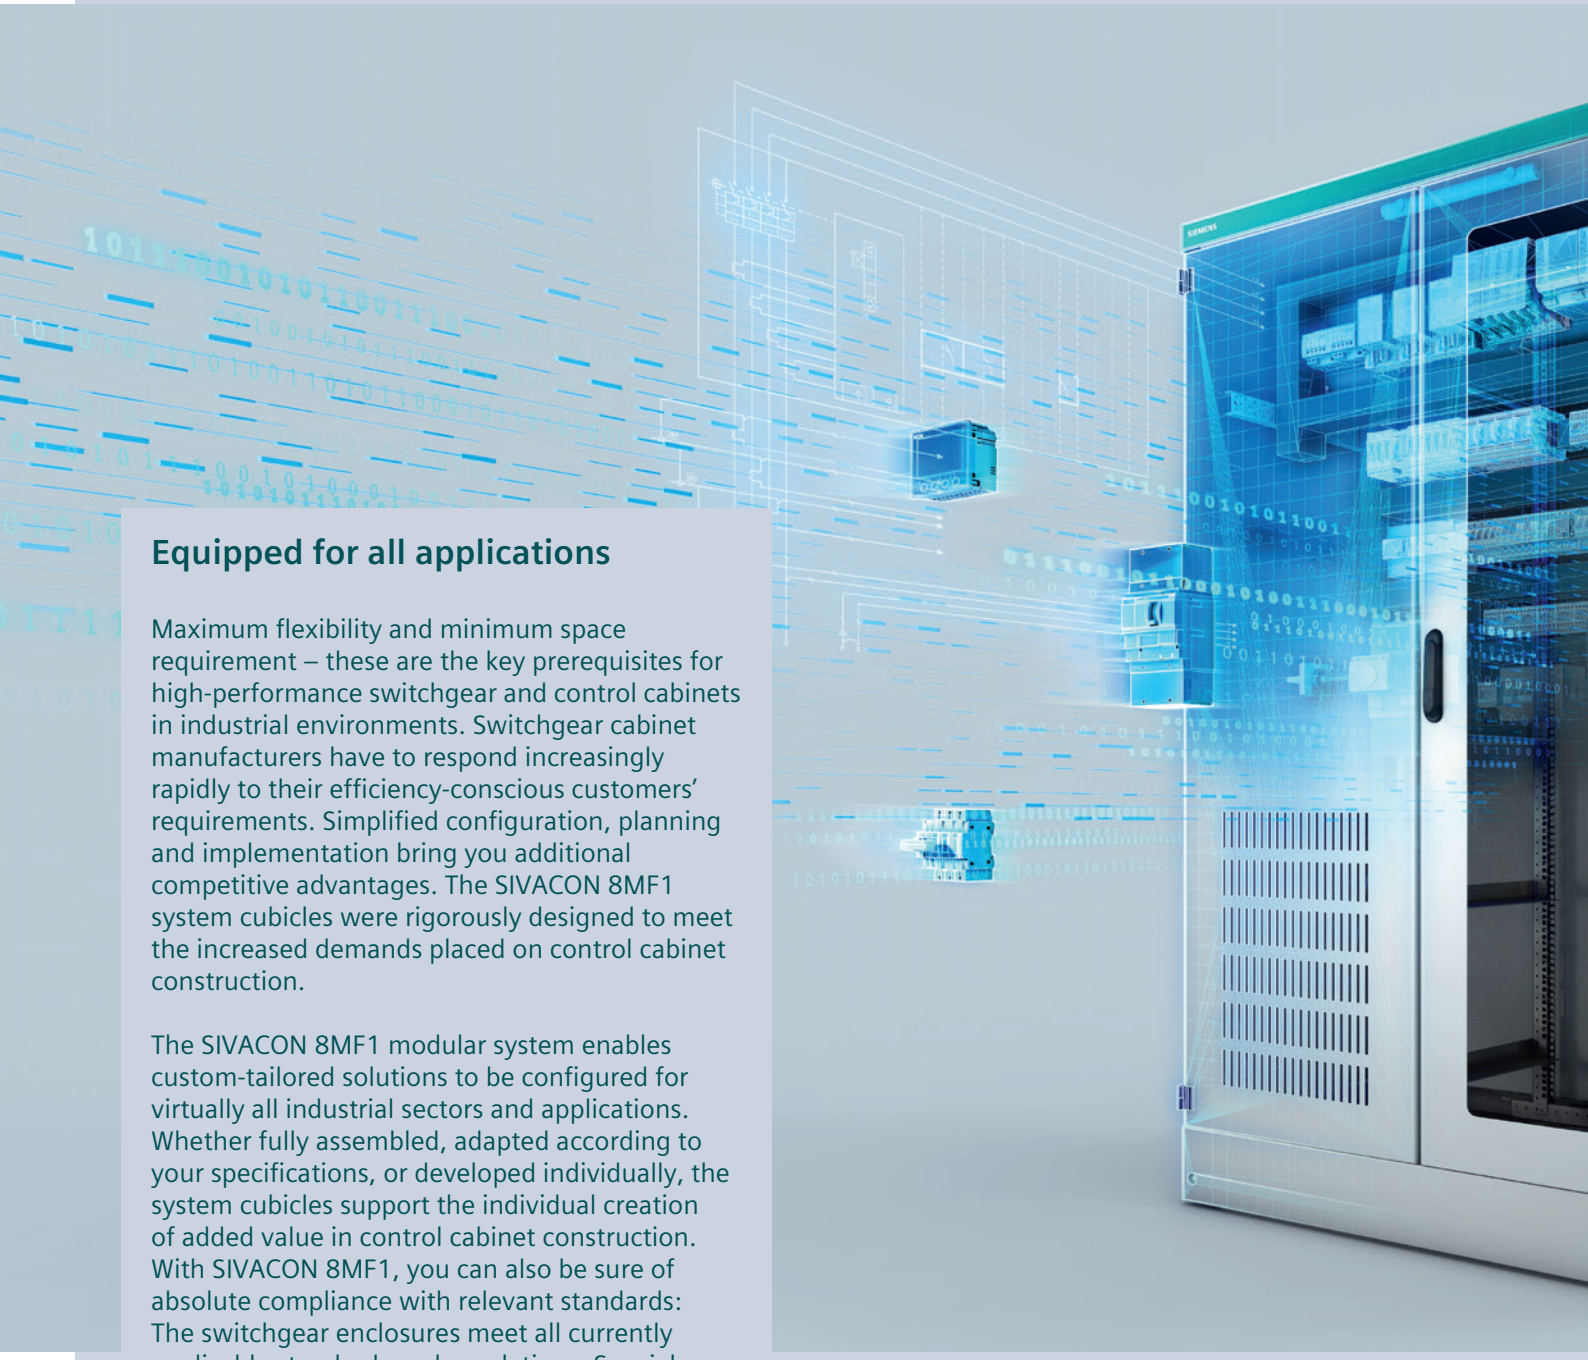

Equipped for all applications

Maximum flexibility and minimum space requirement – these are the key prerequisites for high-performance switchgear and control cabinets in industrial environments. Switchgear cabinet manufacturers have to respond increasingly rapidly to their efficiency-conscious customers' requirements. Simplified configuration, planning and implementation bring you additional competitive advantages. The SIVACON 8MF1 system cubicles were rigorously designed to meet the increased demands placed on control cabinet construction.

The SIVACON 8MF1 modular system enables custom-tailored solutions to be configured for virtually all industrial sectors and applications. Whether fully assembled, adapted according to your specifications, or developed individually, the system cubicles support the individual creation of added value in control cabinet construction. With SIVACON 8MF1, you can also be sure of absolute compliance with relevant standards: The switchgear enclosures meet all currently applicable standards and regulations. Special versions, and control cabinets with various special certifications and specific approvals, as well as variants adapted to specific sectors, can be individually developed.

© Siemens 2022

System Cubicles, System Lighting and System Air-Conditioning



All the information you need 17/2

System overview 17/4

SIVACON 8MF1 basic cubicles 17/7

- Quick selection guide 17/7
- Online configurator highlights 17/8
- Structure of the article numbers 17/9

SIVACON 8MF1 configurable enclosures 17/10

- Quick selection guide 7/10
- Frame 17/11
- Door, door halves, compartment door 17/14
- Side/rear panel 17/18
- Roof 17/20
- Floor 17/22
- Mounting panels 17/23
- Mounting plates 17/24
- Mounting rails 17/25
- General accessories interior installation 17/26
- 19-inch expansion 17/30

SIVACON 8MF/8MR system lighting 17/32

- Quick selection guide 17/32
- LED lights 17/34
- Slimline lights 17/35

SIVACON 8MR system air-conditioning 17/36

- Quick selection guide 17/36
- Filter fans and outlet filters 17/37
- Roof filter fans and roof outlet filters 17/39
- Air conditioners/cooling devices, heat exchangers 17/40
- Heater units 17/41
- Fan heaters 17/42
- Thermostats 17/43
- Hygrostats and hygrotherms 17/45

© Siemens 2022

A multitude of additional information ...

Information + ordering

All the important things at a glance

For information about system cubicles, system lighting and system air-conditioning, please visit our website **www.siemens.com/sivacon-8mf**

Your product in detail

The Siemens Industry Online Support (SIOS) provides comprehensive information **www.siemens.com/lowvoltage/product-support**

- Technical basic information
  - SIVACON 8MF1 system cubicle **(109767386)**
- Brochure
  - SIVACON 8MF1 system cubicles – As versatile as your requirements **(109744677)**

The relevant tender specifications can be found at **www.siemens.com/lowvoltage/tenderspecifications**

Use our conversion tool for quick and easy conversion to Siemens products **www.siemens.com/conversion-tool**

Everything you need for your order

Refer to the Industry Mall for an overview of your products

- System cubicles, system lighting and system air-conditioning **sie.ag/339cQB9**

Direct forwarding to the individual products in the Industry Mall by clicking on the article number in the catalog or by entering this web address incl. article number **www.siemens.com/product?Article No.**

Configurators

The configurator reduces the time and effort required in the planning and ordering process, and allows for individual adaptations. Configure your SIVACON 8MF1 system cubicle at **www.siemens.com/lowvoltage/8mf1-configurator**

The following are additionally available for your configured SIVACON 8MF1 system cubicle:

- Parts lists
- 2D data
- 3D data

The fast track to the experts

Contact persons in your region

We offer a comprehensive portfolio of services. You can find your local contacts at **www.siemens.com/lowvoltage/systems/contact**

You can find further information on services at **www.siemens.com/service-catalog**

Competent expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

Assistance with technical queries is provided at **www.siemens.com/support-request**

... can be found in our online services

Commissioning + operation

SIMARIS therm

The SIMARIS therm calculation tool helps you to easily and precisely dimension the heat dissipation of your control panels, simply by entering the ambient air temperature and selecting the relevant devices in the panel. If necessary, you can immediately select the necessary cooling devices and air conditioners. You can also define the necessary heating power for anti-condensation heating
www.siemens.com/simaristherm

Your product in detail

The Siemens Industry Online Support (SIOS) provides detailed technical information
www.siemens.com/lowvoltage/product-support

- Operating instructions
- Certificates

Comprehensive mobile support via the Siemens Industry Online Support app available for download from the **App Store** and **Play Store**
You will find further information under:
www.siemens.com/support-app

Provision of 3D data (step and u3d data formats)

- Siemens Industry Mall
  www.siemens.com/lowvoltage/mall
- Image database
  www.siemens.com/lowvoltage/picturedb

Engineering data for CAD or CAE systems are available in the CAx Download Manager at
www.siemens.com/cax

Manuals

Manuals are available for downloading in Siemens Industry Online Support (SIOS) at
www.siemens.com/lowvoltage/manuals

- Operating manual
  – Software SIMARIS therm planning tool **(109744553)**

Technical overview – System cubicles, system lighting and system air-conditioning

The fast way to get you to our online services

This page provides you with comprehensive information and links on system cubicles, system lighting and system air-conditioning
www.siemens.com/lowvoltage/product-support (109769091)

© Siemens 2022

System overview

System Cubicles, system lighting and system air conditioning

For a complete and valid configuration of your system cubicle, please use our online configurator at www.siemens.com/lowvoltage/8mf1-configurator

SIVACON 8MF1 basic cubicles


Basic cubicles, IP40


Basic cubicles, IP55


Ventilated cubicles, IP20


Data cubicles, IP40


Earthquake-resistant cubicles, IP40

SIVACON 8MF1 configurable enclosures – Frames


Standard frames


Corner frames

Frame accessories


Bases

Separators


Trim strips


Transport eyebolts


Transport brackets


Cubicle suites

SIVACON 8MF1 configurable enclosures – Enclosures

Section doors


Ventilated doors

Glass doors

Door halves


Compartment doors

Side walls/ rear walls


Rooves


Floors

Enclosure accessories

Roof trays

Covers


Grilles

Strips


Hinges


Rotary handles


Door position switches


Door stays

Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

SIVACON 8MF1 configurable enclosures – Interior installation


Mounting panels


Mounting plates


Partitions


Shelves


Busbars

Interior installation accessories


Brackets


Groundings


Grounding screws

SIVACON 8MF1 configurable enclosures – 19-inch expansion


Swing frames


Fixed-mounted

19-inch expansion accessories


Covers


Universal supports


Device panels

SIVACON 8MF/8MR system lighting – LED lights


LED lights with motion detector


LED lights with On/Off switch

LED lights accessories


Cables, plugs and sockets

SIVACON 8MF/8MR system lighting – Slimline lights


Slimline light with motion detector


Slimline light with On/Off switch

SIVACON 8MR system air-conditioning


Filters and filter fans


Air conditioners/ cooling devices


Heat exchangers


Heater units


Fan heaters


Thermostats, hygrostats, hygrotherms


Note:
You will find a detailed range of accessories with the basic units and in the Accessories section.

© Siemens 2022

System overview

SIVACON 8MF1 system cubicles





		Standard types		Individual types
Available dimensions				
Height	mm	1800 | 2000 | 2200		Special dimensions available on request (max. 2400 mm)
Width	mm	400 | 600 | 800 | 900 | 1000 | 1200		Special dimensions available on request (max. 1600 mm)
Depth	mm	400 | 500 | 600 | 800 | 1000		Special dimensions available on request (max. 1200 mm)
Approvals				
Standards		IEC 62208		IEC 62208
Protection				
Degree of protection		IP20 | IP40 | IP55 | Shock resistance IK09 | Glass doors IK08		IP20 | IP21 | IP40 | IP41 | IP42 | IP55 | Shock resistance IK09 | Glass doors IK08
Protection class		I		I
Enclosure				
Material		Sheet steel		Sheet steel
Surface		Zinc-plated | Powder-coated		Zinc-plated | Powder-coated
Color		RAL 7035 (light gray)		All RAL colors available, other color palettes available on request
Corrosivity category acc. to EN ISO 12944-2		C3 medium, paint thickness 100 µm (+/-25 µm)		Up to C5-M very high (marine), paint thickness 150 µm (+/-25 µm)
Material thickness				
Frame		2.5 mm		2.5 mm
Enclosure (without doors)		1.5 mm		≤2.5 mm
Mounting panels		2.5 mm		≤3.0 mm
Mounting plates		2.0 mm		≤3.0 mm
Doors		1.5 mm		≤2.0 mm
EMC attenuation				
EMC attenuation		www.siemens.com/lowvoltage/product-support		www.siemens.com/lowvoltage/product-support
Installable module heights (HU = 1 3/4" = 44.45 mm)				
		19" fixed-mounted	19" swing frame	
Height 1800 mm		36 HU	34 HU	On request
Height 2000 mm		41 HU	38 HU	On request
Height 2200 mm		45 HU	43 HU	On request

© Siemens 2022

Quick selection guide

Two installation types



Stand-alone installation
- With side panels
  (lockable in the case of data cubicles)



Suite installation
- Without side panels

Four versions




Basic version
- IP40 or IP55



Ventilated cubicles
- IP20
- Door and roof with ventilation fins



Data cubicles
- IP40
- Glass door at front
- Section door at rear
- Roof with cable entry
- 19" fixed-mounted

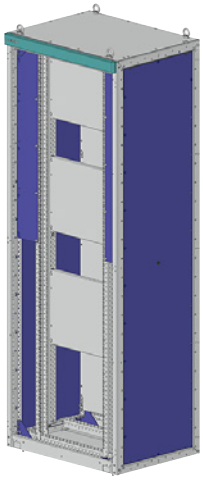


Earthquake-resistant version
- IP40
- Increased stability

© Siemens 2022


Online configurator highlights

www.siemens.com/lowvoltage/8mf1-configurator


Graphical configuration directly on the 3D model

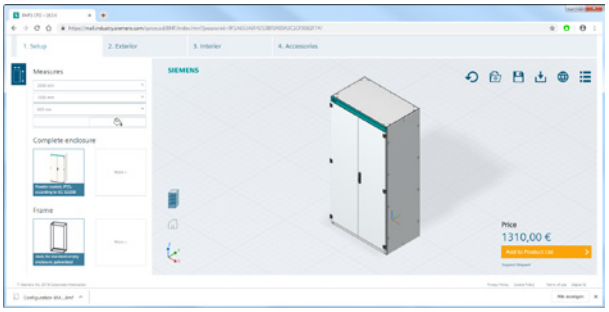


Customization of the control cabinet with cutouts and color

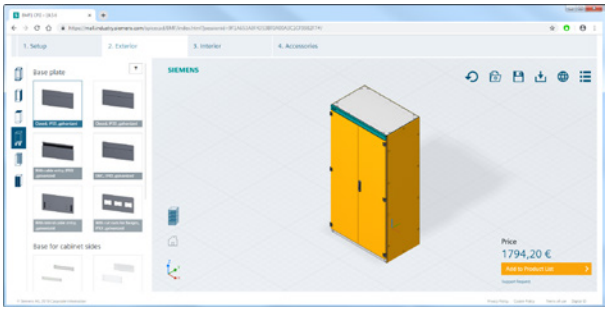

Exporting of parts lists and 3D and 2D data

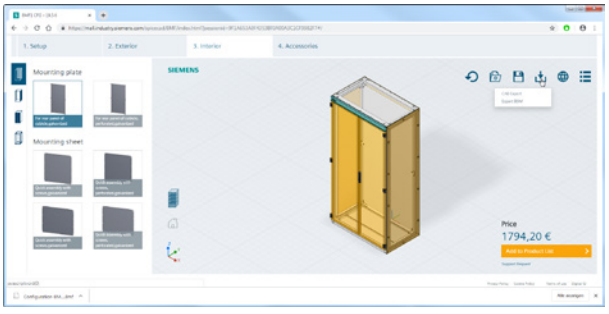

Dynamic and interactive parts lists

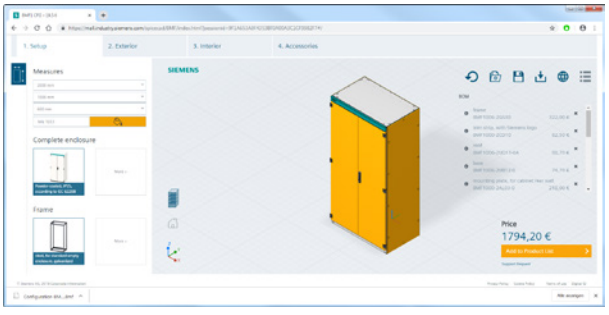

System overview, page 17/4

© Siemens 2022

Structure of the article numbers

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

8MF1	5	6	7	8	9	10	11
				3			
Height							
1800 mm	8						
2000 mm	0						
2200 mm	2						
Width							
400 mm		4					
600 mm		6					
800 mm		8					
900 mm		9					
1000 mm		0					
1200 mm		2					
Depth							
400 mm			4				
500 mm			5				
600 mm			6				
800 mm			8				
1000 mm			0				
Version							
Basic					B		
Ventilated					V		
Data					D		
Earthquake-resistant					E		
Installation							
Stand-alone						S	
Side by side						R	
Degree of protection							
Basic cubicles, data cubicles							
IP40							4
IP55							5
Ventilated cubicles							
IP20							4
Earthquake-resistant cubicles							
IP40							5

17


System overview, page 17/4

© Siemens 2022


Quick selection guide

Frame

For standard enclosure

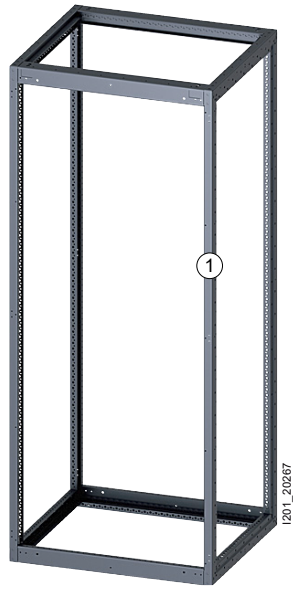


For corner enclosure

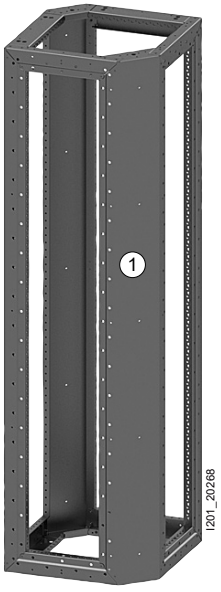

① Frame

Enclosure

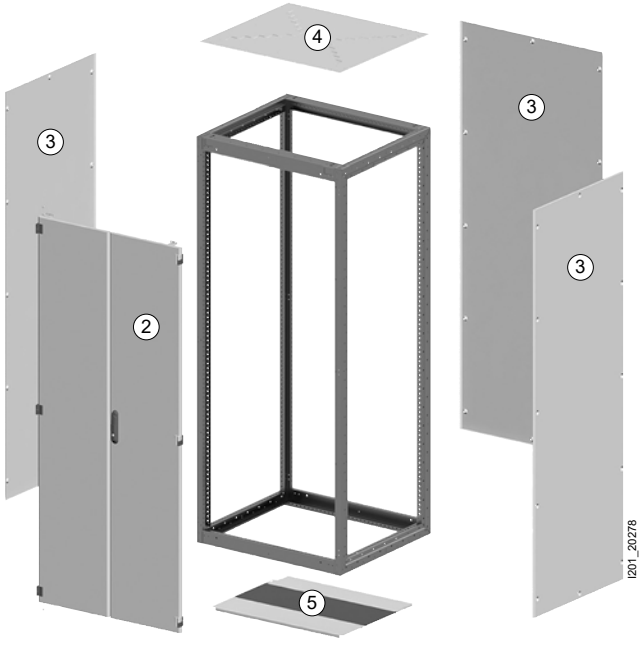

② Door, door half, compartment door
③ Side panels, rear panel
④ Roof
⑤ Floor

System overview, page 17/4

① Frame



**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator**

For standard enclosure

8MF1		5	6	7	8	9	10	11	12
					3	G	S		0
Height	1800 mm	8							
	2000 mm	0							
	2200 mm	2							
Width	400 mm		4						
	600 mm		6						
	800 mm		8						
	900 mm		9						
	1000 mm		0						
	1200 mm		2						
Depth	400 mm			4					
	500 mm			5					
	600 mm			6					
	800 mm			8					
	1000 mm			0					
Material, surface	Zinc-plated							3	
	Powder-coated, RAL 7035							4	

For corner enclosure

8MF1		5	6	7	8	9	10	11	12
					2	G	E		0
Height	1800 mm	8							
	2000 mm	0							
	2200 mm	2							
Width	400 mm		4						
	600 mm		6						
	800 mm		8						
	1000 mm		0						
Depth	400 mm			5					
	600 mm			7					
	800 mm			0					
	1000 mm			1					
Material, surface	Zinc-plated							3	

System overview, page 17/4

© Siemens 2022

① Frame

Accessories


**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator**

Base



8MF1		5	6	7	8	9	10
				0	2		
Height	100 mm	0					
	200 mm	2					
Width	400 mm		4				
	600 mm		6				
	800 mm		8				
	900 mm		9				
	1000 mm		0				
	1200 mm		2				
Version	Base for cubicles with door at the front and the rear					C	R
	Base and feet for cubicles with door at the front					C	S
	Base for corner cubicle					E	S

Base cover



8MF1		5	6	7	8	9	10
			0		2	C	
Height	100 mm	0					
	200 mm	2					
Depth	400 mm			4			
	500 mm			5			
	600 mm			6			
	800 mm			8			
	1000 mm			0			
Version	Base covers for cubicle sides						T

System overview, page 17/4

© Siemens 2022

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

Trim strip



8MF1	5	6	7	8	9	10	11	12
	0		0	2	C	D		

Width	400 mm	4					
	600 mm	6					
	800 mm	8					
	900 mm	9					
	1000 mm	0					
	1200 mm	2					
Version	Trim strip petrol		Without Siemens logo, above the door	Without cutout	0		0
			With Siemens logo, left, above the door	Without cutout	1		0
			With Siemens logo, right, above the door	With cutout, left	1		6
			With Siemens logo, left, above the door	With cutout, right	1		7
	Trim strip RAL 7035		Without Siemens logo, below the door	Without cutout	0		8

Separator


Separator for vertical division of the enclosure



Height	Article No.
1800 mm	8MF1165-2AT30
2000 mm	8MF1185-2AT30
2200 mm	8MF1205-2AT30

Mounting accessories

Accessories for cubicle suites



Version	Degree of protection	Article No.
Screw set	IP40	8MF1000-2CA
Sealing tape	IP40 to IP55	8MF1000-2CB
Side-by-side installation kit	IP40 EMC (IP55 not available)	8MF1000-2CE

Kit for stabilization of corner connections



	Article No.
	8MF1000-2HF

Transport accessories

Transport eyebolts



Load bearing capacity	Article No.
Up to 500 kg	8MF1000-2CK

Transport brakets




Width	Article No.
400 mm	8MF1040-2CW
600 mm	8MF1060-2CW
800 mm	8MF1080-2CW
900 mm	8MF1090-2CW
1000 mm	8MF1000-2CW
1200 mm	8MF1020-2CW

System overview, page 17/4

© Siemens 2022

② Door, door halves, compartment door



Door, door halves

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

8MF1		5	6	7	8	9	10	11	12	13		14		15	16
				0	2	U	T								
Height	1800 mm	8													
	2000 mm	0													
	2200 mm	2													
Width	300 mm		3												
	400 mm		4												
	450 mm		7												
	500 mm		5												
	600 mm		6												
	800 mm		8												
	900 mm		9												
	1000 mm		0												
	1200 mm		2												
Door type	Door/inner door							1							
	Door halves (only available with hinging on the left)							2							
Hinge position	Left								5						
	Right								4						
Door version	IP20	With ventilation openings			Foamed seal					1		B		A	2
	IP40	Closed			EMC seal					0		C		A	1
		With ventilation slits			Foamed seal					2		B		A	2
	IP55	Closed			Foamed seal					0		B		A	2
		With inspection window			Foamed seal					0		B		E	2
	IPxx	With cutout 292 × 292 mm (up to IP55) for filter fan			Foamed seal					3		B		A	2
	–	Inner door, closed (up to 800 mm wide)			Without seal					4		B		A	2

System overview, page 17/4

© Siemens 2022

Compartment door

The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

		5	6	7	8	9	10	11	12	13	14	15	16
8MF1				0	2	U	T	3	4	0	B	A	2
Compartment height	300 mm	3											
	400 mm	4											
	500 mm	5											
	600 mm	6											
	700 mm	7											
	800 mm	8											
	900 mm	9											
	1000 mm	0											
	1100 mm	1											
	1200 mm	2											
Width	600 mm		6										
	800 mm		8										

17

System overview, page 17/4

© Siemens 2022

② Door, door halves, compartment door

Accessories

Door shelves



- Multi-purpose door bars required for mounting
- Shelf: RAL 7035

For door width	Mounting location			Article No.
	Door	Door halves	Compartment door	
600 mm	■	■	–	8MF1060-2VP
800 mm	■	■	–	8MF1080-2VP

Grilles



- To upgrade degree of protection from IP2x to IP4x
- Surface: zinc-plated


Width	Mounting location			Article No.
	Door	Door halves	Compartment door	
300 mm	■	■	–	8MF1030-2HM
400 mm	■	■	–	8MF1040-2HM
500 mm	■	■	–	8MF1050-2HM
600 mm	■	■	–	8MF1060-2HM
700 mm	■	■	–	8MF1070-2HM
800 mm	■	■	–	8MF1080-2HM
900 mm	■	■	–	8MF1090-2HM

Strips

- For door reinforcement
- Surface: zinc-plated
- Cannot be used for glass doors

Height	Mounting location			Article No.
	Door	Door halves	Compartment door	
1800 mm	■	■	–	8MF1008-2VM
2000 mm	■	■	–	8MF1000-2VM
2200 mm	■	■	–	8MF1002-2VM

Position switches



Version				Article No.
1 NO + 1 NC	■	■	■	8MF1000-2VL
1 NO + 2 NC	■	■	■	8MF1000-2VR

Circuit diagram pockets



- Cannot be used for glass doors

Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
Plastic	■	■	–	8MF1000-2VK
Steel, zinc-plated	■	■	–	8MF1000-2VU

Limit plates

For a number n of compartment doors, n–1 limit plates are additionally required.Please order separately.

Width	Mounting location			Article No.
	Door	Door halves	Compartment door	
600 mm	–	–	■	8MF1060-2AK14-0
800 mm	–	–	■	8MF1080-2AK14-0

Door stays



- With variable opening angle: 90°, 120° and 150°
- Surface: zinc-plated

	Mounting location			Article No.
	Door	Door halves	Compartment door	
	■	■	–	8MF1000-2VG

System overview, page 17/4

Rotary handles



Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
With button insert and eye for padlock (Lock not included in 8MF portfolio)	■	–	–	8MF1000-2VN

Rotary handle inserts

- Not suitable for door halves

Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
Double-bit key	■	–	–	8MF1000-2VA
Square key	■	–	–	8MF1000-2VC
Triangular key	■	–	–	8MF1000-2VD
Daimler	■	–	–	8MF1000-2VE
Cylinder lock	■	–	–	8MF1000-2VF











Spare part door

Hinge sets



Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
For left-hand hinge	■	■	■	8MF1000-2VT
For right-hand hinge	■	■	■	8MF1000-2VW

Rotary handles



Version	Mounting location			Article No.
	Door	Door halves	Compartment door	
Without insert	■	–	–	8MF1000-2VP

Grounding cables for doors




Cable cross-section	Mounting location			Article No.
	Door	Door halves	Compartment door	
6 mm²	■	■	■	8MF1010-2HD3

17

System overview, page 17/4

© Siemens 2022

③ Side/rear panel



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator


8MF1				5	6	7	8	9	10	11	12	13	14
							2	U	W				
Height			1800 mm	8									
			2000 mm	0									
			2200 mm	2									
Width			300 mm		3								
			400 mm		4								
			450 mm		7								
			500 mm		5								
			600 mm		6								
			800 mm		8								
			900 mm		9								
			1000 mm/ *No selection available for partitions*		0								
			1200 mm		2								
Depth			No value			0							
			400 mm			4							
			500 mm			5							
			600 mm			6							
			800 mm			8							
			1000 mm/*No selection available for side panels*			0							
Side wall/ rear wall	IP40	Closed	Without seal							6	0	1	C
			EMC seal							6	2	1	B
		Flat								6	3	1	C
	IP55	Closed	Foamed seal							6	1	1	C
Partition		Closed	Without seal							7	0	3	C

© Siemens 2022

System overview, page 17/4

© Siemens 2022

④ Roof



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For standard systems

8MF1	5	6	7	8	9	10	11	12	13	14
	0			2	U	D				

Width	400 mm					4					
	600 mm					6					
	800 mm					8					
	900 mm					9					
	1000 mm					0					
	1200 mm					2					
Depth	400 mm						4				
	500 mm						5				
	600 mm						6				
	800 mm						8				
	1000 mm						0				
Version	IP20	Perforated	Without seal					2	0	0	A
	IP40	Closed	Without seal					1	0	0	A
			EMC seal					1	2	0	A
		With ventilation fins	Without seal					3	0	0	A
	IP55	Closed	Foamed seal					1	1	0	A

For corner enclosure

8MF1	5	6	7	8	9	10	11	12	13	14
	0	0		2	U	E				


Width/depth	400/400 mm						4				
	600/600 mm						6				
	800/800 mm						8				
	1000/1000 mm						0				
Version	For corner cubicle	IP20	With ventilation openings					2	0	0	A
		IP40	Closed					1	0	0	A
			With ventilation openings					3	0	0	A
		IP55	Closed					1	1	0	A

© Siemens 2022

Accessories

Roof trays

Roof trays for increasing the degree of protection, IPX1



Width	Depth	Article No.
400 mm	400 mm	8MF1044-2VH
	500 mm	8MF1045-2VH
	600 mm	8MF1046-2VH
	800 mm	8MF1048-2VH
	1000 mm	8MF1040-2VH
600 mm	400 mm	8MF1064-2VH
	500 mm	8MF1065-2VH
	600 mm	8MF1066-2VH
	800 mm	8MF1068-2VH
	1000 mm	8MF1060-2VH
800 mm	400 mm	8MF1084-2VH
	500 mm	8MF1085-2VH
	600 mm	8MF1086-2VH
	800 mm	8MF1088-2VH
	1000 mm	8MF1080-2VH
900 mm	400 mm	8MF1094-2VH
	500 mm	8MF1095-2VH
	600 mm	8MF1096-2VH
	800 mm	8MF1098-2VH
	1000 mm	8MF1090-2VH
1000 mm	400 mm	8MF1004-2VH
	500 mm	8MF1005-2VH
	600 mm	8MF1006-2VH
	800 mm	8MF1008-2VH
	1000 mm	8MF1000-2VH
1200 mm	400 mm	8MF1024-2VH
	500 mm	8MF1025-2VH
	600 mm	8MF1026-2VH
	800 mm	8MF1028-2VH
	1000 mm	8MF1020-2VH

Roof tray rims

Roof tray rims for cubicle side, IPX1




Each cubicle or cubicle group with a roof tray requires two roof tray rims.
(1 set = 2 units)

Depth	Article No.
400 mm	8MF1004-2VB
500 mm	8MF1005-2VB
600 mm	8MF1006-2VB
800 mm	8MF1008-2VB
1000 mm	8MF1000-2VB

System overview, page 17/4

© Siemens 2022

⑤ Floor



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator

For standard enclosure

8MF1	5	6	7	8	9	10	11	12	13
	0			2	U	B			

				5	6	7	8	9	10	11	12	13
Width		400 mm			4							
		600 mm			6							
		800 mm			8							
		900 mm			9							
		1000 mm			0							
		1200 mm			2							
Depth		400 mm				4						
		500 mm				5						
		600 mm				6						
		800 mm				8						
		1000 mm				0						
Version	IP30	Closed, divided								2	2	0
	IP40	Closed	EMC seal							4	2	0
	IP55	Closed	Foamed seal							1	2	0
	IPxx	With cable entry								3	2	0
		With cable entry, lateral and rear [1]								5	1	2
		With cut-outs for flanges								5	2	0

[1] Version available from width ≥600 mm and depth ≥600 mm


For corner enclosure

8MF1	5	6	7	8	9	10	11	12	13
	0	0		2	U	E		1	0

		5	6	7	8	9	10	11	12	13
Depth	400 mm			4						
	600 mm			6						
	800 mm			8						
	1000 mm			0						
Degree of protection	IP40							2		
	IP55							1		

System overview, page 17/4

Mounting panels




**The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator**

8MF1		5	6	7	8	9	10	11	12	13
					2	A				0
Cubicle height	1800 mm	8								
	2000 mm	0								
	2200 mm	2								
Cubicle width	400 mm		4							
	600 mm		6							
	800 mm		8							
	900 mm		9							
	1000 mm/*No selection available for installation on side of cubicle*		0							
	1200 mm		2							
Depth	400 mm			4						
	500 mm			5						
	600 mm			6						
	800 mm			8						
	1000 mm/*No selection available for installation on cubicle width*			0						
Installation location	Cubicle width						L			
	Cubicle side						K			
Version	Smooth							0		
	Perforated							1		
Material	2.5 mm sheet steel								3	

Accessories

Mounting panel adapters



- For connecting side-by-side mounting panels
- Surface: zinc-plated


Height	Article No.
1800 mm	8MF1800-2CH
2000 mm	8MF1000-2CH
2200 mm	8MF1200-2CH

17

System overview, page 17/4

© Siemens 2022

Mounting plates



The structure shown below is intended as an overview of each position and its meaning.
For a complete and valid configuration of your system cubicle, please use our online configurator at
www.siemens.com/lowvoltage/8mf1-configurator


		5	6	7	8	9	10	11	12	13
8MF1				0	2	A				0
Height	100 mm	1								
	200 mm	2								
	300 mm	3								
	400 mm	4								
	600 mm	6								
	800 mm	8								
Width	400 mm		4							
	600 mm		6							
	800 mm		8							
	900 mm		9							
	1000 mm		0							
	1200 mm		2							
Installation location	Fixed with zinc die-cast parts between the bars of the frame						M			
	Fixed directly to the frame						A			
Version	Smooth							0		
	Perforated							1		
Material	2.0 mm sheet steel								2	

System overview, page 17/4

© Siemens 2022


Mounting rails


Mounting rails (50)



Length	Version	Article No.
250 mm	Suitable for cubicle depth 400 mm	8MF1025-2AS30
325 mm	Suitable for cubicle width 400 mm	8MF1032-2AS30
350 mm	Suitable for cubicle depth 500 mm	8MF1035-2AS30
425 mm	–	8MF1042-2AS30
450 mm	Suitable for cubicle depth 600 mm	8MF1045-2AS30
525 mm	Suitable for cubicle width 600 mm	8MF1052-2AS30
550 mm	–	8MF1055-2AS30
625 mm	–	8MF1062-2AS30
650 mm	Suitable for cubicle depth 800 mm	8MF1065-2AS30
725 mm	Suitable for cubicle width 800 mm	8MF1072-2AS30
750 mm	–	8MF1075-2AS30
825 mm	Suitable for cubicle width 900 mm	8MF1082-2AS30
850 mm	Suitable for cubicle depth 1000 mm	8MF1085-2AS30
925 mm	Suitable for cubicle width 1000 mm	8MF1092-2AS30
1050 mm	–	8MF1105-2AS30
1125 mm	Suitable for cubicle width 1200 mm	8MF1112-2AS30
1250 mm	–	8MF1125-2AS30
1350 mm	–	8MF1135-2AS30
1450 mm	–	8MF1145-2AS30
1550 mm	–	8MF1155-2AS30
1650 mm	Suitable for cubicle height 1800 mm	8MF1165-2AS30
1750 mm	–	8MF1175-2AS30
1850 mm	Suitable for cubicle height 2000 mm	8MF1185-2AS30
1950 mm	–	8MF1195-2AS30
2050 mm	Suitable for cubicle height 2200 mm	8MF1205-2AS30
2150 mm	–	8MF1215-2AS30
2250 mm	–	8MF1225-2AS30


Mounting rails, serrated





Version	Article No.
Flat	8MF1060-2HC13-0
	8MF1080-2HC13-0
	8MF1090-2HC13-0
	8MF1000-2HC13-0
	8MF1020-2HC13-0
U-shape	8MF1060-2HC03-0
	8MF1080-2HC03-0
	8MF1090-2HC03-0
	8MF1000-2HC03-0
	8MF1020-2HC03-0

Mounting rails, compact



Version		Length	Article No.
Suitable for cubicle width	600 mm	566 mm	8MF1056-2AS30
	1000 mm	966 mm	8MF1096-2AS30
	1200 mm	1166 mm	8MF1006-2AS30
Suitable for door width	300 mm	166 mm	8MF1016-2AS30
	400 mm	266 mm	8MF1026-2AS30
	450 mm	316 mm	8MF1031-2AS30
	500 mm	366 mm	8MF1036-2AS30
	600 mm	466 mm	8MF1046-2AS30
	800 mm	666 mm	8MF1066-2AS30
	900 mm	766 mm	8MF1076-2AS30
	1000 mm	866 mm	8MF1086-2AS30

Mounting rails, heavy duty



- Can be installed in the cubicle depth and width (the length corresponds to the appropriate cubicle dimension)

Length	Article No.
600 mm	8MF1060-2AH60
800 mm	8MF1080-2AH60
900 mm	8MF1090-2AH60
1000 mm	8MF1000-2AH60
1200 mm	8MF1020-2AH60

System overview, page 17/4

© Siemens 2022

General accessories interior installation


Telescopic rails



- For withdrawable shelves

For cubicle depth	Article No.
400 mm and 600 mm	8MF1003-2HF
800 mm and 1000 mm	8MF1006-2HF


Mounting brackets




- For mounting expansion elements

Article No.
8MF1000-2CP

Earthquake assembly kits







For stabilization of	Article No.
Corner connections	8MF1000-2HA
Intermediate panel	8MF1000-2HW
19" fixed-mounted	8MF1000-2HE

Grounding plates



- For fixing to the frame (although fixing points for ground connection are already provided on the frame)

Article No.
8MF1000-2HK

Grounding bars



Version	Width	Article No.
30 × 10 mm²	600 mm	8MF1060-2HD2
	800 mm	8MF1080-2HD2
	900 mm	8MF1090-2HD2
	1000 mm	8MF1000-2HD2
	1200 mm	8MF1020-2HD2
30 × 5 mm²	600 mm	8MF1060-2HD1
	800 mm	8MF1080-2HD1
	900 mm	8MF1090-2HD1
	1000 mm	8MF1000-2HD1
	1200 mm	8MF1020-2HD1

Grounding screws



Thread	Article No.
M12	8MF1000-2HB

Grounding straps




Cross-section	Article No.
16 mm²	8MF1000-2HK1
32 mm²	8MF1000-2HK2

17

System overview, page 17/4

© Siemens 2022

Universal sheets



- Incl. DIN rail; e.g. for mounting a heater unit

Article No.
8MF1000-2HG

DIN rails



- For mounting modular installation devices


Height	Article No.
7.5 mm	8MF1500-2HS
15 mm	8MF1100-2HS

Insulated supports



Thread	Dimensions	Article No.
M8	D 40 × 50 mm	8MF1000-2VY

Cable clamping rails




Height	Width	Depth	Article No.
30 mm	600 mm	–	8MF1360-2HH
	800 mm	–	8MF1380-2HH
	900 mm	–	8MF1390-2HH
	1000 mm	–	8MF1310-2HH
	1200 mm	–	8MF1320-2HH
	–	400 mm	8MF1304-2HH
		600 mm	8MF1306-2HH
		800 mm	8MF1308-2HH
		1000 mm	8MF1301-2HH
40 mm	600 mm	–	8MF1460-2HH
	800 mm	–	8MF1480-2HH
	900 mm	–	8MF1490-2HH
	1000 mm	–	8MF1410-2HH
	1200 mm	–	8MF1420-2HH
	–	400 mm	8MF1404-2HH
		600 mm	8MF1406-2HH
		800 mm	8MF1408-2HH
		1000 mm	8MF1401-2HH
50 mm	600 mm	–	8MF1560-2HH
	800 mm	–	8MF1580-2HH
	900 mm	–	8MF1590-2HH
	1000 mm	–	8MF1510-2HH
	1200 mm	–	8MF1520-2HH
	–	400 mm	8MF1504-2HH
		600 mm	8MF1506-2HH
		800 mm	8MF1508-2HH
		1000 mm	8MF1501-2HH

System overview, page 17/4

© Siemens 2022


General accessories interior installation

Cable ducts




Version	Color	Height	Width	Article No.
Halogen-free	RAL 7035	37.5 mm	25 mm	8MF1120-2HL7
		50 mm	25 mm	8MF1220-2HL7
			37.5 mm	8MF1240-2HL7
			50 mm	8MF1250-2HL7
			75 mm	8MF1260-2HL7
		75 mm	50 mm	8MF1350-2HL7
			75 mm	8MF1360-2HL7
			100 mm	8MF1370-2HL7
			125 mm	8MF1380-2HL7
		100 mm	75 mm	8MF1460-2HL7
Standard	RAL 7030	37.5 mm	25 mm	8MF1120-2HL6
		50 mm	25 mm	8MF1220-2HL6
			37.5 mm	8MF1240-2HL6
			50 mm	8MF1250-2HL6
			75 mm	8MF1260-2HL6
		75 mm	50 mm	8MF1350-2HL6
			75 mm	8MF1360-2HL6
			100 mm	8MF1370-2HL6
			125 mm	8MF1380-2HL6
		100 mm	75 mm	8MF1460-2HL6

Edge protection



Dimensions	Article No.
9.5 × 6.5 mm	8MF1000-2CD


Mounting plates





Dimensions	Version	Article No.
122 × 91 mm	Standard	8MF1000-2HH
122 × 92 mm	With DIN rail	8MF1000-2HH1

Buses for improving EMC



Installation in	Width	Depth	Article No.
Cubicle width	400 mm	–	8MF1040-2HN
	600 mm	–	8MF1060-2HN
	800 mm	–	8MF1080-2HN
	900 mm	–	8MF1090-2HN
	1000 mm	–	8MF1000-2HN
	1200 mm	–	8MF1020-2HN
Cubicle depth	–	400 mm	8MF1004-2HN
		600 mm	8MF1006-2HN
		800 mm	8MF1008-2HN
		1000 mm	8MF1001-2HN

System overview, page 17/4

© Siemens 2022


Brackets



- For variable mounting of cable clamping rails

Article No.
8MF1000-2HH5

Toothed bars



- For installation on mounting rail

Length	Article No.
100 mm	8MF1000-2HC

Contact washers



- Size 6

Scope of supply	Article No.
100 units	8MF1000-2VJ

Screws



- M6 × 12

Scope of supply	Article No.
100 units	8MF1000-2VS

Adapters for wiring systems



Version	Article No.
For Lütze wiring system	8MF1000-2HL
For Promet wiring system	8MF1000-2HP

17

System overview, page 17/4

© Siemens 2022

19-inch expansion

Cubicle frames



- For the installation of 19" devices, screwed
- In combination with 2 mounting rails, heavy duty in cubicle width (order mounting rail separately, see page 17/25)
- For cubicle width ≧600 mm

Surface	Height	For mounting height	Article No.
Zinc-plated	400 mm	7 HU	8MF1100-2AN30
	600 mm	12 HU	8MF1200-2AN30
	800 mm	16 HU	8MF1300-2AN30
	1000 mm	21 HU	8MF1400-2AN30
	1200 mm	25 HU	8MF1500-2AN30
	1400 mm	30 HU	8MF1600-2AN30
	1800 mm	36 HU	8MF1700-2AN30
	2000 mm	41 HU	8MF1800-2AN30
	2200 mm	45 HU	8MF1900-2AN30

Swing frames






- For the installation of 19" devices, screwed
- Left-hand/right-hand hinge
- In combination with 2 mounting rails, heavy duty in cubicle width (order mounting rail separately)
- For cubicle width ≧800 mm

Version	Surface	Height	For mounting height	Article No.
Screwed [1]	Zinc-plated	1800 mm	34 HU	8MF1800-2AR02-4
		2000 mm	38 HU	8MF1000-2AR02-4
		2200 mm	43 HU	8MF1200-2AR02-4
	Powder-coated	1800 mm	34 HU	8MF1800-2AR02-3
		2000 mm	38 HU	8MF1000-2AR02-3
		2200 mm	43 HU	8MF1200-2AR02-3
Welded [2]	Powder-coated		34 HU	8MF1800-2AR02-2
			38 HU	8MF1000-2AR02-2
			43 HU	8MF1200-2AR02-2

[1] Interlocking with 3 mm double-bit key
[2] Spring interlocking at top and bottom

Accessories

Universal supports



Version	For mounting height	Article No.
For cable channel, DIN rail and C rail	1 HU	8MF1000-2HH2
	2 HU	8MF1000-2HH3
For cable channel, DIN rail, C rail and lamp		8MF1000-2HH4

System overview, page 17/4

© Siemens 2022

Covers

Version	Surface	For mounting height	Article No.
Closed	RAL 7035	1 HU	8MF1000-2AB01
		2 HU	8MF1000-2AB02
		3 HU	8MF1000-2AB03
		4 HU	8MF1000-2AB04
		5 HU	8MF1000-2AB05
		6 HU	8MF1000-2AB06
		7 HU	8MF1000-2AB07



With ventilation openings	RAL 7035	2 HU	8MF1000-2AB32
		3 HU	8MF1000-2AB33



For modular installation devices, for 24 modular widths	RAL 7035	3 HU	8MF1000-2AB31

Frames


Version	Surface	For mounting height	Article No.
For mounting test switches, 19"	RAL 7035	7 HU	8MF1000-2AB30

Covers for frames

Version	Surface	Article No.
For mounting 7XP 1/6 standard devices	RAL 7035	8MF1000-2AB34
For mounting 7XP 2/6 standard devices	RAL 7035	8MF1000-2AB35
For mounting 7XP 3/6 standard devices	RAL 7035	8MF1000-2AB36


Shelves

- For 19" frame



Version	Surface	For mounting height	Depth	Article No.
Non-adjustable	Zinc-plated	3 HU	230 mm	8MF1000-2AB12
			400 mm	8MF1000-2AB14
Withdrawable	RAL 7035	1 HU		8MF1000-2HF12

Slide rails



Version	Depth	Article No.
For 19" fixed-mounted (double mounting at front and rear)	400 mm	8MF1004-2HG12
	600 mm	8MF1006-2HG12
	800 mm	8MF1008-2HG12
	1000 mm	8MF1000-2HG12
For 19" fixed-mounted and For 19" swing frame		8MF1000-2HS12

Device panels



Version	Surface	Height	Width	Article No.
For 24 modular widths	Zinc-plated	1800 mm	100 mm	8MF1810-2AB00
			150 mm	8MF1850-2AB00
			200 mm	8MF1820-2AB00
		2000 mm	100 mm	8MF1010-2AB00
			150 mm	8MF1050-2AB00
			200 mm	8MF1020-2AB00
		2200 mm	100 mm	8MF1210-2AB00
			150 mm	8MF1250-2AB00
			200 mm	8MF1220-2AB00

17

System overview, page 17/4

© Siemens 2022

Quick selection guide

LED lights

The LED lights offer optimum lighting conditions for installation and maintenance.
The LED technology is energy-efficient and maintenance-free.

	Magnetic fixing Easy installation at any point on the steel cubicle	**Screw fixing** Fixed installation in the case of impact loads or high vibration levels	**Clip fixing** The lamp is snapped into the clip bracket and can be turned in both directions
With motion detector The lights switch on when the door is opened, enabling work in the cubicle to be started immediately			
With On/Off switch Particularly suitable for operation in cubicles and enclosures with a high density of built-in electrical/electronic components			

System overview, page 17/4

© Siemens 2022

Slimline lights

The Slimline lights are an alternative with an energy-saving lamp and are also available as a version with an integrated socket.

		Screw fixing	Magnetic fixing
With motion detector The lights switch on when the door is opened, enabling work in the cubicle to be started immediately	**With socket outlet**		
	Without socket outlet		
With On/Off switch Particularly suitable for operation in cubicles and enclosures with a high density of built-in electrical/electronic components	**With socket outlet**		
	Without socket outlet		

System overview, page 17/4

© Siemens 2022

LED lights

Magnetic fixing



Version	Voltage	Standard	Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-0A
	24 ... 48 V DC	VDE	8MR2201-0A
With On/Off switch	100 ... 240 V AC, 50/60 Hz	VDE, UL	8MR2200-1A
	24 ... 48 V DC	VDE, UL	8MR2201-1A

Screw fixing



Version	Voltage	Standard	Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-0B
	24 ... 48 V DC	VDE	8MR2201-0B
With On/Off switch	100 ... 240 V AC, 50/60 Hz	VDE, UL	8MR2200-1B
	24 ... 48 V DC	VDE, UL	8MR2201-1B

Clip fixing



Version	Voltage	Standard	Article No.
With motion detector	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-0C
	24 ... 48 V DC	VDE	8MR2201-0C
With On/Off switch	100 ... 240 V AC, 50/60 Hz	VDE	8MR2200-1C
	24 ... 48 V DC	VDE	8MR2201-1C

Accessories

Cables

Connecting cables with socket and open end



- For connection of an LED light (switch side)
- Length 2 m

Version	Cross-section	Standard	Article No.
AC connecting cable	2× 1.5 mm²	VDE	8MR2210-1B
	AWG 16	VDE, UL	8MR2210-2B
DC connecting cable	2× 1.5 mm²	VDE	8MR2210-3B
	AWG 16	VDE, UL	8MR2210-4B

Extension cables with socket and plug



- For looping through to another LED light
- Length 1 m

Version	Cross-section	Standard	Article No.
AC plastic-sheathed cable	2× 1.5 mm²	VDE	8MR2210-1C
	AWG 16	VDE, UL	8MR2210-2C
DC plastic-sheathed cable	2× 1.5 mm²	VDE	8MR2210-3C
	AWG 16	VDE, UL	8MR2210-4C

Individual plugs or sockets for self-assembly of cables

For connection of an LED light (switch side)



Version	Application	Standard	Color	Article No.
AC socket	For input side	VDE	White	8MR2210-1A
DC socket	For input side	VDE	Blue	8MR2210-3A

For looping through to another LED light



Version	Application	Standard	Color	Article No.
AC connector	For output side	VDE	White	8MR2210-2A
DC connector	For output side	VDE	Blue	8MR2210-4A

17

System overview, page 17/4

© Siemens 2022

Slimline lights

		With magnet	Without magnet (approx. 30 N)
			
Slimline lights with motion detector, acc. to VDE			
230 V AC, 50/60 Hz	With socket outlet	8MF5910-1A	8MF5910-1C
	Without socket outlet	8MF5910-2A	8MF5910-2B
Slimline lights with On/Off switch, acc. to VDE			
230 V AC, 50/60 Hz	With socket outlet	8MF5900-1A	8MF5900-1C
	Without socket outlet	8MF5900-2A	8MF5900-2B

System overview, page 17/4

© Siemens 2022

Quick selection guide

Solutions to provide protection against heat

Cooling devices



Heat exchangers



Filter fans/outlet fans



Thermostats



Solutions to provide protection against cold

Heater units



Fan heaters



Thermostats



Solutions to provide protection against corrosion and condensation

Heater units/fan heaters



Filter fans/outlet filters




Thermostats



Hygrostats/hygrotherms



SIMARIS therm

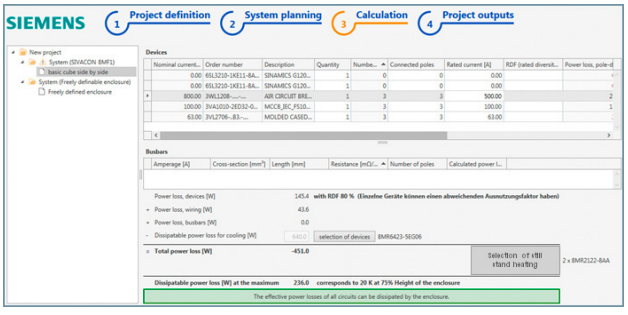

The SIMARIS therm calculation tool helps you to easily and precisely dimension the heat dissipation of your control panels, simply by entering the ambient air temperature and selecting the relevant devices in the panel. If necessary, you can immediately select the necessary cooling devices and air conditioners. You can also define the necessary heating power for anti-condensation heating.

For a free download, and further information, visit:
www.siemens.com/simaristherm

System overview, page 17/4

© Siemens 2022

Filter fans and outlet filters

Filter fans

	Size	Cutout	Voltage	Input rating at 50 Hz	Standard	Color	Degree of protection IP54 Air current, free-blowing at 50 Hz	Degree of protection IP54 Article No.	Degree of protection IP55 Air current, free-blowing at 50 Hz	Degree of protection IP55 Article No.
	**Filter fans with EC technology**									
	2	125 × 125 mm	115 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	62 m³/h	8MR6411-5LE25		–
			230 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	62 m³/h	8MR6423-5LE25		–
	3	177 × 177 mm	115 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	120 m³/h	8MR6411-5LE30		–
			230 V AC, 50/60 Hz	4.4 W	VDE	RAL 7035	120 m³/h	8MR6423-5LE30		–
	**Standard filter fans**									
	1	92 × 92 mm	115 V AC, 50/60 Hz	12 W	VDE	RAL 7035	25 m³/h	8MR6411-5LV10		–
			230 V AC, 50/60 Hz	12 W	VDE, UL	RAL 7032	25 m³/h	8MR6423-2LV10		–
					VDE, UL	RAL 7035	25 m³/h	8MR6423-5LV10		–
	2	125 × 125 mm	115 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	63 m³/h	8MR6411-5LV25	58 m³/h	8MR6511-5LV25
			230 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7032	63 m³/h	8MR6423-2LV25		–
					VDE, UL	RAL 7035	63 m³/h	8MR6423-5LV25	58 m³/h	8MR6523-5LV25
	3	177 × 177 mm	115 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6411-5LV30	105 m³/h	8MR6511-5LV30
			230 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6423-5LV30	105 m³/h	8MR6523-5LV30
	4	223 × 223 mm	115 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7035	160 m³/h	8MR6411-5LV45	147 m³/h	8MR6511-5LV45
				43 W	VDE, UL	RAL 7035	250 m³/h	8MR6411-5LV41	230 m³/h	8MR6511-5LV41
			230 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7032	160 m³/h	8MR6423-2LV45		–
					VDE, UL	RAL 7035	160 m³/h	8MR6423-5LV45	147 m³/h	8MR6523-5LV45
				45 W	VDE, UL	RAL 7032	250 m³/h	8MR6423-2LV41		–
					VDE, UL	RAL 7035	250 m³/h	8MR6423-5LV41	230 m³/h	8MR6423-5LV41
			24 V DC	16 W	VDE, UL	RAL 7032	250 m³/h	8MR6402-2LV41		–
	6	292 × 292 mm	115 V AC, 50/60 Hz	64 W	VDE, UL	RAL 7035	580 m³/h	8MR6411-5LV60	531 m³/h	8MR6511-5LV60
				115 W	VDE, UL	RAL 7035	930 m³/h	8MR6411-5LV80	850 m³/h	8MR6511-5LV80
			230 V AC, 50/60 Hz	64 W	VDE, UL	RAL 7032	580 m³/h	8MR6423-2LV60		–
					VDE, UL	RAL 7035	580 m³/h	8MR6423-5LV60	531 m³/h	8MR6523-5LV60
				135 W	VDE, UL	RAL 7035	930 m³/h	8MR6423-5LV80	850 m³/h	8MR6523-5LV80
	**EMC filter fans**									
	3	177 × 177 mm	115 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6411-6LV30	105 m³/h	8MR6511-6LV30
			230 V AC, 50/60 Hz	20 W	VDE, UL	RAL 7035	115 m³/h	8MR6423-6LV30	105 m³/h	8MR6523-6LV30
	4	223 × 223 mm	115 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7035	160 m³/h	8MR6411-6LV45	147 m³/h	8MR6511-6LV45
				43 W	VDE, UL	RAL 7035	250 m³/h	8MR6411-6LV41	230 m³/h	8MR6511-6LV41
			230 V AC, 50/60 Hz	18 W	VDE, UL	RAL 7035	160 m³/h	8MR6423-6LV45	147 m³/h	8MR6523-6LV45
				45 W	VDE, UL	RAL 7035	250 m³/h	8MR6423-6LV41	230 m³/h	8MR6523-6LV41

17

System overview, page 17/4

© Siemens 2022

Filter fans and outlet filters

Outlet filters without fan





	Size	Cutout	External dimensions W x H	Mounting depth	Cover grille height	Color	Degree of protection IP54 Article No.	Degree of protection IP55 Article No.
	Standard outlet filters, acc. to VDE, UL							
	1	92 × 92 mm	105 × 105 mm	12 mm	4.5 mm	RAL 7032	8MR6400-2GV10	–
						RAL 7035	8MR6400-5GV10	–
	2	125 × 125 mm	148 × 148 mm	23 mm	5.5 mm	RAL 7032	8MR6400-2GV25	–
						RAL 7035	8MR6400-5GV25	8MR6500-5GV25
	3	177 × 177 mm	204 × 204 mm	26 mm	6 mm	RAL 7035	8MR6400-5GV30	8MR6500-5GV30
	4	223 × 223 mm	250 × 250 mm	32 mm	6 mm	RAL 7032	8MR6400-2GV45	–
						RAL 7035	8MR6400-5GV45	8MR6500-5GV45
	6	292 × 292 mm	323 × 323 mm	33 mm	6.5 mm	RAL 7032	8MR6400-2GV67	–
						RAL 7035	8MR6400-5GV67	8MR6500-5GV67
	EMC outlet filters, acc. to VDE, UL							
	3	177 × 177 mm	204 × 204 mm	26 mm	6 mm	RAL 7035	8MR6400-6GV30	8MR6500-6GV30
	4	223 × 223 mm	250 × 250 mm	32 mm	6 mm	RAL 7035	8MR6400-6GV45	8MR6500-6GV45

Filter mats for filter fans and outlet filters


	Size	Degree of protection IP54 Dimensions W x H	Degree of protection IP54 Article No.	Degree of protection IP55 Dimensions W x H	Degree of protection IP55 Article No.
	Standard filter mats, acc. to VDE				
	1	92 × 92 mm	8MR6000-0AM10		–
	2	125 × 125 mm	8MR6000-0AM25	116 × 116 mm	8MR6000-0CF25
	3	177 × 177 mm	8MR6000-0AM30	169 × 169 mm	8MR6000-0CF30
	4	223 × 223 mm	8MR6000-0AM45	215 × 215 mm	8MR6000-0CF45
	6	292 × 292 mm	8MR6000-0AM67	281 × 281 mm	8MR6000-0CF67

System overview, page 17/4


© Siemens 2022

Roof filter fans and roof outlet filters

Roof filter fans

	Air current, free-blowing at 50 Hz	External dimensions W x H x D	Voltage	Input rating	Standard	Degree of protection IP44 Article No.	Degree of protection IP54 Article No.
	**For cutout 223 × 223 mm, color RAL 7035**						
	71 m³/h	287 × 287 × 104 mm	230 V AC, 50/60 Hz	40 W	VDE, UL	–	8MR6423-5VL44
			115 V AC, 50/60 Hz	48 W	VDE	–	8MR6411-5VL44
			24 V DC	8.8 W	VDE, UL	–	8MR6402-5VL44
	240 m³/h	287 × 287 × 174 mm	230 V AC, 50/60 Hz	45 W	VDE, UL	–	8MR6423-5VL41
			115 V AC, 50/60 Hz	43 W	VDE	–	8MR6411-5VL41
			24 V DC	16 W	VDE, UL	–	8MR6402-5VL41
	300 m³/h	287 × 287 × 174 mm	230 V AC, 50/60 Hz	45 W	VDE, UL	–	8MR6423-5VL55
	**For cutout 292 × 292 mm, color RAL 7035**						
	232 m³/h	361 × 361 × 114 mm	230 V AC, 50/60 Hz	68 W	VDE, UL	–	8MR6423-5VL64
			115 V AC, 50/60 Hz	68 W	VDE	–	8MR6411-5VL64
			24 V DC	14 W	VDE, UL	–	8MR6402-5VL64
	550 m³/h	361 × 361 × 211 mm	230 V AC, 50/60 Hz	64 W	VDE, UL	–	8MR6423-5VL60
			115 V AC, 50/60 Hz	64 W	VDE	–	8MR6411-5VL60
			24 V DC	55 W	VDE, UL	–	8MR6402-5VL60
	840 m³/h	361 × 361 × 203 mm	230 V AC, 50/60 Hz	135 W	VDE, UL	–	8MR6423-5VL80
			115 V AC, 50/60 Hz	115 W	VDE	–	8MR6411-5VL80
			24 V DC	105 W	VDE, UL	–	8MR6402-5VL80
	**For cutout 345 × 265 mm, color RAL 7035, metal**						
	405 m³/h	420 × 340 × 108 mm	115 V AC, 50/60 Hz	40/45 W	VDE, UL	8MR6311-5DL40	–
			230 V AC, 50/60 Hz	40/45 W	VDE, UL	8MR6323-5DL40	–
	690 m³/h	420 × 340 × 108 mm	115 V AC, 50/60 Hz	100/130 W	VDE, UL	8MR6311-5DL42	–
			230 V AC, 50/60 Hz	100/130 W	VDE, UL	8MR6323-5DL42	–

Roof outlet filters without fan

	External dimensions W x H x D	Degree of protection IP44 Article No.	Degree of protection IP54 Article No.
	**For cutout 223 × 223 mm, color RAL 7035, acc. to VDE, UL**		
	287 × 287 × 85 mm	–	8MR6400-5VE45
	**For cutout 292 × 292 mm, color RAL 7035, acc. to VDE, UL**		
	361 × 361 × 96 mm	–	8MR6400-5VE67
	**For cutout 345 × 265 mm, color RAL 7035, metal, acc. to VDE, UL**		
	420 × 340 × 83 mm	8MR6000-5DE40	–

17

System overview, page 17/4

© Siemens 2022

Air conditioners/cooling devices

For door or side mounting, degree of protection inside IP54/outside IP34, color RAL 7035





Cooling capacity	Rated power	Dimensions W × H × D	Air capacity Inside	Air capacity Outside	Design	Mounting Undrilled	Mounting Part	Article No.
230 V, 50/60 Hz, acc. to VDE								
380 W	280 W	285 × 460 × 180 mm	280 m³/h	280 m³/h	■	■	–	8MR6423-5EG04
640 W	400 W	360 × 606 × 212 mm	330 m³/h	570 m³/h	■	■	–	8MR6423-5EG06
820 W	440 W	348 × 783 × 215 mm	330 m³/h	570 m³/h	■	■	–	8MR6423-5EG08
1050 W	570 W	348 × 783 × 215 mm	570 m³/h	860 m³/h	■	■	■	8MR6423-5SK10
1550 W	880 W	400 × 950 × 233 mm	570 m³/h	1050 m³/h	■	■	■	8MR6423-5SK15
2050 W	1080 W	400 × 1265 × 236 mm	860 m³/h	1050 m³/h	■	■	■	8MR6423-5SK20
400 V, 50/60 Hz, acc. to VDE								
2900 W	1220 W	500 × 1270 × 336 mm	860 m³/h	1450 m³/h	■	■	–	8MR6440-5EG30
3850 W	1780 W	500 × 1270 × 336 mm	1450 m³/h	1450 m³/h	■	■	–	8MR6440-5EG40
5800 W	2340 W	600 × 2000 × 380 mm	1450 m³/h	2900 m³/h	■	■	–	8MR6440-5EG60

For roof mounting, degree of protection inside IP54/outside IP34, color RAL 7035



Cooling capacity	Rated power	Dimensions W × H × D	Air capacity Inside	Air capacity Outside	Design	Mounting Undrilled	Mounting Part	Article No.
230 V, 50/60 Hz, acc. to VDE								
410 W	270 W	259 × 264 × 486 mm	235 m³/h	330 m³/h	■	■	–	8MR6423-5DE04
820 W	510 W	340 × 340 × 600 mm	330 m³/h	570 m³/h	■	■	–	8MR6423-5DE08
1150 W	550 W	401 × 415 × 567 mm	570 m³/h	1010 m³/h	■	■	–	8MR6423-5DE12
1550 W	810 W	401 × 415 × 567 mm	860 m³/h	1820 m³/h	■	■	–	8MR6423-5DE15
2050 W	1190 W	401 × 415 × 567 mm	1050 m³/h	1820 m³/h	■	■	–	8MR6423-5DE20
400 V, 50/60 Hz, acc. to VDE								
2900 W	1210 W	492 × 496 × 797 mm	860 m³/h	3410 m³/h	■	■	–	8MR6440-5DE30
3850 W	1630 W	492 × 496 × 797 mm	1450 m³/h	3410 m³/h	■	■	–	8MR6440-5DE40

Heat exchangers

Air/air heat exchangers, degree of protection IP54, color RAL 7035




Thermal power	Rated power	Dimensions W × H × D	Air capacity Inside	Air capacity Outside	Design	Mounting Undrilled	Mounting Part	Article No.
230 V, 50/60 Hz, acc. to VDE								
36 W/K	140 W	316 × 771 × 103 mm	570 m³/h	570 m³/h	■	■	–	8MR6423-5ML36
80 W/K	240 W	317 × 1260 × 148 mm	1050 m³/h	1050 m³/h	■	■	–	8MR6423-5ML80

System overview, page 17/4

© Siemens 2022

Heater units

	Rated value	Rated power	Shutdown temperature	Article No.
	**Heater units with PTC thermistor, UL-approved, acc. to VDE, UL**			
	120 ... 240 V AC/DC	15 W	–	8MR2130-1A
		30 W	–	8MR2130-3A
		45 W	–	8MR2130-4A
		60 W	–	8MR2130-6A
		75 W	–	8MR2130-7A
		100 W	–	8MR2130-0A
		150 W	–	8MR2130-5A
	**Semiconductor heater units without thermostat, compact design, UL-approved, acc. to VDE**			
	120 ... 240 V AC/DC	50 W	–	8MR2131-4A
		100 W	–	8MR2131-0A
		150 W		8MR2131-5A
	**Semiconductor heater units with thermostat, compact design, acc. to VDE**			
	120 ... 240 V AC/DC	50 W	15 °C	8MR2132-1A
			25 °C	8MR2132-1AB
		100 W	15 °C	8MR2132-0A
			25 °C	8MR2132-0AB
		150 W	15 °C	8MR2132-5A
			25 °C	8MR2132-5AB
	**Semiconductor heater units, acc. to VDE**			
	12 ... 30 V AC/DC	15 W	–	8MR2130-1BA
		30 W	–	8MR2130-3BA
		45 W	–	8MR2130-4BA
		60 W	–	8MR2130-6BA

System overview, page 17/4

© Siemens 2022

Fan heaters

Fan heaters







Version	Voltage	Continuous heat output	Parameter	Article No.
Standard version, acc. to VDE, UL				
Without fan	230 V AC	100 W	–	8MR2140-0A
		150 W	–	8MR2140-1A
		200 W	–	8MR2140-2A
		300 W	–	8MR2140-3A
		400 W	–	8MR2140-4A
With fan	230 V AC	100 W	–	8MR2140-0B
		150 W	–	8MR2140-1B
		200 W	–	8MR2140-2B
		300 W	–	8MR2140-3B
		400 W	–	8MR2140-4B
Compact fan heater, acc. to VDE, UL				
Without fan	230 V AC	250 W	–	8MR2122-4A
		400 W	–	8MR2122-8A
	120 V AC	250 W	–	8MR2122-4B
		400 W	–	8MR2122-8B
With fan	24 V DC	250 W	–	8MR2122-4AB
	48 V DC	250 W	–	8MR2122-4AC
		400 W	–	8MR2122-8AA
With integrated thermostat, acc. to VDE, UL				
For floor mounting	230 V AC	950 W	0 ... +60 °C	8MR2150-0A
For wall mounting	230 V AC	950 W	0 ... +60 °C	8MR2150-0C
With integrated hygrostat, acc. to VDE, UL				
For wall mounting	230 V AC	950 W	65% R.H.	8MR2150-0CA

Semiconductor fan heaters









Mounting	Voltage	Continuous heat output	Version	Article No.
Fan heaters, acc. to VDE, UL				
Clip fixing	230 V AC	150 W	–	8MR2150-2C
		250 W	–	8MR2150-5A
		400 W	–	8MR2150-4A
	120 V AC	250 W	–	8MR2150-5AA
		400 W	–	8MR2150-4AA
Screw fixing	230 V AC	150 W	–	8MR2150-2D
		250 W	–	8MR2150-5B
		400 W	–	8MR2150-4B
	120 V AC	250 W	–	8MR2150-5AB
		400 W	–	8MR2150-4AB
PTC fan heaters for wall mounting, acc. to VDE, UL				
Screw fixing	230 V AC	1200 W	With thermostat 0 ... +60 °C	8MR2150-3A
		1200 W	Without thermostat	8MR2150-3B
Clip fixing	120 V AC	1200 W	With thermostat +32 ... +140 °F	8MR2151-3A
		1200 W	Without thermostat	8MR2151-3B
PTC fan heaters for floor mounting, acc. to VDE, UL				
Screw fixing	230 V AC	1200 W	With thermostat 0 ... +60 °C	8MR2150-2A
		1200 W	Without thermostat	8MR2150-2B
Clip fixing	120 V AC	1200 W	With thermostat +32 ... +140 °F	8MR2151-2A
		1200 W	Without thermostat	8MR2151-2B

17

System overview, page 17/4

© Siemens 2022

Thermostats

Adjustable thermostats









Version	Max. switching power	Temperature range	Article No.
Mini thermostat, acc. to VDE, UL			
NC with red adjusting knob	250 V AC, 10 (2) A	–10 ... +50 °C	8MR2170-1CA
		0 ... +60 °C	8MR2170-2BA
		+20 ... +80 °C	8MR2170-1DA
NO with blue adjusting knob	250 V AC, 10 (2) A	–10 ... +50 °C	8MR2170-1CB
		0 ... +60 °C	8MR2170-2BB
		+20 ... +80 °C	8MR2170-1DB
Mechanical thermostat, acc. to VDE, UL			
CO	250 V AC, 10 (4) A	+5 ... +60 °C	8MR2170-1A
		–20 ... +30 °C	8MR2170-1B
Electronic thermostat, acc. to VDE			
CO	230 V AC, 8 (1.6) A	–20 ... +60 °C	8MR2170-1GA
	120 V AC, 8 (1.6) A	–4 ... +140 °F	8MR2170-1GB
	24 V DC, 16 A	0 ... +60 °C	8MR2170-2A
CO, integrated	230 V AC, 8 (1.6) A	–20 ... +60 °C	8MR2170-1GC
Twin thermostat, acc. to VDE, UL			
NC and NO	250 V AC, 10 (2) A	0 ... +60 °C	8MR2170-1E
NO and NO	250 V AC, 10 (2) A	0 ... +60 °C	8MR2170-1EA

System overview, page 17/4

© Siemens 2022

Thermostats

Tamper-proof thermostats

	Version	Max. switching power	Shutdown temperature	Article No.
	**Tamper-proof thermostat, acc. to VDE, UL**			
	NC	250 V AC, 5 (1.6) A	15 °C	8MR2171-1BA
			25 °C	8MR2171-2BA
	NO	250 V AC, 5 (1.6) A	35 °C	8MR2171-3BB
			50 °C	8MR2171-1BB
			60 °C	8MR2171-2BB
	**Twin thermostat, acc. to VDE, UL**			
	NC and NO	250 V AC, 5 (1.6) A	15 °C | 50 °C (NC | NO)	8MR2172-1A
		250 V AC, 5 (1.6) A or 30 W DC	25 °C | 60 °C (NC | NO)	8MR2172-2A
	NO and NO	250 V AC, 5 (1.6) A	50 °C | 60 °C (NO | NO)	8MR2172-1AB

System overview, page 17/4

© Siemens 2022

Hygrostats and hygrotherms

Hygrostats





Version	Relative air humidity	Voltage	Max. switching power	Article No.
Mechanical hygrostat, acc. to VDE, UL				
CO	35 ... 95%	230 V AC	250 V AC, 5 (0.2) A/20 W DC	8MR2170-1C
Electronic hygrostat, acc. to VDE				
CO	40 ... 90%	230 V AC	240 V AC, 8 (1.6) A	8MR2170-1AF
		120 V AC	240 V AC, 8 (1.6) A	8MR2170-2AF
	65%	230 V AC	240 V AC	8MR2170-1BF
		120 V AC	120 V AC	8MR2170-2BF

Hygrotherms



Version	Relative air humidity	Temperature range	Voltage	Max. switching power	Article No.
Electronic hygrotherm, acc. to VDE, UL					
NC and NO	50 ... 90%	+32 ... +140 °F	100 ... 240 V AC	NC: 120 V AC, 6 (1) A NO: 120 V AC, 8 (1.6) A	8MR2170-4F
		0 ... +60 °C	100 ... 240 V AC	NC: 100 ... 240 V AC, 6 (1) A NO: 100 ... 240 V AC, 8 (1.6) A	8MR2170-4E

System overview, page 17/4

© Siemens 2022



© Siemens 2022

Appendix



Link directory A/2

Conditions of sale and delivery A/8

Article number index A/10

Index A/17

Notes A/21

A

© Siemens 2022

Link directory

Catalog LV 10

General information

Information on low-voltage power distribution and electrical installation technology	www.siemens.com/lowvoltage
Tender specifications	www.siemens.com/lowvoltage/tenderspecifications
Conversion tool	www.siemens.com/conversion-tool
Image database	www.siemens.com/lowvoltage/picturedb
CAx download manager	www.siemens.com/cax
Newsletter system	www.siemens.com/lowvoltage/newsletter
Siemens YouTube channel	www.youtube.com/Siemens
Catalogue LV 10	www.siemens.com/lv10
Catalogue LV 18	www.siemens.com/lv18
Brochures/catalogs	www.siemens.com/lowvoltage/catalogs
Operating instructions/manuals	www.siemens.com/lowvoltage/manuals
Siemens Industry Online Support (SIOS)	www.siemens.com/lowvoltage/product-support
Siemens Industry Online Support app	www.siemens.com/support-app
My Documentation Manager (MDM)	www.siemens.com/lowvoltage/mdm
Configurators	www.siemens.com/lowvoltage/configurators
Siemens Industry Mall – product catalog and online ordering system	www.siemens.com/lowvoltage/mall
Direct forwarding to the Industry Mall	www.siemens.com/product?Article No.
Training	www.siemens.com/sitrain-lowvoltage
Local contacts	www.siemens.com/lowvoltage/contact www.siemens.com/lowvoltage/components/contact www.siemens.com/lowvoltage/systems/contact www.siemens.com/lowvoltage/software/contact
Technical Support	www.siemens.com/support-request
Information on services	www.siemens.com/service-catalog
Manual for the generation, transmission and distribution of electrical energy	www.siemens.com/power-engineering-guide
Control panels for the North American market	www.siemens.com/northamerican-standards
Control panel building	www.siemens.com/controlpanel
Energy savings and amortization	www.automation.siemens.com/sinasave
SIMATIC Energy Suite	www.siemens.com/energysuite
SITOP power supplies	www.siemens.com/sitop
Power distribution with Totally Integrated Power	www.siemens.com/tip

Information + ordering

Technical overviews	
Air circuit breakers	www.siemens.com/lowvoltage/produkt-support (109781188) www.siemens.com/lowvoltage/product-support (109766020)
Molded case circuit breakers	www.siemens.com/lowvoltage/product-support (109767421)
Miniature circuit breakers	www.siemens.com/lowvoltage/product-support (109769082)
Residual current protective devices/arc fault detection devices	www.siemens.com/lowvoltage/product-support (109769082)
Switching devices	www.siemens.com/lowvoltage/product-support (109769083)
Overvoltage protection devices	www.siemens.com/lowvoltage/product-support (109769084)
Fuse systems	www.siemens.com/lowvoltage/product-support (109769085)
Switch disconnectors	www.siemens.com/lowvoltage/product-support (109764946)
Transfer switching equipment and load transfer switches	www.siemens.com/lowvoltage/product-support (109764946)
Measuring devices, power monitoring and digitalization solutions	www.siemens.com/lowvoltage/product-support (109764480)
Monitoring devices	www.siemens.com/lowvoltage/product-support (109769086)
Transformers, power supply units and socket outlets	www.siemens.com/lowvoltage/product-support (109764946)
Busbar systems	www.siemens.com/lowvoltage/product-support (109769087)

A

© Siemens 2022

Technical overviews	
Terminal blocks	www.siemens.com/lowvoltage/product-support (109769088)
Power distribution boards, motor control center s and distribution boards	www.siemens.com/lowvoltage/product-support (109769089)
Busbar trunking systems	www.siemens.com/lowvoltage/product-support (109769090)
System cubicles, system lighting and system air-conditioning	www.siemens.com/lowvoltage/product-support (109769091)
All the important things at a glance	
Air circuit breakers	www.siemens.com/3WA www.siemens.com/3WL
Molded case circuit breakers	www.siemens.com/3VA
Miniature circuit breakers	www.siemens.com/mcb www.siemens.com/protection-concept
Residual current protective devices/arc fault detection devices	www.siemens.com/rccb www.siemens.com/protection-concept
Switching devices	www.siemens.com/switching-devices
Overvoltage protection devices	www.siemens.com/overvoltage-protection
Fuse systems	www.siemens.com/fuses
Switch disconnectors	www.siemens.com/switching-devices
Transfer switching equipment and load transfer switches	www.siemens.com/switching-devices sie.ag/2XBonIi
Measuring devices, power monitoring and digitalization solutions	www.siemens.com/powermonitoring www.siemens.com/sentron-digital
Monitoring devices	www.siemens.com/lowvoltage
Transformers, power supply units and socket outlets	www.siemens.com/lowvoltage
Busbar systems	www.siemens.com/lowvoltage
Terminal blocks	www.siemens.com/distribution-components
Power distribution boards, motor control centers and distribution boards	www.siemens.com/sivacon-S8 www.siemens.com/distributionsystems
Busbar trunking systems	www.siemens.com/sivacon-8PS
System cubicles, system lighting and system air-conditioning	www.siemens.com/sivacon-8mf
Your product in detail	
Brochure – 3WA air circuit breakers	www.siemens.com/lowvoltage/product-support (109800077)
Brochure – Energy and data successfully put on track	www.siemens.com/lowvoltage/product-support (109747761)
Brochure – Reliable, sustainable, and efficient – TÜV-certified power monitoring system in accordance with ISO 50001	www.siemens.com/lowvoltage/product-support (109744679)
Brochure – SENTRON portfolio for power monitoring	www.siemens.com/lowvoltage/product-support (109744725)
Brochure – SIVACON 8MF1 system cubicles – As versatile as your requirements	www.siemens.com/lowvoltage/product-support (109744677)
Brochure – The plus for your business: Intelligent. Flexible. Safe. Low-voltage switchboard SIVACON S8^{plus}	www.siemens.com/lowvoltage/product-support (109747937)
Catalog LV 70 · 2019 – SIVACON 8PS busbar trunking systems – BD01, BD2 up to 1250 A	www.siemens.com/lowvoltage/product-support (109744546)
Quick selection guide – 3WA air circuit breakers	www.siemens.com/lowvoltage/product-support (109781967)
Quick selection guide – 3WL air circuit breakers	www.siemens.com/lowvoltage/product-support (109751638)
SENTRON powermanager – update and benefit	www.siemens.com/lowvoltage/product-support (109805178)
Technical basic information – 3VA molded case circuit breakers	www.siemens.com/lowvoltage/product-support (109766672)
Technical basic information – 3WL air circuit breakers	www.siemens.com/lowvoltage/product-support (109767789)
Technical basic information – ALPHA distribution systems	www.siemens.com/lowvoltage/product-support (109778911)
Technical basic information – SENTRON power monitoring and digital solutions	www.siemens.com/lowvoltage/product-support (109769851)
Technical basic information – SENTRON protection concept	www.siemens.com/lowvoltage/product-support (109767456)
Technical basic information – SIVACON 8MF1 system cubicle	www.siemens.com/lowvoltage/product-support (109767386)
Technical basic information – SIVACON S4 power distribution boards and ALPHA UNIVERSAL distribution boards	www.siemens.com/lowvoltage/product-support (109767882)
Technical basic information – Switch disconnectors and transfer switching equipment	www.siemens.com/lowvoltage/product-support (109763354)

© Siemens 2022

Link directory

Catalog LV 10

Your product in detail	
Technology primer – Fuse systems	www.siemens.com/lowvoltage/product-support (109482303)
Technology primer – Miniature circuit breakers	www.siemens.com/lowvoltage/product-support (109482304)
Technology primer – Overvoltage protection devices	www.siemens.com/lowvoltage/product-support (109756965)
Technology primer – Residual current protective devices	www.siemens.com/lowvoltage/product-support (109482301)
Siemens YouTube channel	
3WA air circuit breaker – Teaserfilm	bit.ly/3p14AOZ
3WA air circuit breaker – Highlightfilm	bit.ly/2Y0iWD2
3WL air circuit breakers (general)	bit.ly/2ZH1rXH
3VA molded case circuit breakers (general)	bit.ly/2xNxlFA
Miniature circuit breakers (general)	bit.ly/2kJP2Dq
Residual current protective devices (general)	bit.ly/2YuWkNc
Siemens fuse systems	bit.ly/2kWaepz
Power monitoring (general)	bit.ly/2lZ9QqC
Siemens ALPHA FIX terminal blocks – 8WH2 terminal with spring-loaded-connection	bit.ly/2kKVz0D
Power distribution – SIVACON (general)	bit.ly/2m4oSLI
Siemens SIVACON S4 power distribution boards up to 4000 A	bit.ly/2krni6h
Everything you need for your order	
Air circuit breakers	sie.ag/2lXiZjB
Molded case circuit breakers	sie.ag/2mmLcAk
Miniature circuit breakers	sie.ag/2kTFXI5
Residual current protective devices/arc fault detection devices	sie.ag/2m55Y7j
Switching devices	sie.ag/2m4eG5M
Overvoltage protection devices	sie.ag/2kTfytV
Fuse systems	sie.ag/2kW3pnU
Switch disconnectors	sie.ag/36HDiZp
Transfer switching equipment and load transfer switches	sie.ag/2mmMw6g
Measuring devices and power monitoring	sie.ag/2kTH9Lz
Digitalization solutions	sie.ag/2olIiNi
Library for SIMATIC	sie.ag/2kpbwcs
SENTRON powermanager/SENTRON powerconfig	sie.ag/2kTJjuF
Monitoring devices	sie.ag/2m3no4A
Transformers, power supply units and socket outlets	sie.ag/2mmSHHu
Busbar systems	sie.ag/2lXoUFl
Terminal blocks	sie.ag/2kW8ZXo
SIVACON S4 power distribution boards	sie.ag/2JUQwE4
ALPHA distribution boards	sie.ag/2kURLd8
Overvoltage protection devices	sie.ag/2kTfytV
SIMARIS planning tools	sie.ag/2m3oFbS
SIVACON 8PS	sie.ag/2lXpCT1 www.siemens.com/sivacon8PS-contact
System cubicles, system lighting and system air-conditioning	sie.ag/339cQB9
SIVACON S8	www.siemens.com/sivacon-partnerfinder www.siemens.com/sivaconS8-contact
Order support	
3KD switch disconnectors – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109750228)
3LD2 main control and EMERGENCY-STOP-switching equipment – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755626)
3NP1 fuse switch disconnectors – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755624)
3KF switch disconnectors with fuses – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109750229)

© Siemens 2022

Order support	
3NJ6 switch disconnectors with fuses – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755619)
3KC automatic transfer switching equipment (ATSE) – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755620)
3KC remotely operated transfer switching equipment (RTSE) – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109755627)
3KC manual transfer switching equipment (MTSE) – End-to-end safety for user and systems	www.siemens.com/lowvoltage/catalogs (109750227)
SIVACON 8PS – BD01 and BD2	www.siemens.com/LV70
3WA air circuit breakers – Made for makers. Simply reliable.	www.siemens.com/lowvoltage/catalogs (109800074)
Configurators	
3WA air circuit breakers	www.siemens.com/lowvoltage/3wa-configurator
3WL air circuit breakers	www.siemens.com/lowvoltage/3wl-configurator
3WL10 air circuit breakers	www.siemens.com/lowvoltage/3wl10-configurator
3VA molded case circuit breakers	www.siemens.com/lowvoltage/3va-configurator
3VA27 molded case circuit breakers	www.siemens.com/lowvoltage/3va27-configurator
SITOR semiconductor fuses	www.siemens.com/lowvoltage/sitor-configurator
3NJ63 switch disconnectors	www.siemens.com/lowvoltage/3nj63-configurator
3NP1 fuse switch disconnectors	www.siemens.com/lowvoltage/3np1-configurator
SIVACON 8MF1 system cubicle	www.siemens.com/lowvoltage/8mf1-configurator
SIVACON 8PS	sie.ag/2lXpCT1

Commissioning + operation

Tools/software	
SIMARIS configuration	www.siemens.com/simarisconfig
SENTRON powerconfig	www.siemens.com/powerconfig
SIMARIS planning tools	www.siemens.com/simaris
SIMARIS therm	www.siemens.com/simaristherm
Manuals	
Communication manual – 3VA molded case circuit breakers with IEC and UL certification	www.siemens.com/lowvoltage/manuals (98746267)
Communication manual – 3WL air circuit breakers via COM35 – PROFINET IO, Modbus TCP	www.siemens.com/lowvoltage/manuals (109757987)
Communication manual – 3WL10 air circuit breakers & 3VA27 molded case circuit breakers	www.siemens.com/lowvoltage/manuals (109760220)
Communication manual – SENTRON PAC5100/5200 7KM5212/5412	www.siemens.com/lowvoltage/manuals (109477870)
Configuration manual – 3VA selectivity	www.siemens.com/lowvoltage/manuals (109743975)
Configuration manual – 3WL1 air circuit breakers	www.siemens.com/lowvoltage/manuals (35681108)
Configuration manual – Busbar systems	www.siemens.com/lowvoltage/manuals (109769746)
Configuration manual – Busbar systems	www.siemens.com/lowvoltage/manuals (81379793)
Configuration manual – Fuse systems	www.siemens.com/lowvoltage/manuals (45314810)
Configuration manual – Low-voltage protection devices selectivity tables	www.siemens.com/lowvoltage/manuals (109748621)
Configuration manual – Measuring devices and power monitoring	www.siemens.com/lowvoltage/manuals (45315973)
Configuration manual – Miniature circuit breakers	www.siemens.com/lowvoltage/manuals (45302792)
Configuration manual – Monitoring devices	www.siemens.com/lowvoltage/manuals (45316099)
Configuration manual – Overvoltage protection devices	www.siemens.com/lowvoltage/manuals (45315289)
Configuration manual – Residual protective devices/ arc fault detection devices	www.siemens.com/lowvoltage/manuals (45303255)
Configuration manual – Switching devices	www.siemens.com/lowvoltage/manuals (45315361)
Configuration manual – Switch disconnectors	www.siemens.com/lowvoltage/manuals (109769744)

A

© Siemens 2022

Link directory

Catalog LV 10

Manuals	
Configuration manual – Transfer switching equipment and load transfer switches	www.siemens.com/lowvoltage/manuals (109769745)
Configuration manual – Transformers, power supply units and socket outlets	www.siemens.com/lowvoltage/manuals (45315886)
Equipment manual – 3KD switch disconnector	www.siemens.com/lowvoltage/manuals (109758120)
Equipment manual – 3KC3 and 3KC6 transfer switching equipment	www.siemens.com/lowvoltage/manuals (109754954)
Equipment manual – 3KC0 manual transfer switching equipment	www.siemens.com/lowvoltage/manuals (109763232)
Equipment manual – 3KC4 and 3KC8 transfer switching equipment	www.siemens.com/lowvoltage/manuals (109738725)
Equipment manual – 3KC ATC3100 transfer control device	www.siemens.com/lowvoltage/manuals (100341671)
Equipment manual – 3KC ATC6300 transfer control device	www.siemens.com/lowvoltage/manuals (109755149)
Equipment manual – 3VA27 molded case circuit breakers & 3WL10 air circuit breakers	www.siemens.com/lowvoltage/manuals (109753821)
Equipment manual – 3VA molded case circuit breakers with IEC certificate	www.siemens.com/lowvoltage/manuals (90318775)
Equipment manual – 3WA air circuit breakers	www.siemens.com/lowvoltage/manuals (109763061)
Equipment manual – 3KC ATC6500 transfer control device	www.siemens.com/lowvoltage/manuals (109758018)
Equipment manual – 7KT PAC1600 energy meter	www.siemens.com/lowvoltage/manuals (109759827)
Equipment manual – 7KT PAC1600 multimeter	www.siemens.com/lowvoltage/manuals (109760293)
Equipment manual – PAC2200 measuring device	www.siemens.com/lowvoltage/manuals (109746835)
Equipment manual – SENTRON PAC3200 Power monitoring device	www.siemens.com/lowvoltage/manuals (26504150)
Equipment manual – PAC3200T measuring device	www.siemens.com/lowvoltage/manuals (109746833)
Equipment manual – PAC3100 measuring device	www.siemens.com/lowvoltage/manuals (37881976)
Equipment manual – SENTRON PAC5100/5200 7KM5212/5412	www.siemens.com/lowvoltage/manuals (109477872)
Equipment manual – 7KM PAC3120 and 7KM PAC3220	www.siemens.com/lowvoltage/manuals (109767307)
Equipment manual – 7KN POWERCENTER 3000	www.siemens.com/lowvoltage/manuals (109763838)
Equipment manual – 7KM Power Monitoring Device PAC2200CLP	www.siemens.com/lowvoltage/manuals (109783220)
Installation manual – Circuit protection devices with communication and measuring function	www.siemens.com/lowvoltage/manuals (109791805)
Manual – SIVACON S4	www.siemens.com/lowvoltage/manuals (25909512)
Operating Manual – Software SIMARIS therm planning tool	www.siemens.com/lowvoltage/manuals (109744553)
Planning manual – Planning with SIVACON 8PS	www.siemens.com/lowvoltage/manuals (109478425)
Planning manual – SIVACON S8 – Technical planning information	www.siemens.com/lowvoltage/manuals (107113936)
Quick installation guide – 7KN POWERCENTER 3000	www.siemens.com/lowvoltage/manuals (109766001)
SEM3™ – Embedded Micro Metering Module™	www.siemens.com/lowvoltage/manuals (109748928)
System manual – 3WA air circuit breaker communication	www.siemens.com/lowvoltage/manuals (109792368)
System manual – 3WL/3VL circuit breakers with communication capability – Modbus	www.siemens.com/lowvoltage/manuals (39850157)
System manual – 3WL/3VL circuit breakers with communication capability – PROFIBUS	www.siemens.com/lowvoltage/manuals (12560390)
System manual – SENTRON 3NJ62 In-Line Plug-In switch disconnectors with fuses	www.siemens.com/lowvoltage/manuals (31753460)
System manual – SENTRON 3NP1 fuse switch disconnector	www.siemens.com/lowvoltage/manuals (33515690)
System manual – 7KT multichannel current measuring system	www.siemens.com/lowvoltage/manuals (109483442)
System manual – SENTRON PAC4200 Power monitoring device	www.siemens.com/lowvoltage/manuals (34261595)
System manual – Circuit protection devices with communication and measuring function	www.siemens.com/lowvoltage/manuals (109791806)
Face-to-face or online training	
Video tutorial on the 3WL air circuit breaker	www.lowvoltage.siemens.com/wcms/3wl-tutorial
Protection systems in low-voltage power distribution	www.siemens.com/sitrain-lowvoltage (WT-LVAPS)
3WL10 air circuit breaker, size 0	www.siemens.com/sitrain-lowvoltage (WT-LVA3WL0)

© Siemens 2022

Face-to-face or online training	
3WL air circuit breakers, sizes 1-3	www.siemens.com/sitrain-lowvoltage (WT-LVA3WL)
3VA molded case circuit breaker	www.siemens.com/sitrain-lowvoltage (WT-LVA3VA)
Protection concept	www.siemens.com/sitrain-lowvoltage (WT-LVBPC)
5SM6/5SV6 arc fault detection devices	www.siemens.com/sitrain-lowvoltage (WT-LVBAFDD)
Power monitoring with SENTRON	www.siemens.com/sitrain-lowvoltage (WT-LVAEM)
SIMARIS configuration	www.siemens.com/sitrain-lowvoltage (WT-LVASIMC)
Communication with SENTRON components	www.siemens.com/sitrain-lowvoltage (LV-COM)
Maintenance and operation of 3WL circuit breakers with subsequent certification option	www.siemens.com/sitrain-lowvoltage (LV-CBMAIN) www.siemens.com/sitrain-lowvoltage (LV-CBCERT)
Project planning and selection of SENTRON circuit breakers	www.siemens.com/sitrain-lowvoltage (LV-CBPROJ)
Energy Management with Powermanager 5.x – User training	www.siemens.com/sitrain-lowvoltage (LV-PM5)
Energy Management with Powermanager 5.x including graphic module – User training	www.siemens.com/sitrain-lowvoltage (LV-PM5-G)
SIVACON 8PS	www.power-academy.siemens.com
SENTRON circuit protection devices with measuring and communication function	www.siemens.com/sitrain-lowvoltage (WT-LVBCOM)
Basic principles of electrical engineering	www.siemens.com/sitrain-lowvoltage (WT-LVBGET)
3WA air circuit breakers	www.siemens.com/sitrain-lowvoltage (WT-LV3WA)
LV-3WA Basic	www.siemens.com/sitrain-lowvoltage (LV-3WA_BA)
LV-3WA Advanced	www.siemens.com/sitrain-lowvoltage (LV-3WA_AD)
ALPHA 3200 low voltage switch boards – technic and software	www.siemens.com/sitrain-lowvoltage (LV-ALPHAT)
ALPHA 3200 low voltage switch boards – mounting	www.siemens.com/sitrain-lowvoltage (LV-ALPHAPB)

Further links

SIRIUS

Industrial Controls – SIRIUS	www.siemens.com/sirius
Industry Online Support – SIRIUS	www.siemens.com/sirius/support
Catalogue IC 10	www.siemens.com/ic10
Brochures/catalogs	www.siemens.com/sirius/catalogs
SIRIUS Control for controlling and protecting	www.siemens.com/sirius-control
SIRIUS Command for commanding, signaling and detecting applications	www.siemens.com/sirius-command
SIRIUS Hybrid for starting motors	www.siemens.com/sirius-hybrid
SIRIUS Monitor for monitoring and responding	www.siemens.com/sirius-monitor
Control and signaling devices SIRIUS ACT – Performance in Action	www.siemens.com/sirius-act
IO-Link –the new communication standard	www.siemens.com/io-link
Systematic industrial safety technology: Safety Integrated	www.siemens.com/safety-integrated
SIMOCODE pro motor management	www.siemens.com/simocode
Explosion protection (ATEX)	www.siemens.com/sirius/atex
Configurators – SIRIUS	www.siemens.com/sirius/configurators
SIRIUS Media	www.siemens.com/sirius/news

© Siemens 2022

Conditions of sale and delivery

1. General Provisions

By using this catalog you can purchase products (hardware, software and services) described therein from Siemens Aktiengesellschaft subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as „T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in European Union

For customers with a seat or registered office in European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for stand-alone software products and software products forming a part of a product or project, the „General License Conditions for Software Products for Automation and Drives for Customers with a Seat or registered Office in Germany"[1)] and/or
- for consulting services the "Allgemeine Geschäftsbedingungen für Beratungsleistungen der Division DF – Deutschland" (available only in German) and/or
- for other services, the „Supplementary Terms and Conditions for Services ("BL")[1)] and/or
- for other supplies the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"[1)].
  In case such supplies should contain Open Source Software, the conditions of which shall prevail over the „General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"[1)], a notice will be contained in the scope of delivery in which the applicable conditions for Open Source Software are specified. This shall apply mutatis mutandis for notices referring to other third party software components.

1.2 For customers with a seat or registered office outside European Union

For customers with a seat or registered office outside European Union, the following terms and conditions apply subordinate to T&C:

- for products, which include specific terms and conditions in the description text, these specific terms and conditions shall apply and subordinate thereto,
- for consulting services the „Standard Terms and Conditions for Consulting Services of the Division DF for Customers with a Seat or Registered Office Outside of Germany"[1)] and/or
- for other services the „International Terms & Conditions for Services"[1)] supplemented by „Software Licensing Conditions"[1)] and/or
- for other supplies of hard- and software the „International Terms & Conditions for Products"[1)] supplemented by „Software Licensing Conditions"[1)]

1.3 For customers with master or framework agreement

To the extent our supplies and/or services offered are covered by an existing master or framework agreement, the terms and conditions of that agreement shall apply instead of T&C.

2. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog – especially with regard to data, dimensions and weights given – these are subject to change without prior notice.

[1)] The text of the Terms and Conditions of Siemens AG can be downloaded at https://mall.industry.siemens.com/legal/ww/en/terms_of_trade_en.pdf

© Siemens 2022

3. Export Regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export may be subject to license. We shall indicate in the delivery details whether licenses are required under German, European and US export lists.

Our products are controlled by the U.S. Government (when labeled with „ECCN" unequal „N") and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. Government or as otherwise authorized by U.S. law and regulations. Products labeled with „AL" unequal „N" are subject to European/national export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels „AL" and „ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Products without label, with label „AL:N"/„ECCN:N", or label „AL:9X9999"/„ECCN: 9X9999" may require authorization from responsible authorities depending on the final end-use, or the destination.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you shall comply with all applicable national and international (re-)export control regulations. In any event of such transfer of goods, works and services you shall comply with the (re-) export control regulations of the Federal Republic of Germany, of the European Union and of the United States of America.

Prior to any transfer of goods, works and services provided by us to a third party you shall in particular check and guarantee by appropriate measures that

- there will be no infringement of an embargo imposed by the European Union, by the United States of America and/or by the United Nations by such transfer, by brokering of contracts concerning those goods, works and services or by provision of other economic resources in connection with those goods, works and services, also considering the limitations of domestic business and prohibitions of by-passing those embargos;
- such goods, works and services are not intended for use in connection with armaments, nuclear technology or weapons, if and to the extent such use is subject to prohibition or authorization, unless required authorization is provided;
- the regulations of all applicable Sanctioned Party Lists of the European Union and the United States of America concerning the trading with entities, persons and organizations listed therein are considered.

If required to enable authorities or us to conduct export control checks, you, upon request by us, shall promptly provide us with all information pertaining to the particular end customer, the particular destination and the particular intended use of goods, works and services provided by us, as well as any export control restrictions existing.

You acknowledge that under the EU embargo regulations against Iran, Syria and Russia respectively the sale of certain listed goods and related services is subject to authorization by the competent export control authorities of the European Union. If (1) the goods or services ordered by you are destined for Iran, Syria or Russia, and (2) the contract for our supplies and/or services is subject to prior authorization of the competent export control authorities of the European Union, the contract between you and us shall come into force in this respect only upon granting of such authorization.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities. Errors excepted and subject to change without prior notice.

© Siemens 2022

Article number index

Article No.	Page
3K	
3KC03	9/24–9/25
3KC04	9/24–9/25
3KC34	9/8, 9/16
3KC43	9/16
3KC44	9/16
3KC64	9/8, 9/17
3KC83	9/17
3KC84	9/17
3KC90	9/32, 9/34
3KC91	9/26–9/27, 9/29
3KC92	9/26–9/27
3KC93	9/26–9/27, 9/29
3KC94	9/26–9/27, 9/29
3KC95	9/26–9/27, 9/29
3KC96	9/16, 9/18–9/19, 9/21
3KC97	9/19
3KC98	9/18–9/23
3KD01	8/70–8/72
3KD02	8/70–8/72
3KD03	8/70–8/72
3KD04	8/70–8/72
3KD05	8/70–8/72
3KD06	8/70–8/72
3KD16	8/70, 8/72–8/73
3KD22	8/70, 8/72–8/73
3KD26	8/70, 8/72–8/73
3KD28	8/70, 8/72–8/73
3KD30	8/70, 8/72–8/73
3KD32	8/70, 8/72–8/73
3KD34	8/70, 8/72–8/73
3KD36	8/70, 8/72–8/73
3KD38	8/70, 8/72–8/73
3KD40	8/70, 8/72–8/73
3KD42	8/70, 8/72–8/73
3KD44	8/70, 8/72–8/73
3KD46	8/70, 8/72–8/73
3KD48	8/70, 8/72–8/73
3KD50	8/70, 8/72–8/73
3KD52	8/70, 8/72–8/73
3KD54	8/70, 8/72–8/73
3KD56	8/70, 8/72–8/73
3KD90	8/74–8/78
3KD91	8/74–8/75, 8/77–8/79, 8/131–8/132, 9/26, 9/29
3KD92	8/74–8/75, 8/78–8/79, 9/26
3KD93	8/74–8/75, 8/78–8/79, 8/132, 9/28–9/29
3KD94	8/74–8/75, 8/78–8/79, 8/132, 9/28–9/29
3KD95	8/74–8/75, 8/78–8/79, 8/132, 9/28–9/29
3KF13	8/126–8/128
3KF14	8/126–8/127
3KF23	8/126–8/128
3KF24	8/126–8/127
3KF33	8/126–8/128
3KF34	8/126–8/127
3KF43	8/126–8/128
3KF44	8/126–8/127
3KF53	8/126–8/128
3KF54	8/126–8/127
3KF90	7/88, 8/132
3KF91	8/78–8/79, 8/129, 8/131, 8/133, 9/29
3KF92	8/78, 8/129, 8/132–8/133
3KF93	8/129, 8/132–8/133
3KF94	8/78, 8/129, 8/132–8/133
3KF95	8/78, 8/129, 8/133
3L	
3LD20	8/24–8/27, 8/30–8/33, 8/36–8/39, 8/46–8/49, 8/51
3LD21	8/24–8/27, 8/30–8/33, 8/36–8/39, 8/46–8/49, 8/51, 9/30–9/31
3LD22	8/24–8/27, 8/30–8/33, 8/36–8/40, 8/46–8/51, 9/30–9/31
3LD23	8/24–8/27, 8/30–8/33, 8/36–8/39, 9/30–9/31
3LD24	8/24–8/27, 8/30–8/33, 8/36–8/39, 9/30–9/31
3LD25	8/24–8/27, 8/30–8/33, 8/36–8/39, 8/46–8/49, 8/51, 9/30–9/31
3LD27	8/24–8/27, 8/30–8/33, 8/36–8/39, 8/46–8/49, 8/51, 9/30–9/31
3LD28	8/24–8/27, 8/30–8/33, 8/36–8/39, 8/46–8/49, 8/51
3LD30	8/14–8/19
3LD31	8/14–8/19
3LD32	8/14–8/19
3LD33	8/14–8/19
3LD34	8/14–8/19
3LD50	8/54, 8/56–8/61
3LD52	8/56–8/61
3LD54	8/54, 8/56–8/61
3LD56	8/56–8/61
3LD58	8/56–8/61
3LD92	8/24–8/39, 8/41–8/43, 8/46–8/49, 8/52–8/53, 8/56–8/58, 8/60–8/63, 9/30–9/31
3LD93	8/14–8/21
3N	
3NA30	7/44, 7/46
3NA31	7/44, 7/46
3NA32	7/45, 7/47, 7/50
3NA33	7/47
3NA34	7/47
3NA36	7/47
3NA38	7/44, 7/46
3NA61	7/36, 7/38–7/39
3NA62	7/37, 7/39
3NA68	7/36, 7/38
3NA71	7/40, 7/42–7/43
3NA72	7/41, 7/43
3NA78	7/40, 7/42
3NB11	7/70
3NB12	7/70
3NB13	7/70
3NB23	7/70
3NB33	7/59
3NC10	7/25, 7/72, 7/74, 7/84
3NC14	7/25, 7/72, 7/74, 7/76, 7/83, 7/85

© Siemens 2022

Article No.	Page
3NC18	7/73
3NC22	7/25, 7/72, 7/75, 7/77
3NC23	7/25, 7/71–7/72, 7/77
3NC24	7/58–7/59, 7/62, 7/64
3NC26	7/73, 7/77
3NC32	7/65–7/66
3NC33	7/65, 7/67
3NC34	7/65, 7/67
3NC55	7/68
3NC58	7/68
3NC73	7/69
3NC84	7/58–7/59, 7/64
3ND13	7/48
3ND18	7/48
3ND21	7/48
3ND22	7/48
3ND23	7/48
3NE10	7/54, 7/56
3NE12	7/54, 7/57–7/58, 7/79
3NE13	7/54, 7/57, 7/59, 7/79
3NE14	7/54, 7/57, 7/59, 7/79
3NE18	7/54
3NE32	7/58, 7/62
3NE33	7/63
3NE34	7/64
3NE35	7/69
3NE36	7/64–7/66
3NE41	7/57, 7/61, 7/68–7/69
3NE43	7/63, 7/69
3NE53	7/59, 7/63
3NE54	7/64–7/65
3NE56	7/64
3NE64	7/68
3NE74	7/64
3NE76	7/64–7/65
3NE80	7/55–7/56, 7/60–7/61
3NE82	7/61–7/62
3NE83	7/61
3NE87	7/55, 7/60
3NE88	7/56, 7/61
3NE93	7/63
3NE94	7/68
3NE96	7/65
3NG10	7/23, 8/93, 8/133
3NG11	7/23
3NG12	7/23, 8/93, 8/133
3NG13	7/23, 8/93, 8/133
3NG14	7/23, 8/93, 8/133
3NG15	7/23
3NH30	7/10, 7/22–7/23
3NH31	7/10, 7/22
3NH32	7/10, 7/22, 7/27
3NH33	7/10, 7/22
3NH34	7/10, 7/22
3NH35	7/22
3NH40	7/10, 7/23
3NH42	7/10, 7/23
3NH50	7/25, 7/55, 7/60, 7/73, 7/75, 7/77
3NH53	7/25
3NH54	7/25, 7/58–7/59, 7/62–7/65
3NH57	7/25, 7/73
3NH72	7/27
3NH73	7/27
3NH74	7/27
3NH75	7/23
3NJ41	8/102, 8/104–8/105, 8/107, 8/109, 8/111
3NJ49	8/104, 8/106, 8/108, 8/110, 15/98, 15/169
3NJ56	8/102
3NJ59	8/102, 8/104, 8/106, 15/98
3NJ63	8/141
3NJ69	8/138–8/141, 10/36, 15/100–15/101
3NP11	8/86–8/87, 15/96–15/97, 15/168
3NP19	8/88–8/94
3NP40	15/182
3NP50	8/98, 13/29
3NP52	8/98
3NP53	8/98
3NP54	8/98
3NW10	7/80
3NW11	7/80
3NW12	7/80
3NW13	7/80
3NW20	7/80
3NW21	7/80
3NW22	7/80
3NW23	7/80
3NW30	7/80
3NW31	7/80
3NW32	7/80
3NW33	7/80
3NW60	7/52, 7/78
3NW61	7/52
3NW62	7/52
3NW63	7/52
3NW66	7/78
3NW70	7/24, 7/26, 7/78
3NW71	7/24, 7/83, 7/85
3NW72	7/24
3NW73	7/24
3NW74	7/11, 7/24, 7/28–7/29, 7/80, 13/23
3NW75	7/28–7/29, 7/84
3NW76	7/26, 7/78
3NW79	7/24, 7/29
3NW80	7/53
3NW81	7/53
3NW82	7/53
3NX10	7/23, 7/88
3NX20	7/22
3NX31	7/22, 7/27
3NY10	8/99

© Siemens 2022

Article number index

Article No.	Page
3NY11	8/98–8/99
3NY12	8/98–8/99
3NY13	8/99
3NY14	8/99
3NY15	8/99
3NY19	8/98–8/99
3NY30	8/98
3NY40	8/99
3S	
3SU14	8/77, 8/132, 9/26
3T	
3TX42	14/69
3V	
3VA90	2/32, 2/60, 2/62–2/65
3VA91	I/7, 2/28–2/29, 2/35, 2/37, 2/39, 2/41, 2/43, 2/45–2/48, 2/50–2/52, 2/55–2/56, 2/60, 2/62, 2/64–2/65
3VA92	2/28–2/31, 2/35, 2/37, 2/39, 2/41, 2/43, 2/45, 2/47, 2/49–2/52, 2/55, 2/62, 2/64–2/65
3VA93	2/37, 2/39, 2/45, 2/47, 2/50–2/52, 2/55–2/56, 2/60, 2/62–2/63, 2/65
3VA94	2/28–2/31, 2/35, 2/37, 2/39, 2/41, 2/43, 2/45, 2/47, 2/49, 2/52, 2/55, 2/63
3VA95	2/39, 2/63, 2/65
3VA96	2/28, 2/30–2/32, 2/37, 2/41, 2/43–2/45, 2/47, 2/49, 2/51, 2/53, 2/60, 2/65
3VA99	2/26–2/27, 2/29–2/30, 2/32, 2/34, 2/51, 2/53, 2/55, 2/58, 2/60–2/63, 11/9, 11/11
3VL12	15/174
3VL16	15/174
3VL94	11/9
3VW81	1/114, 2/74
3VW90	1/94, 1/115–1/123, 2/61, 2/75–2/84
3VW97	1/119, 2/79–2/80, 2/82–2/83
3W	
3WA91	1/38, 1/44–1/55, 1/92, 1/97, 15/44, 15/46, 15/48, 15/50, 15/52, 15/54, 15/56, 15/58
3WL12	1/39
3WL91	1/50, 1/91–1/100, 1/102–1/105, 1/122, 2/84
3WL93	1/91
3Z	
3ZS27	10/23
4A	
4AC24	12/10
4AC32	12/6–12/7
4AC37	12/8–12/9
4N	
4NC51	10/36–10/37
4NC52	10/36–10/37
4NC53	10/36–10/37
4NC54	10/36–10/37
4NC59	10/37
5S	
5SA26	7/33
5SA27	7/33
5SA28	7/33
5SB26	7/33
5SB27	7/33
5SB28	7/33
5SB40	7/33
5SB41	7/33
5SB42	7/33
5SB43	7/33
5SD74	6/6–6/18
5SD80	7/33
5SE13	7/34
5SE20	7/32
5SE22	7/32
5SE23	7/32
5SF10	7/18
5SF12	7/18–7/19
5SF42	7/19
5SF50	7/18
5SF52	7/18
5SF60	7/9, 7/20, 13/23
5SF62	7/9, 7/20, 13/23
5SG13	7/8, 7/16, 7/83
5SG15	7/17
5SG16	7/17
5SG17	7/8, 7/16, 7/83
5SG18	7/17
5SG53	7/8, 7/16, 7/83
5SG55	7/17
5SG56	7/17
5SG57	7/8, 7/16, 7/83
5SG62	7/9, 7/20, 13/9, 13/22
5SG71	7/13, 8/143
5SG72	7/14, 8/115, 8/117, 8/143, 13/24
5SG76	7/12, 8/113
5SH11	7/18
5SH12	7/18
5SH20	7/20, 13/23
5SH22	7/20, 13/23
5SH34	7/19
5SH35	13/13, 13/17
5SH37	7/19
5SH41	7/16
5SH43	7/16
5SH50	7/16
5SH51	7/17
5SH52	7/17, 7/20, 13/22
5SH53	7/83, 7/86
5SH54	7/16–7/17

A

© Siemens 2022

Article No.	Page
5SH55	7/13–7/14, 8/143, 13/24
5SJ41	3/36
5SJ42	3/37
5SJ43	3/37
5SJ61	3/18
5SJ62	3/18
5SJ63	3/18
5SJ65	3/18
5SK91	3/43
5SL30	3/20
5SL31	3/12
5SL32	3/12
5SL33	3/12
5SL34	3/13
5SL35	3/12
5SL36	3/13
5SL41	3/16
5SL42	3/16
5SL43	3/17
5SL44	3/17
5SL45	3/16
5SL46	3/17
5SL60	3/22, 3/38
5SL61	3/14
5SL62	3/14
5SL63	3/14
5SL64	3/15
5SL65	3/14
5SL66	3/15
5SM21	4/32
5SM23	4/32–4/34, 4/36–4/37
5SM24	4/32, 4/34, 4/36
5SM26	4/32–4/34, 4/36–4/37
5SM27	4/32, 4/34, 4/36
5SM28	4/32–4/34, 4/36–4/37
5SM33	4/30–4/31
5SM34	4/30–4/31
5SM36	4/30–4/31
5SM37	4/31
5SM60	3/17, 3/23, 3/25, 3/27, 3/33, 3/38, 3/44, 3/55, 4/39, 4/41, 4/43, 4/47, 4/51–4/52, 4/56
5SP32	3/41
5SP33	3/41
5SP34	3/41
5SP37	3/40–3/41
5SP38	3/40–3/41
5SP41	3/28
5SP42	3/28
5SP43	3/29
5SP44	3/29
5ST10	3/44, 4/45, 4/56, 4/58–4/59
5ST11	14/81
5ST21	3/57, 4/68, 7/82, 7/86
5ST25	3/80–3/83
5ST26	7/24, 7/29
5ST30	3/13, 3/15, 3/17, 3/21, 3/23, 3/25, 3/27, 3/29, 3/31, 3/33, 3/35, 3/37–3/38, 3/42, 3/44, 3/46–3/50, 3/52–3/54, 3/56, 4/15, 4/17, 4/19, 4/21, 4/23, 4/25, 4/27, 4/29, 4/33, 4/35, 4/37, 4/39, 4/41, 4/43, 4/47, 4/49, 4/51–4/54, 4/56, 4/58–4/62, 4/64–4/67, 5/13, 5/15, 5/17, 7/13, 8/143
5ST36	3/59–3/62, 3/64, 3/66–3/68, 3/70–3/71, 3/73–3/74, 3/76, 4/71, 4/73–4/74, 4/76, 4/79, 7/86–7/87
5ST37	3/60–3/68, 3/71–3/74, 3/76, 3/78, 4/71–4/74, 4/77–4/79, 7/82–7/87
5ST38	3/15, 3/17, 3/23, 3/25, 3/27, 3/29, 3/31, 3/33, 3/35, 3/38, 3/42, 3/46, 3/48–3/50, 3/52–3/54, 3/56, 4/15, 4/17, 4/19, 4/21, 4/23, 4/25, 4/27, 4/29, 4/33, 4/35, 4/37, 4/39, 4/41, 4/43, 4/47, 4/51, 4/58, 4/60–4/62, 4/64–4/67, 5/7, 5/13, 5/15
5SU11	4/39
5SU13	4/38–4/40, 4/42–4/49
5SU14	4/43
5SU16	4/38–4/39, 4/42–4/43, 4/45, 4/47–4/49
5SU18	4/48
5SV13	4/50–4/51
5SV16	4/50–4/51
5SV31	4/14
5SV33	4/14–4/16, 4/20–4/22, 4/26, 4/28
5SV34	4/14–4/15, 4/20–4/21
5SV36	4/14–4/16, 4/20–4/22, 4/26, 4/28
5SV37	4/20, 4/28
5SV38	4/21
5SV41	4/18
5SV43	4/18, 4/24
5SV44	4/18, 4/24
5SV46	4/18, 4/24
5SV47	4/24
5SV60	4/53–4/54
5SV80	11/6
5SV81	11/8–11/11
5SV82	11/6
5SV87	11/7, 11/9–11/11
5SV89	11/7, 11/9, 11/11
5SW12	3/57
5SW30	3/57, 4/67
5SW33	4/31, 4/58–4/59
5SY17	3/42
5SY41	3/26
5SY42	3/26
5SY43	3/27
5SY44	3/27
5SY45	3/26
5SY46	3/27
5SY51	3/30
5SY52	3/30
5SY54	3/30
5SY61	3/24
5SY62	3/24
5SY63	3/24
5SY64	3/25
5SY65	3/24

© Siemens 2022

Article number index

Article No.	Page
5SY66	3/25
5SY71	3/32
5SY72	3/32
5SY73	3/33
5SY74	3/33
5SY75	3/32
5SY76	3/33
5SY81	3/34
5SY82	3/34
5SY83	3/34
5SY84	3/35
5SY85	3/34
5SY86	3/35
5SZ92	4/68
5T	
5TE25	5/16
5TE48	5/8–5/9
5TE58	5/10
5TE68	12/12–12/13
5TE81	5/6, 5/12
5TE82	5/12
5TE91	5/18, 12/12–12/13
5TG80	5/7, 5/9, 5/11
5TG82	3/56, 5/7, 5/13, 5/15, 5/29–5/30, 5/33, 11/22–11/23
5TL11	5/14–5/15
5TL12	5/14–5/15
5TL13	5/14–5/15
5TL14	5/14–5/15
5TL16	5/14–5/15
5TT31	5/47, 7/12–7/14, 7/17, 7/19–7/20, 7/88, 11/17, 11/23
5TT34	5/35, 11/12–11/15, 11/18–11/20, 11/22
5TT41	5/20–5/22
5TT42	5/28–5/29
5TT44	5/24
5TT49	5/21, 5/23, 5/25–5/27
5TT50	5/30
5TT52	11/21
5TT58	5/32
5TT59	5/31, 5/33–5/34
5TT61	11/16
6A	
6AV66	10/22
6M	
6MF28	1/101, 2/58
7K	
7KM10	10/24
7KM22	10/24
7KM31	10/24–10/25
7KM32	10/24–10/25
7KM42	10/25
7KM52	10/3, A/5–A/6
7KM54	10/25
7KM92	10/27
7KM93	2/58, 10/26–10/27
7KM99	10/26
7KN11	3/39, 3/51, 4/55, 4/63, 7/50, 10/19
7KN13	10/18
7KN27	10/14
7KT12	10/29, 10/31–10/33, 10/37
7KT16	10/28
7KT55	10/34
7KT56	10/34
7KT58	10/34–10/35
7KT90	10/34
7L	
7LF45	5/36–5/39
7LF49	5/38–5/40
7LF53	5/42–5/45
7LF63	5/46
7LF90	3/57, 5/40, 5/43, 5/45
7LQ23	11/24
7LQ29	11/24
8G	
8GB13	15/199
8GB20	15/199
8GB45	3/57
8GB46	15/196–15/197
8GB50	15/196–15/198
8GB52	15/196
8GD90	15/148, 15/187
8GD91	15/148, 15/187
8GD92	15/148, 15/189
8GE37	15/178
8GF57	15/138–15/141
8GF58	15/141
8GF71	15/144, 15/146
8GF93	14/68–14/69, 15/189
8GF96	15/134, 15/136–15/138, 15/141, 15/143–15/144, 15/146, 15/148, 15/187
8GK10	15/164–15/165
8GK11	15/160–15/161
8GK13	15/154, 15/156–15/158
8GK14	15/152
8GK20	15/130
8GK21	15/124
8GK23	15/126
8GK24	15/122
8GK40	15/180–15/181
8GK41	15/181
8GK43	15/166
8GK44	15/166–15/167
8GK45	15/167–15/168, 15/179
8GK46	15/168
8GK47	15/169, 15/172–15/177

© Siemens 2022

Article No.	Page
8GK48	15/153, 15/170–15/171, 15/185–15/186
8GK63	15/136
8GK64	15/134–15/135
8GK67	15/132–15/133
8GK68	15/123, 15/134, 15/138–15/139, 15/141
8GK90	15/184–15/185, 15/193
8GK91	15/125, 15/128–15/129, 15/131, 15/134, 15/143, 15/147, 15/152–15/153, 15/183–15/185, 15/193
8GK92	15/123
8GK93	15/184
8GK95	15/122, 15/124–15/125, 15/128, 15/131, 15/144–15/146, 15/148, 15/152, 15/156, 15/162, 15/184–15/185, 15/188
8GK96	15/123, 15/125, 15/129–15/130, 15/137, 15/140–15/143, 15/168, 15/182, 15/186
8GK97	15/139–15/141, 15/153, 15/168–15/169, 15/171, 15/182
8GK99	15/70, 15/102, 15/123–15/125, 15/129–15/130, 15/134, 15/138, 15/140–15/141, 15/143–15/144, 15/146–15/148, 15/152, 15/156, 15/168, 15/170–15/171, 15/183–15/184, 15/186–15/187, 15/189–15/190, 15/192–15/193, 15/199
8GS40	15/178, 15/185, 15/190

8H

8HC69	15/193
8HE85	15/193
8HP15	15/193
8HP18	15/193

8J

8JH40	15/191
8JH41	15/192
8JK31	15/192
8JK40	15/191

8M

8MF10	17/13, 17/16–17/17, 17/21, 17/23, 17/25–17/31
8MF11	17/13, 17/25, 17/27–17/28, 17/30
8MF12	17/13, 17/23, 17/25, 17/28, 17/30–17/31
8MF13	17/27–17/28, 17/30
8MF14	17/27–17/28, 17/30
8MF15	17/27, 17/30
8MF16	17/30
8MF17	17/30
8MF18	17/23, 17/30–17/31
8MF19	17/30
8MF59	17/35
8MR21	17/41–17/45
8MR22	17/34
8MR60	17/38–17/39
8MR63	17/39
8MR64	17/37–17/40
8MR65	17/37–17/38

8P

8PQ10	15/26, 15/28, 15/30, 15/104
8PQ12	15/20, 15/22, 15/24, 15/52, 15/54, 15/56, 15/58, 15/100, 15/104
8PQ20	15/36–15/40, 15/44–15/50, 15/52–15/59, 15/62–15/69, 15/71–15/73, 15/94–15/102, 15/106, 15/131, 15/147
8PQ21	15/32–15/34, 15/101, 15/106
8PQ23	15/26–15/27, 15/30–15/31, 15/104–15/105
8PQ24	15/27, 15/105
8PQ25	15/27, 15/30
8PQ30	15/20–15/24, 15/41, 15/49, 15/52, 15/54, 15/56, 15/58, 15/60, 15/82, 15/92, 15/100–15/101, 15/103, 15/107, 15/110–15/111, 15/113–15/115, 15/117, 15/119
8PQ40	15/41–15/43, 15/101, 15/103, 15/112–15/115, 15/139–15/140
8PQ50	15/40, 15/45, 15/47, 15/49, 15/51–15/59, 15/73–15/81, 15/84–15/91, 15/99, 15/116–15/118
8PQ60	15/45, 15/47, 15/49–15/51, 15/53, 15/55, 15/57, 15/59–15/60, 15/62–15/74, 15/76, 15/78–15/80, 15/85, 15/87, 15/89, 15/91, 15/94–15/98, 15/102
8PQ94	15/24, 15/32, 15/34, 15/37, 15/40–15/42, 15/82, 15/103, 15/107, 15/118–15/119
8PQ95	15/24, 15/42, 15/118
8PQ96	15/103
8PQ99	15/119
8PT96	8/141

8U

8UC60	8/35, 8/76–8/77, 8/131, 9/28
8UC71	8/34
8UC72	8/34
8UD11	8/75, 8/130, 9/27
8UD17	2/30, 8/60, 8/63, 8/76, 8/130, 9/27
8UD18	2/80, 8/76, 8/130, 9/27
8UD19	2/30–2/32, 2/80, 8/61, 8/63, 8/76–8/77, 8/131, 9/28
8US12	8/98, 13/11, 13/17, 13/27, 13/29, 13/31
8US13	13/29
8US16	13/10–13/11
8US17	13/11
8US19	13/6–13/7, 13/9–13/14, 13/17, 13/19, 13/21, 13/27, 13/29, 13/31–13/32, 15/170, 15/191

8W

8WA10	14/62–14/63, 14/66–14/69, 14/71–14/75, 14/78
8WA12	14/63, 14/65
8WA13	14/63
8WA15	14/70
8WA16	14/69
8WA18	14/14, 14/64–14/68, 14/70–14/75, 14/78, 14/80–14/81
8WA20	14/76–14/77
8WA28	14/22, 14/68–14/69, 14/80
8WA71	14/71
8WA75	14/81
8WA82	14/68, 14/80
8WA83	14/68, 14/79–14/80
8WA88	14/78, 14/80–14/81
8WC50	13/12
8WC51	13/6–13/7, 13/12

A

© Siemens 2022

Article number index

Article No.	Page
8WH10	8/52–8/53, 14/44–14/55
8WH12	14/19, 14/21
8WH18	14/64
8WH20	14/24–14/25, 14/27–14/32, 14/34–14/35
8WH21	14/26
8WH30	14/40–14/42
8WH50	14/36
8WH51	14/37
8WH60	14/8–14/16, 14/18–14/23
8WH81	14/17, 14/57–14/59
8WH82	3/57, 4/67, 14/57, 14/78
8WH90	3/43, 14/8–14/15, 14/17–14/32, 14/34–14/38, 14/40–14/42, 14/44–14/56, 14/60–14/61, 14/72
8WH91	14/10, 14/18–14/22, 14/38, 14/46–14/47, 14/50, 14/53, 14/55–14/56, 14/60

US

US2:	10/30–10/31, 10/33, A/16

XP

XPT:	8/141, A/16

© Siemens 2022

Index

Keyword	Page
0–9	
19-inch expansion	17/30
3KC ATC transfer control devices	9/32
3KC0 manual transfer switching equipment	9/24
3KC3 and 3KC4 remote transfer switching	9/16
3KC6 and 3KC8 automatic transfer switching	9/17
3KD switch disconnectors	8/64–8/79
3KF switch disconnectors with fuses	8/118–8/133
3LD switch disconnectors 3LD3 main control and EMERGENCY-STOP switches,	8/18
3LD switch disconnectors	8/12–8/63
3LD2 load transfer switches	9/30
3NA COM LV HRC fuse links	7/50
3NJ4 fuse switch disconnectors	8/100–8/111
3NJ63 switch disconnectors with fuses	8/134–8/141
3NP1 fuse switch disconnectors	8/82–8/95
3NP5 fuse switch disconnectors	8/96–8/99
3VA1 molded case circuit breakers	2/8–2/11
3VA10 – 3VA26	2/20–2/65
3VA2 molded case circuit breakers	2/12–2/15
3VA27	2/66–2/84
3VL	2/85
3WA11–3WA13	1/24–1/55
3WL10	1/106–1/123
3WL11–3WL13	1/70–1/105
40 mm 8US busbar system	13/6
4AC2 electronic power supply unit	12/10
4AC32 bell transformer	12/6
4AC37 safety transformer	12/8
5SD74 combination surge arresters	6/8, 6/12
5SD74 lightning arresters type 1	6/6
5SD74 surge arresters type 1 + type 2 + type 3	6/10
5SD74 surge arresters type 2	6/14–6/17
5SD74 surge arresters type 3	6/18
5SG switch disconnectors with fuses	8/142
5SG76 fuse switch disconnectors	8/112
5SJ4..HG.. miniature circuit breakers	3/36
5SJ6...-.KS miniature circuit breakers	3/18
5SK9 device protection switches	3/43
5SL3 miniature circuit breakers	3/12
5SL30 miniature circuit breakers	3/20
5SL4 miniature circuit breakers	3/16
5SL6 COM miniature circuit breakers	3/38
5SL6 miniature circuit breakers	3/14
5SL60 miniature circuit breakers	3/22
5SM2 RC units	4/32–4/37
5SM3 RCCBs	4/30
5SM6 arc fault detection units	4/52
5SP3 selective main miniature	3/40
5SP4 miniature circuit breakers	3/28
5SU1 RCBOs	4/38–4/49
5SV RCCBs	4/14–4/25
5SV1 RCBOs	4/50
5SV3 RCCBs (SIQUENCE)	4/26–4/29
5SV6 AFDD/MCB	4/53
5SV6 COM AFDD/MCB	4/54
5SV8 modular residual current device	11/8–11/11
5SV8 residual current monitors	11/6
5SY17 device protection switches	3/42
5SY4 miniature circuit breakers	3/26
5SY5 miniature circuit breakers	3/30
5SY6 miniature circuit breakers	3/24
5SY7 miniature circuit breakers	3/32
5SY8 miniature circuit breakers	3/34
5TE DC isolator	5/16
5TE busbars	5/18
5TE48 pushbuttons	5/8
5TE58 light indicators	5/10
5TE6 socket outlet for modular installation	12/12
5TE8 control switches	5/6
5TE81/82 On/Off switches	5/12
5TL1 On/Off switches	5/14
5TT3 fuse monitors	11/17
5TT3 insulation monitors for industrial applications	11/20
5TT3 level relays	11/22
5TT3 line circuit relays	11/23
5TT3 phase monitors	11/18
5TT3 phase sequence monitors	11/19
5TT3 short-time voltage relay	11/14
5TT3 soft-starting devices	5/35
5TT3 timers for industrial applications	5/47
5TT3 undervoltage and overvoltage relays	11/15
5TT3 undervoltage relays	11/12–11/13
5TT4 auxiliary switches	5/26
5TT41 remote control switches	5/20–5/23
5TT42 switching relays	5/28
5TT44 remote control switches	5/24
5TT5 EMERGENCY STOP modules	11/21
5TT5 auxiliary switches	5/34
5TT50 Insta contactors	5/30
5TT58 Insta contactors	5/32
5TT6 current relays	11/16
60 mm 8US busbar system	13/12–13/33
60 mm 8US compact busbar system	13/7–13/11
7KM PAC measuring devices	10/24–10/27
7KN Powercenter	10/18
7KT PAC measuring devices	10/28
7LF4 digital time switches	5/36–5/41
7LF5 mechanical time switches	5/42–5/45
7LF6 timers for buildings	5/46
7LQ2 dimmer switches	11/24
8WA terminal blocks	14/6, 14/62–14/81
8WA1 screw terminals	14/62–14/75
8WA2 spring-loaded terminals	14/76
8WH screw terminals	14/44–14/56
8WH terminal blocks	14/4, 14/8–14/61
8WH2 spring-loaded terminals	14/24–14/35
8WH3 insulation displacement terminals	14/40–14/43
8WH5 combination plug-in terminals	14/36–14/39

© Siemens 2022

Index

Keyword	Page
8WH6 iPo installation terminals	14/18–14/23
8WH6 iPo plug-in terminals	14/8–14/17
A	
ALPHA 1250 floor-mounted	15/152
ALPHA 1250 marshaling boxes	15/154
ALPHA 160 distribution boards	15/164
ALPHA 400 distribution boards	15/160, 15/162
ALPHA 630 UNIVERSAL floor-mounted	15/126–15/129
ALPHA 630 UNIVERSAL wall-mounted	15/124
ALPHA 630 floor-mounted	15/156
ALPHA 630 marshaling boxes	15/158
ALPHA 800 UNIVERSAL floor-mounted	15/122
ALPHA SIMBOX WP small distribution boards	15/199
ALPHA SIMBOX XL small distribution boards	15/196–15/198
ALPHA UNIVERSAL 125 distribution boards	15/130
ALPHA UNIVERSAL distribution boards (NF technology)	15/120–15/149
ALPHA UNIVERSAL system overview	15/120
ALPHA distribution boards (DIN technology)	15/150–15/193
ALPHA system overview	15/150
Accessories	3/44–3/83, 4/56–4/79, 7/82–7/89, 9/18–9/23, 9/26–9/29, 10/10, 15/142–15/149, 15/183–15/193
Accessories and spare parts	1/44–1/55, 1/91–1/105, 1/118–1/123
Accessories for 8WA terminal blocks	14/78–14/81
Accessories for 8WH terminal blocks	14/57–14/61
Accessories for busbars	3/74–3/79
Accessories for connection and insulation	2/78
Accessories for transfer control devices	9/34
Accessory options	1/38–1/40, 1/78–1/88, 1/112, 2/72
Air Circuit Breakers	1/1–1/123
Air conditioners/cooling devices	17/40
All the information you need	1/2–1/3, 2/2–2/3, 3/2–3/3, 4/2–4/3, 5/2–5/3, 6/2–6/3, 7/2–7/3, 8/2–8/3, 9/2–9/3, 10/2–10/3, 11/2–11/3, 12/2–12/3, 13/2–13/3, 14/2–14/3, 15/2–15/3, 16/2–16/3, 17/2–17/3
Appendix	A/1–A/20
Applications	9/6
Arc fault detection devices (AFDDs)	4/12
Arc fault detection devices Miniature circuit breakers Device protection switches Switching devices	4/57
Article number index	A/10–A/16
Assembly kits	15/132–15/137, 15/166–15/179
Auxiliary release, closing coil	2/81–2/82
B	
Basic units	3/12–3/43, 4/14–4/55, 6/6–6/19
Bus-mounting bases	7/20
Busbar Systems	13/1–13/33
Busbar Trunking Systems	16/1–16/3
Busbar systems	15/41–15/42
Busbar trunking systems	16/4–16/9
Busbars 1	7/82
Busbars L1 L1 1	7/84
Busbars	7/86, 15/138–15/141, 15/182
C	
Circuit breakers and non-automatic circuit breakers	1/4–1/16, 1/56–1/63
Class CC fuse holders	7/29
Class CC fuse links	7/80
Class J fuse holders	7/28
Communication	1/23, 2/56–2/61
Compact busbars	3/69–3/73, 4/75–4/79
Conditions of sale and delivery	A/8–A/9
Connection	1/22, 1/68
Connection technology	2/36–2/49
Control cabinets/System cubicles	I/26–I/27
Cover frame and mounting	2/64
Current transformers	10/36–10/37
Cylindrical fuse holders	7/24
Cylindrical fuse links	7/52
D	
DIAZED fuse bases	7/18
DIAZED fuse links	7/33
Device protection switches	3/10
Devices for all applications	3/4
Distribution blocks for standard rail mounting	3/80–3/82
Distribution systems	I/24–I/25
E	
Electrical accessories 5ST3 COM auxiliary switches and fault signal contacts (AS+FC)	3/50, 4/62
Electrical accessories	3/46–3/55, 4/58–4/66
Electronic trip unit ETU and accessories	1/115–1/116, 2/75–2/77
Electronic trip unit ETU600	1/17–1/21
Electronic trip unit ETU	1/64–1/67
Enclosure	15/26–15/40
Examples of digitalization in industry	I/11
Examples of digitalization in infrastructure	I/10
F	
Fan heaters	17/42
Filter fans and outlet filters	17/37–17/38
Frame	15/20–15/24
Fuse Systems L1 L1 L1 AS L1	7/85
Fuse Systems	7/1–7/89
Fuse holders and bases for SITOR semiconductor fuses	7/25
Fuse holders and bases	7/8–7/29
Fuse links	7/30–7/81
Fuse switch disconnectors	8/80–8/113
Fuseless switch disconnectors	8/6–8/79
G	
General accessories interior installation	17/26–17/29

© Siemens 2022

Keyword	Page
Guide frames for AC	1/41–1/42, 1/89
Guide frames for DC	1/43, 1/90
Guide frames	1/114, 2/74
H	
Hardware components	10/6–10/9
Heater units	17/41
Hygrostats and hygrotherms	17/45
I	
Index	A/17–A/20
Installation switching devices	5/6–5/35
Internal accessories	2/26
Internal separation	15/108–15/119
Introduction to the topic of digitalization and Industry 4.0	I/12–I/13
Introduction to the topic of digitalization	I/12
Introduction	I/2–I/27, 4/5
L	
LED lights	17/34
LV HRC fuse bases	7/22
LV HRC fuse links	7/36–7/49
LV HRC signal detectors	7/88
Link directory	A/2–A/7
Load transfer switches	9/30–9/31
Locking provisions and interlocks	2/83–2/84
Locking, blocking and interlocking	2/62
M	
MINIZED fuse switch disconnectors	7/12
MINIZED switch disconnectors with fuses	7/13
Manual operators	2/28–2/33
Measuring Devices, Power Monitoring and Digitalization Solutions	10/1–10/37
Measuring devices	10/24–10/35
Mechanical accessories	3/56, 4/67
Miniature Circuit Breakers	3/1–3/83
Molded Case Circuit Breakers	2/1–2/85
Molded case circuit breakers and switch disconnectors for all applications	2/4–2/5
Molded case circuit breakers, switch disconnectors and accessories	2/6
Monitoring Devices	11/1–11/25
Monitoring devices for electrical values	11/6–11/20
Monitoring devices for plants and equipment	11/21–11/25
Motor operators and manual operators	2/80
Motor operators	2/34
Mounting concept and accessories	9/12–9/15
Mounting panels	17/23
Mounting plates	17/24
Mounting rails	17/25
N	
NEOZED bus-mounting switch	7/14
NEOZED fuse bases	7/16
NEOZED fuse links	7/32
New products	I/2–I/3
Non-automatic circuit breakers for DC	1/14–1/16, 1/62
O	
Online configurator highlights	1/26, 1/72, 1/108, 2/18, 17/8
Operating mechanism, auxiliary release,	1/69
Overview of fuse systems according to IEC	7/6–7/7
Overview of modular system	4/56
Overview of protection, switching, measuring and monitoring tasks	I/14–I/22
Overview of the modular system Miniature circuit breakers	3/44
Overvoltage Protection Devices	6/1–6/19
P	
PAC/3WL/3VA SIMATIC PCS 7 library	10/23
Photovoltaic cumulative fuse bases	7/27
Photovoltaic cumulative fuse links	7/79
Photovoltaic cylindrical fuse holders	7/26
Photovoltaic cylindrical fuse links	7/78
Planning and installation tools	16/6–16/9
Plug-in and withdrawable technology	2/50–2/53
Power Distribution Boards, Motor Control Centers and Disribution Boards	15/1–15/199
Power distribution boards and motor control centers	15/14–15/17
Power monitoring	10/4
Power supply units	12/10–12/11
Products and their applications in industry	I/9
Products and their applications in infrastructure	I/8
Q	
Quick selection guide	2/6–2/19, 3/6–3/11, 4/6–4/13, 8/4–8/5, 9/6–9/11, 10/4–10/11, 13/5, 14/4–14/7, 15/4–15/13, 16/4–16/9, 17/7, 17/10, 17/32, 17/36
Quick selection guide 3WA	1/4–1/23
Quick selection guide 3WL	1/56–1/69
Quick selection guide of fuse holders, bases	7/8–7/11
Quick selection guide of fuse links	7/30
Quick-assembly kits	15/180
R	
RC units	4/8
RCBOs	4/10
RCCB protective socket outlets	4/68
RCCBs	4/6
Residual Current Protective Devices/ Arc Fault Detection Devices (AFDDs)	4/1–4/79
Residual current devices RCD According to IEC 60947-2 Annex B (Type A, Type B) and according to	2/54

© Siemens 2022

Index

Keyword	Page
Residual current protective devices Arc fault detection devices Device protection switches Switching devices	3/45
Roof filter fans and roof outlet filters	17/39

S

SEM3 multichannel current measuring system	10/30
SEM3T multichannel temperature measuring	10/32
SENTRON powerconfig	10/12
SENTRON powermanager	10/14–10/17
SENTRON powermind	10/20
SIKclip wiring system	3/83
SILIZED fuse links	7/34
SIMARIS planning tools	I/23, 15/12
SIMARIS® Planning Tools	I/23
SIMATIC Energy Suite	10/22
SITOR semiconductor fuse links	7/54–7/76
SIVACON 8MF/8MR system lighting	17/32–17/35
SIVACON 8MF1 basic cubicles	17/7–17/9
SIVACON 8MF1 configurable enclosures	17/10–17/31
SIVACON 8MR system air-conditioning	17/36–17/45
SIVACON 8PS busbar trunking systems	16/4
SIVACON S4 power distribution boards	15/18–15/119
SIVACON S8/SIVACON S4/ALPHA 3200/	15/14–15/17
SIVACON and ALPHA distribution systems	15/4–15/11
Section expansion	15/44–15/107
Slimline lights	17/35
Small distribution boards	15/194–15/199
Socket outlets	12/12–12/13
Software and digitalization solutions	10/12–10/23
Standard busbars	3/58–3/68, 4/70–4/74
Structure of the article numbers	1/28–1/37, 1/74–1/77, 1/110, 2/22–2/25, 2/68–2/71, 17/9
Switch Disconnectors	8/1–8/143
Switch disconnectors with fuses	8/114–8/143
Switching Devices	5/1–5/47
System Cubicles, System Lighting and System Air-Conditioning	17/1–17/45
System overview 3WA11 – 3WA13	1/24
System overview 3WL10	1/106
System overview 3WL11 – 3WL13	1/70
System overview	2/20, 2/66, 3/5, 4/4, 5/4–5/5, 6/4–6/5, 7/4–7/5, 9/4–9/5, 11/4–11/5, 12/4–12/5, 13/4, 15/18, 15/194, 17/4–17/6

T

Terminal Blocks	14/1–14/81
The fast route to the product	I/4–I/7
Thermostats	17/43–17/44
Time and pulse counters	10/34
Timers	5/36–5/47
Transfer Switching Equipment and Load Transfer Switches	9/1–9/35
Transfer control devices	9/32–9/35
Transfer switching equipment	9/16–9/29
Transformers, Power Supply Units and Socket Outlets	12/1–12/13
Transformers	12/6–12/9
Trip units	2/16
Tripping characteristics	I/18–I/21

© Siemens 2022

Notes

© Siemens 2022

Notes

© Siemens 2022

Catalogs and further information



LV 10
Low-Voltage Power Distribution and Electrical Installation Technology
SENTRON • SIVACON • ALPHA


Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems

PDF (E86060-K8280-A101-B5-7600)



ET D1
Switches and Socket Outlets
DELTA

PDF



LV 18
Air Circuit Breakers and Molded Case Circuit Breakers with UL Certification
SENTRON

PDF (E86060-K8280-E347-A9-7600)




Industry Mall
Information and Ordering Platform on the Internet:

www.siemens.com/industrymall



IC 10
Industrial Controls
SIRIUS

PDF (E86060-K1010-A101-B3-7600)



SITRAIN
Digital Industry Academy

www.siemens.com/sitrain

Siemens TIA Selection Tool
for the selection, configuration and ordering of TIA products and devices

www.siemens.com/tst

The catalogs listed above and additional catalogs are available in PDF format at Siemens Industry Online Support **www.siemens.com/lowvoltage/catalogs**

Further information on low-voltage power distribution and electrical installation technology is available on the Internet at **www.siemens.com/lowvoltage**

© Siemens 2022

Get more information

www.siemens.com/lowvoltage

Published by
Siemens AG

Smart Infrastructure
Electrical Products
Siemensstraße 10
93055 Regensburg, Germany

For the U.S. published by
Siemens Industry Inc.

100 Technology Drive
Alpharetta, GA 30005
United States

PDF (E86060-K8280-A101-B5-7600)
KG 0622 1212 En
Produced in Germany
© Siemens 2022

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the Internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial security measures that may be implemented, please visit **https://www.siemens.com/industrialsecurity** .

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under **https://www.siemens.com/cert** .

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or other rights of Siemens AG, its affiliated companies or other companies whose use by third parties for their own purposes could violate the rights of the respective owner.