
CATALOG









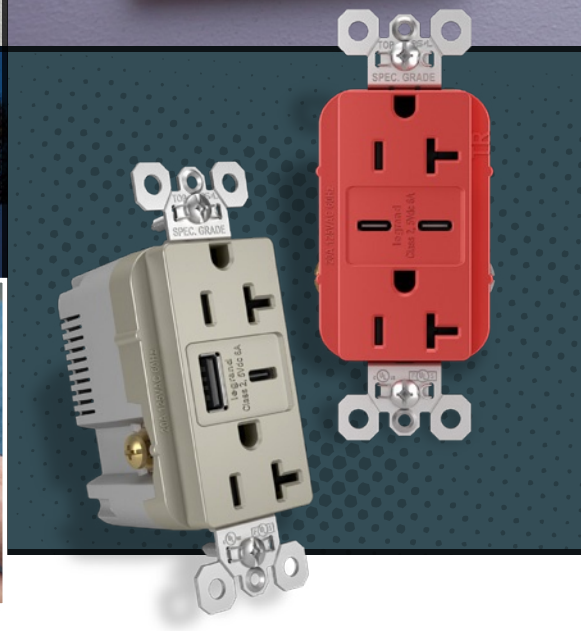

Pass & Seymour®
ELECTRICAL WIRING DEVICES


2019
2020

designed to be better.™

legrand®

A catalog for all your wiring device needs.

The Pass & Seymour® Wiring Devices and Accessories Product Guide is packed with useful information. This helpful guide works for you, whether you're a purchasing agent, distributor salesperson, electrician, or specifying engineer – as you strive to choose the best product for the job at hand.

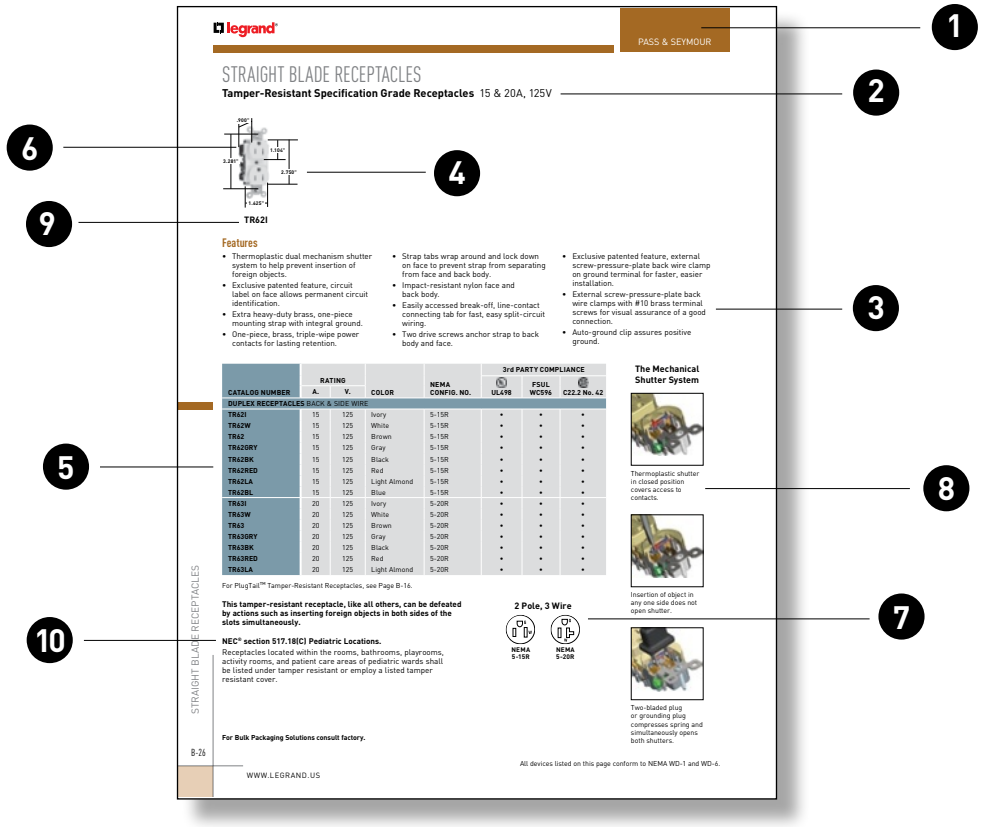

1. **Color-coded section pages** help you find products fast. Plus, product and section headings on every page.
2. **Clear, sans-serif typefaces** remain legible after scanning and photocopying.
3. **Product Features** tell how our products work for you — fast!
4. **Dimensions overlay photos and line art.** No need to look in three different spots to get a "full picture" of the product.
5. **Key information at a glance:**
   - Features/Specifications
   - Canadian models
   - NEMA ratings/configurations
   - Dimensions
   - Catalog numbers
   - 3rd Party listings
   - Amperage/Voltage
   - Application notes
6. **Silhouetted product photos** suitable for scanning and photocopying.
7. **NEMA configurations in 3 locations!** At beginning of catalog, in appropriate sections, and on pages with NEMA-applicable products.
8. **Additional information or accessory listing** for added convenience.
9. **Catalog numbers below product photos and line drawings** let you identify what you want by sight.
10. **NEC® requirements** called out near products help you keep current.

Energy-saving products will display an energy logo indicating the product reduces environmental impact and helps control energy costs.

Portions of this document are reprinted with permission from NFPA 70-1999, the National Electrical Code®, Copyright® 2017, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety. National Electrical Code® and NEC® are registered trademarks of the National Fire Protection Association, Inc., Quincy, MA 02269.

To make your job easier, Legrand has gone to great lengths to ensure the accuracy of this catalog's data and graphics. Should you discover errors, please report them to us; we will gladly correct future editions.

The data and dimensions listed in the following pages are accurate as of the publishing date. Legrand reserves the right to change the design, dimensions, materials and manufacturing techniques of the products listed without notice. Therefore, you are encouraged to verify these characteristics before specifying, ordering or installing these products.

© Copyright 2019 Legrand All Rights Reserved

Printed in USA

TABLE OF CONTENTS



SWITCHES

A

Residential	A-2
Commercial	A-14
Industrial Grade	A-19



STRAIGHT BLADE RECEPTACLES

B

Residential Receptacles	B-2
Miscellaneous Receptacles	B-11
Commercial/Industrial Grade Receptacles	B-19
Hospital Grade Receptacles	B-48
Surge Protective & Isolated Ground Receptacles	B-86
Mobile Charging Devices	B-101



GFCIs/AFCIs

C

GFCIs: Residential/Commercial	C-2
GFCIs: Hospital Grade	C-14
AFCIs/Dual Function AFCI/GFCIs	C-25



INDUSTRIAL

D


Straight Blade Plugs & Connectors	D-2
Turnlok® Locking Devices	D-18
Cam-Type Devices	D-60
Pin & Sleeve/Mechanical Interlocks	D-72
Flexcor® Wire Mesh Grips	D-105
Rubber & Watertight Devices	D-135
Switch Disconnects & Manual Motor Controllers	D-147
Cable Reels	D-171



SENSORS & DIMMERS

E

Occupancy/Vacancy Sensors & Timers	E-2
Dimmers & Fan Speed Controls	E-25

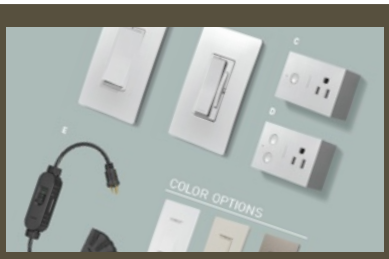

SMART LIGHTING

F

Smart Switch	F-2
Smart Tru-Universal Dimmer	F-2
Smart Plug-In Switch	F-2
Smart Plug-In Tru-Universal Dimmer	F-2
Smart Plug-In Outdoor GFCI	F-2
Smart Lighting Ordering Information	F-2

TABLE OF CONTENTS



WEATHERPROOF BOXES & COVERS G

Extra-Duty While-In-Use Covers	G-2
Cast While-In-Use Covers	G-2
Cast Weatherproof Covers	G-5
Thermoplastic Covers	G-9
Heavy Cast Aluminum Covers	G-12
Weatherproof Stainless Steel Covers	G-14
Dustproof Stainless Steel Covers	G-15
Cast Weatherproof Boxes	G-16
Weatherproof Round Boxes & Weatherproof Kits	G-20
Cluster & Blank Covers	G-21
LED Lampholders, Lighting Accessories & Swimming Pool Junction Boxes	G-22
Gaskets & Accessories	G-23
NEC® Compliance	G-24



BOXES H

Slater Plastic Boxes	H-2
Reiker Ceiling Fan & Fixture Support Products	H-22



ELECTRICAL ACCESSORIES J

Appliance Switches	J-2
Fluorescent Lampholders	J-3
Incandescent/CFL Lampholders	J-4
Household Devices	J-7
Fluorescent Starters & Wall Plate Inserts	J-10
Special Purpose Devices-Despard	J-11
Low-Voltage Switching Components	J-13
Keystone Products, Wall Plates & Frames	J-15
Frames & Wall Plates	J-16
Patch Panels, 66 Block & Patch Cords	J-17



WALL PLATES I

radiant® Screwless Wall Plates	I-2
Standard Size Wall Plates	I-5
Junior Jumbo & Jumbo Wall Plates	I-19
Custom & Engraved Wall Plates	I-23
Miscellaneous	I-31
Reference Materials	I-40



REFERENCE

Technical Resources	Section K
Index	Section L

our commitment to sustainability

BETTER PERFORMANCE, BETTER OPERATIONS, BETTER SOLUTIONS

At Legrand, our sustainability commitment translates into greater benefits and tangible value for our customers, business partners, employees and the broader community.

BETTER PERFORMANCE.

Our sustainability goals reach inside and outside Legrand. We provide building solutions to meet many building performance goals from sustainability and energy efficiency to productivity and occupant well being.

BETTER OPERATIONS.

We focus on operational excellence because we believe optimizing the way we manage energy, water and waste is not only good for the environment, it's good for business. As part of the Department of Energy's Better Building, Better Plants Challenge (BBBP) Legrand has reduced its energy intensity by over 30 percent across 14 sites in the United States in just three years.

DESIGNED FOR YOU.

Legrand is committed to sharing key tools to reduce energy intensity. Read more about our journey and download no-cost tools and resources at www.legrand.us/sustainability.

SUSTAINABILITY

MIX
Paper from responsible sources
FSC® C132124
www.fsc.org

The FSC certified paper used for the text pages of this catalog is made from 30% post-consumer recycled paper; the cover paper is made of 10% post-consumer recycled paper. Over 127,142 pounds of paper were used to produce this catalog.

By substituting recycled paper for standard paper, the following savings were realized:

WOOD USE – Post consumer content means a savings of more than 51 tons of wood.
GREENHOUSE GASES – Eliminated more than 194,800 pounds of greenhouse gases.
WATER – Saved more than 74,000 gallons of wastewater.
SOLID WASTE – 510 less pounds of solid waste was generated.*

These savings would not have been possible without the assistance of:
Catalyst Paper Company – Manufacturer of Consoweb Gloss and other quality, certified and recycled printing papers.
RRD – Printer, reduced environmental impact by using the highest practical renewable content ink.
Lindenmeyr Munroe – A leading paper broker

*Source: Environmental Paper Network Online Paper Calculator. FSC® is not responsible for the savings calculations by using this paper.



RESIDENTIAL

SMART LIGHTING FROM THE WORLD LEADER IN ELECTRICAL SWITCHES AND OUTLETS

Take comfort in the convenience of controlling your lights from any smart device to set the exact lighting you need—from anywhere.

See Section F.





AFCI and GFCI point-of-use protection.

See Section C.



MORE OPTIONS. radiant® layers on the style with these tasteful color and metallic finish options to coordinate with any decor. radiant wall plates are available in up to six-gang options. The featured product above is the radiant PADDLE SWITCH, paired with coordinating screwless wall plates, which elevate the entire collection.

Transform your living spaces with innovations from the radiant® collection.

Everyone wants a home that's a step above the ordinary. The radiant® collection of switches, outlets, dimmers, screwless wall plates, and home automation controls puts that stylish finishing touch affordably within reach. radiant gets rid of unsightly screws, delivering clean looks in a range of colors and metallic finishes. Put more modern convenience at your fingertips with these devices from the radiant collection:

- AFCI and AFCI/GFCI Receptacles
- radiant® Smart Lighting
- radiant® Wireless Charger
- USB Charging Devices
- Tru-Universal Dimmers
- Digital Timers
- Vacancy and Occupancy Sensors
- Night Light and Switch Combination Devices
- Tamper-Resistant Receptacles
- Self-Test GFCIs with SafeLock® Protection
- Screwless Wall Plates
- Multi-location Dimmers
- Metallic-Finish Wiring Devices and Wall Plates



The radiant® Wireless Charger (above) instantly provides a convenient, clutter-free charging station, perfect for clearing space on counters and nightstands. It works with Qi-enabled phones and includes two traditional outlets and a USB port to offer additional power options.

Ultra-fast USB Type-A/C Wall Chargers (right) also available.

See Section B.






NIGHT LIGHT WITH TAMPER-RESISTANT OUTLET

This seamlessly integrated night light features five adjustable brightness levels, an optional louver for greater light control, and a hidden sensor that turns light on in the dark, off in daylight.

See Section B.



COMMERCIAL

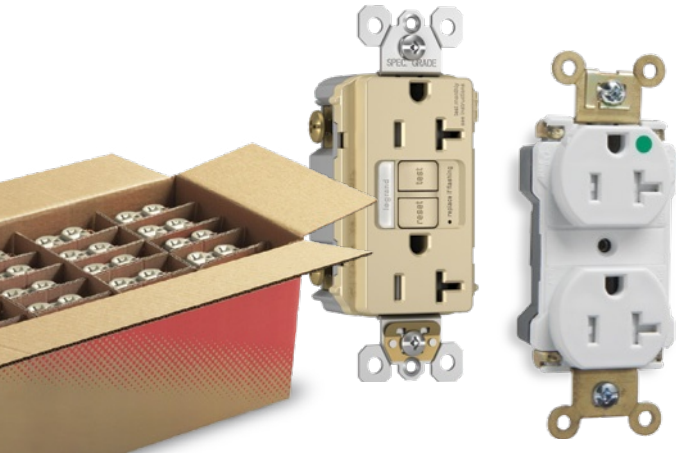

Subtract waste and add productivity with Pass & Seymour bulk solutions.

Consult factory.






Take a load off of energy bills by installing Plug Load Control receptacles.

See Section B.

Innovative solutions that **increase** productivity and safety.

Pass & Seymour Commercial devices are known for quality and reliability. With good reason, too. Easy to install and hard to break, they're the smart choice for every commercial install.

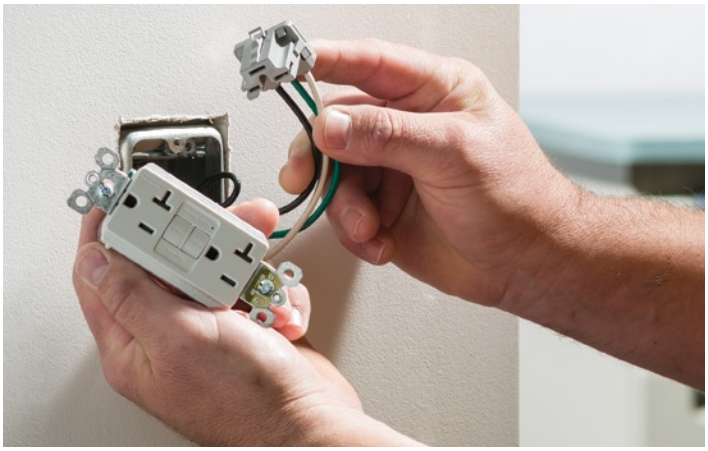

- PlugTail® Wiring Devices
- Specification Grade Switches
- Fed Spec and Hospital Grade USB Charging Devices
- Self-Test GFCIs with SafeLock® Protection
- Occupancy and Vacancy Sensors
- Surge Protective and Isolated Ground Devices
- Plug Load Controls and Receptacles
- Hospital Grade Devices
- Straight Blade Plugs & Connectors
- Clamp-Lock® Plugs & Connectors
- Titan® Dimmers
- Specification Grade Receptacles
- Fan Speed Controls
- Wall Plates



Hospital Grade Devices — solutions for every healthcare application.
See Section B.



Power-Indicator Receptacles are perfect for emergency-circuit applications.
See Section B.



ALL INDUSTRIAL



Flexcor® Wire Mesh Grips

See Section D.




Cable Reels

See Section D.



Ground Continuity Monitoring Plugs and Connectors add job site safety.

See Section D.

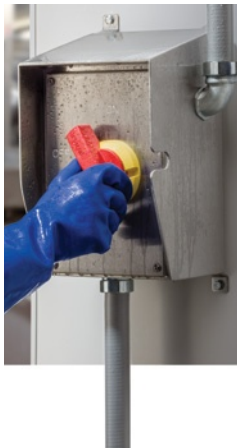

Stainless Steel Safety Switches

See Section D.


Innovative solutions that **stand up** to harsh environments.

When we offered the first fusible mechanical interlock with visible blown-fuse indication, we helped plants avoid downtime. That's typical of the feature-rich Pass & Seymour Industrial device line. These rugged, reliable workhorses can take all the wear and tear industrial facilities can dish out.

- Straight Blade Plugs, Connectors and Receptacles
- Turnlok® Plugs, Connectors, Receptacles, Flanged Inlets and Outlets
- Rubber Dust-tight and Watertight Plugs, Connectors, and Receptacles
- SteriGuard® Antimicrobial Plugs, Connectors, and Cord Drops
- Portable Outlet Boxes
- Cam-Type Devices
- Flexcor® Wire Mesh Grips
- Cable Reels
- IEC Pin and Sleeve Devices
- Surge Protective and Isolated Ground Devices
- Industrial Grade Switches
- Manual Controllers
- Fusible & Non-fusible Mechanical Interlocks
- NSF® Certified Safety Switches
- Stainless Steel Safety Switches
- Ground Continuity Monitoring Plugs & Connectors



Fusible & Non-fusible Mechanical Interlocks
See Section D.

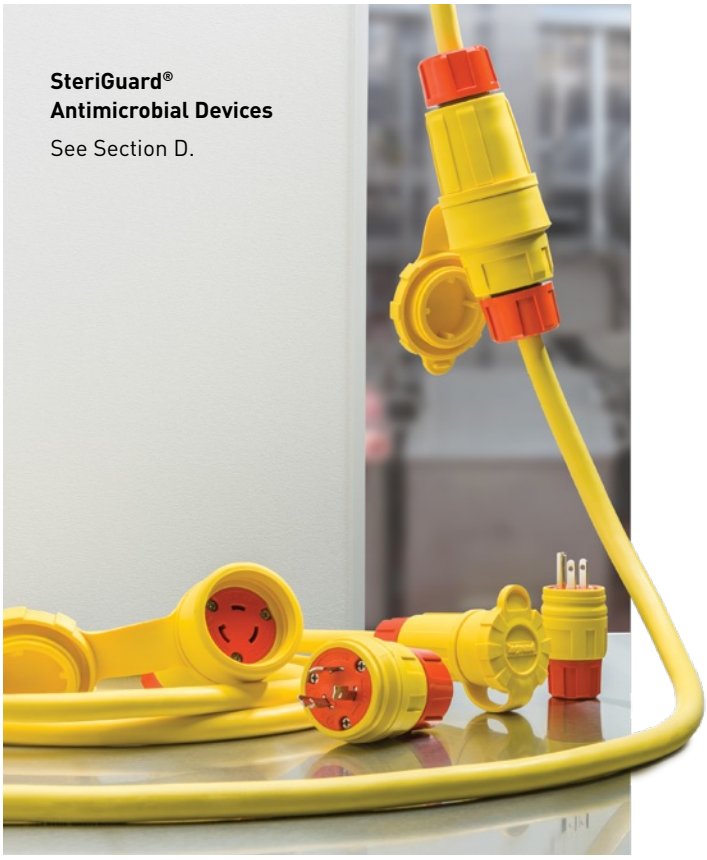

SteriGuard® Antimicrobial Devices
See Section D.

SWITCHES





RESIDENTIAL SWITCHES

Canopy Switches & Locator Switches	A-2
TRADEMASTER®	
Grounding Toggle Switches	A-3
Grounding Illuminated & Self-Grounding Toggle Switches	A-4
Combination Switches	A-5
RADIANT®	
Switches	A-7
Specification Grade Momentary & Maintained Contact Switches	A-8
Illuminated & Self-Grounding Paddle Switches	A-9
Combination Switches	A-10



COMMERCIAL SWITCHES

Hard Use Specification Grade Switches	A-14
Commercial Specification Grade Switches	A-15
Decorator Specification Grade Paddle Switches plus PlugTail®	A-16
Specification Grade Paddle Combination Switches	A-18




INDUSTRIAL GRADE SWITCHES

Industrial Extra Heavy-Duty Specification Grade Switches	A-19
PlugTail® Industrial Extra Heavy-Duty Specification Grade Switches	A-22
Manual Controllers	A-24

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Canopy Switches & Locator Switches & Shim-Lock 15A, 120 & 250VAC; 15A, 120VAC



1200, 1201



TM8LOCATORLA

CATALOG NUMBER		RATING AC	
LIGHT ON DOOR OPEN	LIGHT ON DOOR CLOSED	120VAC	250VAC
PRESSURE SENSITIVE DOOR & CANOPY SWITCHES			
1200	1201	15A	15A
INTERIORS ONLY, WITH LEADS, PLUNGER & FACE PLATE			
1205A	1206A	15A	15A

Features

- Equipped with wire leads.
- 1200 and 1201 complete with metal box and plate.
- Only 14 oz. pressure actuates switch.
- Back box cold rolled steel.
- Plate is steel with a bronze coating.

Application

In an emergency, seconds can make all the difference. Easily make a home instantly identifiable with a P&S Home Locator Switch. Just a single touch on its lower push button flashes the front outside lights continuously. The switch's LED flashes red to indicate the locator is in operation. When the locator flasher isn't in use, the switch's LED glows green for easy location in the dark.

Features

- ON/OFF switch with normal paddle operation.
- Locator function flashes the outdoor light ON and OFF signaling SOS in Morse Code.
- Green LED illuminates and differentiates switch for easy location in emergency.
- Red LED indicates the emergency function is enabled.
- Wires the same as a single pole switch.
- cULus Listed.

CATALOG NUMBER	DESCRIPTION	RATING	COLOR
HOME LOCATOR SWITCHES			
TM8LOCATORI TM8LOCATORW TM8LOCATORLA	Emergency Home Locator	500 Watts, 15A, 120VAC	Ivory White Light Almond


Helps Emergency Personnel Locate Address

Used in conjunction with your call for assistance, the P&S Home Locator Switch solves the problem of night time house identification for emergency personnel. After you have placed your call for help, simply press the lower portion of the switch and your outdoor light will flash on and off continuously, cutting response time to insure effective action.

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

TradeMaster® Grounding Toggle Switches 15A, 120VAC



663IG

Features

- Thermoplastic toggle and frame.
- Extra-long strap.
- High-impact resistant construction.
- Side wire #12 and #14 AWG; push wire #14 AWG.
- Tri-drive ground, terminal and mounting screws.
- Easy-access green hex head ground screw.
- Smooth, quiet toggle action.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE UL20	FSUL WS896	C22.2 111
SINGLE POLE TOGGLE SWITCHES GROUNDING						
660IG*	15	120	Ivory	•		•
660WG*	15	120	White	•		•
660G*	15	120	Brown	•		•
660BKG	15	120	Black	•		•
660LAG*	15	120	Light Almond	•		•
SINGLE POLE TOGGLE SWITCHES GROUNDING (WITHOUT EARS)						
660IGMH	15	120	Ivory	•		•
660WGMH	15	120	White	•		•
660GMH	15	120	Brown	•		•
NAFTA-COMPLIANT SINGLE POLE TOGGLE SWITCHES GROUNDING						
660NAIG	15	120	Ivory		•	
660NAWG	15	120	White		•	
660NAG	15	120	Brown		•	
660NABKG	15	120	Black		•	
660NALAG	15	120	Light Almond		•	
THREE-WAY TOGGLE SWITCHES GROUNDING						
663IG*	15	120	Ivory	•		•
663WG*	15	120	White	•		•
663G*	15	120	Brown	•		•
663BKG	15	120	Black	•		•
663LAG*	15	120	Light Almond	•		•
NAFTA-COMPLIANT THREE-WAY TOGGLE SWITCHES GROUNDING						
663IG	15	120	Ivory		•	
663WG	15	120	White		•	
663G	15	120	Brown		•	
663BKG	15	120	Black		•	
663LAG	15	120	Light Almond		•	
FOUR-WAY TOGGLE SWITCHES GROUNDING						
664IG	15	120	Ivory	•		•
664WG	15	120	White	•		•
664G	15	120	Brown	•		•
664BKG	15	120	Black	•		•
664LAG	15	120	Light Almond	•		•
664ICN	15	120	Ivory	•		•
664WCN	15	120	White	•		•
NAFTA-COMPLIANT FOUR-WAY TOGGLE SWITCHES GROUNDING						
664IG	15	120	Ivory		•	
664WG	15	120	White		•	
664G	15	120	Brown		•	
664BKG	15	120	Black		•	
664LAG	15	120	Light Almond		•	



660WG



664G

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.


* Available in bulk packs of 100. Please contact customer support.

NAFTA-Compliant Switches are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES


TradeMaster® Grounding Illuminated & Self-Grounding Toggle Switches 15A, 120VAC



660ISLG



663SIG



664SWG

Features

- Thermoplastic toggle and frame.
- Extra-long strap.
- High-impact resistant construction.
- Side wire #12 and #14 AWG.
- Push wire #14 AWG.
- Tri-drive ground, terminal and mounting screws.
- Easy-access green hex head ground screw.
- Smooth, quiet toggle action.
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE C22.2 111
SINGLE POLE ILLUMINATED TOGGLE SWITCHES GROUNDING (LIGHTED WHEN OFF)					
660ISLG	15	120	Ivory	•	•
660WSLG	15	120	White	•	•
660LASLG	15	120	Light Almond	•	•
SELF-GROUNDING SINGLE POLE TOGGLE SWITCHES					
660SIG	15	120	Ivory	•	•
660SWG	15	120	White	•	•
660SG	15	120	Brown	•	•
660SLAG	15	120	Light Almond	•	•
THREE-WAY ILLUMINATED TOGGLE SWITCHES GROUNDING (LIGHTED WHEN OFF)					
663ISLG	15	120	Ivory	•	•
663WSLG	15	120	White	•	•
663LASLG	15	120	Light Almond	•	•
SELF-GROUNDING THREE-WAY TOGGLE SWITCHES					
663SIG	15	120	Ivory	•	•
663SWG	15	120	White	•	•
663SG	15	120	Brown	•	•
663SLAG	15	120	Light Almond	•	•
SELF-GROUNDING FOUR-WAY TOGGLE SWITCHES					
664SIG	15	120	Ivory	•	•
664SWG	15	120	White	•	•
664SG	15	120	Brown	•	•
664SLAG	15	120	Light Almond	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


SWITCHES

TradeMaster® Combination Switches 15 & 20A, 120/277VAC; 15 & 20A, 120/125VAC; 15A, 120VAC


Features

- Easily accessible break-off for separate or common feed.
- Long-life red neon lamp in pilot light rated 1/25 Watt, 125V.
- Side wire #12 and #14 AWG.
- Two devices fit into the space of one.
- Grounding combination devices meet NEC Requirements.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.


CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE UL498
SINGLE POLE SWITCH & TAMPER-RESISTANT SINGLE RECEPTACLE SIDE WIRE, GROUNDING						
691TRI	15	120/125	Ivory	5-15R	•	•
691TRW	15	120/125	White	5-15R	•	•
691TR	15	120/125	Brown	5-15R	•	•
691TRLA	15	120/125	Light Almond	5-15R	•	•
671TRI	20	120/125	Ivory	5-20R	•	•
671TRW	20	120/125	White	5-20R	•	•
671TR	20	120/125	Brown	5-20R	•	•
671TRLA	20	120/125	Light Almond	5-20R	•	•
TWO SINGLE POLE SWITCHES SIDE WIRE, GROUNDING						
690IG	15	120/277	Ivory		•	
690WG	15	120/277	White		•	
690G	15	120/277	Brown		•	
690LAG	15	120/277	Light Almond		•	
670IG	20	120/277	Ivory		•	
670WG	20	120/277	White		•	
670G	20	120/277	Brown		•	
670LAG	20	120/277	Light Almond		•	
SINGLE POLE & THREE-WAY SWITCH SIDE WIRE, GROUNDING						
696IG	15	120/277	Ivory		•	
696WG	15	120/277	White		•	
696G	15	120/277	Brown		•	
696LAG	15	120/277	Light Almond		•	
TWO THREE-WAY SWITCHES SIDE WIRE, GROUNDING						
693IG	15	120/277	Ivory		•	
693WG	15	120/277	White		•	
693G	15	120/277	Brown		•	
693LAG	15	120/277	Light Almond		•	
SINGLE POLE SWITCH & SINGLE RECEPTACLE SIDE WIRE, GROUNDING						
691I	15	120/125	Ivory	5-15R	•	•
691W	15	120/125	White	5-15R	•	•
691	15	120/125	Brown	5-15R	•	•
691LA	15	120/125	Light Almond	5-15R	•	•
671I	20	120/125	Ivory	5-20R	•	•
671W	20	120/125	White	5-20R	•	•
671	20	120/125	Brown	5-20R	•	•
671LA	20	120/125	Light Almond	5-20R	•	•
SINGLE POLE SWITCH & PILOT LIGHT SIDE WIRE, GROUNDING						
692IG	15	120	Ivory		•	
692WG	15	120	White		•	
692G	15	120	Brown		•	
692LAG	15	120	Light Almond		•	
THREE-WAY SWITCH & PILOT LIGHT SIDE WIRE, GROUNDING						
695IG	15	120	Ivory		•	
695WG	15	120	White		•	
695G	15	120	Brown		•	
695LAG	15	120	Light Almond		•	



Combination Switch & Tamper-Resistant Receptacle



Combination Switches



Combination Switch & Pilot Light



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

TradeMaster® Combination Switches 15 & 20A, 120/277VAC; 15A, 120/125VAC; 15A, 120VAC



Paddle-Style Combination Switch



Combination Switches

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE UL498
TWO SINGLE POLE SWITCHES SIDE WIRE GROUNDING (FITS PADDLE-STYLE WALL PLATES)						
680IG	15	120/277	Ivory		•	
680WG	15	120/277	White		•	
680LAG	15	120/277	Light Almond		•	
SINGLE POLE SWITCH & SINGLE RECEPTACLE SIDE WIRE GROUNDING (FITS PADDLE-STYLE WALL PLATES)						
681I	15	120/125	Ivory	5-15R	•	•
681W	15	120/125	White	5-15R	•	•
681LA	15	120/125	Light Almond	5-15R	•	•



NEMA 5-15R

Non-Grounding


CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE UL498
TWO SINGLE POLE SWITCHES SIDE WIRE NON-GROUNDING					
690I	15	120/277	Ivory	•	
690W	15	120/277	White	•	
690	15	120/277	Brown	•	
670I	20	120/277	Ivory	•	
670W	20	120/277	White	•	
670	20	120/277	Brown	•	
SINGLE POLE & THREE-WAY SWITCH SIDE WIRE NON-GROUNDING					
696I	15	120/277	Ivory	•	
696W	15	120/277	White	•	
696	15	120/277	Brown	•	
696LA	15	120/277	Light Almond	•	
TWO THREE-WAY SWITCHES SIDE WIRE NON-GROUNDING					
693I	15	120/277	Ivory	•	
693W	15	120/277	White	•	
693	15	120/277	Brown	•	
693LA	15	120/277	Light Almond	•	
SINGLE POLE SWITCH & PILOT LIGHT SIDE WIRE NON-GROUNDING					
692I	15	120	Ivory	•	•
692W	15	120	White	•	•
692	15	120	Brown	•	•
692LA	15	120	Light Almond	•	•
THREE-WAY SWITCH & PILOT LIGHT SIDE WIRE NON-GROUNDING					
695I	15	120	Ivory	•	
695W	15	120	White	•	
695	15	120	Brown	•	
695LA	15	120	Light Almond	•	
TWO SINGLE POLE SWITCHES SIDE WIRE NON-GROUNDING					
680I	15	120/277	Ivory	•	
680W	15	120/277	White	•	
680LA	15	120/277	Light Almond	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.


SWITCHES

radiant® Switches 15A, 120/277VAC


the radiant® collection



TM870LA



TM873LA



TM874LA

Features

- Part of the radiant® collection.
- Smooth paddle action.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE c UL us	3rd PARTY COMPLIANCE C22.2 111
SINGLE POLE RADIANT® SWITCHES GROUNDING						
TM870I	15	120/277	Ivory	•		•
TM870W	15	120/277	White	•		•
TM870	15	120/277	Brown	•		•
TM870GRY	15	120/277	Gray	•		•
TM870BK	15	120/277	Black	•		•
TM870DBCC10	15	120/277	Dark Bronze	•		•
TM870LA	15	120/277	Light Almond	•		•
TM870GCC10	15	120/277	Graphite	•		•
TM870NICC10	15	120/277	Nickel	•		•
NAFTA-COMPLIANT SINGLE POLE RADIANT® SWITCHES GROUNDING						
TM870NAI	15	120	Ivory		•	
TM870NAW	15	120	White		•	
TM870NA	15	120	Brown		•	
TM870NAGRY	15	120	Gray		•	
TM870NABK	15	120	Black		•	
TM870NALA	15	120	Light Almond		•	
THREE-WAY RADIANT® SWITCHES GROUNDING						
TM873I	15	120/277	Ivory	•		•
TM873W	15	120/277	White	•		•
TM873	15	120/277	Brown	•		•
TM873GRY	15	120/277	Gray	•		•
TM873DBCC10	15	120/277	Dark Bronze	•		•
TM873BK	15	120/277	Black	•		•
TM873LA	15	120/277	Light Almond	•		•
TM873GCC10	15	120/277	Graphite	•		•
TM873NICC10	15	120/277	Nickel	•		•
NAFTA-COMPLIANT THREE-WAY RADIANT® SWITCHES GROUNDING						
TM873NAI	15	120	Ivory		•	
TM873NAW	15	120	White		•	
TM873NA	15	120	Brown		•	
TM873NAGRY	15	120	Gray		•	
TM873NABK	15	120	Black		•	
TM873NALA	15	120	Light Almond		•	
FOUR-WAY RADIANT® SWITCHES GROUNDING						
TM874I	15	120/277	Ivory	•		•
TM874W	15	120/277	White	•		•
TM874	15	120/277	Brown	•		•
TM874BK	15	120/277	Black	•		•
TM874DBCC6	15	120/277	Dark Bronze	•		•
TM874GRY	15	120/277	Gray	•		•
TM874LA	15	120/277	Light Almond	•		•
TM874NICC6	15	120/277	Nickel	•		•
NAFTA-COMPLIANT FOUR-WAY RADIANT® SWITCHES GROUNDING						
TM874I	15	120	Ivory		•	
TM874W	15	120	White		•	
TM874	15	120	Brown		•	
TM874BK	15	120	Black		•	
TM874LA	15	120	Light Almond		•	

NAFTA-Compliant Switches are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES


the radiant® collection

radiant® & Specification Grade Momentary & Maintained Contact Switches


15A, 120 & 120/277VAC



TM870STMLACC6



Momentary Contact



Maintained Contact

Features

- Part of the radiant® collection.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Smooth, quiet paddle action.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws
- ON-OFF switches conform to NEC 430-104 requirements for kitchen disposal units.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE C22.2 111
SINGLE POLE RADIANT® MOMENTARY CONTACT SWITCHES					
TM870STMWCC6	15	120/277	White	•	•
TM870STMICC6	15	120/277	Ivory	•	•
TM870STMBKCC6	15	120/277	Black	•	•
TM870STMLACC6	15	120/277	Light Almond	•	•

Features

- Unique "Up/Down" switches match the look and feel of standard switches.
- Impact-resistant face and body.
- Side and external screw-pressure-plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patent-pending split circuit tab – easily accessible, and can be reinstalled without a tool.


CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE cULus	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE UL508
SPECIFICATION GRADE DOUBLE THROW MOMENTARY CONTACT SWITCHES						
TM811DTMOI	15	120	Ivory	•		•
TM811DTMOW	15	120	White	•		•
TM811DTMOBK	15	120	Black	•		•
TM811DTMOLA	15	120	Light Almond	•		•
SPECIFICATION GRADE DOUBLE THROW MAINTAINED CONTACT SWITCHES						
TM811DTMAI	15	120	Ivory	•	•	
TM811DTMAW	15	120	White	•	•	
TM811DTMABK	15	120	Black	•	•	
TM811DTMALA	15	120	Light Almond	•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.


SWITCHES

radiant® Illuminated & Self-Grounding Paddle Switches 15A, 120 & 120/277VAC

the radiant® collection



TM870LASL



TM870SLA

Features

- Part of the radiant® collection.
- Smooth paddle action.
- White LED indicator light is centered at the top of the frame for easy detection in the dark.
- High-impact resistant thermoplastic construction.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Push wire #14 AWG.
- Narrow back body leaves more room for wires in the box.
- Extra-long, through-body strap eliminates floating installations and imperfect applications.
- Easy-access green hex head ground screw.
- Tri-drive ground, terminal and mounting screws.
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE C22.2 111
SINGLE POLE ILLUMINATED RADIANT® SWITCHES GROUNDING (LIGHTED WHEN OFF)					
TM870ISL	15	120	Ivory	•	•
TM870WSL	15	120	White	•	•
TM870LASL	15	120	Light Almond	•	•
SELF-GROUNDING SINGLE POLE RADIANT® SWITCHES					
TM870SI	15	120/277	Ivory	•	•
TM870SW	15	120/277	White	•	•
TM870S	15	120/277	Brown	•	•
TM870SBK	15	120/277	Black	•	•
TM870SLA	15	120/277	Light Almond	•	•
THREE-WAY ILLUMINATED RADIANT® SWITCHES GROUNDING (LIGHTED WHEN OFF)					
TM873ISL	15	120	Ivory	•	•
TM873WSL	15	120	White	•	•
TM873LASL	15	120	Light Almond	•	•
SELF-GROUNDING THREE-WAY RADIANT® SWITCHES					
TM873SI	15	120/277	Ivory	•	•
TM873SW	15	120/277	White	•	•
TM873S	15	120/277	Brown	•	•
TM873SBK	15	120/277	Black	•	•
TM873SLA	15	120/277	Light Almond	•	•
FOUR-WAY ILLUMINATED RADIANT® SWITCHES GROUNDING (LIGHTED WHEN OFF)					
TM874ISL	15	120	Ivory	•	•
TM874WSL	15	120	White	•	•
TM874LASL	15	120	Light Almond	•	•
SELF-GROUNDING FOUR-WAY RADIANT® SWITCHES					
TM874SI	15	120/277	Ivory	•	•
TM874SW	15	120/277	White	•	•
TM874S	15	120/277	Brown	•	•
TM874SBK	15	120/277	Black	•	•
TM874SLA	15	120/277	Light Almond	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

radiant® Combination Switches

the radiant® collection

RCD113W
radiant® Combination Switches

A. Unique "Up/Down" switches match the look and feel of standard paddle switches.

B. Easy-to-use oversized main switch for primary load.


C. Patented Snap-In Light Module (sold separately) transforms a combination switch into an illuminated switch in seconds.

D. Impact-resistant face and body.

E. Full wraparound metal strap, commercial grade with lock-in tabs.

F. All screws are tri-drive.

G. External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.

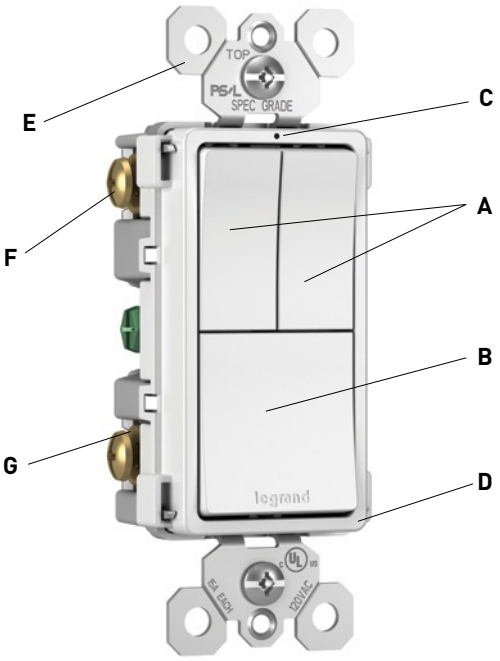

RCD113W

Features

- Module simply snaps-in for easy installation.


Snap-In Light Module:

- Lights when OFF.
- Uses energy-efficient LED light.
- LED light will not generate heat and will last, on average, 47 years.



RCDLM

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE cULus
RADIANT® LOCATOR LIGHT MODULE				
RCDLM	15	120/125	Clear	•

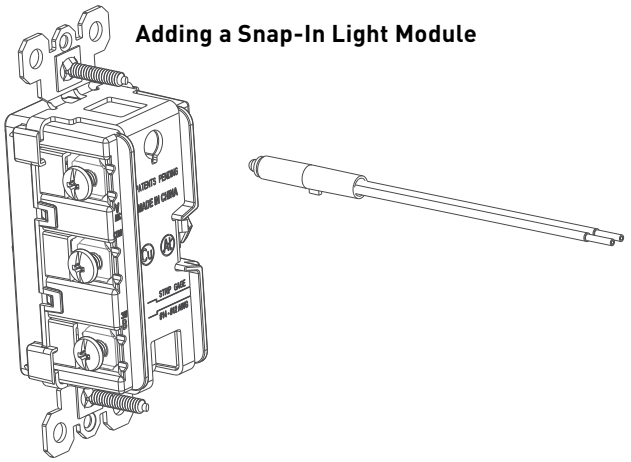


Adding a Snap-In Light Module

All devices listed on this page conform to NEMA WD-1 and WD-6.


SWITCHES

radiant® Combination Switches 15A, 120/125VAC


the radiant® collection




RCD11W



RCD33W



RCD113W



RCD38TRW

Features

- Part of the radiant® collection
- Impact-resistant face and body.
- External screw-pressure-plate back and side wired. Accepts #12 and #14 AWG.
- Full wraparound metal strap with lock-in tabs.
- Unique "Up/Down" switches match the look and feel of standard paddle switches.
- Largest breadth of 15 amp offering.
- All screws are tri-drive.
- Protects children: patented shutter system – now with black "invisi-shutters" that disappear for an invisible effect – helps prevent improper insertion of foreign objects.
- Single Pole/3-Way Switches can be wired as a single pole or 3-way switch.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE cULus
TWO SINGLE POLE SWITCHES					
RCD11I	15	120/125	Ivory	•	•
RCD11W	15	120/125	White	•	•
RCD11BK	15	120/125	Black	•	•
RCD11LA	15	120/125	Light Almond	•	•
TWO SINGLE POLE/3-WAY SWITCHES					
RCD33I	15	120/125	Ivory	•	•
RCD33W	15	120/125	White	•	•
RCD33BK	15	120/125	Black	•	•
RCD33LA	15	120/125	Light Almond	•	•
TWO SINGLE POLE SWITCHES & SINGLE POLE/3-WAY SWITCH					
RCD113I	15	120/125	Ivory	•	•
RCD113W	15	120/125	White	•	•
RCD113BK	15	120/125	Black	•	•
RCD113LA	15	120/125	Light Almond	•	•

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL20	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE cULus
SINGLE POLE/3-WAY SWITCH & TAMPER-RESISTANT SINGLE RECEPTACLE							
RCD38TRI	15	120/125	Ivory	5-15R	•	•	•
RCD38TRW	15	120/125	White	5-15R	•	•	•
RCD38TRBK	15	120/125	Black	5-15R	•	•	•
RCD38TRLA	15	120/125	Light Almond	5-15R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

radiant® USB Charger with Single Pole/3-Way Switch 15A, 120V

the radiant® collection



TM83USBW

Features


- Part of the radiant® collection.
- Charge multiple USB powered devices at the same time.
- Allow users to plug USB cables directly without AC adapters or transformer style plugs.
- Back and side wire terminals.
- Compatible with USB 2.0 and 3.0 devices.
- Accepts standard Pass & Seymour wall plates and radiant® screwless wall plates (see pages I-3 and I-4).
- Compact design.
- Meets NEC standards.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE UL1310	ETL	cULus
USB CHARGERS WITH SINGLE POLE/3-WAY SWITCH							
TM83USBICC6	15	120	Ivory	2.1 Amp		•	•
TM83USBWCC6	15	120	White	2.1 Amp		•	•
TM83USBBKCC6	15	120	Black	2.1 Amp		•	•
TM83USBLACC6	15	120	Light Almond	2.1 Amp		•	•
TM83USBNICC6	15	120	Nickel	2.1 Amp		•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

radiant® Combination Switch / Self-Test GFCI Tamper-Resistant Receptacle with SafeLock® Protection 15A, 125VAC



1597SWTTRWCC4

Features

- Part of the radiant® collection.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Thinner than competitors' GFCI Receptacles: leaves more room for wires in the box.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- Trip indicator light (red LED).
- Two back wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	SWITCH RATING A.	SWITCH RATING VAC	RECEPTACLE RATING A.	RECEPTACLE RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	UL943 C22.2 No. 144
RADIANT® COMBINATION TAMPER-RESISTANT SINGLE POLE SWITCH/GFCI									
1597SWTTRICC4	15	120	15	125	Ivory	5-15R	•	•	•
1597SWTTRWCC4	15	120	15	125	White	5-15R	•	•	•
1597SWTTRBKCC4	15	120	15	125	Black	5-15R	•	•	•
1597SWTTRLACC4	15	120	15	125	Light Almond	5-15R	•	•	•
1597SWTTRGRY	15	120	15	125	Gray	5-15R	•	•	•




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Hard Use Specification Grade Switches 15 & 20A, 120/277VAC



15 & 20 Amp



CSB15AC3W



CSB20AC1W



CSB20AC4I

Features

- One-piece brass alloy contact arm for reliable electrical performance.
- One-piece steel strap with integral ground is plated for corrsion resistance.
- High strength thermoplastic polycarbonate toggle resists breaking and chipping under heavy abuse.
- Heavy-duty toggle bumpers for smooth and quiet operation.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Rated for #14-#10 AWG copper or copper-clad wire.
- Cam designed for fast make with positive break action to minimize arcing and prolong switch life.
- Oversized silver alloy contacts for longer dependable switch life.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.
- Posted, ready-to-wire terminal screws for more productive side wire terminations.
- External back-wire pressure plates on Hard Use models make for faster, easier terminations.

Hard Use Specification Grade Back & Side Wire


CATALOG NUMBER				RATING		COLOR	3rd PARTY COMPLIANCE		
SINGLE POLE	DOUBLE POLE	THREE-WAY	FOUR-WAY	A.	VAC		UL20	FSUL WS896	C22.2 111
CSB15AC1I	CSB15AC2I	CSB15AC3I	CSB15AC4I	15	120/277	Ivory	•	•	•
CSB15AC1W	CSB15AC2W	CSB15AC3W	CSB15AC4W	15	120/277	White	•	•	•
CSB15AC1	CSB15AC2	CSB15AC3	CSB15AC4	15	120/277	Brown	•	•	•
CSB15AC1GRY	CSB15AC2GRY	CSB15AC3GRY	CSB15AC4GRY	15	120/277	Gray	•	•	•
CSB15AC1LA	CSB15AC2LA	CSB15AC3LA	CSB15AC4LA	15	120/277	Light Almond	•	•	•
CSB20AC1I	CSB20AC2I	CSB20AC3I	CSB20AC4I	20	120/277	Ivory	•	•	•
CSB20AC1W	CSB20AC2W	CSB20AC3W	CSB20AC4W	20	120/277	White	•	•	•
CSB20AC1	CSB20AC2	CSB20AC3	CSB20AC4	20	120/277	Brown	•	•	•
CSB20AC1BK		CSB20AC3BK		20	120/277	Black	•	•	•
CSB20AC1GRY	CSB20AC2GRY	CSB20AC3GRY	CSB20AC4GRY	20	120/277	Gray	•	•	•
CSB20AC1LA	CSB20AC2LA	CSB20AC3LA	CSB20AC4LA	20	120/277	Light Almond	•	•	•

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Commercial Specification Grade Switches 15 & 20A, 120/277VAC



CS15AC1W



CS15AC3W



CS20AC1W



CS20AC3W

Features

- One-piece brass alloy contact arm for reliable electrical performance.
- One-piece steel strap with integral ground is plated for corrsion resistance.
- High strength thermoplastic polycarbonate toggle resists breaking and chipping under heavy abuse.
- Heavy-duty toggle bumpers for smooth and quiet operation.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Rated for #14-#10 AWG copper or copper-clad wire.
- Cam designed for fast make with positive break action to minimize arcing and prolong switch life.
- Oversized silver alloy contacts for longer dependable switch life.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.
- Posted, ready-to-wire terminal screws for more productive side wire terminations.
- External back-wire pressure plates on Hard Use models make for faster, easier terminations.

Commercial Specification Grade Side Wire

CATALOG NUMBER		RATING			3rd PARTY COMPLIANCE		
SINGLE POLE	THREE-WAY	A.	VAC	COLOR	UL20	FSUL WS896	C22.2 111
CS15AC1I	CS15AC3I	15	120/277	Ivory	•	•	•
CS15AC1W	CS15AC3W	15	120/277	White	•	•	•
CS15AC1	CS15AC3	15	120/277	Brown	•	•	•
CS15AC1GRY	CS15AC3GRY	15	120/277	Gray	•	•	•
CS15AC1BK	CS15AC3BK	15	120/277	Black	•	•	•
CS15AC1LA	CS15AC3LA	15	120/277	Light Almond	•	•	•
CS20AC1I	CS20AC3I	20	120/277	Ivory	•	•	•
CS20AC1W	CS20AC3W	20	120/277	White	•	•	•
CS20AC1	CS20AC3	20	120/277	Brown	•	•	•
CS20AC1GRY	CS20AC3GRY	20	120/277	Gray	•	•	•
CS20AC1LA	CS20AC3LA	20	120/277	Light Almond	•	•	•


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


SWITCHES

PlugTail® Decorator Specification Grade Switches

PT2626W
PlugTail® Switches

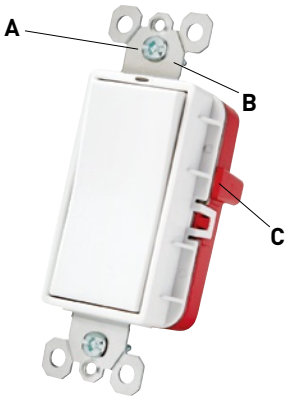

PT2626W

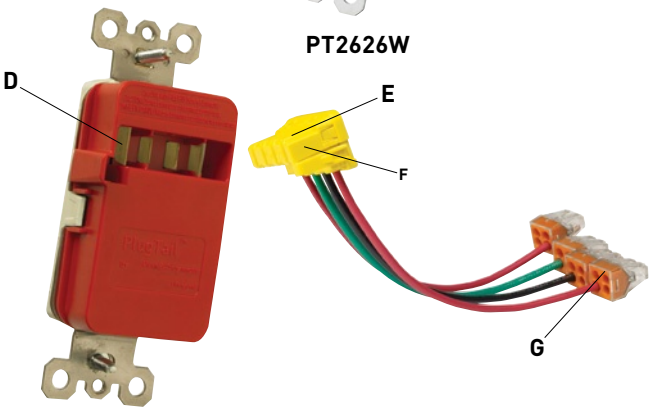

A. **Auto-ground clip** assures positive ground.

B. **Heavy-gauge steel strap** for superior strength.

C. **No exposed terminals** create a finger-safe application before, during, and after installation.


D. **Built-in connector** features large brass terminal blades to ensure consistent, reliable electrical connections.

E. **Large brass contacts** snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.


F. **Polycarbonate connector housing** secures terminations and conductors in a UL Listed, finger-safe housing.

G. **WAGO push-in connectors** are available to further speed up installation.

Shallow design for easier installation.



PTS6STR3
PTS6STR4



PTS6STR3BP
PTS6STR4BP

PlugTail® Connectors

CATALOG NUMBER	WIRE TYPE	WIRE LENGTH	WIRE COLORS
PLUGTAIL CONNECTORS FOR SINGLE POLE SWITCHES			
PTS6STR3	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277	3 Wire Solid	6"	Green, Brown, Brown
PLUGTAIL CONNECTORS FOR THREE-WAY SWITCHES			
PTS6STR4	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277	4 Wire Solid	6"	Green, Brown, Yellow, Yellow
PLUGTAIL CONNECTORS FOR SINGLE POLE SWITCHES WITH WAGO CONNECTORS			
PTS6STR3BP	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3BP	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277BP	3 Wire Stranded	6"	Green, Brown, Brown
PLUGTAIL CONNECTORS FOR THREE-WAY SWITCHES WITH WAGO CONNECTORS			
PTS6STR4BP	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4BP	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277BP	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow

All PTS Connectors are 120/277VAC






PTJ5

CATALOG NUMBER	DESCRIPTION
PLUGTAIL JUMPER	
PTJ5	PlugTail Cover for Rough In, 5-pack


All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES


Decorator Specification Grade Paddle Switches 15 & 20A, 120/277 & 347VAC; 20A, 120VAC



2601




2625, 2626, 2629



2601347



PT2601W



PT2603W

Features

- Impact-resistant polycarbonate back body and frame.
- Cushioned thermoplastic paddle assures smooth, quiet long-term operation.
- Unique single rocking butterfly contact provides long-term consistent performance with significantly fewer moving parts.
- Internal screw-pressure-plate back and side wire capability for easy installation with #14 - #10 AWG stranded or solid copper/copper clad wire. Terminals made of high conductivity brass and serrated for maximum wire gripping.
- Silver alloy contacts integrally formed to the butterfly actuator assures reliable performance.
- Integral auto-ground clip for posivitve ground to metal boxes.
- Tri-drive ground, terminal and mounting screws. All terminal screws backed out, ready-to-install.

CATALOG NUMBER				PLUGTAIL CATALOG NUMBER		RATING			3rd PARTY COMPLIANCE	
SINGLE POLE	DOUBLE POLE	THREE-WAY	FOUR-WAY	SINGLE POLE	THREE-WAY	A.	VAC	COLOR	UL20	C22.2 111
SPECIFICATION GRADE PADDLE SWITCHES BACK & SIDE WIRE										
2601I		2603I	2604I	PT2601I	PT2603I	15	120/277	Ivory	•	•
2601W		2603W	2604W	PT2601W	PT2603W	15	120/277	White	•	•
				PT2601	PT2603	15	120/277	Brown	•	•
2601GRY		2603GRY		PT2601GRY	PT2603GRY	15	120/277	Gray	•	•
2601BK		2603BK		PT2601BK	PT2603BK	15	120/277	Black	•	•
2601LA		2603LA	2604LA	PT2601LA	PT2603LA	15	120/277	Light Almond	•	•
2621I	2622I	2623I	2624I	PT2621I	PT2623I	20	120/277	Ivory	•	•
2621W	2622W	2623W	2624W	PT2621W	PT2623W	20	120/277	White	•	•
2621	2622	2623	2624	PT2621	PT2623	20	120/277	Brown	•	•
2621GRY	2622GRY	2623GRY	2624GRY	PT2621GRY	PT2623GRY	20	120/277	Gray	•	•
2621BK	2622BK	2623BK	2624BK	PT2621BK	PT2623BK	20	120/277	Black	•	•
2621RED		2623RED	2624RED	PT2621RED	PT2623RED	20	120/277	Red	•	•
2621LA	2622LA	2623LA	2624LA	PT2621LA	PT2623LA	20	120/277	Light Almond	•	•
ILLUMINATED PADDLE SWITCHES (LIGHTED WHEN OFF) BACK & SIDE WIRE										
2625I		2626I	2628I	PT2625I	PT2626I	20	120	Ivory	•	•
2625W		2626W	2628W	PT2625W	PT2626W	20	120	White	•	•
2625						20	120	Brown	•	•
2625LA		2626LA	2628LA			20	120	Light Almond	•	•
PILOT LIGHTED PADDLE SWITCHES (LIGHTED WHEN ON) BACK & SIDE WIRE										
2629I						20	120	Ivory	•	•
2629W						20	120	White	•	•
2629LA						20	120	Light Almond	•	•
2629BK						20	120	Black	•	•

For Bulk Packaging Solutions consult factory.


CATALOG NUMBER			RATING			3rd PARTY COMPLIANCE	
SINGLE POLE	THREE-WAY	FOUR-WAY	A.	VAC	COLOR	UL20	C22.2 111
SPECIFICATION GRADE PADDLE SWITCHES BACK & SIDE WIRE							
2601347I	2603347I		15	347	Ivory	•	•
2601347W	2603347W		15	347	White	•	•
2621347I	2623347I	2624347I	20	347	Ivory	•	•
2621347W	2623347W	2624347W	20	347	White	•	•
2621347GRY			20	347	Gray	•	•
2621347BK			20	347	Black	•	•
2621347RED	2623347RED		20	347	Red	•	•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Specification Grade Paddle Combination Switches 20A, 277VAC



15 & 20 Amp

Features

- Unique "Up/Down" switches match the look and feel of standard paddle switches.
- Impact-resistant face and body.
- Side and external screw pressure plate back wire accepts #12 and #14 AWG.
- All screws are tri-drive.
- Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.
- Patented split circuit tab – easily accessible, and can be reinstalled without a tool.

CATALOG NUMBER	RATING		COLOR	3rd PARTY COMPLIANCE	
	A.	VAC		cULus	UL20
TWO SINGLE POLE SWITCHES					
PS81120I	20	277	Ivory	•	•
PS81120W	20	277	White	•	•
PS81120LA	20	277	Light Almond	•	•
THREE SINGLE POLE SWITCHES					
PS811120I	20	277	Ivory	•	•
PS811120W	20	277	White	•	•
PS811120LA	20	277	Light Almond	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Industrial Extra Heavy-Duty Specification Grade Switches

PS20AC1W
Industrial EHD Specification Grade Switches

A. One-piece nickel-plated steel strap with integral ground.

B. Auto-ground clip assures positive ground.

C. Shallow design for easier installation.

D. Glass-reinforced nylon back body for superior durability and strength.


E. Locking support provides resistance to face and back body separation.

F. Side and external screw-pressure-plate back wire with #14 – #10 AWG copper or copper-clad wire.

G. Grounding terminal is standard with screw-pressure-plate back wire.

H. One-piece toggle molded from chemical-, impact- and heat-resistant thermoplastic.

Cam control and spring actuator for positive makes and breaks.

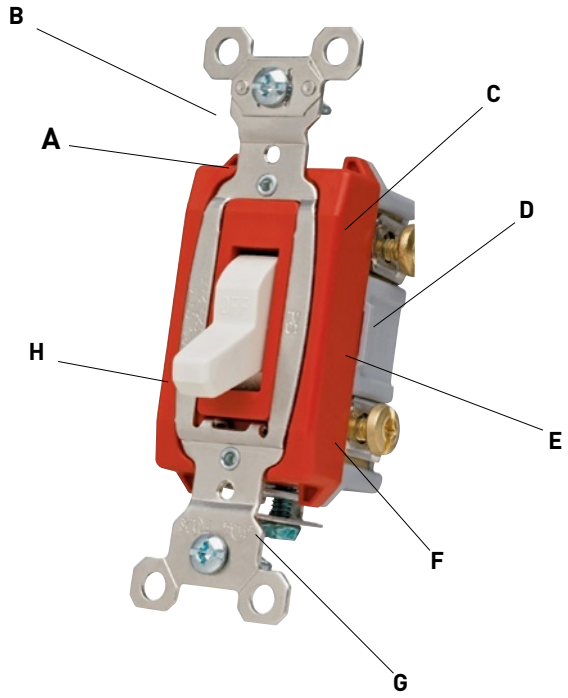

PS20AC1W


Features

- **Heavy-duty, brass alloy, one-piece contact arm** virtually eliminates contact bounce
- **Oversized silver alloy contacts** for long life and better heat dissipation.
- **Heavy-duty bumpers** for quiet, smooth operation.


All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES


Industrial Extra Heavy-Duty Specification Grade Switches 15, 20 & 30A, 120, 277 & 120/277VAC



15 & 20 Amp*




15 & 20 Amp Lighted & Pilot Lighted*



Locking*
*30AC series is 1.437" wide

500K
Fits current Switches

799K
Fits Switches manufactured before 1983



Lock Switch Replacement Keys
(One key furnished with each switch)

Features

- Heavy-gauge one-piece copper alloy contact arm virtually eliminates contact bounce.
- Cam controls fast make and positive break to minimize arcing.
- Heavy-duty bumper pads for quiet operation.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Oversized silver alloy contacts for long life and better heat dissipation.
- Grounding terminal is standard.
- Shallow design for ease of installation.
- Nickel-plated steel strap with integral ground.
- Auto-ground clip assures postive ground.
- One-piece toggle molded from chemical-, impact- and heat-resistant thermoplastic.

CATALOG NUMBER				RATING			3rd PARTY COMPLIANCE		
SINGLE POLE	DOUBLE POLE	THREE-WAY	FOUR-WAY	A.	VAC	COLOR	UL20	FSUL WS896	C22.2 111
TOGGLE SWITCHES BACK & SIDE WIRE									
PS15AC1I	PS15AC2I	PS15AC3I	PS15AC4I	15	120/277	Ivory	•	•	•
PS15AC1W	PS15AC2W	PS15AC3W	PS15AC4W	15	120/277	White	•	•	•
PS15AC1	PS15AC2	PS15AC3	PS15AC4	15	120/277	Brown	•	•	•
PS15AC1GRY	PS15AC2GRY	PS15AC3GRY	PS15AC4GRY	15	120/277	Gray	•	•	•
PS15AC1LA	PS15AC2LA	PS15AC3LA	PS15AC4LA	15	120/277	Light Almond	•	•	•
PS20AC1I	PS20AC2I	PS20AC3I	PS20AC4I	20	120/277	Ivory	•	•	•
PS20AC1W	PS20AC2W	PS20AC3W	PS20AC4W	20	120/277	White	•	•	•
PS20AC1	PS20AC2	PS20AC3	PS20AC4	20	120/277	Brown	•	•	•
PS20AC1GRY	PS20AC2GRY	PS20AC3GRY	PS20AC4GRY	20	120/277	Gray	•	•	•
PS20AC1BK	PS20AC2BK	PS20AC3BK	PS20AC4BK	20	120/277	Black	•	•	•
PS20AC1GN				20	120/277	Green	•	•	•
PS20AC1RED	PS20AC2RED	PS20AC3RED	PS20AC4RED	20	120/277	Red	•	•	•
PS20AC1LA	PS20AC2LA	PS20AC3LA	PS20AC4LA	20	120/277	Light Almond	•	•	•
PS30AC1I	PS30AC2I	PS30AC3I		30	120/277	Ivory	•	•	•
PS30AC1W	PS30AC2W			30	120/277	White	•	•	•
PS30AC1	PS30AC2	PS30AC3		30	120/277	Brown	•	•	•
LIGHTED TOGGLE SWITCHES (LIGHTED WHEN OFF) BACK & SIDE WIRE									
PS15AC1CSL		PS15AC3CSL		15	120/277	Clear	•	•	•
PS15AC1ISL		PS15AC3ISL		15	120/277	Ivory	•	•	•
PS15AC1WSL		PS15AC3WSL		15	120/277	White	•	•	•
PS20AC1CSL		PS20AC3CSL		20	120/277	Clear	•	•	•
PS20AC1ISL		PS20AC3ISL		20	120/277	Ivory	•	•	•
PS20AC1WSL		PS20AC3WSL		20	120/277	White	•	•	•
PS20AC1LASL		PS20AC3LASL		20	120/277	Light Almond	•	•	•
PILOT LIGHTED SWITCHES (LIGHTED WHEN ON) BACK & SIDE WIRE									
PS15AC1CPL		PS15AC3CPL		15	120	Clear	•	•	•
PS15AC1RPL		PS15AC3RPL		15	120	Red	•	•	•
PS20AC1CPL		PS20AC3CPL		20	120	Clear	•	•	•
PS20AC1CPL7				20	277	Clear	•	•	•
PS20AC1RPL		PS20AC3RPL		20	120	Red	•	•	•
PS20AC1RPL7		PS20AC3RPL7		20	277	Red	•	•	•
	PS20AC2CPL			20	120/277	Clear	•	•	•
	PS20AC2RPL			20	120/277	Red	•	•	•
PS30AC1RPL		PS30AC3RPL		30	120	Red	•	•	•
	PS30AC2RPL			30	120/277	Red	•	•	•
LOCK SWITCHES (KEY CAN BE REMOVED IN BOTH POSITIONS) BACK & SIDE WIRE									
PS15AC1L		PS15AC3L		15	120/277	Gray	•	•	•
PS20AC1IL	PS20AC2IL	PS20AC3IL	PS20AC4IL	20	120/277	Ivory	•	•	•
PS20AC1WL	PS20AC2WL	PS20AC3WL	PS20AC4WL	20	120/277	White	•	•	•
PS20AC1L	PS20AC2L	PS20AC3L	PS20AC4L	20	120/277	Gray	•	•	•
PS20AC1B	PS20AC2BKL	PS20AC3BKL	PS20AC4BKL	20	120/277	Black	•	•	•
PS20AC1REDL		PS20AC3REDL	PS20AC4REDL	20	120/277	Red	•	•	•
PS20AC1LAL	PS20AC2LAL	PS20AC3LAL	PS20AC4LAL	20	120/277	Light Almond	•	•	•
PS20AC1BKL				20	120/277	Black	•	•	•
SECURITY SWITCHES BACK & SIDE WIRE									
PS20AC1KL	PS20AC2KL	PS20AC3KL	PS20AC4KL	20	120/277		•	•	•


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Industrial Extra Heavy-Duty Specification Grade & Security Switches

15 & 20A, 347VAC; 20A, 120/277VAC



15 & 20 Amp
Canadian 347VAC

Features

- External screw-pressure-plate back and side wired. Accepts #14 – #10 AWG copper or copper-clad conductors.
- Heavy-gauge one-piece copper alloy contact arm virtually eliminates contact bounce.
- Cam controls fast make and positive break to minimize arcing.
- Heavy-duty bumper pads for quiet operation.
- High strength thermoplastic polycarbonate toggle.
- Back body made of glass-reinforced nylon.
- Locking support provides resistance to face and back body separation.
- Oversized silver alloy contacts for long life and better heat dissipation.
- Grounding terminal is standard.
- Shallow design for ease of installation.
- Nickel-plated steel strap with integral ground.
- Auto-ground clip assures positive ground.

CATALOG NUMBER		RATING			3rd PARTY COMPLIANCE
SINGLE POLE	THREE-WAY	A.	VAC	COLOR	C22.2 111
347VAC TOGGLE SWITCHES BACK & SIDE WIRE					
PS371510I	PS371530I	15	347	Ivory	•
PS371510W	PS371530W	15	347	White	•
PS371510	PS371530	15	347	Brown	•
PS371510GRY	PS371530GRY	15	347	Gray	•
PS371510BK	PS371530BK	15	347	Black	•
PS371510RED	PS371530RED	15	347	Red	•
PS372010I	PS372030I	20	347	Ivory	•
PS372010W	PS372030W	20	347	White	•
PS372010	PS372030	20	347	Brown	•
PS372010GRY	PS372030GRY	20	347	Gray	•
PS372010BK		20	347	Black	•
PS372010RED	PS372030RED	20	347	Red	•
PS372010LA	PS372030LA	20	347	Light Almond	•
PS372010L	PS372030L	20	347	Gray, Locking	•


Features

- Back and side wired. Accepts #14 – #10 AWG.
- Operated by cam lock for maximum security in critical areas.
- Recommended for tamper-proof installation in schools, public housing, trailer parks, freight yards, etc.
- Uses same key as Cat. #4600 cast enclosure.
- Key can be removed in both positions.

CATALOG NUMBER				RATING		3rd PARTY COMPLIANCE		
SINGLE POLE	DOUBLE POLE	THREE-WAY	FOUR-WAY	A.	VAC	UL20	FSUL WS896	C22.255
SECURITY SWITCHES BACK & SIDE WIRE								
PS372010KL				20	347	•		•

Denotes Canadian catalog number. All Canadian products have Combination Slotted/Robertson Head Brass Screws.

Stainless Steel Plate for PS20ACKL Switches Single Gang – SS717, Double Gang – SS727.
For custom combinations specify opening Style No. 302.
Catalog Number 4609 Security Switch Replacement Keys for PS20ACKL Switches (2 keys furnished with each switch).



Security Switch

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

PlugTail® Industrial Extra-Heavy Duty Spec Grade Toggle Switches

PT20AC1W
PlugTail® Specification Grade Toggle Switches

A. Auto-ground clip assures positive ground.

B. One-piece nickel-plated mounting strap for superior corrosion resistance.

C. No exposed terminals create a finger-safe application before, during and after installation.

D. Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

E. Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.

F. Polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.


G. Pre-stripped connector leads fasten to conductors, easier than standard pigtails.

H. Glass-reinforced nylon back body for durability and strength.

I. One-piece toggle molded from chemical-, impact- and heat-resistant thermoplastic.

Heavy-duty bumpers for quiet, smooth operation.

Shallow design for easier installation.

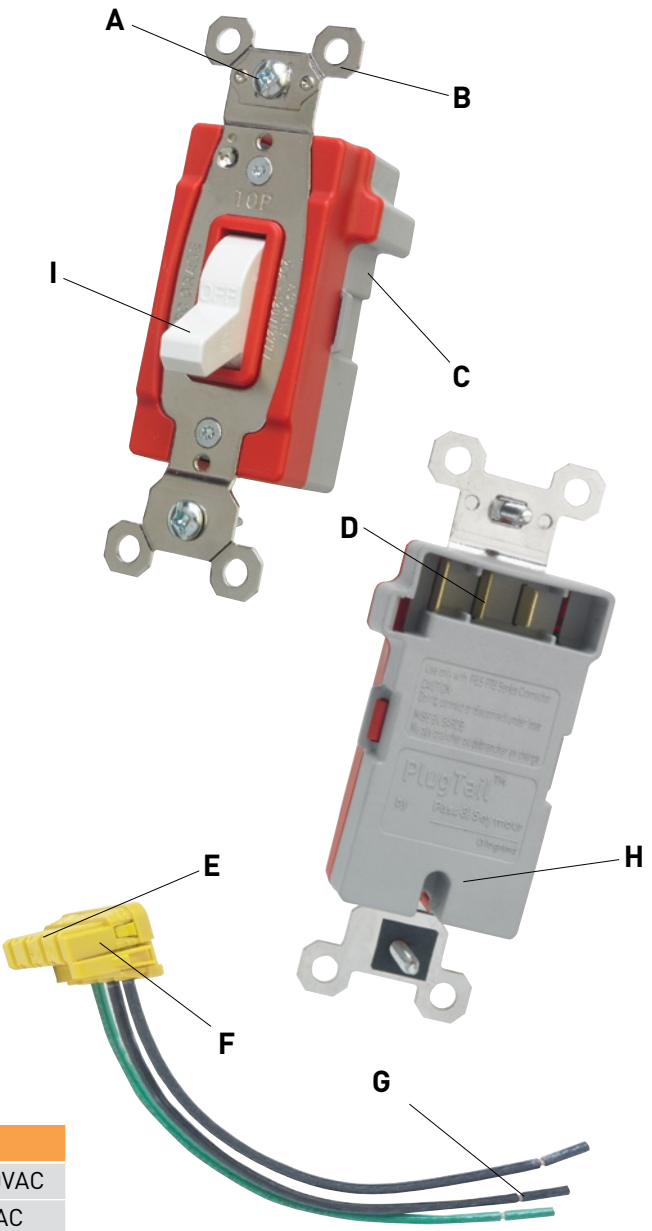


HP CONVERSION TABLE – SWITCHES	
15 Amp	1/2 Horsepower at 120VAC; 2 Horsepower at 240VAC
20 Amp	1 Horsepower at 120VAC; 2 Horsepower at 240VAC
30 Amp	2 Horsepower at 120VAC; 2 Horsepower at 240VAC

Note: HP Conversions apply to all specification grade switches.

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

PlugTail® Industrial Extra-Heavy Duty Spec Grade Switches 15 & 20A, 120/277VAC



PT20AC1W





PTS6STR3 PTS6STR4





PTJ5

CATALOG NUMBER		RATING			3rd PARTY COMPLIANCE		
SINGLE POLE	THREE-WAY	A.	VAC	COLOR	cULus	FSUL WS896	SCC C22.2 111
TOGGLE SWITCHES							
PT15AC1W	PT15AC3W	15	120/277	White	•	•	•
PT15AC1RED	PT15AC3RED	15	120/277	Red	•	•	•
PT15AC1LA	PT15AC3LA	15	120/277	Light Almond	•	•	•
PT15AC1BK		15	120/277	Black	•	•	•
PT20AC1I	PT20AC3I	20	120/277	Ivory	•	•	•
PT20AC1W	PT20AC3W	20	120/277	White	•	•	•
PT20AC1	PT20AC3	20	120/277	Brown	•	•	•
PT20AC1BK	PT20AC3BK	20	120/277	Black	•	•	•
PT20AC1GRY	PT20AC3GRY	20	120/277	Gray	•	•	•
PT20AC1RED	PT20AC3RED	20	120/277	Red	•	•	•
PT20AC1LA	PT20AC3LA	20	120/277	Light Almond	•	•	•
PT15AC1BK		20	120/277	Black	•	•	•
ILLUMINATED TOGGLE SWITCHES							
PT15AC1WSL	PT15AC3WSL	15	120/277	White	•	•	•
PT20AC1CSL	PT20AC3CSL	20	120/277	Clear	•	•	•
PT20AC1ISL	PT20AC3ISL	20	120/277	Ivory	•	•	•
PT20AC1WSL	PT20AC3WSL	20	120/277	White	•	•	•

CATALOG NUMBER	WIRE TYPE	WIRE LENGTH	WIRE COLORS
PLUGTAIL CONNECTORS FOR SINGLE POLE SWITCHES 120/277VAC			
PTS6STR3	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277	3 Wire Stranded	6"	Green, Brown, Brown
PTS6SOL3277	3 Wire Solid	6"	Green, Brown, Brown
PLUGTAIL CONNECTORS FOR THREE-WAY SWITCHES 120/277VAC			
PTS6STR4	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow
PTS6SOL4277	4 Wire Solid	6"	Green, Brown, Yellow, Yellow
PLUGTAIL CONNECTORS FOR SINGLE POLE SWITCHES WITH WAGO CONNECTORS			
PTS6STR3BP	3 Wire Stranded	6"	Green, Black, Black
PTS6SOL3BP	3 Wire Solid	6"	Green, Black, Black
PTS6STR3277BP	3 Wire Stranded	6"	Green, Brown, Brown
PLUGTAIL CONNECTORS FOR THREE-WAY SWITCHES WITH WAGO CONNECTORS			
PTS6STR4BP	4 Wire Stranded	6"	Green, Red, Red, Black
PTS6SOL4BP	4 Wire Solid	6"	Green, Red, Red, Black
PTS6STR4277BP	4 Wire Stranded	6"	Green, Brown, Yellow, Yellow

CATALOG NUMBER	DESCRIPTION
PLUGTAIL JUMPERS	
PTJ5	PlugTail Cover for Rough In, 5-pack


All models made exclusively of chemical-, heat- and impact-resistant thermoplastics.

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Manual Controllers

7803MD
Manual Controller

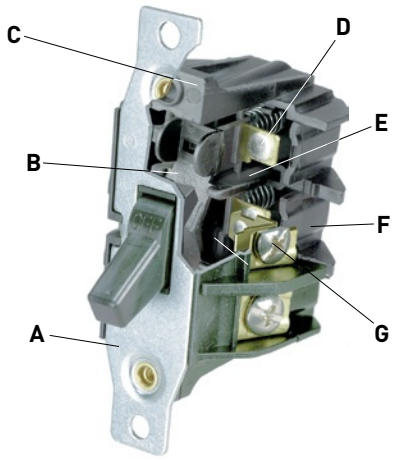

A. Heavy-duty, zinc-plated strap resists corrosion; two rolled-brass rivets secure the strap to the housing to avoid field tampering.

B. Two-point contact arm design reduces overall unit size; provides more enclosure space.

C. Thermoplastic housing resists cracking; withstands impacts.

D. Two oversized silver alloy contacts withstand years of use; improve heat dissipation by distributing arc energy.

E. One-piece contact carrier constructed of glass-reinforced thermoplastic ensures long-lasting "make and break" performance.

F. Exclusive, ready-to-wire external screw-pressure-plate back and side wire capability for easy installation with solid or stranded wire.

G. Oversized #10 terminal screws increase contact with wire and increase torque limit. Angled screw heads for easier access.

NEMA Type Enclosures

Motor control switches can be sold with, or in some instances, even mounted into various types of NEMA Type Enclosures, such as those listed here.

NEMA Type 1 Enclosures – Intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt in locations where unusual service conditions do not exist.

NEMA Type 7 Enclosures – Intended for indoor use in locations classified as Class 1, Group A, B, C, or D, as defined in the National Electrical Code. They shall be capable of withstanding the pressures resulting from an internal explosion of specified gases, and contain such an explosion sufficient that an explosive gas-air mixture existing in the atmosphere surrounding the enclosure will not be ignited. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting explosive gas-air mixtures in the surrounding atmosphere. Enclosures shall meet explosion, hydrostatic, and temperature design tests.

NEMA Type 3R Enclosures – Intended for outdoor use primarily to provide a degree of protection against rain and sleet; and to be undamaged by the formation of ice on the enclosure. They are not intended to provide protection against conditions such as internal condensation, or internal icing.


NEMA Type 9 Enclosures – Intended for indoor use in locations classified as Class II, Groups E, F, or G, as defined in the National Electrical Code. They shall be capable of preventing the entrance of dust. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting or discoloring dust on the enclosure or igniting dust-air mixtures in the surrounding atmosphere. Enclosures shall meet dust penetration and temperature design tests, and aging of gaskets (if used).

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Manual Controllers


30A, 1ø & 3ø




7802MD, 7803MD



7812PMD, 7813PMD
(in NEMA Type 1 Enclosure)



7812EX, 7813EX
(in NEMA Type 7 & 9 Enclosures)



7832MD, 7833MD
(in NEMA Type 3R Enclosure)

Features – 7802MD & 7803MD


- High horsepower rating of 20HP
- Compact design.
- Gull-wing shaped brass terminal pressure clamps.
- Constructed of glass-reinforced thermoplastic.
- Two-point contact arms.
- One-piece contact carrier.
- UL508 and cULus Listing of individual device and assembled device within enclosure.
- Heavy-duty zinc-plated steel strap.
- Two brass rivets secure strap to housing.
- External screw-pressure-plate back and side wire terminal screws unstaked for use with ring terminals.
- Oversized silver alloy contacts.
- 2-3/4" hubs (7812EX and 7813EX).
- 2-1/2" knockouts on back and 2-1/2"-3/4" knockouts on top and bottom (7812PMD, 7813PMD, 7806P).
- 2-1/2" knockouts on bottom and back (7832MD and 7833MD).
- Slotted opening on enclosures allows for lock-out, tag-out functionality.

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING V.	RATING HP	RATING VAC
DOUBLE POLE, SINGLE PHASE					
7802MD	Double Pole, Single Phase AC Manual Motor Controller (No overload protection), See Footnote 1	General Use 30	600 max.	2 3 7.5 10	120 240 480 600
7812PMD	7802MD in a NEMA 1 Enclosure, See Footnote 1	Same as 7802MD			
7812EX	7802MD in a NEMA 7 and 9 Enclosure for Hazardous Locations Class I - Groups C, D; Class II - Groups E, F, G	Same as 7802MD			
7832MD	7802MD in a NEMA 3R Enclosure, See Footnote 1	Same as 7802MD			
THREE POLE, THREE PHASE					
7803MD	Three Pole, Three Phase AC Manual Motor Controller (No overload protection), See Footnote 1	General Use 30	600 max.	3 7.5 10 20	120 240 480 600
7803W	7803MD in a NEMA 1 Enclosure, White, See Footnote 1	Same as 7803MD			
7813PMD	7803MD in a NEMA 1 Enclosure, See Footnote 1	Same as 7803MD			
7813EX	7803MD in a NEMA 7 and 9 Enclosure for Hazardous Locations Class I - Groups C, D; Class II - Groups E, F, G	Same as 7803MD			
7833MD	7803MD in a NEMA 3R Enclosure, See Footnote 1	Same as 7803MD			
7806P	NEMA 1 Black Nylon Enclosure with 1/2" and 3/4" knockouts at each end.				
7801P	Handle Locking Guard has opening for padlock to secure control in either ON or OFF position.				
7830	NEMA 3R Aluminum Enclosure.				

All Industrial Control Equipment is suitable for use in a circuit capable of delivering not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote 1. Suitable as Motor Disconnect – 10KA @ 600VAC, 30A max. Class J Fuse.

CATALOG NO.	PHASE	POLE
7802MD or 7842MD	1	2
7803MD or 7843MD	3	3

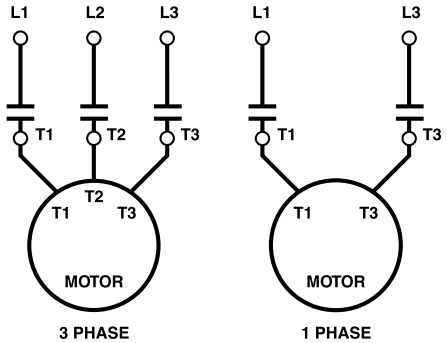

RATINGS

RESISTANCE		
7802MD / 7803MD	30 AMP	600 VAC MAX.
7842MD / 7843MD	40 AMP	600 VAC MAX.

MANUAL MOTOR CONTROLLER				
VAC	30A		40A	
	1 PHASE HP	3 PHASE HP	1 PHASE HP	3 PHASE HP
120	2	3	2	3
240	3	7.5	5	7.5
480	7.5	10	10	15
600	10	20	15	20

USE 60 / 75°C WIRING
TORQUE TERMINAL SCREWS TO 16 IN. LBS.



NO ALUMINUM




DO NOT REMOVE SCREWS FROM 30A DEVICES

UL Listed. CSA Certified. All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Manual Controllers 40A, 1ø & 3ø



7842MD, 7843MD

Features – 7842MD & 7843MD


- High horsepower rating of 20HP
- Compact design.
- Gull-wing shaped brass terminal pressure clamps.
- Constructed of glass-reinforced thermoplastic.
- Two-point contact arms.
- One-piece contact carrier.
- Heavy-duty yellow chromate plated steel strap.
- Two brass rivets secure strap to housing.
- External screw-pressure-plate back and side wire terminal screws unstaked for use with ring terminals.
- Oversized silver alloy contacts.
- UL508 and cULus Listing of individual device and assembled device within enclosure.

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING VAC	RATING HP	RATING VAC
DOUBLE POLE, SINGLE PHASE					
7842MD	Double Pole, Single Phase AC Manual Motor Controller (No overload protection), See Footnote 2	40	600 max.	2 5 10 15	120 240 480 600
THREE POLE, THREE PHASE					
7843MD	Three Pole, Three Phase AC Manual Motor Controller (No overload protection), See Footnote 2	40	600 max.	2 7.5 15 20	120 240 480 600

All Industrial Control Equipment is suitable for use in a circuit capable of delivering not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote 2. Suitable as Motor Disconnect – 10KA @ 600VAC, 60A max. Class J Fuse or 100A max. Mersen HSJ Fuse.

CATALOG NO.	PHASE	POLE
7802MD or 7842MD	1	2
7803MD or 7843MD	3	3

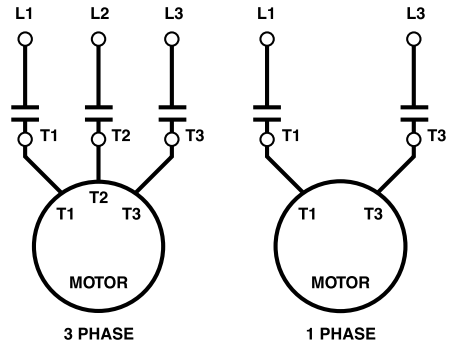

RATINGS

RESISTANCE		
7802MD / 7803MD	30 AMP	600 VAC MAX.
7842MD / 7843MD	40 AMP	600 VAC MAX.

MANUAL MOTOR CONTROLLER				
VAC	30A		40A	
	1 PHASE HP	3 PHASE HP	1 PHASE HP	3 PHASE HP
120	2	3	2	3
240	3	7.5	5	7.5
480	7.5	10	10	15
600	10	20	15	20

USE 60 / 75°C WIRING
TORQUE TERMINAL SCREWS TO 16 IN. LBS.



NO ALUMINUM



DO NOT REMOVE SCREWS FROM 30A DEVICES

All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Manual Controllers 60A, 1ø & 3ø





7863

Features

- High horsepower rating, up to 3 HP for heavy duty applications.
- Compact design provides ease of installation.
- Box lug terminals.
- Single piece moveable and stationary contact arms with oversized silver cadmium buttons provides excellent continuity and long life.
- Made in USA.
- Wire pockets and thick wall arc barriers.
- Cold-rolled steel NEMA 3R enclosure with polyester urethane finish conforms to OSHA lockout requirements.
- Type 3R enclosure has 2-1/2", 3/4" and 1" concentric knockouts on bottom.
- Accepts #4 AWG.
- cULus listed.
- Slotted opening on enclosure allows for lock-out, tag-out functionality

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING VAC	RATING HP	RATING VAC
DOUBLE POLE MANUAL MOTOR CONTROLLER					
7862	Double Pole AC Manual Motor Controller	60	600 max	Same as 7862R	
7862R	Double Pole AC Manual Motor Controller in a NEMA 3R Enclosure	60	600 max.	3 5 15 15	120 240 480 600
THREE POLE MANUAL MOTOR CONTROLLER					
7863	Three Pole AC Manual Motor Controller	60	600 max	Same as 7863R	
7863R	Three Pole AC Manual Motor Controller in a NEMA 3R Enclosure	60	600 max.	5 10 20 30	120 240 480 600
NEMA 3R ENCLOSURE					
7860	NEMA 3R Enclosure for 7862 & 7863				






20 & 30A Horsepower Rated Switches

Features

- Oversize silver contacts for long life and better heat dissipation.
- Single phase switches are side wired with #14 AWG - #10 AWG copper or copper-clad conductors.
- Shallow design for ease of installation.
- 2-3/4" hubs (HP30EX).

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING VAC	RATING HP	RATING VAC
DOUBLE POLE, SINGLE PHASE					
PS20AC2HP	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)	20	120/277	1 2	120 240
PS30AC2HP	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)	30	120/277	1 2	120 240
HP30EX	PS30AC2HP in a NEMA 7 & 9 Enclosure for Hazardous Locations Class I - Groups C, D; Class II - Groups E, F, G	Same as PS30AC2HP			




PS20AC2HP
PS30AC2HP


All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCHES

Manual Controllers 15, 20 & 30A, 120/277VAC – Maintained Contact
15, 20 & 30A, 120/277VAC – Momentary Contact



Maintained and Momentary Contact



Locking

Applications

For ON-OFF control of motors on small machine tools, pumps, fans and air conditioning equipment that require heavy-duty AC Double Throw Center OFF controls. Maintained contact switches remain in the "on" position until toggled off. Momentary contact switches remain in the "on" position only when toggle is held away from the center position.

Features

- Oversized silver alloy contacts for long life and better heat dissipation.
- Side wired terminals accept #14 AWG – #10 AWG copper or copper-clad conductors.
- Fiber terminal insulation barriers provide additonal protection against electrical shock.
- Can be mounted in standard device boxes or in NEMA 1 sheet steel enclosures.
- Bodies, covers and toggles molded of durable nylon.
- Single Pole-Double Throw and Double Pole-Double Throw.
- Locking Switches supplied with one 1498 NT key.

CATALOG NUMBER		RATING		
S.P.D.T.	D.P.D.T.	A.	VAC	COLOR
MAINTAINED CONTACT THREE POSITION – TWO CIRCUIT, CENTER OFF				
1221I	1222I	15	120/277	Ivory
1221W	1222W	15	120/277	White
1221	1222	15	120/277	Brown
1221LA		15	120/277	Light Almond
1221L	1222L	15	120/277	Locking
1225I	1226I	20	120/277	Ivory
1225W	1226W	20	120/277	White
1225	1226	20	120/277	Brown
1225GRY		20	120/277	Gray
1225LA		20	120/277	Light Almond
1225L	1226L	20	120/277	Locking
1227I	1228I	30	120/277	Ivory
1227	1228	30	120/277	Brown
MAINTAINED CONTACT EITHER DIRECTION TWO POSITION, NO CENTER OFF				
1275	1276	30	120/277	Brown
MOMENTARY CONTACT EITHER DIRECTION THREE POSITION, CENTER OFF				
1250I		15	120/277	Ivory
1250W		15	120/277	White
1250		15	120/277	Brown
1250GRY		15	120/277	Gray
1250LA		15	120/277	Light Almond
1250RED		15	120/277	Red
1250L		15	120/277	Locking
1251I		20	120/277	Ivory
1251W		20	120/277	White
1251		20	120/277	Brown
1251GRY		20	120/277	Gray
1251RED		20	120/277	Red
1251LA		20	120/277	Light Almond
1251L		20	120/277	Locking
	1256I	30	120/277	Ivory
	1256W	30	120/277	White
1255	1256	30	120/277	Brown
1255L	1256L	30	120/277	Locking

CATALOG NUMBER	DESCRIPTION
LOCK SWITCH REPLACEMENT KEYS	
1498	Fits switches manufactured before 1976.
1498NT	Fits switches manufactured between 1976-present.

HP Conversion Table


1221 SERIES	
15 Amp	1/2 Horsepower at 120VAC 2 Horsepower at 240VAC
20 Amp	1 Horsepower at 120VAC 2 Horsepower at 240VAC
30 Amp	2 Horsepower at 120VAC 2 Horsepower at 240VAC
1250 SERIES	
15 Amp	1/2 Horsepower at 120VAC 2 Horsepower at 240VAC
20 Amp	1 Horsepower at 120VAC 2 Horsepower at 240VAC
30 Amp	2 Horsepower at 120VAC 2 Horsepower at 240VAC


All devices listed on this page conform to NEMA WD-1 and WD-6.


DEVICES & WALL PLATES


Color Selection Chart

Devices & Plastic Wall Plate Colors


Ivory


Light Almond


White



Green



Dark Bronze



Nickel



Graphite



Black


Blue


Brown


Gray


Orange



Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

Metal Finish


Aluminum



Polished Brass



Stainless Steel



Chrome


Custom Metal Wall Plates Paint Finish Colors


Paint Color


Orange



Green



Gray


Yellow



Glossy Black



Brown



White



Primer


Red


Pink


Flat Black


Ivory


Light Almond


Blue


To order custom metal wall plates, see Pages I-25—I-29.

For additional colors consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE RECEPTACLES

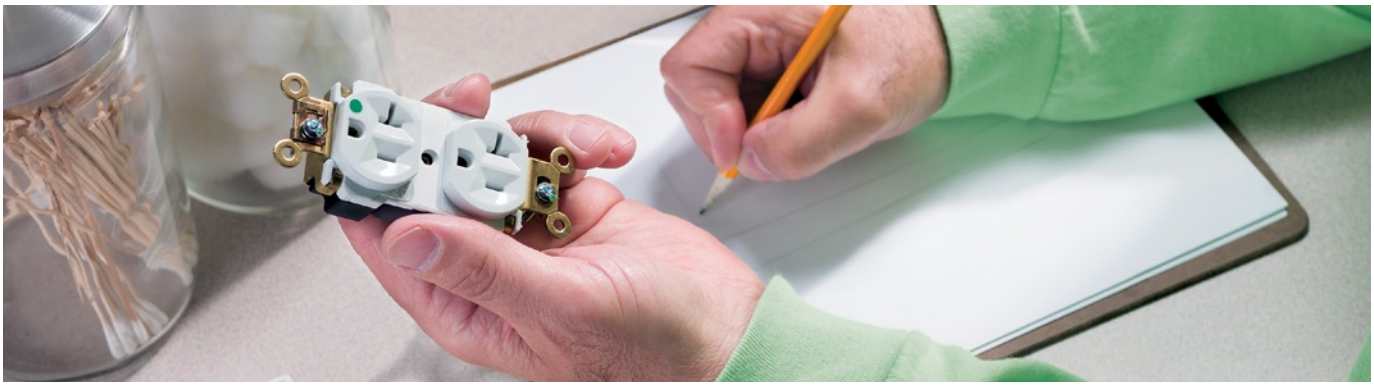



RESIDENTIAL RECEPTACLES B-2



MISCELLANEOUS RECEPTACLES B-11



COMMERCIAL/ INDUSTRIAL GRADE RECEPTACLES B-19



HOSPITAL GRADE RECEPTACLES B-48



SURGE PROTECTIVE & ISOLATED GROUND RECEPTACLES B-86



MOBILE CHARGING DEVICES B-101

RESIDENTIAL RECEPTACLES

Table of Contents





RESIDENTIAL RECEPTACLES

TRADEMASTER®	
Receptacles	B-3
Tamper-Resistant Receptacles	B-4
Weather-Resistant Receptacles	B-5
RADIANT®	
Receptacles & Self-Grounding Receptacles	B-6
Tamper-Resistant Receptacles	B-7
Tamper-Resistant Self-Grounding & NAFTA Approved Receptacles	B-8
Weather-Resistant Receptacles	B-9
Night Lights, Hallway Lights & Combination Devices	B-10




MISCELLANEOUS RECEPTACLES


Quad Receptacles & Accessories	B-11
Dust & Moisture Resistant & Clock Hanger Receptacles	B-12
Power Outlet Receptacles and Plugs	B-13
Power & Surge Protection Strips	B-16
Miscellaneous Configurations	B-18

RESIDENTIAL RECEPTACLES


TradeMaster® Receptacles 15A, 125V



3232I



3232SI



3232IMH

Features

- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier #12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Low profile face.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	C22.2 No. 42	cULus
DUPLEX RECEPTACLES – GROUNDING							
3232I*	15	125	Ivory	5-15R	•	•	
3232W*	15	125	White	5-15R	•	•	
3232*	15	125	Brown	5-15R	•	•	
3232BK	15	125	Black	5-15R	•	•	
3232LA*	15	125	Light Almond	5-15R	•	•	
SELF-GROUNDING DUPLEX RECEPTACLES							
3232SI	15	125	Ivory	5-15R	•	•	
3232SW	15	125	White	5-15R	•	•	
3232S	15	125	Brown	5-15R	•	•	
3232SLA	15	125	Light Almond	5-15R	•	•	
4 TERMINAL, SCREWS IN							
3232W4	15	125	White	5-15R	•	•	
32324	15	125	Brown	5-15R	•	•	
DUPLEX RECEPTACLES – WITHOUT EARS							
3232IMH	15	125	Ivory	5-15R	•	•	
3232WMH	15	125	White	5-15R	•	•	
3232MH	15	125	Brown	5-15R	•	•	

*Available in bulk packs of 150. Add "U" to end of Catalog Number. Example: 3232LAU.

2 Pole, 3 Wire



NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

TradeMaster® Tamper-Resistant Receptacles

3232TRW
TradeMaster® Tamper-Resistant Receptacles

Meets National Electrical Code® Tamper-Resistant requirements.

A. High-impact resistant thermoplastic construction.

B. Low profile face.


C. Side wire accepts #12 – #14 AWG solid wire. Push wire accepts #14 AWG solid only.

D. "TR" markings on strap per UL Tamper-Resistant requirements.

E. Patented internal shutter system lets plugs in, but keeps keys and other objects out with automatic shutters that block access.

F. Traditional contoured face.


G. Safer and more effective than traditional plastic outlet caps or protection plates.

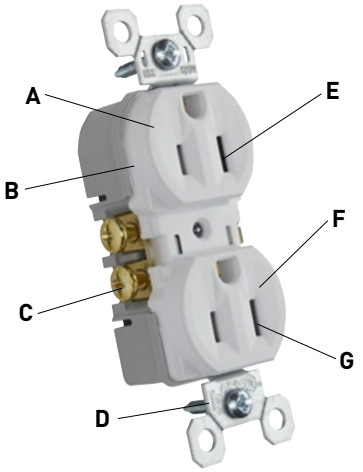

3232TRW

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.

In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.



3232TRW

Features

- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier #12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Traditional contoured face (3232 models).
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	C22.2 No. 42	cULus
TAMPER-RESISTANT DUPLEX RECEPTACLES – GROUNDING							
3232TRI	15	125	Ivory	5-15R	•	•	•
3232TRW*	15	125	White	5-15R	•	•	•
3232TR	15	125	Brown	5-15R	•	•	•
3232TRBK	15	125	Black	5-15R	•	•	•
3232TRLA*	15	125	Light Almond	5-15R	•	•	•
SELF-GROUNDING TAMPER-RESISTANT DUPLEX RECEPTACLES							
3232TRSI	15	125	Ivory	5-15R	•	•	•
3232TRSW	15	125	White	5-15R	•	•	•
3232TRS	15	125	Brown	5-15R	•	•	•
3232TRSLA	15	125	Light Almond	5-15R	•	•	•
NAFTA-COMPLIANT TRADEMASTER® TAMPER-RESISTANT 15 AMP DUPLEX RECEPTACLES							
3232TRNAI	15	125	Ivory	5-15R	•	•	•
3232TRNAW	15	125	White	5-15R	•	•	•
3232TRNA	15	125	Brown	5-15R	•	•	•
3232TRNABK	15	125	Black	5-15R	•	•	•
3232TRNALA	15	125	Light Almond	5-15R	•	•	•

*Available in contractor bulk packs of 100. Add 100 to end of catalog number. Example: 3232TRW100.

2 Pole, 3 Wire



NEMA 5-15R

NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

TradeMaster® Weather-Resistant Receptacles

3232TRWRW
Weather-Resistant Receptacles

Residential Weather-Resistant Receptacles are Tamper-Resistant as required by National Electrical Code®

A. High-impact resistant thermoplastic construction.

B. Low profile face.

C. Side wire accepts #12 – #14 AWG solid wire. Push wire accepts #14 AWG solid only.

D. "TR" markings identify devices as Tamper-Resistant.

E. "WR" markings on face per UL Weather-Resistant requirements.


F. Traditional contoured face.

G. Patented internal shutter system lets plugs in, but keeps keys and other objects out with automatic shutters that block access.

H. Safer and more effective than plastic outlet caps.

National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.


Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

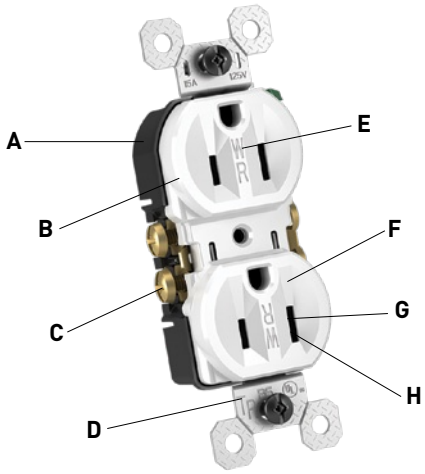

3232TRWRW

Listed to the Weather-Resistant supplement of UL498, meeting demanding UL requirements including:

- Ultraviolet light exposure test
- Cold impact test
- Accelerated aging test
- Stringent material requirements for current-carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.




3232TRWRW

Features

- Specifically designed for increased protection of children in the home.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	C22.2 No. 42	cULus
WEATHER-RESISTANT DUPLEX RECEPTACLES							
3232TRWRI	15	125	Ivory	5-15R	•	•	•
3232TRWRW	15	125	White	5-15R	•	•	•
3232TRWR	15	125	Brown	5-15R	•	•	•
3232TRWRGRY	15	125	Gray	5-15R	•	•	•
3232TRWRLA	15	125	Light Almond	5-15R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


RESIDENTIAL RECEPTACLES

the radiant® collection

radiant® Receptacles & Self-Grounding Receptacles 15A, 125V



885I



885SI

Features

- Part of the radiant® collection.
- High impact-resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Tri-drive screws.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid.
- Push wire accepts #14 AWG solid only.
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42
RADIANT® DUPLEX RECEPTACLES						
885I	15	125	Ivory	5-15R	•	•
885W	15	125	White	5-15R	•	•
885	15	125	Brown	5-15R	•	•
885BK	15	125	Black	5-15R	•	•
885GRY	15	125	Gray	5-15R	•	•
885LA	15	125	Light Almond	5-15R	•	•
SELF-GROUNDING RADIANT® DUPLEX RECEPTACLES						
885SI	15	125	Ivory	5-15R	•	•
885SW	15	125	White	5-15R	•	•
885SLA	15	125	Light Almond	5-15R	•	•

2 Pole, 3 Wire




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

radiant® Tamper-Resistant Receptacles 15A, 125V

the radiant® collection



885TRLA

Features

- Part of the radiant® collection.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system — now with black "invisi-shutters" that disappear for an invisible effect — helps prevent improper insertion of foreign objects.
- Now with black "invisi-shutters" for an invisible effect preferred by end users.
- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection than traditional outlet "caps" or "protection plates."
- Low profile face.
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	C22.2 No. 42	cULus
TAMPER-RESISTANT RECEPTACLES							
885TRI	15	125	Ivory	5-15R	•	•	•
885TRW	15	125	White	5-15R	•	•	•
885TR	15	125	Brown	5-15R	•	•	•
885TRGRY	15	125	Gray	5-15R	•	•	•
885TRBK	15	125	Black	5-15R	•	•	•
885TRLA	15	125	Light Almond	5-15R	•	•	•
885TRNICC12	15	125	Nickel	5-15R	•	•	•
885TRGCC12	15	125	Graphite	5-15R	•	•	•
885TRDBCC12	15	125	Dark Bronze	5-15R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

radiant® Tamper-Resistant Self-Grounding & NAFTA Approved Receptacles 15A, 125V

the radiant® collection



885TRSLA

Features

- Part of the radiant® collection.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system — now with black "invisi-shutters" that disappear for an invisible effect — helps prevent improper insertion of foreign objects.
- Now with black "invisi-shutters" for an invisible effect preferred by end users.
- High-impact resistant thermoplastic construction.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.
- Longer tri-drive screws for easier 12 AWG looping.
- Extra-large circuit break-off tabs.
- Side-access push wire release.
- Ultrasonic welding of face to back body.
- Side wire accepts #12 – #14 AWG solid wire.
- Push wire accepts #14 AWG solid only.
- Superior protection than traditional outlet "caps" or "protection plates."
- Low profile face.
- Self-grounding models provide automatic ground clip.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	C22.2 No. 42	cULus
SELF-GROUNDING TAMPER-RESISTANT RECEPTACLES							
885TRSI	15	125	Ivory	5-15R	•	•	•
885TRSW	15	125	White	5-15R	•	•	•
885TRSLA	15	125	Light Almond	5-15R	•	•	•
NAFTA-COMPLIANT TAMPER-RESISTANT RECEPTACLES							
885TRNAI	15	125	Ivory	5-15R	•	•	•
885TRNAW	15	125	White	5-15R	•	•	•
885TRNAGRY	15	125	Gray	5-15R	•	•	•
885TRNALA	15	125	Light Almond	5-15R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R


NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

radiant® Weather-Resistant Receptacles

the radiant® collection



885TRWRLA

Features

- Specifically designed for increased protection of children in the home.
- Extra-long strap.
- Quickloop wire looping aid.
- Long-term blade retention.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	C22.2 No. 42	cULus
RADIANT® WEATHER-RESISTANT DUPLEX RECEPTACLES							
885TRWRI	15	125	Ivory	5-15R	•	•	•
885TRWRW	15	125	White	5-15R	•	•	•
885TRWR	15	125	Brown	5-15R	•	•	•
885TRWRLA	15	125	Light Almond	5-15R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


RESIDENTIAL RECEPTACLES

radiant® Night Lights, Hallway Lights & Combination Devices


the radiant® collection




NTL885TRW



NTL81TRWCC6



NTLFULLWCC6



NTL873WCC6

Features

- Part of the radiant® collection.
- 5 adjustable light settings including OFF
- Two tamper-resistant outlets — an industry exclusive
- Hidden sensor automatically controls night light
- Replaces any standard receptacle
- Optional louver included for additional light-level options
- Ideal for hallways, kitchens and nurseries
- Optional louver included with the Duplex Night Light Receptacle and the Full Night Light, for added light-level control.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE
NIGHT LIGHT WITH TWO 15A TAMPER-RESISTANT RECEPTACLES AND ADJUSTABLE LIGHT LEVELS with optional louver included					
NTL885TRICC6	15A	120/125V	Ivory	5-15R	•
NTL885TRW	15A	120/125V	White	5-15R	•
NTL885TRLACC6	15A	120/125V	Light Almond	5-15R	•
NTL885TRBKCC6	15A	120/125V	Black	5-15R	•
NTL885TRNICC6	15A	120/125V	Nickel	5-15R	•
NIGHT LIGHT WITH SINGLE TAMPER-RESISTANT RECEPTACLE					
NTL81TRICC6	15A	120/125V	Ivory	5-15R	•
NTL81TRWCC6	15A	120/125V	White	5-15R	•
NTL81TRLACC6	15A	120/125V	Light Almond	5-15R	•
NTL81TRBKCC6	15A	120/125V	Black	5-15R	•
FULL NIGHT LIGHT, ADJUSTABLE LIGHT LEVELS, TRI-COLOR with optional louver included					
NTLFULLTC		120/125V	Ivory/Light Almond/Black		•
FULL NIGHT LIGHT, ADJUSTABLE LIGHT LEVELS with optional louver included					
NTLFULLW		120/125V	White		•
AMBER LED NIGHT LIGHT WITH TWO 15A TAMPER-RESISTANT OUTLETS with louver included					
NTL885TRAMBERWCC6	15A	120/125V	White	5-15R	•
AMBER LED FULL NIGHT LIGHT with louver included					
NTLFULLAMBERWCC6		120/125V	White		•
AMBER LED NIGHT LIGHT WITH SINGLE POLE/3-WAY SWITCH					
NTL873AMBERWCC6	15A	120/125V	White		•
NIGHT LIGHT WITH SINGLE POLE/3-WAY SWITCH					
NTL873ICC6	15A	120/125V	Ivory	5-15R	•
NTL873WCC6	15A	120/125V	White	5-15R	•
NTL873LACC6	15A	120/125V	Light Almond	5-15R	•
NTL873BKCC6	15A	120/125V	Black	5-15R	•
NTL873NICC6	15A	120/125V	Nickel	5-15R	•

2 Pole, 3 Wire




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

Quad Receptacles & Accessories 15 & 20A, 125V



Quad Receptacle

Application


Pass & Seymour® quad receptacles are designed for dense, multiple-outlet applications such as personal computers and peripherals, office equipment, and home entertainment centers. The bidirectional outlet configuration allows use of up to four oversized plugs, in close proximity. The clean, contemporary design of the quad receptacle allows for surface mounting with minimal protrusion from the wall. No wall plate is required.

Features

- Rugged nylon face and body withstands impacts and hard use.
- Built-in wire stripping gauge.
- Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
- Heavy-duty, phosphor bronze contacts.
- Shielding walls guard against live-circuit-to-ground shorts.
- Split circuit break-off tabs.
- UL and CSA listed.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	UL1449	CSA
SPECIFICATION GRADE QUADS							
415I	15	125	Ivory	5-15R	•		•
415W	15	125	White	5-15R	•		•
415GRY	15	125	Gray	5-15R	•		•
420I	20	125	Ivory	5-20R	•		•
420W	20	125	White	5-20R	•		•
420GRY	20	125	Gray	5-20R	•		•
QUAD ADAPTER PLATES							
4API			Ivory		•	•	
4APW			White		•	•	
4AP			Brown		•	•	
4APRED			Red		•	•	

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES


Dust & Moisture Resistant & Clock Hanger Receptacles 15 & 20A, 125V




6207
shown with neoprene sealing mat



S3713I



S3713TRI



R885TRWCC6

Features – Dust & Moisture Resistant


- Duplex receptacle has face backed by neoprene gasket which is slit to provide wiping action on plug blades and to provide positive closure when not in use.
- Cellular neoprene sealing mat fits under wall plate.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUST & MOISTURE RESISTANT							
6207	15	125	Duplex, Dust and Moisture Resistant, Gray	5-15R	•	•	•
6307	20	125	Duplex, Dust and Moisture Resistant, Gray	5-20R	•	•	
CR6307	20	125	Duplex, Corrosion, Dust and Moisture Resistant, Yellow	5-20R	•	•	

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
CLOCK HANGERS							
S3713I	15	125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713W	15	125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713GRY	15	125	Recessed Receptacle with Gray Smooth Wall Plate	5-15R	•	•	•
S3713BK	15	125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713LA	15	125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•
S3733SS	15	125	Recessed Receptacle with Stainless Steel Wall Plate	5-15R	•	•	•
S3733	15	125	Recessed Receptacle with Brass Wall Plate	5-15R	•	•	•
TAMPER-RESISTANT CLOCK HANGERS BACK & SIDE WIRE							
S3713TRI	15	125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713TRW	15	125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713TRGRY	15	125	Recessed Receptacle with Gray Smooth Wall Plate	5-15R	•	•	•
S3713TRBK	15	125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713TRLA	15	125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE cULus
RECESSED DUPLEX TAMPER-RESISTANT RECEPTACLE					
R885TRWCC6	15	125	White	5-15R	•

2 Pole, 3 Wire













NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

Power Outlet Receptacles & Plugs 20, 30, 50, & 60A


RATING A.	RATING V.	RECEPTACLE/PLUG CONFIGURATION & NEMA NO.		FLUSH RECEPTACLE	WALL PLATE *For 2 screw mounting **For 4 screw mounting	SURFACE RECEPTACLE	PLUG	ANGLE PLUG	CONNECTOR
				CATALOG NUMBERS					
2 POLE, 3 WIRE GROUNDING									
30	125	5-30		**3802**§ AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****		**D0531** .57"-1.26"		**D0533** .57"-1.26"
30	125	NEMA TT30		**3830** AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****				
For recreational vehicles.									
30	250	6-30		**3801** AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****		**D0631** .57"-1.26"	**3869**	**D0633** .57"-1.26"
50	125	5-50					**D0551** .57"-1.26"		**D0553** .57"-1.26"
50	250	6-50		**3804**§ AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****	**3852**# AL/CU	**D0651** .57"-1.26"	**3869**	**D0653** .57"-1.26"
3 POLE, 3 WIRE NON-GROUNDING									
30	125/250 **Dryer**	10-30		**3860** AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****	**388** AL/CU	**1031**	**3861**	
50	125/250 **Range**	10-50		**3890**§ AL/CU	1-Gang: **TP724*** 2-Gang: **SS702*** 2-Gang: **TP703****	**385** AL/CU	**1051** .57"-1.26"	**3861**	**1053** .32"-.91"
3 POLE, 4 WIRE GROUNDING									
20	125/250	14-20		**3820**	1-Gang: **SS7***				
30	125/250 **Dryer**	14-30		**3864** AL/CU **3864NA†**	2-Gang: **SS702*** 2-Gang: **TP703****	**3884**#/**388440**‡ AL/CU	**1431** .57"-1.26"	**5746AN** **3867**	
30	3ø, 250	15-30		**5740** AL/CU	2-Gang: **SS702*** 2-Gang: **TP703****			**5741AN**	
50	125/250 **Range**	14-50		**3894**§ AL/CU **3894NA†**	2-Gang: **SS702*** 2-Gang: **TP703****	**3854**#/**385440**‡ AL/CU	**1451** .57"-1.26"	**5745AN** **3867**	
50	3ø, 250	15-50		**5750** AL/CU	2-Gang: **SS702*** 2-Gang: **TP703****			**5751AN**	
60	3ø, 250	15-60		**5760** AL/CU	2-Gang: **SS702*** 2-Gang: **TP703****		**8462N**	**5761AN**	
4 POLE, 4 WIRE NON-GROUNDING									
20	3øY, 120/208	18-20		**3822**	1-Gang: **SS7***		**7251DF** .35"-1.05"		
60	3øY, 120/208	18-60		**3870**§ AL/CU	2-Gang: **SS701****		**D1861** .57"-1.26"	**8302AN**	

‡ In bulk pack of 40 with plastic snap-in wire clamp.
§ Up to #3 AWG aluminum conductors.
# Up to #4 AWG aluminum conductors.
For further information consult Wall Plate Section I (for Stainless Steel versions of TP724 and TP703, refer to Pages I-10 and I-11).
† NAFTA-Compliant Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

Power Outlet Receptacles & Plugs 20, 30, 50, & 60A




3822




3820




385 3854
388 3884
3852




3870




3801 3802
3804 3864
3894 5740
5750 5760




3830
3860
3890




3861




3867



3869



5741AN 5751AN
5745AN 5761AN
5746AN 8302AN



7251DF

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES


Power Outlet Receptacles & Plugs 20, 30, 50 & 60A



Flush Receptacle



Surface Receptacle



Angle Plug



Plug



Wall Plate

Application


Power devices are for use in industrial, institutional, commercial, and certain residential applications to provide higher amperage power to equipment such as air conditioners, copiers, small welders, ranges, and dryers.

Features

- Flush receptacle bodies are molded of arc-resistant plastic.
- All devices are of dead front design.
- Receptacles have double-wipe contacts of high performance copper-based alloy.
- Recommended stainless steel wall plates are listed with each flush receptacle.
- UL Listed for use with aluminum wiring.

RECEPTACLE AMP. RATING	AWG SIZE	MATERIAL
CONDUCTOR SIZE & MATERIAL FOR POWER OUTLET RECEPTACLES		
20A	#14 – #10	Copper/Copper-clad
30A	#10 – #6	Copper/Copper-clad/Aluminum
50A	#10 – #6	Copper/Copper-clad/Aluminum
60A	#8 – #4	Copper/Copper-clad/Aluminum

AMPERE RATING	WITH NON-METALLIC SHEATHED CABLE	WITH CONDUIT
RECOMMENDED BOX SIZES FOR FLUSH RECEPTACLES		
30A	4" sq. x 2-1/8" deep	4-11/16" sq. x 2-1/8" deep
50A	4-11/16" sq. x 2-1/8" deep	2-g deep box (4" sq. x 2-1/2" deep)
60A	4-11/16" sq. x 2-1/8" deep with 1/2" raised ring	2-g deep box (4" sq. x 2-1/2" deep)


DESCRIPTION	COLOR	NYLON TRADEMASTER®	METAL MATERIAL		WALL PLATES RECOMMENDED FOR THE FOLLOWING FLUSH RECEPTACLES	
ACCESSORIES – FLUSH RECEPTACLE WALL PLATES						
 • 2.156" hole for 2.125" dia. device • 2 mtg. holes	Ivory	TP724I			2 Pole, 3 Wire Grounded	
	White	TP724W			3801	3804
	Brown	TP724	Chrome	S384C	3802	3830
	Gray	TP724GRY				
	Black	TP724BK				
	Light Almond	TP724LA	302S/S	SS724		
 • 2-5/32" hole for 2-1/8" dia. device • 2 mtg. holes			302S/S	SS702	3 Pole, 3 Wire Ungrounded 3860	
					3860	
 • 2.1563" hole for 2.125" dia. device • 4 mtg. holes	Ivory	TP703I			3 Pole, 4 Wire Ungrounded	
	White	TP703W	Chrome	S3862C	3864	5740
	Brown	TP703	302S/S	SS703	3894	5750
	Gray	TP703GRY				5760
	Black	TP703BK				
	Light Almond	TP703LA				

New Installations require 4 wire range and dryer outlets. Ref: 2002 NEC 250-134, 250-138
Existing Installations permitted to use 3 wire range and dryer outlets. Ref: 2002 NEC 250-140


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

Power & Surge Protection Strips



TAP – PS1

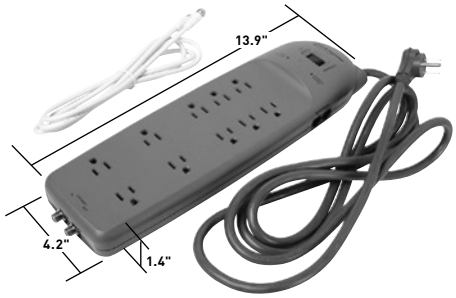

BLOCK – PS10PC

Application

There are an average of over 250 power disturbances per year in each home or office in the United States. Over 8% data loss is a direct result from lightning and the value of equipment and data is sometimes much greater than that of equipment.

Surges and spikes can come through power lines as well as phone and coax lines. So choose a protector which includes phone and/or coax protection.

Features

- 400V clamping voltage.
- UL1449 listed.
- Heavy-duty cord from 3' to 15', depending on device.
- Multiple function protection available for power, phone, fax, modem, coax or data.
- Extremely long life with dependable protection.
- Surge protection indicator on surge devices.
- Circuit breaker switch.
- Heavy-duty high-energy MOVs.
- Ground continuity indicator.

Protection Specifications

- Line protection modes: L-N, L-G, N-G.
- Spike protection for sudden, dramatic surges, over 400V.
- Surge protection lasts for 1/120 of a second, for moderate short term overvoltage.
- EMI/RFI noise attenuation.

CATALOG NUMBER	RATING		TYPE OF HOUSING	# OF OUTLETS	CORD LENGTH	JOULE RATING RANGE	MAX. SPIKE CURRENT (AMPS)	TYPE OF PROTECTION		COLOR
	A.	V.						PHONE/FAX	COAX	
POWER STRIPS WITH SURGE PROTECTION										
PS1	15	125	Tap	1		740J	48K			PC Gray
PS6	15	125	Strip	6	3'	555J	36K			PC Gray
PS7	15	125	Strip	7	6'	740J	48K			PC Gray
PS7P	15	125	Strip	7	6'	740J	48K	X		PC Gray
PS7L	15	125	Strip	7	15'	740J	48K			PC Gray
PS8C	15	125	Block	8	8'	1100J	72K		X	PC Gray
PS8P	15	125	Block	8	8'	1100J	72K	X		PC Gray
PS10PC	15	125	Block	10	8'	1100J	72K	X	X	PC Gray

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES

Surge Protection Strips Specifications


Power & Surge Protection Devices – Ratings

Catalog Number	PS1	PS6	PS7	PS7P	PS7L	PS8C	PS8P	PS10PC
Type of Housing	Tap	Strip	Strip	Strip	Strip	Block	Block	Block
Number of Outlets	1	6	7	7	7	8	8	10
Standard Grounded Outlets	1	6	6	6	6	0	0	6
Transformer Ready Outlets	1	0	1	1	1	8	8	4
Joule Rating Range	740J	555J	740J	740J	740J	1100J	1100J	1100J
MOV Configuration	4-20mm	3-20mm	4-20mm	4-20mm	4-20mm	6-20mm	6-20mm	6-20mm
Clamping Voltage	400V	400V	400V	400V	400V	400V	400V	400V
Max. Spike Current (Amps)	48K	36K	48K	48K	48K	72K	72K	72K
EMI Filter Capacitors	X		X	X	X	X	X	X
Protection (L-N, L-G, N-G)	X	X	X	X	X	X	X	X
Surge Protection Indicator	X	X	X	X	X	X	X	X
Ground/Wiring Indicator			X	X	X	X	X	X
Circuit Breaker Switch		Unlighted	Lighted	Lighted	Lighted	Lighted	Lighted	Lighted
Cord Length (exposed) ft.		3'	6'	6'	15'	8'	8'	8'
Plug		Straight	Straight	Straight	Straight	Rt. Angle	Rt. Angle	Rt. Angle
Phone/Fax Protection				X			X	X
Phone Line(s) Configuration				1 in/1 out			1 in/2 out	1 in/1 out
Phone Jack Spec				RJ-11			RJ-45	RJ-45
Nickel-Coaxial Jack Protection						X		X
6' Phone Cable (6P2C)				X			X	X
6' Coax Cable (Nickel Plated)						X		X
Molded Add-On Safety Covers	0	0	2	2	2	4	4	5
Molded Housing Color	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray
UL1449 2nd Edition	X	X	X	X	X	X	X	X


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL RECEPTACLES


Miscellaneous Configurations Straight Blade Receptacles, 3 Wire, Specification Grade



5762




6810I



7621



9977



7088

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
POLE, 3 WIRE GROUNDING							
5762	15	277	Duplex Receptacle, Self-Grounding	7-15R	•		
PS5766X	15	277	Plug, Yellow	7-15P	•		•
7621	20	277	Single Receptacle	7-20R	•		
PS5866X	20	277	Plug, Yellow	7-20P	•		•
3 POLE, 3 WIRE NON-GROUNDING							
6810I	20	125/250	Receptacle, Ivory	10-20R	•		
6810	20	125/250	Receptacle, Black	10-20R	•		
9977	20	125/250	Plug, Nylon	10-20P			
7088	20	125/250	Connector, Armored	10-20R			



NEMA 7-15P



NEMA 7-15R



NEMA 7-20P



NEMA 7-20R



NEMA 10-20P



NEMA 10-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL AND INDUSTRIAL GRADE RECEPTACLES





COMMERCIAL GRADE RECEPTACLES

COMMERCIAL SPECIFICATION GRADE

PlugTail® Overview B-20
PlugTail® Connectors & Tester B-21
Receptacles B-22
Tamper-Resistant Receptacles B-23
Tamper-Resistant Decorator Receptacles B-24
Single Receptacles B-25
Tamper-Resistant Single Receptacles B-26
Tamper-Resistant Weather-Resistant Receptacles B-27

CONSTRUCTION SPECIFICATION GRADE

Receptacles B-28

HARD USE SPECIFICATION GRADE

Receptacles plus PlugTail® B-29
Tamper-Resistant Receptacles plus PlugTail® B-30
Plug Load Controllable Receptacles plus PlugTail® B-31
Weather-Resistant Receptacles B-33
PlugTail® Split-Circuit Tamper-Resistant Receptacles B-34

HEAVY-DUTY SPECIFICATION GRADE

Receptacles B-35
Single Receptacles B-36

HEAVY-DUTY SPECIFICATION GRADE DECORATOR

Receptacles B-37
Receptacles plus PlugTail® B-38
Tamper-Resistant Receptacles plus PlugTail® B-39
PlugTail® Split-Circuit Receptacles B-40
Single Receptacles B-41
Tamper-Resistant Single Receptacles B-42
Plug Load Controllable Receptacles plus PlugTail® B-43



INDUSTRIAL GRADE RECEPTACLES

INDUSTRIAL EXTRA HEAVY-DUTY SPECIFICATION GRADE

Receptacles plus PlugTail® B-45
Tamper-Resistant Receptacles plus PlugTail® B-46
Corrosion-Resistant Receptacles B-47

COMMERCIAL AND INDUSTRIAL GRADE RECEPTACLES

PlugTail® Receptacles







CONNECT WITH THE FUTURE

In the world of commercial wiring device installation, it's all about flexibility. For years now, PlugTail® electrical wiring devices have been providing that flexibility in commercial buildings everywhere. Easy to install, change out and upgrade, PlugTail allows you to continuously reconfigure to meet a building's electrical requirements as the space transforms – without the time and expense of rewiring.

It's a cost-effective, code-compliant, proven way to keep your customers connected to the future, while securing your reputation as a forward-thinking electrical contractor.

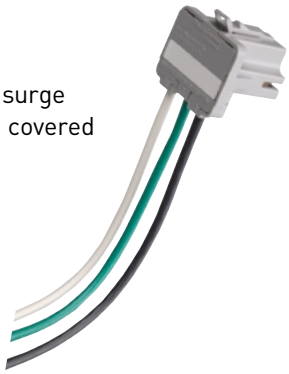
Connect with the product line that keeps growing.

From sensors to switches, standard and controlled receptacles to surge protection devices. The constantly growing PlugTail family has you covered on every conceivable commercial job:


- Devices install in less than a minute
- No preparing, stripping, looping or taping
- Meet NEC® and Energy Code requirements
- Makes changeouts and upgrades quick and easy

Happier installers. Happier customers. Because PlugTail installation's a lot easier on the knees and fingers, installers benefit. And because it makes it easy and affordable for customers to transform their building layouts without expensive rewiring, they're happier, too.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL AND INDUSTRIAL GRADE RECEPTACLES

PlugTail® Connectors & Tester



PTRA6STR



PTRA6STRBP



PTRA6STRG



PTTESTER

Features

- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large crimped and welded brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Available in any wire length up to 25 inches, use Configurable Solutions to order.
- Audible snapping latch assures connection, allows release.

PT TESTER

- Ensures proper connections and power presence at both rough-in and device-out stages during P&S PlugTail Device installation.
- Fast, easy identification of circuit connections.
- Easy-to-see indicator lights.
- Sturdy construction for long-term dependability.
- Helps prevent call backs.
- Ensures proper wiring.

CATALOG NUMBER	WIRE TYPE	CONNECTOR HEAD	WIRE LENGTH
PLUGTAIL CONNECTORS – RIGHT ANGLE			
PTRA6SOL	Solid		6"
PTRA6STR	Stranded		6"
PTRA6SOLB25	Solid		25"
PTRA6STRB25	Stranded		25"
NAFTA-COMPLIANT PLUGTAIL CONNECTORS – RIGHT ANGLE			
PTRA6SOLNA	Solid		6"
PTRA6STRNABL	Stranded	Blue	6"
PTRA6STRXBB	Stranded		6"
PTRA6STRNARED	Stranded	Red	6"

CATALOG NUMBER	WIRE TYPE	WIRE LENGTH
PLUGTAIL CONNECTORS – RIGHT ANGLE WITH WAGO CONNECTORS*		
PTRA6SOLBP	Solid	6"
PTRA6STRBP	Stranded	6"
PLUGTAIL CONNECTORS – RIGHT ANGLE WITH GROUND SCREW*		
PTRA6SOLG	Solid	6"
PTRA6STRG	Stranded	6"


* Also NAFTA-Compliant.

CATALOG NUMBER	DESCRIPTION
P&S PLUGTAIL® TESTER	
PTTESTER	Red PlugTail Tester for Receptacles and Tails

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Commercial Specification Grade Receptacles 15A, 125V; 20A, 125 & 250V




CR15I

Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- Accepts #14 – #10 AWG solid or stranded copper or copper-clad wire.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.
- Posted, ready-to-wire terminal screws for added productivity.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42
DUPLEX RECEPTACLES SIDE WIRE						
CR15I	15	125	Ivory	5-15R	•	•
CR15W	15	125	White	5-15R	•	•
CR15	15	125	Brown	5-15R	•	•
CR15GRY	15	125	Gray	5-15R	•	•
CR15LA	15	125	Light Almond	5-15R	•	•
CR20I	20	125	Ivory	5-20R	•	•
CR20W	20	125	White	5-20R	•	•
CR20	20	125	Brown	5-20R	•	•
CR20GRY	20	125	Gray	5-20R	•	•
CR20BK	20	125	Black	5-20R	•	•
CR20RED	20	125	Red	5-20R	•	•
CR20LA	20	125	Light Almond	5-20R	•	•
5850I	20	250	Ivory	6-20R	•	•
5850W	20	250	White	6-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**




NEMA 6-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Commercial Specification Grade Tamper-Resistant Receptacles 15 & 20A, 125V



TR15LA



TR5252W


Features

- Dual mechanical shutter system to help prevent insertions of foreign objects.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- .032 inch thick brass triple-wipe power contacts for lasting retention.
- Corrosion-resistant plated steel strap is locked in to the face and back body to resist pulling away from the face/body assembly.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive steel terminal screws.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	cULus	C22.2 No. 42
COMMERCIAL SPECIFICATION GRADE TAMPER-RESISTANT RECEPTACLES SIDE WIRE							
TR15I	15	125	Ivory	5-15R	•	•	•
TR15W	15	125	White	5-15R	•	•	•
TR15	15	125	Brown	5-15R	•	•	•
TR15GRY	15	125	Gray	5-15R	•	•	•
TR15BK	15	125	Black	5-15R	•	•	•
TR15LA	15	125	Light Almond	5-15R	•	•	•
TR20I	20	125	Ivory	5-20R	•	•	•
TR20W	20	125	White	5-20R	•	•	•
TR20	20	125	Brown	5-20R	•	•	•
TR20GRY	20	125	Gray	5-20R	•	•	•
TR20BK	20	125	Black	5-20R	•	•	•
TR20LA	20	125	Light Almond	5-20R	•	•	•

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
COMMERCIAL SPECIFICATION GRADE TAMPER-RESISTANT RECEPTACLES BACK AND SIDE WIRE							
TR5252I	15	125	Ivory	5-15R	•		•
TR5252W	15	125	White	5-15R	•		•
TR5252	15	125	Brown	5-15R	•		•
TR5252GRY	15	125	Gray	5-15R	•		•
TR5252BK	15	125	Black	5-15R	•		•
TR5252LA	15	125	Light Almond	5-15R	•		•
TR5352I	20	125	Ivory	5-20R	•		•
TR5352W	20	125	White	5-20R	•		•
TR5352	20	125	Brown	5-20R	•		•
TR5352GRY	20	125	Gray	5-20R	•		•
TR5352BK	20	125	Black	5-20R	•		•
TR5352LA	20	125	Light Almond	5-20R	•		•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Commercial Specification Grade Tamper-Resistant Decorator Receptacles 15 & 20A, 125V



TR26242I




TR26352GRY

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- Impact-resistant nylon face for durability.
- .032-inch thick brass triple-wipe power contacts for reliable plug retention.
- Auto-ground clip assures positive ground.
- Corrosion-resistant, plated steel strap.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Backed-out tri-drive steel terminal screws for faster installation.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42
DUPLEX RECEPTACLES SIDE WIRE						
TR26242I	15	125	Ivory	5-15R	•	•
TR26242W	15	125	White	5-15R	•	•
TR26242	15	125	Brown	5-15R	•	•
TR26242GRY	15	125	Gray	5-15R	•	•
TR26242BK	15	125	Black	5-15R	•	•
TR26242LA	15	125	Light Almond	5-15R	•	•
TR26342I	20	125	Ivory	5-20R	•	•
TR26342W	20	125	White	5-20R	•	•
TR26342	20	125	Brown	5-20R	•	•
TR26342GRY	20	125	Gray	5-20R	•	•
TR26342BK	20	125	Black	5-20R	•	•
TR26342LA	20	125	Light Almond	5-20R	•	•
DUPLEX RECEPTACLES BACK & SIDE WIRE						
TR26252I	15	125	Ivory	5-15R	•	•
TR26252W	15	125	White	5-15R	•	•
TR26252	15	125	Brown	5-15R	•	•
TR26252GRY	15	125	Gray	5-15R	•	•
TR26252BK	15	125	Black	5-15R	•	•
TR26252LA	15	125	Light Almond	5-15R	•	•
TR26352I	20	125	Ivory	5-20R	•	•
TR26352W	20	125	White	5-20R	•	•
TR26352	20	125	Brown	5-20R	•	•
TR26352GRY	20	125	Gray	5-20R	•	•
TR26352BK	20	125	Black	5-20R	•	•
TR26352LA	20	125	Light Almond	5-20R	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES


Commercial Specification Grade Single Receptacles 15 & 20A, 125 & 250V



5251I



5371I



5258I

Features


- Auto-ground clip assures positive ground.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- Heavy-duty, corrosion-resistant zinc-plated steel strap for added strength.
- One-piece brass triple-wipe power contacts for lasting retention.
- Posted, ready-to-wire terminal screws for added productivity.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42
SINGLE RECEPTACLES SIDE WIRE						
5251I	15	125	Ivory	5-15R	•	•
5251W	15	125	White	5-15R	•	•
5251	15	125	Brown	5-15R	•	•
5251LA	15	125	Light Almond	5-15R	•	•
5351I	20	125	Ivory	5-20R	•	•
5351W	20	125	White	5-20R	•	•
5351	20	125	Brown	5-20R	•	•
5351LA	20	125	Light Almond	5-20R	•	•
5651I	15	250	Ivory	6-15R	•	•
5651W	15	250	White	6-15R	•	•
5651	15	250	Brown	6-15R	•	•
5651LA	15	250	Light Almond	6-15R	•	•
5851I	20	250	Ivory	6-20R	•	•
5851W	20	250	White	6-20R	•	•
5851	20	250	Brown	6-20R	•	•
5851LA	20	250	Light Almond	6-20R	•	•
SHORT STRAP SINGLE RECEPTACLES SCREW SPACING 2.370"						
5251SSWB	15	125	White	5-15R	•	•
5251SSLAB	15	125	Light Almond	5-15R	•	•
SINGLE RECEPTACLES SIDE WIRE RIGHT ANGLE SLOTS						
5371I	20	125	Ivory	Non-NEMA	•	•
5371W	20	125	White	Non-NEMA	•	•
5371	20	125	Brown	Non-NEMA	•	•
SHORT STRAP SINGLE RECEPTACLES SCREW SPACING 1.750"						
5258I	15	125	Ivory	5-15R	•	•
5258W	15	125	White	5-15R	•	•
5258	15	125	Brown	5-15R	•	•
5258BK	15	125	Black	5-15R	•	•
5358I	20	125	Ivory	5-20R	•	•
5358W	20	125	White	5-20R	•	•
5358	20	125	Brown	5-20R	•	•
5358BK	20	125	Black	5-20R	•	•
5658I	15	250	Ivory	6-15R	•	•
5658	15	250	Brown	6-15R	•	•
5858I	20	250	Ivory	6-20R	•	•
5858W	20	250	White	6-20R	•	•
5858	20	250	Brown	6-20R	•	•


Supplied with mounting screws.

For Bulk Packaging Solutions consult factory.

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**




NEMA 6-15R **NEMA 6-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Commercial Specification Grade Tamper-Resistant Single Receptacles 15 & 20A, 125V




TR5351LA

Features

- Dual mechanical shutter system to help prevent insertions of foreign objects.
- Two drive screws anchor strap to back body and face where abrupt removal torque is greatest.
- Heavy-duty, corrosion-resistant zinc-plated steel strap for added strength.
- Backed-out tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for increased wiring flexibility.
- One-piece brass triple-wipe power contacts for lasting retention.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
TAMPER-RESISTANT SINGLE RECEPTACLES BACK & SIDE WIRE							
TR5251I	15	125	Ivory	5-15R	•	•	•
TR5251W	15	125	White	5-15R	•	•	•
TR5251	15	125	Brown	5-15R	•	•	•
TR5251LA	15	125	Light Almond	5-15R	•	•	•
TR5351I	20	125	Ivory	5-20R	•	•	•
TR5351W	20	125	White	5-20R	•	•	•
TR5351	20	125	Brown	5-20R	•	•	•
TR5351LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Commercial Specification Grade Weather-Resistant Tamper-Resistant Receptacles

20A, 125V



WR20TRW

Features

- Auto-ground clip assures positive ground.
- WR marking on face as required by UL Standard.
- Zinc-plated steel mounting screws for greater ease of installation and removal in wet or damp locations.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Heavy-duty, brass strap for added strength and ground conductivity.
- UV-resistant nylon face for longer life under adverse environmental conditions.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- .032 inch thick brass triple-wipe power contacts for lasting retention.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42
WEATHER-RESISTANT TAMPER-RESISTANT DUPLEX RECEPTACLES SIDE WIRE						
WR20TRI	20	125	Ivory	5-20R	•	•
WR20TRW	20	125	White	5-20R	•	•
WR20TR	20	125	Brown	5-20R	•	•
WR20TRGRY	20	125	Gray	5-20R	•	•
WR20TRLA	20	125	Light Almond	5-20R	•	•

WR20TR models are Tamper-Resistant.

2 Pole, 3 Wire



NEMA 5-20R


National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.
Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Construction Specification Grade Receptacles 15 & 20A, 125V



CRB5362I



CRB5362SW

Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES BACK & SIDE WIRE							
CRB5262I	15	125	Ivory	5-15R	•	•	•
CRB5262W	15	125	White	5-15R	•	•	•
CRB5262	15	125	Brown	5-15R	•	•	•
CRB5262GRY	15	125	Gray	5-15R	•	•	•
CRB5262BK	15	125	Black	5-15R	•	•	•
CRB5262RED	15	125	Red	5-15R	•	•	•
CRB5262LA	15	125	Light Almond	5-15R	•	•	•
CRB5362I	20	125	Ivory	5-20R	•	•	•
CRB5362W	20	125	White	5-20R	•	•	•
CRB5362	20	125	Brown	5-20R	•	•	•
CRB5362GRY	20	125	Gray	5-20R	•	•	•
CRB5362BK	20	125	Black	5-20R	•	•	•
CRB5362RED	20	125	Red	5-20R	•	•	•
CRB5362LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R




NEMA 5-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES


Hard Use Specification Grade Receptacles 15A & 20A, 125 & 125/250V



5262I



5362GN



PT5362LA



PlugTail® Features Only


- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
  No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

Features

- Corrosion-resistant, plated and tabbed steel strap is locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES								
5262I	**PT5262I**	15	125	Ivory	5-15R	•	•	•
5262W	**PT5262W**	15	125	White	5-15R	•	•	•
5262	**PT5262**	15	125	Brown	5-15R	•	•	•
5262GRY	**PT5262GRY**	15	125	Gray	5-15R	•	•	•
5262BK	**PT5262BK**	15	125	Black	5-15R	•	•	•
5262RED	**PT5262RED**	15	125	Red	5-15R	•	•	•
5262BL	**PT5262BL**	15	125	Blue	5-15R	•	•	•
5262LA	**PT5262LA**	15	125	Light Almond	5-15R	•	•	•
5362I	**PT5362I**	20	125	Ivory	5-20R	•	•	•
5362W	**PT5362W**	20	125	White	5-20R	•	•	•
5362	**PT5362**	20	125	Brown	5-20R	•	•	•
5362GRY	**PT5362GRY**	20	125	Gray	5-20R	•	•	•
5362BK	**PT5362BK**	20	125	Black	5-20R	•	•	•
5362RED	**PT5362RED**	20	125	Red	5-20R	•	•	•
5362LA	**PT5362LA**	20	125	Light Almond	5-20R	•	•	•
5362BL	**PT5362BL**	20	125	Blue	5-20R	•	•	•
5362GN		20	125	Green	5-20R	•	•	•
5362YLW		20	125	Yellow	5-20R	•	•	•
5362OR		20	125	Orange	5-20R	•	•	•
COMBINATION DUPLEX RECEPTACLES SIDE WIRE								
5290I		15	125/250	Ivory	5/6-15R	•	•	•
5290		15	125/250	Brown	5/6-15R	•	•	•
5890I		20	125/250	Ivory	5/6-20R	•	•	
5890W		20	125/250	White	5/6-20R	•	•	
5890		20	125/250	Brown	5/6-20R	•	•	

2 Pole, 3 Wire




For PlugTail Connectors, see Page B-21.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Hard Use Specification Grade Tamper-Resistant Receptacles 15 & 20A, 125V



TR5362LA



PTTR5362W



Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Corrosion-resistant plated steel strap is locked in to face and back body to resist pulling away from the face/body assembly.
- .032 inch thick brass triple-wipe power contacts.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
TAMPER-RESISTANT HARD USE DUPLEX RECEPTACLES								
TR5262I	**PTTR5262I**	15	125	Ivory	5-15R	•	•	•
TR5262W	**PTTR5262W**	15	125	White	5-15R	•	•	•
TR5262	**PTTR5262**	15	125	Brown	5-15R	•	•	•
TR5262GRY	**PTTR5262GRY**	15	125	Gray	5-15R	•	•	•
TR5262BK		15	125	Black	5-15R	•	•	•
TR5262RED	**PTTR5262RED**	15	125	Red	5-15R	•	•	•
TR5262BL		15	125	Blue	5-15R	•	•	•
TR5262LA	**PTTR5262LA**	15	125	Light Almond	5-15R	•	•	•
TR5362I	**PTTR5362I**	20	125	Ivory	5-20R	•	•	•
TR5362W	**PTTR5362W**	20	125	White	5-20R	•	•	•
TR5362	**PTTR5362**	20	125	Brown	5-20R	•	•	•
TR5362GRY	**PTTR5362GRY**	20	125	Gray	5-20R	•	•	•
TR5362BK	**PTTR5362BK**	20	125	Black	5-20R	•	•	•
TR5362RED		20	125	Red	5-20R	•	•	•
TR5362BL		20	125	Blue	5-20R	•	•	•
TR5362LA	**PTTR5362LA**	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R




NEMA 5-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Hard Use Specification Grade Plug Load Controllable Receptacles 15 & 20A, 125V



5262CHBK




5362CDBK

Features

- Pad-printed ink on face of receptacle for long-lasting identification and code compliance.
- **CH Version Only:** Split circuit tab broken at the factory, allowing half of the receptacle to be controlled.
- Controlled receptacle marking is NEMA-approved and compliant with 2017 NEC®.
- Can be wired to sensors, timers, or other control signals to control plug loads.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Corrosion-resistant, plated steel strap locked into face and back body to resist pulling away from face/body assembly.
- Auto-ground eliminates the necessity to terminate grounding conductor in device.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two backwire holes for more wiring flexibility.

CATALOG NUMBER	TAMPER-RESISTANT CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HALF-CONTROLLED DUPLEX RECEPTACLES BACK & SIDE WIRE								
5262CHI	**TR5262CHI**	15	125	Ivory	5-15R	•	•	•
5262CHW	**TR5262CHW**	15	125	White	5-15R	•	•	•
5262CH		15	125	Brown	5-15R	•	•	•
5262CHGRY	**TR5262CHGRY**	15	125	Gray	5-15R	•	•	•
5262CHBK		15	125	Black	5-15R	•	•	•
5262CHLA	**TR5262CHLA**	15	125	Light Almond	5-15R	•	•	•
5262CHBL	**TR5262CHBL**	15	125	Blue	5-15R	•	•	•
5262CHGN		15	125	Green	5-15R	•	•	•
5362CHI	**TR5362CHI**	20	125	Ivory	5-20R	•	•	•
5362CHW	**TR5362CHW**	20	125	White	5-20R	•	•	•
5362CH	**TR5362CH**	20	125	Brown	5-20R	•	•	•
5362CHGRY	**TR5362CHGRY**	20	125	Gray	5-20R	•	•	•
5362CHBK	**TR5362CHBK**	20	125	Black	5-20R	•	•	•
5362CHLA	**TR5362CHLA**	20	125	Light Almond	5-20R	•	•	•
5362CHBL	**TR5362CHBL**	20	125	Blue	5-20R	•	•	•
5362CHGN		20	125	Green	5-20R	•	•	•
DUAL-CONTROLLED DUPLEX RECEPTACLES BACK & SIDE WIRE								
5262CDI	**TR5262CDI**	15	125	Ivory	5-15R	•	•	•
5262CDW	**TR5262CDW**	15	125	White	5-15R	•	•	•
5262CD	**TR5262CD**	15	125	Brown	5-15R	•	•	•
5262CDGRY	**TR5262CDGRY**	15	125	Gray	5-15R	•	•	•
5262CDBK		15	125	Black	5-15R	•	•	•
5262CDLA	**TR5262CDLA**	15	125	Light Almond	5-15R	•	•	•
5262CDBL	**TR5262CDBL**	15	125	Blue	5-15R	•	•	•
5262CDGN		15	125	Green	5-15R	•	•	•
5362CDI	**TR5362CDI**	20	125	Ivory	5-20R	•	•	•
5362CDW	**TR5362CDW**	20	125	White	5-20R	•	•	•
5362CD	**TR5362CD**	20	125	Brown	5-20R	•	•	•
5362CDGRY	**TR5362CDGRY**	20	125	Gray	5-20R	•	•	•
5362CDBK	**TR5362CDBK**	20	125	Black	5-20R	•	•	•
5362CDLA	**TR5362CDLA**	20	125	Light Almond	5-20R	•	•	•
5362CDBL	**TR5362CDBL**	20	125	Blue	5-20R	•	•	•
5362CDGN		20	125	Green	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

PlugTail® Hard Use Specification Grade Plug Load Controllable Receptacles 15 & 20A, 125V



PT5362CDLA



PTTR5262SCCHI

Features

- Permanent marking on face of receptacle for long-lasting identification and code compliance.
- **CH Version Only:** Split circuit tab broken at the factory, allowing half of the receptacle to be controlled.
- Controlled receptacle marking is NEMA-approved and compliant with 2017 NEC®.
- Can be wired to sensors, timers, or other control signals to control plug loads.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

PLUGTAIL CATALOG NUMBER	PLUGTAIL TAMPER-RESISTANT CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	V.			UL498	FSUL WC596	C22.2 No. 42
HALF-CONTROLLED DUPLEX RECEPTACLES								
PT5262SCCHI	PTTR5262SCCHI	15	125	Ivory	5-15R	•	•	•
PT5262SCCHW	PTTR5262SCCHW	15	125	White	5-15R	•	•	•
PT5262SCCH	PTTR5262SCCH	15	125	Brown	5-15R	•	•	•
PT5262SCCHGRY	PTTR5262SCCHGRY	15	125	Gray	5-15R	•	•	•
PT5262SCCHLA	PTTR5262SCCHLA	15	125	Light Almond	5-15R	•	•	•
PT5362SCCHI	PTTR5362SCCHI	20	125	Ivory	5-20R	•	•	•
PT5362SCCHW	PTTR5362SCCHW	20	125	White	5-20R	•	•	•
PT5362SCCH	PTTR5362SCCH	20	125	Brown	5-20R	•	•	•
PT5362SCCHGRY	PTTR5362SCCHGRY	20	125	Gray	5-20R	•	•	•
PT5362SCCHBK	PTTR5362SCCHBK	20	125	Black	5-20R	•	•	•
PT5362SCCHLA	PTTR5362SCCHLA	20	125	Light Almond	5-20R	•	•	•
DUAL-CONTROLLED DUPLEX RECEPTACLES								
PT5262CDI	PTTR5262CDI	15	125	Ivory	5-15R	•	•	•
PT5262CDW	PTTR5262CDW	15	125	White	5-15R	•	•	•
PT5262CD	PTTR5262CD	15	125	Brown	5-15R	•	•	•
PT5262CDGRY	PTTR5262CDGRY	15	125	Gray	5-15R	•	•	•
PT5262CDLA	PTTR5262CDLA	15	125	Light Almond	5-15R	•	•	•
PT5362CDI	PTTR5362CDI	20	125	Ivory	5-20R	•	•	•
PT5362CDW	PTTR5362CDW	20	125	White	5-20R	•	•	•
PT5362CD	PTTR5362CD	20	125	Brown	5-20R	•	•	•
PT5362CDGRY	PTTR5362CDGRY	20	125	Gray	5-20R	•	•	•
PT5362CDBK	PTTR5362CDBK	20	125	Black	5-20R	•	•	•
PT5362CDLA	PTTR5362CDLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Hard Use Specification Grade Weather-Resistant Receptacles

15 & 20A, 125 & 250V




WR5262W

Features

- Auto-ground clip assures positive ground.
- WR marking on face as required by UL Standard.
- Zinc-plated steel mounting screws for greater ease of installation and removal in wet or damp locations.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Heavy-duty, brass strap for added strength and ground conductivity.
- UV-resistant nylon face for longer life under adverse environmental conditions.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- .032 inch thick brass triple-wipe power contacts for lasting retention.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
WEATHER-RESISTANT DUPLEX RECEPTACLES BACK & SIDE WIRE							
WR5262I	15	125	Ivory	5-15R	•	•	•
WR5262W	15	125	White	5-15R	•	•	•
WR5262GRY	15	125	Gray	5-15R	•	•	•
WR5362I	20	125	Ivory	5-20R	•	•	•
WR5362W	20	125	White	5-20R	•	•	•
WR5362GRY	20	125	Gray	5-20R	•	•	•
WR5662I	15	250	Ivory	6-15R	•	•	•
WR5662GRY	15	250	Gray	6-15R	•	•	•
WR5862I	20	250	Ivory	6-20R	•	•	•
WR5862W	20	250	White	6-20R	•	•	•
WR5862GRY	20	250	Gray	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

NEMA 6-15R **NEMA 6-20R**


National Electrical Code® Section 406.8 Receptacles in Wet or Damp Locations.
Requires that all 15- and 20-amp, 125- and 250-volt non-locking receptacles installed in wet or damp locations shall be weather-resistant receptacles.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

PlugTail® Hard Use Specification Grade Split Circuit Tamper-Resistant Receptacles 15 & 20A, 125V

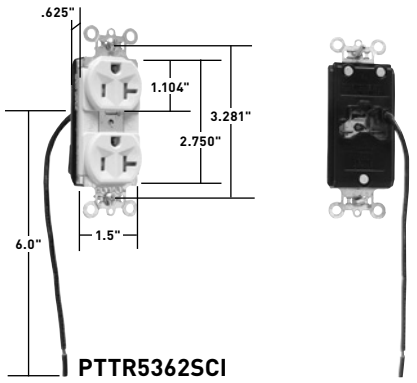


PTTR5362SCI

Features

- Pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
TAMPER-RESISTANT SPLIT CIRCUIT DUPLEX RECEPTACLES WITH 6" LEAD						
PTTR5262SCW	15	125	White	5-15R	•	•
PTTR5262SC	15	125	Brown	5-15R	•	•
PTTR5262SCBK	15	125	Black	5-15R	•	•
PTTR5262SCI	15	125	Ivory	5-15R	•	•
PTTR5262SCLA	15	125	Light Almond	5-15R	•	•
PTTR5362SCI	20	125	Ivory	5-20R	•	•
PTTR5362SCW	20	125	White	5-20R	•	•
PTTR5362SC	20	125	Brown	5-20R	•	•
PTTR5362SCBK	20	125	Black	5-20R	•	•
PTTR5362SCLA	20	125	Light Almond	5-20R	•	•
PTTR5362SCGRY	20	125	Gray	5-20R	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Receptacles 15 & 20A, 125 & 250V




PS5262I

Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- High strength nylon face.
- Internal screw-pressure-plate back and side wired to accept #14 and #10 AWG stranded or solid copper or copper-clad conductors. Eight back wire holes.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES BACK & SIDE WIRE							
PS5262I	15	125	Ivory	5-15R	•	•	•
PS5262W	15	125	White	5-15R	•	•	•
PS5262	15	125	Brown	5-15R	•	•	•
PS5262GRY	15	125	Gray	5-15R	•	•	•
PS5262BK	15	125	Black	5-15R	•	•	•
PS5262RED	15	125	Red	5-15R	•	•	•
PS5262LA	15	125	Light Almond	5-15R	•	•	•
PS5362I	20	125	Ivory	5-20R	•	•	•
PS5362W	20	125	White	5-20R	•	•	•
PS5362	20	125	Brown	5-20R	•	•	•
PS5362GRY	20	125	Gray	5-20R	•	•	•
PS5362BK	20	125	Black	5-20R	•	•	•
PS5362RED	20	125	Red	5-20R	•	•	•
PS5362LA	20	125	Light Almond	5-20R	•	•	•
PS5362BL	20	125	Blue	5-20R	•	•	•
5662I	15	250	Ivory	6-15R	•	•	•
5662W	15	250	White	6-15R	•	•	•
5662	15	250	Brown	6-15R	•	•	•
5862I	20	250	Ivory	6-20R	•	•	•
5862W	20	250	White	6-20R	•	•	•
5862	20	250	Brown	6-20R	•	•	•
5862GRY	20	250	Gray	6-20R	•	•	•
5862BK	20	250	Black	6-20R	•	•	•
5862RED	20	250	Red	6-20R	•	•	•

2 Pole, 3 Wire




For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Single Receptacles 15 & 20A, 125 & 250V




5361I

Features


- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- One-piece brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- Internal screw-pressure-plate back wire capable of accepting #14 – #10 AWG solid or stranded copper or copper-clad wire.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
SINGLE RECEPTACLES BACK & SIDE WIRE							
5261I	15	125	Ivory	5-15R	•	•	•
5261W	15	125	White	5-15R	•	•	•
5261	15	125	Brown	5-15R	•	•	•
5261GRY	15	125	Gray	5-15R	•	•	•
5261BK	15	125	Black	5-15R	•	•	•
5261RED	15	125	Red	5-15R	•	•	•
5261LA	15	125	Light Almond	5-15R	•	•	•
5361I	20	125	Ivory	5-20R	•	•	•
5361W	20	125	White	5-20R	•	•	•
5361	20	125	Brown	5-20R	•	•	•
5361GRY	20	125	Gray	5-20R	•	•	•
5361BK	20	125	Black	5-20R	•	•	•
5361RED	20	125	Red	5-20R	•	•	•
5361LA	20	125	Light Almond	5-20R	•	•	•
5671I	15	250	Ivory	6-15R	•	•	•
5671	15	250	Brown	6-15R	•	•	•
5671RED	15	250	Red	6-15R	•	•	•
5671BL	15	250	Blue	6-15R	•	•	•
5671LA	15	250	Light Almond	6-15R	•	•	•
5871I	20	250	Ivory	6-20R	•	•	•
5871W	20	250	White	6-20R	•	•	•
5871	20	250	Brown	6-20R	•	•	•
5871GRY	20	250	Gray	6-20R	•	•	•
5871BK	20	250	Black	6-20R	•	•	•
5871RED	20	250	Red	6-20R	•	•	•
5871LA	20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**




NEMA 6-15R **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Decorator Receptacles 15 & 20A, 125 & 250V




26242I

Features

- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard Decorator-style wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
DECORATOR RECEPTACLES SIDE WIRE ONLY							
26242I	15	125	Ivory	5-15R	•	•	•
26242W	15	125	White	5-15R	•	•	•
26242	15	125	Brown	5-15R	•	•	•
26242GRY	15	125	Gray	5-15R	•	•	•
26242BK	15	125	Black	5-15R	•	•	•
26242RED	15	125	Red	5-15R	•	•	•
26342I	20	125	Ivory	5-20R	•	•	•
26342W	20	125	White	5-20R	•	•	•
26342	20	125	Brown	5-20R	•	•	•
26342GRY	20	125	Gray	5-20R	•	•	•
26342BK	20	125	Black	5-20R	•	•	•
26342RED	20	125	Red	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES


Heavy-Duty Specification Grade Decorator Receptacles 15 & 20A, 125 & 250V

Features


- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard Decorator-style wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

PlugTail® Features Only


- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.



26252I




26852I



PT26352I

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R** **NEMA 6-15R** **NEMA 6-20R**


CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
DECORATOR RECEPTACLES								
26252I		15	125	Ivory	5-15R	•	•	•
26252W	**PT26252W**	15	125	White	5-15R	•	•	•
26252	**PT26252**	15	125	Brown	5-15R	•	•	•
26252GRY	**PT26252GRY**	15	125	Gray	5-15R	•	•	•
26252BK	**PT26252BK**	15	125	Black	5-15R	•	•	•
26252RED	**PT26252RED**	15	125	Red	5-15R	•	•	•
26252LA	**PT26252LA**	15	125	Light Almond	5-15R	•	•	•
26352I	**PT26352I**	20	125	Ivory	5-20R	•	•	•
26352W	**PT26352W**	20	125	White	5-20R	•	•	•
26352	**PT26352**	20	125	Brown	5-20R	•	•	•
26352GRY	**PT26352GRY**	20	125	Gray	5-20R	•	•	•
26352BK	**PT26352BK**	20	125	Black	5-20R	•	•	•
26352RED	**PT26352RED**	20	125	Red	5-20R	•	•	•
26352BL	**PT26352BL**	20	125	Blue	5-20R	•	•	•
26352LA	**PT26352LA**	20	125	Light Almond	5-20R	•	•	•
26652I		15	250	Ivory	6-15R	•	•	•
26652W		15	250	White	6-15R	•	•	•
26652BK		15	250	Black	6-15R	•	•	•
26852I		20	250	Ivory	6-20R	•	•	•
26852W		20	250	White	6-20R	•	•	•
26852		20	250	Brown	6-20R	•	•	•
26852BK		20	250	Black	6-20R	•	•	•
26852RED		20	250	Red	6-20R	•	•	•
26852LA		20	250	Light Almond	6-20R	•	•	•

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Tamper-Resistant Decorator Receptacles 15 & 20A, 125V



TR26362I



PTTR26362I

Features


- Isolated ground version features nylon isolator plate for isolating ground strap and box system.
- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
TAMPER-RESISTANT DECORATOR DUPLEX RECEPTACLES								
TR26262I		15	125	Ivory	5-15R	•	•	•
TR26262W	PTTR26262W	15	125	White	5-15R	•	•	•
TR26262	PTTR26262	15	125	Brown	5-15R	•	•	•
TR26262GRY	PTTR2626GRY	15	125	Gray	5-15R	•	•	•
TR26262BK	PTTR26262BK	15	125	Black	5-15R	•	•	•
TR26262RED		15	125	Red	5-15R	•	•	•
TR26262LA	PTTR26262LA	15	125	Light Almond	5-15R	•	•	•
TR26362I	PTTR26362I	20	125	Ivory	5-20R	•	•	•
TR26362W	PTTR26362W	20	125	White	5-20R	•	•	•
TR26362	PTTR26362	20	125	Brown	5-20R	•	•	•
TR26362GRY	PTTR26362GRY	20	125	Gray	5-20R	•	•	•
TR26362BK	PTTR26362BK	20	125	Black	5-20R	•	•	•
TR26362RED		20	125	Red	5-20R	•	•	•
TR26362LA	PTTR26362LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

PlugTail® Heavy-Duty Specification Grade Tamper-Resistant Split Circuit Decorator Receptacles

15 & 20A, 125V



PTTR26262SCI

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Split circuit models pre-wired with one welded pre-stripped wire lead to facilitate switched receptacle circuit applications.

CATALOG NUMBER SPEC GRADE	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
TAMPER-RESISTANT SPLIT CIRCUIT DUPLEX RECEPTACLES						
PTTR26262SCI	15	125	Ivory	5-15R	•	•
PTTR26262SCW	15	125	White	5-15R	•	•
PTTR26262SCBK	15	125	Black	5-15R	•	•
PTTR26362SCW	20	125	White	5-20R	•	•
PTTR26362SC	20	125	Brown	5-20R	•	•
PTTR26362SCLA	20	125	Light Almond	5-20R	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Decorator Single Receptacles 15 & 20A, 250V




26861LA

Features

- Corrosion-resistant, plated wraparound steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard Decorator-style wall plate.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
HEAVY-DUTY SPECIFICATION GRADE SINGLE RECEPTACLES BACK & SIDE WIRE							
26661I	15	250	Ivory	6-15R	•	•	•
26661W	15	250	White	6-15R	•	•	•
26661GRY	15	250	Gray	6-15R	•	•	•
26661BK	15	250	Black	6-15R	•	•	•
26861I	20	250	Ivory	6-20R	•	•	
26861W	20	250	White	6-20R	•	•	
26861	20	250	Brown	6-20R	•	•	
26861GRY	20	250	Gray	6-20R	•	•	
26861BK	20	250	Black	6-20R	•	•	
26861LA	20	250	Light Almond	6-20R	•	•	

2 Pole, 3 Wire




NEMA 6-15R **NEMA 6-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Tamper-Resistant Decorator Single Receptacles 15 & 20A, 125V




TR26361LA

Features

- Auto-ground clip assures positive ground.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Heavy-duty corrosion-resistant zinc-plated strap for added strength.
- One-piece brass triple-wipe power contact for lasting retention.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.
- Dual mechanical shutter system to help prevent insertion of foreign objects.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HEAVY-DUTY TAMPER-RESISTANT DECORATOR SINGLE RECEPTACLES BACK & SIDE WIRE							
TR26261I	15	125	Ivory	5-15R	•	•	•
TR26261W	15	125	White	5-15R	•	•	•
TR26261	15	125	Brown	5-15R	•	•	•
TR26261GRY	15	125	Gray	5-15R	•	•	•
TR26261BK	15	125	Black	5-15R	•	•	•
TR26261LA	15	125	Light Almond	5-15R	•	•	•
TR26361I	20	125	Ivory	5-20R	•	•	•
TR26361W	20	125	White	5-20R	•	•	•
TR26361	20	125	Brown	5-20R	•	•	•
TR26361GRY	20	125	Gray	5-20R	•	•	•
TR26361BK	20	125	Black	5-20R	•	•	•
TR26361LA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

INDUSTRIAL GRADE RECEPTACLES

Heavy-Duty Specification Grade Decorator Plug Load Controllable Receptacles 15 & 20A, 125V



26252CHBK




26352CDBK

Features

- Permanent marking on face of receptacle for long-lasting identification and code compliance.
- **CH Version Only:** Split circuit tab broken at the factory, allowing half of the receptacle to be controlled.
- Controlled receptacle marking is NEMA-approved and compliant with 2017 NEC®.
- Can be wired to sensors, timers, or other control signals to control plug loads.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Corrosion-resistant, plated steel strap locked into face and back body to resist pulling away from face/body assembly.
- Auto-ground eliminates the necessity to terminate grounding conductor in device.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two backwire holes for more wiring flexibility.

CATALOG NUMBER	TAMPER-RESISTANT CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HALF-CONTROLLED DUPLEX RECEPTACLES BACK & SIDE WIRE								
26252CHI	**TR26262CHI**	15	125	Ivory	5-15R	•	•	•
26252CHW	**TR26262CHW**	15	125	White	5-15R	•	•	•
26252CH	**TR26262CH**	15	125	Brown	5-15R	•	•	•
26252CHGRY	**TR26262CHGRY**	15	125	Gray	5-15R	•	•	•
26252CHBK		15	125	Black	5-15R	•	•	•
26252CHLA	**TR26262CHLA**	15	125	Light Almond	5-15R	•	•	•
26252CHBL	**TR26262CHBL**	15	125	Blue	5-15R	•	•	•
26252CHGN		15	125	Green	5-15R	•	•	•
26352CHI	**TR26362CHI**	20	125	Ivory	5-20R	•	•	•
26352CHW	**TR26362CHW**	20	125	White	5-20R	•	•	•
26352CH	**TR26362CH**	20	125	Brown	5-20R	•	•	•
26352CHGRY	**TR26362CHGRY**	20	125	Gray	5-20R	•	•	•
26352CHBK	**TR26362CHBK**	20	125	Black	5-20R	•	•	•
26352CHLA	**TR26362CHLA**	20	125	Light Almond	5-20R	•	•	•
26352CHBL	**TR26362CHBL**	20	125	Blue	5-20R	•	•	•
26352CHGN		20	125	Green	5-20R	•	•	•
DUAL-CONTROLLED DUPLEX RECEPTACLES BACK & SIDE WIRE								
26252CDI	**TR26262CDI**	15	125	Ivory	5-15R	•	•	•
26252CDW	**TR26262CDW**	15	125	White	5-15R	•	•	•
26252CD	**TR26262CD**	15	125	Brown	5-15R	•	•	•
26252CDGRY	**TR26262CDGRY**	15	125	Gray	5-15R	•	•	•
26252CDBK	**TR26262CDBK**	15	125	Black	5-15R	•	•	•
26252CDLA	**TR26262CDLA**	15	125	Light Almond	5-15R	•	•	•
26252CDBL	**TR26262CDBL**	15	125	Blue	5-15R	•	•	•
26252CDGN		15	125	Green	5-15R	•	•	•
26352CDI	**TR26362CDI**	20	125	Ivory	5-20R	•	•	•
26352CDW	**TR26362CDW**	20	125	White	5-20R	•	•	•
26352CD	**TR26362CD**	20	125	Brown	5-20R	•	•	•
26352CDGRY	**TR26362CDGRY**	20	125	Gray	5-20R	•	•	•
26352CDBK	**TR26362CDBK**	20	125	Black	5-20R	•	•	•
26352CDLA	**TR26362CDLA**	20	125	Light Almond	5-20R	•	•	•
26352CDBL	**TR26362CDBL**	20	125	Blue	5-20R	•	•	•
26352CDGN		20	125	Green	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

INDUSTRIAL GRADE RECEPTACLES

PlugTail® Heavy-Duty Specification Grade Decorator Plug Load Controllable Receptacles 15 & 20A, 125V




PT26352SCCTW

Features

- Permanent marking on face of receptacle for long-lasting identification and code compliance.
- **CH Version Only:** Split circuit tab broken at the factory, allowing half of the receptacle to be controlled.
- Controlled receptacle marking is NEMA-approved and compliant with 2017 NEC®.
- Can be wired to sensors, timers, or other control signals to control plug loads.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

PLUGTAIL CATALOG NUMBER	PLUGTAIL TAMPER-RESISTANT CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	V.			UL498	FSUL WC596	C22.2 No. 42
HALF-CONTROLLED DUPLEX RECEPTACLES								
PT26252SCCTI	PTTR26262SCCTI	15	125	Ivory	5-15R	•	•	•
PT26252SCCTW	PTTR26262SCCTW	15	125	White	5-15R	•	•	•
PT26252SCCTGRY	PTTR26262SCCTGRY	15	125	Gray	5-15R	•	•	•
PT26252SCCTBK	PTTR26262SCCTBK	15	125	Black	5-15R	•	•	•
PT26252SCCTLA	PTTR26262SCCTLA	15	125	Light Almond	5-15R	•	•	•
PT26352SCCTI	PTTR26362SCCTI	20	125	Ivory	5-20R	•	•	•
PTTR26352SCCTW	PTTR26362SCCTW	20	125	White	5-20R	•	•	•
PT26352SCCTGRY	PTTR26362SCCTGRY	20	125	Gray	5-20R	•	•	•
PT26352SCCTBK	PTTR26362SCCTBK	20	125	Black	5-20R	•	•	•
PT26352SCCTLA	PTTR26362SCCTLA	20	125	Light Almond	5-20R	•	•	•
DUAL-CONTROLLED DUPLEX RECEPTACLES								
PT26252CDI	PTTR26262CDI	15	125	Ivory	5-15R	•	•	•
PT26252CDW	PTTR26262CDW	15	125	White	5-15R	•	•	•
PT26252CD		15	125	Brown	5-15R	•	•	•
PT26252CDGRY	PTTR26262CDGRY	15	125	Gray	5-15R	•	•	•
PT26252CDLA	PTTR26262CDLA	15	125	Light Almond	5-15R	•	•	•
PT26352CDI	PTTR26362CDI	20	125	Ivory	5-20R	•	•	•
PT26352CDW	PTTR26362CDW	20	125	White	5-20R	•	•	•
PT26352CD	PTTR26362CD	20	125	Brown	5-20R	•	•	•
PT26352CDGRY	PTTR26362CDGRY	20	125	Gray	5-20R	•	•	•
PT26352CDBK	PTTR26362CDBK	20	125	Black	5-20R	•	•	•
PT26352CDLA	PTTR26362CDLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1 and WD-6.

INDUSTRIAL GRADE RECEPTACLES

Industrial Extra Heavy-Duty Specification Grade Receptacles 15 & 20A, 125 & 250V



5362AI



PT5362AW

Features


- One-piece brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Corrosion-resistant models have nickel-plated straps and contacts.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	FSUL WC596	CSA C22.2 No. 42
DUPLEX RECEPTACLES								
5262AI	PT5262AI	15	125	Ivory	5-15R	•	•	•
5262AW	PT5262AW	15	125	White	5-15R	•	•	•
5262A	PT5262A	15	125	Brown	5-15R	•	•	•
5262AGRY	PT5262AGRY	15	125	Gray	5-15R	•	•	•
5262ARED		15	125	Red	5-15R	•	•	•
	PT5262ABK	15	125	Black	5-15R	•	•	•
5262ALA	PT5262ALA	15	125	Light Almond	5-15R	•	•	•
5362AI	PT5362AI	20	125	Ivory	5-20R	•	•	•
5362AW	PT5362AW	20	125	White	5-20R	•	•	•
5362A	PT5362A	20	125	Brown	5-20R	•	•	•
5362AGRY	PT5362AGRY	20	125	Gray	5-20R	•	•	•
5362ABK	PT5362ABK	20	125	Black	5-20R	•	•	•
5362ARED	PT5362ARED	20	125	Red	5-20R	•	•	•
5362ALA	PT5362ALA	20	125	Light Almond	5-20R	•	•	•
5362ABL		20	125	Blue	5-20R	•	•	•
5662AI		15	250	Ivory	6-15R	•	•	•
5662AW		15	250	White	6-15R	•	•	•
5662A		15	250	Brown	6-15R	•	•	•
5662AGRY		15	250	Gray	6-15R	•	•	•
5662ABK		15	250	Black	6-15R	•	•	•
5662ARED		15	250	Red	6-15R	•	•	•
5862AI		20	250	Ivory	6-20R	•	•	•
5862AW		20	250	White	6-20R	•	•	•
5862A		20	250	Brown	6-20R	•	•	•
5862AGRY		20	250	Gray	6-20R	•	•	•
5862ABK		20	250	Black	6-20R	•	•	•
5862ARED		20	250	Red	6-20R	•	•	•
5862ALA		20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R | NEMA 5-20R

NEMA 6-15R | NEMA 6-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

INDUSTRIAL GRADE RECEPTACLES

Industrial Extra Heavy-Duty Specification Grade Tamper-Resistant Receptacles 15 & 20A, 125V



TR62I



PTTR63W

Features


- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES								
TR62I	**PTTR62I**	15	125	Ivory	5-15R	•	•	•
TR62W	**PTTR62W**	15	125	White	5-15R	•	•	•
TR62		15	125	Brown	5-15R	•	•	•
TR62GRY		15	125	Gray	5-15R	•	•	•
TR62LA		15	125	Light Almond	5-15R	•	•	•
TR63I	**PTTR63I**	20	125	Ivory	5-20R	•	•	•
TR63W	**PTTR63W**	20	125	White	5-20R	•	•	•
TR63	**PTTR63**	20	125	Brown	5-20R	•	•	•
TR63GRY	**PTTR63GRY**	20	125	Gray	5-20R	•	•	•
TR63BK	**PTTR63BK**	20	125	Black	5-20R	•	•	•
TR63RED		20	125	Red	5-20R	•	•	•
TR63LA	**PTTR63LA**	20	125	Light Almond	5-20R	•	•	•
TR63BL		20	125	Blue	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

INDUSTRIAL GRADE RECEPTACLES

Industrial Extra Heavy-Duty Specification Grade Corrosion-Resistant Receptacles 15 & 20A, 125V




CR6300

Features

- One-piece brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Corrosion-resistant models have nickel-plated straps and contacts.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
CORROSION-RESISTANT RECEPTACLES BACK & SIDE WIRE							
CR6200	15	125	Yellow	5-15R	•	•	•
CR6300	20	125	Yellow	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES



HARD USE SPEC GRADE RECEPTACLES

Receptacles plus PlugTail®	B-49
Tamper-Resistant Receptacles plus PlugTail®	B-50
Single Receptacles	B-51
Tamper-Resistant Single Receptacles	B-52
Tamper-Resistant Power-Indicating Receptacles	B-53
Isolated Ground Receptacles plus PlugTail®	B-54
Isolated Ground Single Receptacles	B-55
Tamper-Resistant Isolated Ground Receptacles	B-56
HEAVY-DUTY SPECIFICATION GRADE	
Receptacles	B-57
Tamper-Resistant Receptacles	B-58
EXTRA HEAVY-DUTY SPECIFICATION GRADE	
Receptacles plus PlugTail®	B-59
Tamper-Resistant Receptacles plus PlugTail®	B-60
MRI Receptacles	B-61
LED Illuminated Face Receptacles plus PlugTail®	B-62
PlugTail® Tamper-Resistant Power Indicating Receptacles	B-63
SURGE PROTECTIVE	
Extra Heavy-Duty Receptacles plus PlugTail®	B-64
Tamper-Resistant Extra Heavy-Duty Receptacles plus PlugTail®	B-65
Isolated Ground Receptacles plus PlugTail®	B-66
Tamper-Resistant Isolated Ground Receptacles	B-67



HEAVY-DUTY DECORATOR

HEAVY-DUTY DECORATOR	
Tamper-Resistant Single Receptacles	B-68
Receptacles plus PlugTail®	B-69
Tamper-Resistant Receptacles plus PlugTail®	B-70
Tamper-Resistant Power Indicating Receptacles	B-71
Isolated Ground Receptacles	B-72
Tamper-Resistant Isolated Ground Receptacles	B-73
GFCIs	
Receptacles plus PlugTail®	B-74
Tamper-Resistant Receptacles plus PlugTail®	B-75
Tamper-Resistant Isolated Ground Receptacles	B-76
Tamper-Resistant Audible Alarm Receptacles	B-77
Tamper-Resistant Night Light/GFCI Receptacles plus PlugTail®	B-78
NAFTA-Compliant Receptacles plus PlugTail®	B-79
Tamper-Resistant NAFTA-Compliant Receptacles	B-80
Tamper-Resistant NAFTA-Compliant Night Light/GFCI Receptacle	B-80




USB CHARGING RECEPTACLES

6A USB CHARGING WITH TAMPER-RESISTANT RECEPTACLES	
One Type-A & One Type-C Port	B-81
Two Type-C Ports	B-81
3.1A USB CHARGING WITH TAMPER-RESISTANT RECEPTACLES	
Two Type-A Ports	B-82
One Type-A & One Type-C Port plus PlugTail®	B-83
Two Type-C Ports	B-83
MISCELLANEOUS	
Straight Blade Plugs & Connectors	B-84
Quad Receptacles	B-85


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Hospital Grade Receptacles 15 & 20A, 125V




PT8200HW



8200HI






PT8300HW

Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a fingersafe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.
- Large brass contacts snugly terminate on device blade terminals. Audible snapping latch assures connection, allows release.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Impact-resistant nylon face.
- One-piece heat-treated triple-wipe brass power contacts.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Back wire holes allow entry of conductor insulation partially into body but not into wiring compartment.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES – COMPACT DESIGN								
8200HI	**PT8200HI**	15	125	Ivory	5-15R	•	•	•
8200HW	**PT8200HW**	15	125	White	5-15R	•	•	•
8200H		15	125	Brown	5-15R	•	•	•
8200HBL		15	125	Blue	5-15R	•	•	•
8200HGRY	**PT8200HGRY**	15	125	Gray	5-15R	•	•	•
8200HRED	**PT8200HRED**	15	125	Red	5-15R	•	•	•
8200HLA	**PT8200HLA**	15	125	Light Almond	5-15R	•	•	•
8300HI	**PT8300HI**	20	125	Ivory	5-20R	•	•	•
8300HW	**PT8300HW**	20	125	White	5-20R	•	•	•
8300H	**PT8300H**	20	125	Brown	5-20R	•	•	•
8300HBL		20	125	Blue	5-20R	•	•	•
8300HGRY	**PT8200HGRY**	20	125	Gray	5-20R	•	•	•
8300HBK	**PT8300HBK**	20	125	Black	5-20R	•	•	•
8300HRED	**PT8300HRED**	20	125	Red	5-20R	•	•	•
8300HLA	**PT8300HLA**	20	125	Light Almond	5-20R	•	•	•
8300HOR		20	125	Orange	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Hospital Grade Tamper-Resistant Receptacles 15 & 20A, 125V



PTTR8300W



TR8300HW

Features


- Dual mechanical shutter system to help prevent insertion of foreign objects.
- .032-inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
HOSPITAL GRADE DUPLEX RECEPTACLES							
TR8200HI	**PTTR8200I**	15	125	Ivory	5-15R	•	•
TR8200HW	**PTTR8200W**	15	125	White	5-15R	•	•
TR8200HLA		15	125	Light Almond	5-15R	•	•
TR8200HGRY		15	125	Gray	5-15R	•	•
TR8200HRED	**PTTR8200RED**	15	125	Red	5-15R	•	•
TR8200HBK		15	125	Black	5-15R	•	•
TR8300HI	**PTTR8300I**	20	125	Ivory	5-20R	•	•
TR8300HW	**PTTR8300W**	20	125	White	5-20R	•	•
TR8300HLA	**PTTR830LA**	20	125	Light Almond	5-20R	•	•
TR8300H	**PTTR8300**	20	125	Brown	5-20R	•	•
TR8300HGRY	**PTTR8300GRY**	20	125	Gray	5-20R	•	•
TR8300HRED	**PTTR8300RED**	20	125	Red	5-20R	•	•
TR8300HBK	**PTTR8300BK**	20	125	Black	5-20R	•	•
TR8300HBL		20	125	Blue	5-20R	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Hospital Grade Single Receptacles 15 & 20A, 125V; 20A, 250V



8201I



8284I

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
SINGLE RECEPTACLES BACK & SIDE WIRE							
8201I	15	125	Ivory	5-15R	•	•	•
8201W	15	125	White	5-15R	•	•	•
8201	15	125	Brown	5-15R	•	•	•
8201GRY	15	125	Gray	5-15R	•	•	•
8201BK	15	125	Black	5-15R	•	•	•
8201RED	15	125	Red	5-15R	•	•	•
8201LA	15	125	Light Almond	5-15R	•	•	•
8301I	20	125	Ivory	5-20R	•	•	•
8301W	20	125	White	5-20R	•	•	•
8301	20	125	Brown	5-20R	•	•	•
8301GRY	20	125	Gray	5-20R	•	•	•
8301RED	20	125	Red	5-20R	•	•	•
8301LA	20	125	Light Almond	5-20R	•	•	•
8301BL	20	125	Blue	5-20R	•	•	•
8801I	20	250	Ivory	6-20R	•	•	•
8801W	20	250	White	6-20R	•	•	•
8801	20	250	Brown	6-20R	•	•	•
8801GRY	20	250	Gray	6-20R	•	•	•
8801RED	20	250	Red	6-20R	•	•	•
8801LA	20	250	Light Almond	6-20R	•	•	•
SHORT STRAP SINGLE RECEPTACLES 1.937" SCREW SPACING, BACK & SIDE WIRE							
8284I	15	125	Ivory	5-15R	•	•	•
8284	15	125	Brown	5-15R	•	•	•
8384I	20	125	Ivory	5-20R	•	•	
8384	20	125	Brown	5-20R	•	•	

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R



NEMA 6-20R


For Hospital Use Power Interrupting Device consult Turnlok® Section D.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Hospital Grade Tamper-Resistant Single Receptacles 15 & 20A, 125V



TR8301LA

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
TAMPER-RESISTANT SINGLE RECEPTACLES, BACK & SIDE WIRE							
TR8201I	15	125	Ivory	5-15R	•	•	•
TR8201W	15	125	White	5-15R	•	•	•
TR8201	15	125	Brown	5-15R	•	•	•
TR8201GRY	15	125	Gray	5-15R	•	•	•
TR8201BK	15	125	Black	5-15R	•	•	•
TR8201RED	15	125	Red	5-15R	•	•	•
TR8201LA	15	125	Light Almond	5-15R	•	•	•
TR8301I	20	125	Ivory	5-20R	•	•	•
TR8301W	20	125	White	5-20R	•	•	•
TR8301	20	125	Brown	5-20R	•	•	•
TR8301BK	20	125	Black	5-20R	•	•	•
TR8301RED	20	125	Red	5-20R	•	•	•
TR8301LA	20	125	Light Almond	5-20R	•	•	•
TR8301BL	20	125	Blue	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Hospital Grade Tamper-Resistant Power-Indicating Receptacles 15 & 20A, 125V




TR8300PIW

Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
POWER INDICATOR HEAVY-DUTY HOSPITAL GRADE DUPLEX RECEPTACLES BACK & SIDE WIRE							
TR8200PI	15	125	Brown	5-15R	•	•	•
TR8200PIW	15	125	White	5-15R	•	•	•
TR8200PILA	15	125	Light Almond	5-15R	•	•	•
TR8200PII	15	125	Ivory	5-15R	•	•	•
TR8200PIRED	15	125	Red	5-15R	•	•	•
TR8200PIGRY	15	125	Gray	5-15R	•	•	•
TR8300PI	20	125	Brown	5-20R	•	•	•
TR8300PIW	20	125	White	5-20R	•	•	•
TR8300PILA	20	125	Light Almond	5-20R	•	•	•
TR8300PII	20	125	Ivory	5-20R	•	•	•
TR8300PIRED	20	125	Red	5-20R	•	•	•
TR8300PIGRY	20	125	Gray	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Isolated Ground Hospital Grade Receptacles 15 & 20A, 125V; 20A, 250V



IG8300

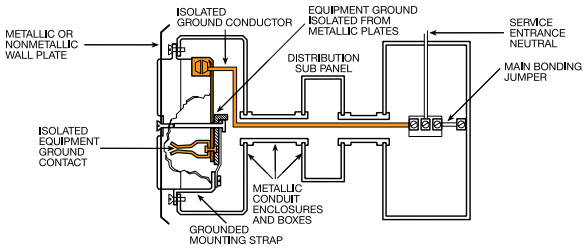

Features

- Impact-resistant nylon face.
- One-piece heat-treated triple-wipe brass power contacts.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Back wire holes allow entry of conductor insulation partially into body but not into wiring compartment.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
ISOLATED GROUND DUPLEX RECEPTACLES								
IG8200I		15	125	Ivory	5-15R	•	•	•
IG8200	PTIG8200	15	125	Orange	5-15R	•	•	•
IG8200RED	PTIG8200RED	15	125	Red	W5-15R	•	•	•
IG8300I	PTIG8300I	20	125	Ivory	5-20R	•	•	•
IG8300W		20	125	White	5-20R	•	•	•
IG8300	PTIG8300	20	125	Orange	5-20R	•	•	•
IG8300RED	PTIG8300RED	20	125	Red	5-20R	•	•	•
IG8300LA		20	125	Light Almond	5-20R	•	•	•
IG8800		20	250	Orange	6-20R	•	•	•
IG8800LA		20	250	Light Almond	6-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R | NEMA 5-20R | NEMA 6-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Isolated Ground Hospital Grade Single Receptacles 2 Pole, 3 Wire Grounding 20A, 125V



IG8301

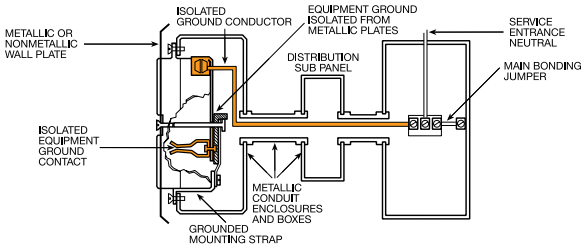

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
SINGLE RECEPTACLES BACK & SIDE WIRE							
IG8301	20	125	Orange	5-20R	•	•	•



NEMA 5-20R


For Wall Plates for Isolated Ground Systems, consult Wall Plates Section I.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hard Use Tamper-Resistant Isolated Ground Hospital Grade Receptacles 2 Pole, 3 Wire Grounding
15 & 20A, 125V



TRIG8300W

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
TAMPER-RESISTANT DUPLEX RECEPTACLES BACK & SIDE WIRE						
TRIG8200I	15	125	Ivory	5-15R	•	•
TRIG8200W	15	125	White	5-15R	•	•
TRIG8200	15	125	Orange	5-15R	•	•
TRIG8200BK	15	125	Black	5-15R	•	•
TRIG8200GRY	15	125	Gray	5-15R	•	•
TRIG8200RED	15	125	Red	5-15R	•	•
TRIG8200LA	15	125	Light Almond	5-15R	•	•
TRIG8300I	20	125	Ivory	5-20R	•	•
TRIG8300W	20	125	White	5-20R	•	•
TRIG8300	20	125	Orange	5-20R	•	•
TRIG8300BK	20	125	Black	5-20R	•	•
TRIG8300GRY	20	125	Gray	5-20R	•	•
TRIG8300RED	20	125	Red	5-20R	•	•
TRIG8300LA	20	125	Light Almond	5-20R	•	•



NEMA 5-15R




NEMA 5-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Hospital Grade Receptacles 15 & 20A, 125V




PS8200HI

Features

- Heavy-duty, brass strap for added strength and ground conductivity.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Tri-drive brass terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES BACK & SIDE WIRE							
PS8200HI	15	125	Ivory	5-15R	•	•	•
PS8200HW	15	125	White	5-15R	•	•	•
PS8200H	15	125	Brown	5-15R	•	•	•
PS8200HGRY	15	125	Gray	5-15R	•	•	•
PS8200HRED	15	125	Red	5-15R	•	•	•
PS8200HLA	15	125	Light Almond	5-15R	•	•	•
PS8300HI	20	125	Ivory	5-20R	•	•	•
PS8300HW	20	125	White	5-20R	•	•	•
PS8300H	20	125	Brown	5-20R	•	•	•
PS8300HGRY	20	125	Gray	5-20R	•	•	•
PS8300HRED	20	125	Red	5-20R	•	•	•
PS8300HLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Hospital Grade Tamper-Resistant Receptacles 15 & 20A, 125V




TR8300HW

Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- .032-inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessible break-off line contact connecting tab for split circuit wiring.
- Terminal compartments isolated from each other for positive conductor containment.
- Corrosion-resistant, zinc-plated steel strap is locked in.
- Internal screw-pressure-plate back wire and side wire line terminals accept #14 – #10 AWG copper or copper-clad conductors.
- High strength thermoplastic back body.
- Two back wire holes for more wiring flexibility.
- Auto-ground clip assures positive ground.
- Compact design for easy installation.
- Tri-drive terminal and mounting screws.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HOSPITAL GRADE TAMPER-RESISTANT DUPLEX RECEPTACLES BACK AND SIDE WIRE							
TR8200HI	15	125	Ivory	5-15R	•	•	•
TR8200HW	15	125	White	5-15R	•	•	•
TR8200HLA	15	125	Light Almond	5-15R	•	•	•
TR8200HGRY	15	125	Gray	5-15R	•	•	•
TR8200HRED	15	125	Red	5-15R	•	•	•
TR8200HBK	15	125	Black	5-15R	•	•	•
TR8300HI	20	125	Ivory	5-20R	•	•	•
TR8300HW	20	125	White	5-20R	•	•	•
TR8300HLA	20	125	Light Almond	5-20R	•	•	•
TR8300H	20	125	Brown	5-20R	•	•	•
TR8300HGRY	20	125	Gray	5-20R	•	•	•
TR8300HRED	20	125	Red	5-20R	•	•	•
TR8300HBK	20	125	Black	5-20R	•	•	•
TR8300HBL	20	125	Blue	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade Receptacles 15 & 20A, 125V; 20A, 250V



8300I



PT8300W

Features


- One-piece nickel-plated brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .040 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DUPLEX RECEPTACLES								
8200I	PT8200I	15	125	Ivory	5-15R	•	•	•
8200W	PT8200W	15	125	White	5-15R	•	•	•
8200		15	125	Brown	5-15R	•	•	•
8200GRY	PT8200GRY	15	125	Gray	5-15R	•	•	•
8200BK	PT8200BK	15	125	Black	5-15R	•	•	•
8200RED	PT8200RED	15	125	Red	5-15R	•	•	•
8200LA	PT8200LA	15	125	Light Almond	5-15R	•	•	•
	PT8200BL	15	125	Light Almond	5-15R	•	•	•
8300I	PT8300I	20	125	Ivory	5-20R	•	•	•
8300W	PT8300W	20	125	White	5-20R	•	•	•
8300	PT8300	20	125	Brown	5-20R	•	•	•
8300GRY	PT8300GRY	20	125	Gray	5-20R	•	•	•
8300BK	PT8300BK	20	125	Black	5-20R	•	•	•
8300RED	PT8300RED	20	125	Red	5-20R	•	•	•
8300LA	PT8300LA	20	125	Light Almond	5-20R	•	•	•
	PT8300BL	20	125	Light Almond	5-20R	•	•	•
8800I		20	250	Ivory	6-20R	•	•	•
8800W		20	250	White	6-20R	•	•	•
8800		20	250	Brown	6-20R	•	•	•
8800GRY		20	250	Gray	6-20R	•	•	•
8800BK		20	250	Black	6-20R	•	•	•
8800LA		20	250	Light Almond	6-20R	•	•	•
8800RED		20	250	Red	6-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**




NEMA 6-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade Tamper-Resistant Receptacles 15 & 20A, 125V



TR62HI

Features

- Thermoplastic dual mechanism shutter system to help prevent insertion of foreign objects.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty brass, one-piece mounting strap with integral ground.
- One-piece, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Impact-resistant nylon face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HOSPITAL GRADE DUPLEX RECEPTACLES								
TR62HI	**PTTR62HI**	15	125	Ivory	5-15R	•	•	•
TR62HW	**PTTR62HW**	15	125	White	5-15R	•	•	•
TR62H		15	125	Brown	5-15R	•	•	•
TR62HGRY		15	125	Gray	5-15R	•	•	•
	PTTR62HBK	15	125	Black	5-15R	•	•	•
TR62HRED	**PTTR62HRED**	15	125	Red	5-15R	•	•	•
TR62HLA		15	125	Light Almond	5-15R	•	•	•
TR63HI	**PTTR63HI**	20	125	Ivory	5-20R	•	•	•
TR63HW	**PTTR63HW**	20	125	White	5-20R	•	•	•
TR63H	**PTTR63H**	20	125	Brown	5-20R	•	•	•
TR63HGRY	**PTTR63HGRY**	20	125	Gray	5-20R	•	•	•
	PTTR63HBK	20	125	Black	5-20R	•	•	•
TR63HRED	**PTTR63HRED**	20	125	Red	5-20R	•	•	•
TR63HLA	**PTTR63HLA**	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R




NEMA 5-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade MRI Receptacles 15 & 20A, 125V



8200LAMRI


Receptacles designed expressly for MRI applications – We build these exclusive P&S receptacles with no ferrous metal, so they are perfect for high-magnetic-field environments such as magnetic-resonance imaging (MRI) suites. With the same basic design as our standard Extra Heavy-Duty Receptacles, they are extremely durable.

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- Extra heavy-duty, one-piece nickel-plated brass mounting strap with integral ground for superior structural integrity and long-term performance.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HOSPITAL GRADE DUPLEX RECEPTACLES BACK & SIDE WIRE							
8200WMRI	15	125	White	5-15R	•	•	•
8200REDMRI	15	125	Red	5-15R	•	•	•
8200LAMRI	15	125	Light Almond	5-15R	•	•	•
8300IMRI	20	125	Ivory	5-20R	•	•	•
8300WMRI	20	125	White	5-20R	•	•	•
8300GRYMRI	20	125	Gray	5-20R	•	•	•
8300REDMRI	20	125	Red	5-20R	•	•	•
8300LAMRI	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade LED Illuminated Face Receptacles

15 & 20A, 125V; 20A, 250V



8300ILI



PT8300ILLA



Illuminated face indicates power to receptacle and makes it easy to identify receptacle in dark applications.

Features


- One-piece nickel-plated brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .040 inch thick, nickel-plated brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External nickel-plated screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Illuminated version features exclusive LED lamp with solder connection for long durable life (10-12 years).

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
LED ILLUMINATED FACE DUPLEX RECEPTACLES								
8200ILI	PT8200ILI	15	125	Ivory	5-15R	•	•	•
8200ILW	PT8200ILW	15	125	White	5-15R	•	•	•
	PT8200ILGRY	15	125	Gray	5-15R	•	•	•
	PT8200ILBK	15	125	Black	5-15R	•	•	•
8200ILRED	PT8200ILRED	15	125	Red	5-15R	•	•	•
	PT8200ILLA	15	125	Light Almond	5-15R	•	•	•
8300ILI	PT8300ILI	20	125	Ivory	5-20R	•	•	•
8300ILW	PT8300ILW	20	125	White	5-20R	•	•	•
	PT8300IL	20	125	Brown	5-20R	•	•	•
8300ILGRY	PT8300ILGRY	20	125	Gray	5-20R	•	•	•
8300ILRED	PT8300ILRED	20	125	Red	5-20R	•	•	•
8300ILLA	PT8300ILLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R NEMA 5-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

PlugTail® Extra Heavy-Duty Hospital Grade Tamper-Resistant Power Indicating Receptacles 15 & 20A, 125V






PTTR8300PIGRY

Features

- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Tamper-resistant version features dual mechanical shutter system to help prevent insertion of foreign objects.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
POWER INDICATOR EXTRA HEAVY-DUTY PLUGTAIL® DUPLEX RECEPTACLES							
PTTR8200PI	15	125	Brown	5-15R	•	•	
PTTR8200PIW	15	125	White	5-15R	•	•	
PTTR8200PILA	15	125	Light Almond	5-15R	•	•	
PTTR8200PII	15	125	Ivory	5-15R	•	•	
PTTR8200PIRED	15	125	Red	5-15R	•	•	
PTTR8200PIGRY	15	125	Gray	5-15R	•	•	
PTTR8300PI	20	125	Brown	5-20R	•	•	
PTTR8300PIW	20	125	White	5-20R	•	•	
PTTR8300PILA	20	125	Light Almond	5-20R	•	•	
PTTR8300PII	20	125	Ivory	5-20R	•	•	
PTTR8300PIRED	20	125	Red	5-20R	•	•	
PTTR8300PIGRY	20	125	Gray	5-20R	•	•	

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.

For PlugTail Connectors, see Page B-21.


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

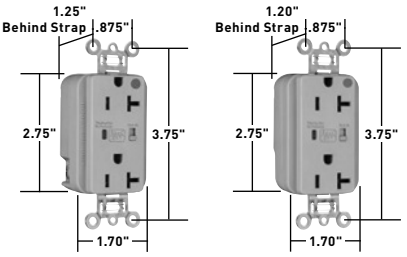

8300GRYSP **PT8300GRYSP**

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).

Hospital Grade Back & Side Wire


- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20µS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

Audible Alarm with LED Indicator

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE			
		A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
DUPLEX RECEPTACLES									
8200ISP	**PT8200ISP**	15	125	Ivory	5-15R	•	•	•	•
8200WSP		15	125	White	5-15R	•	•	•	•
8200SP		15	125	Brown	5-15R	•	•	•	•
8200REDSP		15	125	Red	5-15R	•	•	•	•
8200BLSP	**PT8200BLSP**	15	125	Blue	5-15R	•	•	•	•
8300ISP	**PT8300ISP**	20	125	Ivory	5-20R	•	•	•	•
8300WSP	**PT8300WSP**	20	125	White	5-20R	•	•	•	•
8300SP	**PT8300SP**	20	125	Brown	5-20R	•	•	•	•
8300GRYSP	**PT8300GRYSP**	20	125	Gray	5-20R	•	•	•	•
8300REDSP	**PT8300REDSP**	20	125	Red	5-20R	•	•	•	•
8300LASP		20	125	Light Almond	5-20R	•	•	•	•
8300BLSP	**PT8300BLSP**	20	125	Blue	5-20R	•	•	•	•



NEMA 5-15R **NEMA 5-20R**


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Extra Heavy-Duty Hospital Grade Tamper-Resistant Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



TR8200LASP



PTTR8300GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).

Hospital Grade Back & Side Wire

- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20µS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

Audible Alarm with LED Indicator

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE			
		A.	VAC			UL1449	UL498	FSUL WC596	cUL/CSA
EXTRA HEAVY-DUTY DUPLEX RECEPTACLES									
TR8200WSP	**PTTR8200WSP**	15	125	White	5-15R	•	•	•	•
TR8200SP		15	125	Brown	5-15R	•	•	•	•
TR8200REDSP	**PTTR8200REDSP**	15	125	Red	5-15R	•	•	•	•
TR8200LASP		15	125	Light Almond	5-15R	•	•	•	•
	PTTR8200BLSP	15	125	Blue	5-15R	•	•	•	•
TR8300ISP	**PTTR8300ISP**	20	125	Ivory	5-20R	•	•	•	•
TR8300WSP	**PTTR8300WSP**	20	125	White	5-20R	•	•	•	•
	PTTR8300GRYSP	20	125	Gray	5-20R	•	•	•	•
TR8300REDSP	**PTTR8300REDSP**	20	125	Red	5-20R	•	•	•	•
TR8300BLSP	**PTTR8300BLSP**	20	125	Blue	5-20R	•	•	•	•



NEMA 5-15R



NEMA 5-20R


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Isolated Ground Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



IG8300GRYSP



PTIG8300WSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).

Hospital Grade Back & Side Wire

- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20µS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

Audible Alarm with LED Indicator

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
ISOLATED GROUND DUPLEX RECEPTACLES									
IG8200ISP		15	125	Ivory	5-15R	•	•	•	•
IG8200WSP		15	125	White	5-15R	•	•	•	•
	PTIG8200LASP	15	125	Light Almond	5-15R	•	•	•	•
IG8200BLSP		15	125	Blue	5-15R	•	•	•	•
	PTIG8200REDSP	15	125	Red	5-15R	•	•	•	•
IG8200OSP	PTIG8200OSP	15	125	Orange	5-15R	•	•	•	•
IG8300ISP		20	125	Ivory	5-20R	•	•	•	•
IG8300WSP		20	125	White	5-20R	•	•	•	•
	PTIG8300SP	20	125	Brown	5-20R	•	•	•	•
IG8300GRYSP		20	125	Gray	5-20R	•	•	•	•
IG8300BLSP	PTIG8300BLSP	20	125	Blue	5-20R	•	•	•	•
	PTIG8300REDSP	20	125	Red	5-20R	•	•	•	•
IG8300OSP	PTIG8300OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R



NEMA 5-20R


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Tamper-Resistant Isolated Ground Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



TRIG8300ISP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).

Hospital Grade Back & Side Wire

- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20µS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
ISOLATED GROUND DUPLEX RECEPTACLES BACK & SIDE WIRE								
TRIG8200WSP	15	125	White	5-15R	•	•	•	•
TRIG8200REDSP	15	125	Red	5-15R	•	•	•	•
TRIG8200BLSP	15	125	Blue	5-15R	•	•	•	•
TRIG8300ISP	20	125	Ivory	5-20R	•	•	•	•
TRIG8300WSP	20	125	White	5-20R	•	•	•	•
TRIG8300REDSP	20	125	Red	5-20R	•	•	•	•
TRIG8300BLSP	20	125	Blue	5-20R	•	•	•	•
TRIG8300OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R




NEMA 5-20R

Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Tamper-Resistant Decorator Hospital Grade Single Receptacles 15 & 20A, 125V




TR26361HGLA

Features

- Auto-ground clip assures positive ground.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Heavy-duty corrosion-resistant zinc-plated strap for added strength.
- One-piece brass triple-wipe power contact for lasting retention.
- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.
- Dual mechanical shutter system to help prevent insertion of foreign objects.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HEAVY-DUTY TAMPER-RESISTANT DECORATOR HOSPITAL GRADE SINGLE RECEPTACLES BACK & SIDE WIRE							
TR26261HGI	15	125	Ivory	5-15R	•	•	•
TR26261HGW	15	125	White	5-15R	•	•	•
TR26261HG	15	125	Brown	5-15R	•	•	•
TR26261HGGRY	15	125	Gray	5-15R	•	•	•
TR26261HGBK	15	125	Black	5-15R	•	•	•
TR26261HGLA	15	125	Light Almond	5-15R	•	•	•
TR26361HGI	20	125	Ivory	5-20R	•	•	•
TR26361HGW	20	125	White	5-20R	•	•	•
TR26361HG	20	125	Brown	5-20R	•	•	•
TR26361HGGRY	20	125	Gray	5-20R	•	•	•
TR26361HGBK	20	125	Black	5-20R	•	•	•
TR26361HGLA	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Hospital Grade Decorator Receptacles 15 & 20A, 125V



26262HGI



PT26362HGI



Features


- Corrosion-resistant, plated steel strap locked into assembly to prohibit strap from bending away from body.
- One-piece, brass, triple-wipe power contacts for lasting retention.
- Heavy-duty compact design for easier installation and long lasting performance.
- Isolated ground version features nylon isolator plate for isolating ground strap and box system.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face.
- Terminal compartments isolated from each other for positive conductor containment.
- Side and internal screw-pressure-plate back wire accepts #14 – #10 AWG solid or stranded wire.
- All devices fit standard Decorator-style wall plate.
- Tri-drive terminal and mounting screws.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Isolated ground version features nylon isolator plate for isolating ground from strap and box system.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
HOSPITAL GRADE DUPLEX RECEPTACLES								
26262HGI	**PT26262HGI**	15	125	Ivory	5-15R	•	•	•
26262HGW	**PT26262HGW**	15	125	White	5-15R	•	•	•
26262HGGRY		15	125	Gray	5-15R	•	•	•
26262HGRED	**PT26262HGRED**	15	125	Red	5-15R	•	•	•
26362HGI	**PT26362HGI**	20	125	Ivory	5-20R	•	•	•
26362HGW	**PT26362HGW**	20	125	White	5-20R	•	•	•
26362HG		20	125	Brown	5-20R	•	•	•
26362HGGRY	**PT26362HGGRY**	20	125	Gray	5-20R	•	•	•
26362HGRED	**PT26362HGRED**	20	125	Red	5-20R	•	•	•
26362HGLA	**PT26362HGLA**	20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


For PlugTail Connectors, see Page B-21.

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Tamper-Resistant Decorator Receptacles plus PlugTail® 15 & 20A, 125V



TR26362HGI



PTTR26262HGI



Features

- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.


PlugTail Features

- Dual mechanical shutter system to help prevent insertion of foreign objects.
- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
TAMPER-RESISTANT HOSPITAL GRADE DUPLEX RECEPTACLES								
TR26262HGI	PTTR26262HGI	15	125	Ivory	5-15R	•	•	•
TR26262HGW	PTTR26262HGW	15	125	White	5-15R	•	•	•
TR26262HGGRY		15	125	Gray	5-15R	•	•	•
TR26262HGRED	PTTR26262HGRED	15	125	Red	5-15R	•	•	•
TR26262HGLA		15	125	Light Almond	5-15R	•	•	•
TR26362HGI	PTTR26362HGI	20	125	Ivory	5-20R	•	•	•
TR26362HGW	PTTR26362HGW	20	125	White	5-20R	•	•	•
TR26362HGGRY	PTTR26362HGGRY	20	125	Gray	5-20R	•	•	•
TR26362HGRED	PTTR26362HGRED	20	125	Red	5-20R	•	•	•
TR26362HGLA	PTTR26362HGLA	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connectors, see Page B-21.

2 Pole, 3 Wire




NEMA 5-15R NEMA 5-20R

For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE DEVICES

Heavy-Duty Tamper-Resistant Power Indicating Decorator Receptacles 15 & 20A, 125V




TR26362HGPII

Features

- Auto-ground clip assures positive ground.
- Dual mechanical shutter system to help prevent insertion of foreign objects.
- One-piece brass triple-wipe power contacts for reliable plug retention.
- Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.
- Patented external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- One-piece plated steel mounting strap with integral ground for superior long-term performance.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	cUL/CSA
POWER-INDICATING TAMPER-RESISTANT DUPLEX RECEPTACLES							
TR26262HGPI	15	125	Brown	5-15R	•	•	•
TR26262HGPIW	15	125	White	5-15R	•	•	•
TR26262HGPILA	15	125	Light Almond	5-15R	•	•	•
TR26262HGPII	15	125	Ivory	5-15R	•	•	•
TR26262HGPIRED	15	125	Red	5-15R	•	•	•
TR26262HGPIGRY	15	125	Grey	5-15R	•	•	•
TR26362HGPI	20	125	Brown	5-20R	•	•	•
TR26362HGPIW	20	125	White	5-20R	•	•	•
TR26362HGPILA	20	125	Light Almond	5-20R	•	•	•
TR26362HGPII	20	125	Ivory	5-20R	•	•	•
TR26362HGPIRED	20	125	Red	5-20R	•	•	•
TR26362HGPIGRY	20	125	Grey	5-20R	•	•	•

2 Pole, 3 Wire




NEMA 5-15R **NEMA 5-20R**

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Hospital Grade Isolated Ground Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125V



IG26362HGW

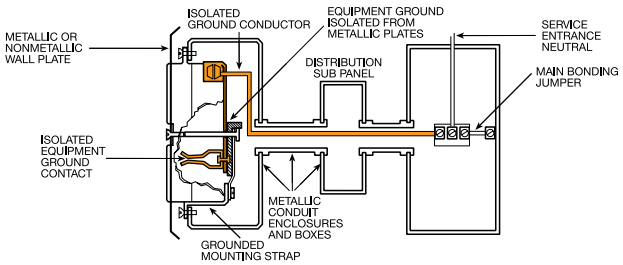

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
DECORATOR DUPLEX RECEPTACLES BACK & SIDE WIRE							
IG26262HGW	15	125	White	5-15R	•	•	•
IG26262HG	15	125	Orange	5-15R	•	•	•
IG26262HGRED	15	125	Red	5-15R	•	•	•
IG26362HGW	20	125	White	5-20R	•	•	•
IG26362HG	20	125	Orange	5-20R	•	•	•
IG26362HGBK	20	125	Black	5-20R	•	•	•
IG26362HGRED	20	125	Red	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

For Wall Plates for Isolated Ground Systems, consult Wall Plates Section I.


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Heavy-Duty Hospital Grade Tamper-Resistant Isolated Ground Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V



TRIG26362HGI

HOSPITAL GRADE CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
TAMPER-RESISTANT DECORATOR RECEPTACLES BACK & SIDE WIRE						
TRIG26262HGI	15	125	Ivory	5-15R	•	•
TRIG26262HGW	15	125	White	5-15R	•	•
TRIG26262HGBK	15	125	Black	5-15R	•	•
TRIG26262HGGRY	15	125	Gray	5-15R	•	•
TRIG26262HGRED	15	125	Red	5-15R	•	•
TRIG26262HGLA	15	125	Light Almond	5-15R	•	•
TRIG26362HGI	20	125	Ivory	5-20R	•	•
TRIG26362HGW	20	125	White	5-20R	•	•
TRIG26362HG	20	125	Orange	5-20R	•	•
TRIG26362HGBK	20	125	Black	5-20R	•	•
TRIG26362HGGRY	20	125	Gray	5-20R	•	•
TRIG26362HGRED	20	125	Red	5-20R	•	•
TRIG26362HGLA	20	125	Light Almond	5-20R	•	•



NEMA 5-15R



NEMA 5-20R


For Bulk Packaging Solutions consult factory.

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597HGW



2097HGW



PT2097HGW

Features

- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.

PlugTail Features

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail Connectors creating a non-feed-thru application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
HOSPITAL GRADE 15 AMP DUPLEX GFCI								
1597HGI		15	125	Ivory	5-15R	•	•	•
1597HGW	**PT1597HGW**	15	125	White	5-15R	•	•	•
1597HGBK		15	125	Black	5-15R	•	•	•
1597HGGRY		15	125	Gray	5-15R	•	•	•
1597HGRED	**PT1597HGRED**	15	125	Red	5-15R	•	•	•
1597HGLA	**PT1597HGLA**	15	125	Light Almond	5-15R	•	•	•
HOSPITAL GRADE 20 AMP DUPLEX GFCI								
2097HGI	**PT2097HGI**	20	125	Ivory	5-20R	•	•	•
2097HGW	**PT2097HGW**	20	125	White	5-20R	•	•	•
2097HG	**PT2097HG**	20	125	Brown	5-20R	•	•	•
2097HGBK	**PT2097HGBK**	20	125	Black	5-20R	•	•	•
2097HGGRY	**PT2097HGGRY**	20	125	Gray	5-20R	•	•	•
2097HGRED	**PT2097HGRED**	20	125	Red	5-20R	•	•	•
2097HGLA	**PT2097HGLA**	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connectors, see Page B-21.



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Hospital Grade Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597HGTRW



2097HGTRW



PT2097HGTRW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.

PlugTail Features

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with existing 3-wire PlugTail Connector creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
HOSPITAL GRADE TAMPER-RESISTANT 15 AMP DUPLEX GFCI								
1597HGTRI	PT1597HGTRI	15	125	Ivory	5-15R	•	•	•
1597HGTRW	PT1597HGTRW	15	125	White	5-15R	•	•	•
1597HGTR		15	125	Brown	5-15R	•	•	•
1597HGTRBK		15	125	Black	5-15R	•	•	•
1597HGTRGRY		15	125	Gray	5-15R	•	•	•
1597HGTRRED	PT1597HGTRRED	15	125	Red	5-15R	•	•	•
1597HGTRLA	PT1597HGTRLA	15	125	Light Almond	5-15R	•	•	•
HOSPITAL GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI								
2097HGTRI	PT2097HGTRI	20	125	Ivory	5-20R	•	•	•
2097HGTRW	PT2097HGTRW	20	125	White	5-20R	•	•	•
2097HGTR		20	125	Brown	5-20R	•	•	•
2097HGTRBK	PT2097HGTRBK	20	125	Black	5-20R	•	•	•
2097HGTRGRY	PT2097HGTRGRY	20	125	Gray	5-20R	•	•	•
2097HGTRRED	PT2097HGTRRED	20	125	Red	5-20R	•	•	•
2097HGTRLA	PT2097HGTRLA	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connectors, see Page B-21.



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Hospital Grade Isolated-Ground Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597IGHGTRO



2097IGHGTRO

Features

- GFCI receptacle's grounding system is isolated from the building's grounding system.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Thinner than competitors' GFCI Receptacles: leaves more room for wires in the box.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Pre-stripped stranded wire lead for isolated ground termination.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
HOSPITAL GRADE ISOLATED GROUND TAMPER-RESISTANT DUPLEX GFCI							
1597IGHGTRO	15	125	Orange	5-15R	•	•	•
2097IGHGTRI	20	125	Ivory	5-20R	•	•	•
2097IGHGTRW	20	125	White	5-20R	•	•	•
2097IGHGTRRED	20	125	Red	5-20R	•	•	•
2097IGHGTRO	20	125	Orange	5-20R	•	•	•
2097IGHGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Hospital Grade Audible Alarm Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597HGTRAW



2097HGTRAW

Features

- Audible Alarm alert of tripped condition.
- Alarm can be turned ON/OFF.
- Alarm rated at 60 db at 10 feet.
- Rated as a 1.5 HP motor control switch.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Thinner than competitors' GFCI Receptacles: leaves more room for wires in the box.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
HOSPITAL GRADE AUDIBLE ALARM TAMPER-RESISTANT DUPLEX GFCI							
1597HGTRA	15	125	Brown	5-15R	•	•	•
1597HGTRALA	15	125	Light Almond	5-15R	•	•	•
2097HGTRAI	20	125	Ivory	5-20R	•	•	•
2097HGTRAW	20	125	White	5-20R	•	•	•
2097HGTRARED	20	125	Red	5-20R	•	•	•
2097HGTRALA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hospital Grade Tamper-Resistant Self-Test Night Light/GFCI Receptacles with SafeLock® Protection
2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



PT2097HGNTLTRW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Sealed night light with high impact-resistant Lexan® lens prevents tampering.
- Night light uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- LED Rated at 186 milliwatts @ 120V.
- Photocell turns night light ON in dark, OFF in daylight.

PlugTail Features

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners..
- Zinc-plated steel mounting strap.


Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	LIGHT OUTPUT IN 1' FCD*	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
HOSPITAL GRADE COMBINATION TAMPER-RESISTANT NIGHT LIGHT/GFCI									
	PT1597HGNTLTRI	15	125	0.10	Ivory	5-20R	•	•	•
	PT1597HGNTLTRRED	15	125	0.10	Red	5-20R	•	•	•
2097HGNTLTRI	PT2097HGNTLTRI	20	125	0.10	Ivory	5-20R	•	•	•
2097HGNTLTRW	PT2097HGNTLTRW	20	125	0.10	White	5-20R	•	•	•
2097HGNTLTRGRY	PT2097HGNTLTRGRY	20	125	0.10	Gray	5-20R	•	•	•
2097HGNTLTRRED		20	125	0.10	Red	5-20R	•	•	•
2097HGNTLTRLA	PT2097HGNTLTRLA	20	125	0.10	Light Almond	5-20R	•	•	•

For PlugTail Connector catalog numbers, see Page B-21.

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page K-20 for more information.




NEMA 5-15R NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

NAFTA-Compliant Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



PT2097HGNAW

Features

- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).

PlugTail® Features

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail Connectors creating a non-feed-thru application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
NAFTA-COMPLIANT HOSPITAL GRADE 20 AMP DUPLEX GFCI								
2097HGNAI	**PT2097HGNAI**	20	125	Ivory	5-20R	•	•	•
2097HGNAW	**PT2097HGNAW**	20	125	White	5-20R	•	•	•
2097HGNAGRY	**PT2097HGNAGRY**	20	125	Gray	5-20R	•	•	•
2097HGNARED	**PT2097HGNARED**	20	125	Red	5-20R	•	•	•
2097HGNALA		20	125	Light Almond	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.

For PlugTail Connectors, see Page B-21.



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

NAFTA-Compliant Tamper-Resistant Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



2097HGTRNAW



PT2097HGNTLTRNAI

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets NEC® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.

PlugTail® Features

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail Connectors creating a non-feed-thru application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	LIGHT OUTPUT IN 1' FCD*	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
NAFTA-COMPLIANT HOSPITAL GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI									
2097HGTRNAI	**PT2097HGTRNAI**	20	125		Ivory	5-20R	•	•	•
2097HGTRNAW	**PT2097HGTRNAW**	20	125		White	5-20R	•	•	•
	PT2097HGNAGRY	20	125		Gray	5-20R	•	•	•
2097HGTRNARED	**PT2097HGTRNAGRY**	20	125		Red	5-20R	•	•	•
2097HGTRNALA		20	125		Light Almond	5-20R	•	•	•
NAFTA-COMPLIANT HOSPITAL GRADE TAMPER-RESISTANT 20 AMP COMBINATION NIGHT LIGHT/GFCI									
	PT2097HGNTLTRNAI	20	125	0.180	Ivory	5-20R	•	•	•

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.
For PlugTail Connectors, see Page B-21.



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Hospital Grade 6A USB Charging with Tamper-Resistant Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125V



TR15HUSBCC6W



TR15HUSBAC6GRY

Features

- Overall 6A charging capability with smart current-sharing technology to allow for full 3A through a singular Type-C port.
- Posted terminal screws and external back-wire pressure plates for more productive and reliable terminations.
- AC USB receptacles available in 15 and 20A, 125V Specification Grade and Hospital Grade.
- AC USB receptacles are tamper-resistant to meet NEC. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end-users – helps prevent improper insertion of foreign objects.
- Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.
- Reinforced nylon USB Type-A ports to withstand abuse over the life of the product.
- Type-A and Type-C ports carry a minimum rating of 10,000 insertions.
- Stainless steel auto-ground clips assure positive ground.
- Slim design allows for installation in standard depth wall boxes.
- Multiple color options available..
- Efficient power supply meets the Department of Energy (DoE) Level VI no-load power requirement of 100mW max for external power supplies.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT HOSPITAL GRADE RECEPTACLES WITH USB CHARGER								
TR15HUSBAC6I	15	125	Ivory	6 Amp	5-15R	•	•	•
TR15HUSBAC6W	15	125	White	6 Amp	5-15R	•	•	•
TR15HUSBAC6	15	125	Brown	6 Amp	5-15R	•	•	•
TR15HUSBAC6GRY	15	125	Gray	6 Amp	5-15R	•	•	•
TR15HUSBAC6BK	15	125	Black	6 Amp	5-15R	•	•	•
TR15HUSBAC6RED	15	125	Red	6 Amp	5-15R	•	•	•
TR20HUSBAC6I	20	125	Ivory	6 Amp	5-20R	•	•	•
TR20HUSBAC6W	20	125	White	6 Amp	5-20R	•	•	•
TR20HUSBAC6	20	125	Brown	6 Amp	5-20R	•	•	•
TR20HUSBAC6BK	20	125	Black	6 Amp	5-20R	•	•	•
TR20HUSBAC6GRY	20	125	Gray	6 Amp	5-20R	•	•	•
TR20HUSBAC6RED	20	125	Red	6 Amp	5-20R	•	•	•
TR20HUSBAC6LA	20	125	Light Almond	6 Amp	5-20R	•	•	•

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT HOSPITAL GRADE RECEPTACLES WITH USB CHARGER								
TR15HUSBCC6I	15	125	Ivory	6 Amp	5-15R	•	•	•
TR15HUSBCC6W	15	125	White	6 Amp	5-15R	•	•	•
TR15HUSBCC6	15	125	Brown	6 Amp	5-15R	•	•	•
TR15HUSBCC6GRY	15	125	Gray	6 Amp	5-15R	•	•	•
TR15HUSBCC6BK	15	125	Black	6 Amp	5-15R	•	•	•
TR15HUSBCC6RED	15	125	Red	6 Amp	5-15R	•	•	•
TR20HUSBCC6I	20	125	Ivory	6 Amp	5-20R	•	•	•
TR20HUSBCC6W	20	125	White	6 Amp	5-20R	•	•	•
TR20HUSBCC6	20	125	Brown	6 Amp	5-20R	•	•	•
TR20HUSBCC6BK	20	125	Black	6 Amp	5-20R	•	•	•
TR20HUSBCC6GRY	20	125	Gray	6 Amp	5-20R	•	•	•
TR20HUSBCC6RED	20	125	Red	6 Amp	5-20R	•	•	•
TR20HUSBCC6LA	20	125	Light Almond	6 Amp	5-20R	•	•	•

2 Pole 3 Wire



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Heavy-Duty Decorator Hospital Grade 3.1A USB Charging with Tamper-Resistant Receptacles

15 & 20A, 125V



TR8200HUSBLA



TR8300HUSBLA

Features

- Smart current-sharing technology to allow as much as 2.4A per port, or 3.1A in total for fast charging of mobile devices
- Back and side wire terminals accommodate #14 AWG - #10 AWG stranded and solid copper wire.
- Stainless steel auto-ground clips assure positive ground
- Tamper-resistant 15 or 20A receptacles help prevent electrical shock
- External back-wire pressure plates provide fast & easy wire terminations
- Posted terminal screws and scalloped cover design for added productivity in side-wire applications

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT HOSPITAL GRADE RECEPTACLES WITH USB CHARGER								
TR8200HUSB	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR8200HUSBW	15	125	White	3.1 Amp	5-15R	•	•	•
TR8200HUSBI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR8200HUSBBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR8200HUSBGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR8200HUSBRED	15	125	Red	3.1 Amp	5-15R	•	•	•
TR8300HUSB	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR8300HUSBW	20	125	White	3.1 Amp	5-20R	•	•	•
TR8300HUSBLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR8300HUSBI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR8300HUSBBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR8300HUSBGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR8300HUSBRED	20	125	Red	3.1 Amp	5-20R	•	•	•



NEMA 5-20R




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


HOSPITAL GRADE RECEPTACLES

Hospital Grade Type A/C & Type C


2 Pole, 3 Wire Grounding 15 & 20A, 125V & 120V



TR20HUSBACW



TR20HUSBCCW



PTTR15HACUSBW

Features

- Available with one USB Type-A and one USB Type-C port or two USB Type-C ports to charge the latest mobile devices
- Overall 3.1A charging capability with smart current-sharing technology to allow for full 3.1A through a single port
- Slim design allows for installation in standard-depth wall boxes
- Posted terminal screws and external back-wire pressure plates for more productive and reliable terminations
- Patented tamper-resistant shutters on receptacles help prevent improper insertion of foreign objects
- Available in 15 and 20A, 125V Specification and Hospital Grade versions
- Reinforced nylon USB Type-A ports to withstand abuse over the life of the product

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT HOSPITAL GRADE RECEPTACLES WITH USB CHARGER									
TR15HUSBACI	PTTR15HACUSBI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR15HUSBACW	PTTR15HACUSBW	15	125	White	3.1 Amp	5-15R	•	•	•
TR15HUSBAC	PTTR15HACUSB	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR15HUSBACGRY	PTTR15HACUSBGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR15HUSBACBK	PTTR15HACUSBBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR15HUSBACRED	PTTR15HACUSBRED	15	125	Red	3.1 Amp	5-15R	•	•	•
	PTTR15HACUSBLA	15	125	Light Almond	3.1 Amp	5-15R	•	•	•
TR20HUSBACI	PTTR20HACUSBI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR20HUSBACW	PTTR20HACUSBW	20	125	White	3.1 Amp	5-20R	•	•	•
TR20HUSBAC	PTTR20HACUSB	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR20HUSBACBK	PTTR20HACUSBBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR20HUSBCACGRY	PTTR20HACUSBGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR20HUSBACRED	PTTR20HACUSBRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR20HUSBACLA	PTTR20HACUSBLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT HOSPITAL GRADE RECEPTACLES WITH USB CHARGER								
TR15HUSBCCI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR15HUSBCCW	15	125	White	3.1 Amp	5-15R	•	•	•
TR15HUSBCC	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR15HUSBCCGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR15HUSBCCBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR15HUSBCCRED	15	125	Red	3.1 Amp	5-15R	•	•	•
TR20HUSBCCI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR20HUSBCCW	20	125	White	3.1 Amp	5-20R	•	•	•
TR20HUSBCC	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR20HUSBCCBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR20HUSBCCGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR20HUSBCCRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR20HUSBCCLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•

2 Pole 3 Wire



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE DEVICES

IP20 Suitability

Straight Blade Plugs & Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V




PS5266XHG



PS5269XHG



PS5266HGAN



PS8115




PS8119

Features

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 NO.42
EXTRA-HARD USE (EHU)								
PS5266XHG	15	125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15	125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15	125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20	125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20	125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20	125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15	250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15	250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15	250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20	250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20	250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20	250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
MAXGRIP® M³								
PS8115	15	125	Plug, White	.230"-.720"	5-15P	•	•	•
PS8119	15	125	Connector, White	.230"-.720"	5-15R	•	•	•
PS8115BK	15	125	Plug, Black	.230"-.720"	5-15P	•	•	•
PS8119BK	15	125	Connector, Black	.230"-.720"	5-15R	•	•	•



NEMA 5-15P **NEMA 5-15R** **NEMA 6-15P** **NEMA 6-15R** **NEMA 5-20P** **NEMA 5-20R** **NEMA 6-20P** **NEMA 6-20R**


CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*

*For further information consult the Flexcor® Section D.

All devices listed on this page conform to NEMA WD-1 and WD-6.

HOSPITAL GRADE RECEPTACLES

Quad Receptacles & Accessories 20A, 125V



420HW

Features

- Rugged nylon face and body withstands impacts and hard use.
- Built-in wire stripping gauge.
- Outward-facing ground terminals make handling up to four straight or angled plugs easy and convenient.
- Heavy-duty, phosphor bronze contacts.
- Shielding walls guard against live-circuit-to-ground shorts.
- Split circuit break-off tabs.
- UL and CSA listed.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	UL1449	CSA
HOSPITAL GRADE QUADS							
420HI	20	125	Ivory	5-20R	•		•
420HW	20	125	White	5-20R	•		•
420H	20	125	Brown	5-20R	•		•
420HGRY	20	125	Gray	5-20R	•		•
420HRED	20	125	Red	5-20R	•		•
QUAD ADAPTER PLATES							
4API			Ivory		•	•	
4APW			White		•	•	
4AP			Brown		•	•	
4APRED			Red		•	•	

2 Pole, 3 Wire



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Table of Contents





SURGE PROTECTIVE

Receptacles	B-87
Tamper-Resistant Receptacles	B-88
Tamper-Resistant Hospital Grade Receptacles	B-89
Hospital Grade Receptacles	B-90
PlugTail® Receptacles	B-91
PlugTail® Tamper-Resistant Receptacles	B-92
PlugTail® Hospital Grade Receptacles	B-93
PlugTail® Tamper-Resistant Hospital Grade Receptacles	B-94
Power & Surge Protection Strips	B-95
Surge Protection Strip Specifications	B-96




ISOLATED GROUND


Receptacles	B-97
Tamper-Resistant Receptacles	B-98
PlugTail® Receptacles	B-99
Turnlok® Receptacles	B-100

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Surge Protective Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



5362GRYSP



IG5362GRYSP

Audible Alarm with LED Indicator

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
EXTRA HEAVY-DUTY DUPLEX RECEPTACLES BACK & SIDE WIRE								
5262ISP	15	125	Ivory	5-15R	•	•	•	•
5262WSP	15	125	White	5-15R	•	•	•	•
5262SP	15	125	Brown	5-15R	•	•	•	•
5262BKSP	15	125	Black	5-15R	•	•	•	•
5262REDSP	15	125	Red	5-15R	•	•	•	•
5262LASP	15	125	Light Almond	5-15R	•	•	•	•
5262BLSP	15	125	Blue	5-15R	•	•	•	•
5362ISP	20	125	Ivory	5-20R	•	•	•	•
5362WSP	20	125	White	5-20R	•	•	•	•
5362SP	20	125	Brown	5-20R	•	•	•	•
5362GRYSP	20	125	Gray	5-20R	•	•	•	•
5362BKSP	20	125	Black	5-20R	•	•	•	•
5362REDSP	20	125	Red	5-20R	•	•	•	•
5362LASP	20	125	Light Almond	5-20R	•	•	•	•
5362BLSP	20	125	Blue	5-20R	•	•	•	•
ISOLATED GROUND DUPLEX RECEPTACLES BACK & SIDE WIRE								
IG5262ISP	15	125	Ivory	5-15R	•	•	•	•
IG5262WSP	15	125	White	5-15R	•	•	•	•
IG5262GRYSP	15	125	Gray	5-15R	•	•	•	•
IG5262BLSP	15	125	Blue	5-15R	•	•	•	•
IG52620SP	15	125	Orange	5-15R	•	•	•	•
IG5362ISP	20	125	Ivory	5-20R	•	•	•	•
IG5362WSP	20	125	White	5-20R	•	•	•	•
IG5362SP	20	125	Brown	5-20R	•	•	•	•
IG5362GRYSP	20	125	Gray	5-20R	•	•	•	•
IG5362LASP	20	125	Light Almond	5-20R	•	•	•	•
IG5362BLSP	20	125	Blue	5-20R	•	•	•	•
IG52620SP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Tamper-Resistant Spec Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



TR5362GRYSP



TRIG5362WSP

Audible Alarm with LED Indicator

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
SPEC GRADE EXTRA HEAVY-DUTY DUPLEX RECEPTACLES BACK & SIDE WIRE								
TR5262ISP	15	125	Ivory	5-15R	•	•	•	•
TR5262WSP	15	125	White	5-15R	•	•	•	•
TR5262SP	15	125	Brown	5-15R	•	•	•	•
TR5262GRYSP	15	125	Gray	5-15R	•	•	•	•
TR5262LASP	15	125	Light Almond	5-15R	•	•	•	•
TR5262BLSP	15	125	Blue	5-15R	•	•	•	•
TR5362ISP	20	125	Ivory	5-20R	•	•	•	•
TR5362WSP	20	125	White	5-20R	•	•	•	•
TR5362SP	20	125	Brown	5-20R	•	•	•	•
TR5362GRYSP	20	125	Gray	5-20R	•	•	•	•
TR5362BKSP	20	125	Black	5-20R	•	•	•	•
TR5362LASP	20	125	Light Almond	5-20R	•	•	•	•
TR5362BLSP	20	125	Blue	5-20R	•	•	•	•
SPEC GRADE ISOLATED GROUND DUPLEX RECEPTACLES BACK & SIDE WIRE								
TRIG5262WSP	15	125	White	5-15R	•	•	•	•
TRIG5262BLSP	15	125	Blue	5-15R	•	•	•	•
TRIG5262OSP	15	125	Orange	5-15R	•	•	•	•
TRIG5362ISP	20	125	Ivory	5-20R	•	•	•	•
TRIG5362WSP	20	125	White	5-20R	•	•	•	•
TRIG5362LASP	20	125	Light Almond	5-20R	•	•	•	•
TRIG5362OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Tamper-Resistant Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



TR8300BLSP



TRIG8300LASP

Audible Alarm with LED Indicator

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
HOSPITAL GRADE EXTRA HEAVY-DUTY DUPLEX RECEPTACLES BACK & SIDE WIRE								
TR8200WSP	15	125	White	5-15R	•	•	•	•
TR8200SP	15	125	Brown	5-15R	•	•	•	•
TR8200REDSP	15	125	Red	5-15R	•	•	•	•
TR8200LASP	15	125	Light Almond	5-15R	•	•	•	•
TR8300ISP	20	125	Ivory	5-20R	•	•	•	•
TR8300WSP	20	125	White	5-20R	•	•	•	•
TR8300REDSP	20	125	Red	5-20R	•	•	•	•
TR8300BLSP	20	125	Blue	5-20R	•	•	•	•
HOSPITAL GRADE ISOLATED GROUND DUPLEX RECEPTACLES BACK & SIDE WIRE								
TRIG8200WSP	15	125	White	5-15R	•	•	•	•
TRIG8200REDSP	15	125	Red	5-15R	•	•	•	•
TRIG8200BLSP	15	125	Blue	5-15R	•	•	•	•
TRIG8300ISP	20	125	Ivory	5-20R	•	•	•	•
TRIG8300WSP	20	125	White	5-20R	•	•	•	•
TRIG8300REDSP	20	125	Red	5-20R	•	•	•	•
TRIG8300BLSP	20	125	Blue	5-20R	•	•	•	•
TRIG8300OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Hospital Grade Surge Protective Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



8300GRYSP



IG8300GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).

5262/5362, IG5262/5362, 8200/8300, IG8200/8300, TR5262/5362, TRIG5262/5362, TR8200/8300, TRIG8200/8300

- 340 joules of energy absorption in each of the 3 modes. Energy (measured for an 8x20µS duration) = 340J.
- Nominal let-through (suppressed) voltage in all 3 modes, 500V.
- Audible alarm able to be turned on/off.
- 3 17mm dual pack MOVs to suppress transients in all modes – equally.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

Audible Alarm with LED Indicator

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
DUPLEX RECEPTACLES BACK & SIDE WIRE								
8200ISP	15	125	Ivory	5-15R	•	•	•	•
8200WSP	15	125	White	5-15R	•	•	•	•
8200SP	15	125	Brown	5-15R	•	•	•	•
8200REDSP	15	125	Red	5-15R	•	•	•	•
8200BLSP	15	125	Blue	5-15R	•	•	•	•
8300ISP	20	125	Ivory	5-20R	•	•	•	•
8300WSP	20	125	White	5-20R	•	•	•	•
8300SP	20	125	Brown	5-20R	•	•	•	•
8300GRYSP	20	125	Gray	5-20R	•	•	•	•
8300REDSP	20	125	Red	5-20R	•	•	•	•
8300LASP	20	125	Light Almond	5-20R	•	•	•	•
8300BLSP	20	125	Blue	5-20R	•	•	•	•
ISOLATED GROUND DUPLEX RECEPTACLES BACK & SIDE WIRE								
IG8200ISP	15	125	Ivory	5-15R	•	•	•	•
IG8200WSP	15	125	White	5-15R	•	•	•	•
IG8200BLSP	15	125	Blue	5-15R	•	•	•	•
IG8200OSP	15	125	Orange	5-15R	•	•	•	•
IG8300ISP	20	125	Ivory	5-20R	•	•	•	•
IG8300WSP	20	125	White	5-20R	•	•	•	•
IG8300GRYSP	20	125	Gray	5-20R	•	•	•	•
IG8300BLSP	20	125	Blue	5-20R	•	•	•	•
IG8300OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R



NEMA 5-20R


Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

All devices listed on this page conform to NEMA WD-1 and WD-6.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

PlugTail® Spec Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



PTIG5362GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).
- Audible alarm able to be turned on/off.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

CATALOG NUMBER	RATING			NEMA CONFIG. NO.	3rd PARTY COMPLIANCE			
SPEC GRADE	A.	V.	COLOR		UL1449	UL498	FSUL WC596	cUL/CSA
SPEC GRADE EXTRA HEAVY-DUTY DUPLEX RECEPTACLES								
PT5262ISP	15	125	Ivory	5-15R	•	•	•	•
PT5262WSP	15	125	White	5-15R	•	•	•	•
PT5262GRYSP	15	125	Gray	5-15R	•	•	•	•
PT5262BLSP	15	125	Blue	5-15R	•	•	•	•
PT5362ISP	20	125	Ivory	5-20R	•	•	•	•
PT5362WSP	20	125	White	5-20R	•	•	•	•
PT5362SP	20	125	Brown	5-20R	•	•	•	•
PT5362GRYSP	20	125	Gray	5-20R	•	•	•	•
PT5362BKSP	20	125	Black	5-20R	•	•	•	•
PT5362LASP	20	125	Light Almond	5-20R	•	•	•	•
PT5362BLSP	20	125	Blue	5-20R	•	•	•	•
SPEC GRADE ISOLATED GROUND DUPLEX RECEPTACLES								
PTIG5262WSP	15	125	White	5-15R	•	•	•	•
PTIG5262OSP	15	125	Orange	5-15R	•	•	•	•
PTIG5362ISP	20	125	Ivory	5-20R	•	•	•	•
PTIG5362WSP	20	125	White	5-20R	•	•	•	•
PTIG5362GRYSP	20	125	Gray	5-20R	•	•	•	•
PTIG5362BKSP	20	125	Black	5-20R	•	•	•	•
PTIG5362LASP	20	125	Light Almond	5-20R	•	•	•	•
PTIG5362OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R



NEMA 5-20R


For PlugTail Connectors, see Page B-21.

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

PlugTail® Tamper-Resistant Spec Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



PTTR5362GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).
- Audible alarm able to be turned on/off.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
SPEC GRADE TAMPER-RESISTANT DUPLEX RECEPTACLES								
PTTR5262WSP	15	125	White	5-15R	•	•	•	•
PTTR5262SP	15	125	Brown	5-15R	•	•	•	•
PTTR5362ISP	20	125	Ivory	5-20R	•	•	•	•
PTTR5362WSP	20	125	White	5-20R	•	•	•	•
PTTR5362GRYSP	20	125	Gray	5-20R	•	•	•	•
PTTR5362LASP	20	125	Light Almond	5-20R	•	•	•	•
PTTR5362BLSP	20	125	Blue	5-20R	•	•	•	•



NEMA 5-15R



NEMA 5-20R


For PlugTail Connectors, see Page B-21.

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.


ISOLATED GROUND & SURGE PROTECTIVE DEVICES

PlugTail® Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



PT8300GRYSP



PTIG8300GRYSP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).
- Audible alarm able to be turned on/off.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
HOSPITAL GRADE EXTRA HEAVY-DUTY DUPLEX RECEPTACLES								
PT8200ISP	15	125	Ivory	5-15R	•	•	•	•
PT8200BLSP	15	125	Blue	5-15R	•	•	•	•
PT8300ISP	20	125	Ivory	5-20R	•	•	•	•
PT8300WSP	20	125	White	5-20R	•	•	•	•
PT8300SP	20	125	Brown	5-20R	•	•	•	•
PT8300GRYSP	20	125	Gray	5-20R	•	•	•	•
PT8300REDSP	20	125	Red	5-20R	•	•	•	•
PT8300BLSP	20	125	Blue	5-20R	•	•	•	•
HOSPITAL GRADE ISOLATED GROUND DUPLEX RECEPTACLES								
PTIG8200REDSP	15	125	Red	5-15R	•	•	•	•
PTIG8200LASP	15	125	Light Almond	5-15R	•	•	•	•
PTIG8200OSP	15	125	Orange	5-15R	•	•	•	•
PTIG8300SP	20	125	Brown	5-20R	•	•	•	•
PTIG8300GRYSP	20	125	Gray	5-20R	•	•	•	•
PTIG8300REDSP	20	125	Red	5-20R	•	•	•	•
PTIG8300BLSP	20	125	Blue	5-20R	•	•	•	•
PTIG8300OSP	20	125	Orange	5-20R	•	•	•	•



NEMA 5-15R



NEMA 5-20R


For PlugTail Connectors, see Page B-21.

All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

PlugTail® Tamper-Resistant Hospital Grade Surge Protective Receptacles

2 Pole, 3 Wire Grounding, 15 & 20A, 125VAC



PTTR8300ISP

Specifications

- UL1449 (3rd Edition). (1.2 x 50µs 6000V, 8 x 20µs 3000A).
- 24,000 amps current handling capability in each of 3 modes: line to neutral, line to ground, neutral to ground.
- LED indication: Steady green = protected; Flashing red = not protected OFF = no power to unit
- Response time less than 1 nanosecond for unmounted MOV.
- Overcurrent protection in all 3 modes.
- Printed circuit board conformally coated to protect against condensing humidity and airborne particulates.
- Thermal protection in all 3 modes.
- Leakage current: 0.5 mA at 25°C/120VAC.
- Common mode noise attenuation: 500 KHz to 30 MHz; up to 20 dB (50 ohm source impedance).
- Varistor voltage: 130V RMS.
- Back and side wire capability including ground terminal.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).
- Audible alarm able to be turned on/off.
- Isolated Ground version complies with NEC 410-56 (C) and 250-146.

PlugTail® Surge Protective Receptacles

- 340 joules of energy absorption in line-to-neutral and line-to-ground modes. 680 joules of energy absorption in neutral-to-ground mode. Energy (measured for an 8x20µS duration) = 340J; 680J for N-G mode.
- 2 17mm dual pack MOVs to suppress transients in all modes – equally.
- Nominal let-through (suppressed) voltage: Line-to-neutral and line-to-ground modes = 500V; neutral-to-ground = 1000V.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1449	UL498	FSUL WC596	cUL/CSA
TAMPER-RESISTANT DUPLEX RECEPTACLES								
PTTR8200WSP	15	125	White	5-15R	•	•	•	•
PTTR8200REDSP	15	125	Red	5-15R	•	•	•	•
PTTR8200BLSP	15	125	Blue	5-15R	•	•	•	•
PTTR8300ISP	20	125	Ivory	5-20R	•	•	•	•
PTTR8300WSP	20	125	White	5-20R	•	•	•	•
PTTR8300GRYSP	20	125	Gray	5-20R	•	•	•	•
PTTR8300REDSP	20	125	Red	5-20R	•	•	•	•
PTTR8300BLSP	20	125	Blue	5-20R	•	•	•	•



NEMA 5-15R




NEMA 5-20R

For PlugTail Connectors, see Page B-21.


All devices listed on this page conform to NEMA WD-1 and WD-6.
Conforms to the latest revision ANSI/IEEE C62.41 (formerly IEEE587), ANSI/IEEE C62.45.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Power & Surge Protection Strips



TAP – PS1

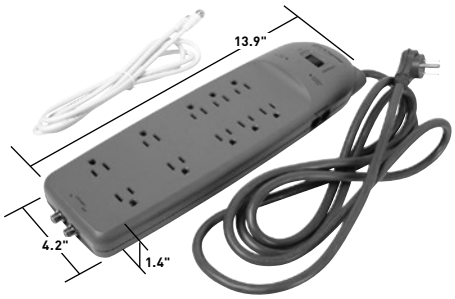

BLOCK – PS10PC

Application

There are an average of over 250 power disturbances per year in each home or office in the United States. Over 8% data loss is a direct result from lightning and the value of equipment and data is sometimes much greater than that of equipment.

Surges and spikes can come through power lines as well as phone and coax lines. So choose a protector which includes phone and/or coax protection.

Features

- 400V clamping voltage.
- UL1449 listed.
- Heavy-duty cord from 3' to 15', depending on device.
- Multiple function protection available for power, phone, fax, modem, coax or data.
- Extremely long life with dependable protection.
- Surge protection indicator on surge devices.
- Circuit breaker switch.
- Heavy-duty high-energy MOVs.
- Ground continuity indicator.

Protection Specifications

- Line protection modes: L-N, L-G, N-G.
- Spike protection for sudden, dramatic surges, over 400V.
- Surge protection lasts for 1/120 of a second, for moderate short term overvoltage.
- EMI/RFI noise attenuation.

CATALOG NUMBER	RATING		TYPE OF HOUSING	# OF OUTLETS	CORD LENGTH	JOULE RATING RANGE	MAX. SPIKE CURRENT (AMPS)	TYPE OF PROTECTION		COLOR
	A.	V.						PHONE/FAX	COAX	
POWER STRIPS WITH SURGE PROTECTION										
PS1	15	125	Tap	1		740J	48K			PC Gray
PS6	15	125	Strip	6	3'	555J	36K			PC Gray
PS7	15	125	Strip	7	6'	740J	48K			PC Gray
PS7P	15	125	Strip	7	6'	740J	48K	X		PC Gray
PS7L	15	125	Strip	7	15'	740J	48K			PC Gray
PS8C	15	125	Block	8	8'	1100J	72K		X	PC Gray
PS8P	15	125	Block	8	8'	1100J	72K	X		PC Gray
PS10PC	15	125	Block	10	8'	1100J	72K	X	X	PC Gray

All devices listed on this page conform to NEMA WD-1 and WD-6.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Surge Protection Strips Specifications


Power & Surge Protection Devices – Ratings

Catalog Number	PS1	PS6	PS7	PS7P	PS7L	PS8C	PS8P	PS10PC
Type of Housing	Tap	Strip	Strip	Strip	Strip	Block	Block	Block
Number of Outlets	1	6	7	7	7	8	8	10
Standard Grounded Outlets	1	6	6	6	6	0	0	6
Transformer Ready Outlets	1	0	1	1	1	8	8	4
Joule Rating Range	740J	555J	740J	740J	740J	1100J	1100J	1100J
MOV Configuration	4-20mm	3-20mm	4-20mm	4-20mm	4-20mm	6-20mm	6-20mm	6-20mm
Clamping Voltage	400V	400V	400V	400V	400V	400V	400V	400V
Max. Spike Current (Amps)	48K	36K	48K	48K	48K	72K	72K	72K
EMI Filter Capacitors	X		X	X	X	X	X	X
Protection (L-N, L-G, N-G)	X	X	X	X	X	X	X	X
Surge Protection Indicator	X	X	X	X	X	X	X	X
Ground/Wiring Indicator			X	X	X	X	X	X
Circuit Breaker Switch		Unlighted	Lighted	Lighted	Lighted	Lighted	Lighted	Lighted
Cord Length (exposed) ft.		3'	6'	6'	15'	8'	8'	8'
Plug		Straight	Straight	Straight	Straight	Rt. Angle	Rt. Angle	Rt. Angle
Phone/Fax Protection				X			X	X
Phone Line(s) Configuration				1 in/1 out			1 in/2 out	1 in/1 out
Phone Jack Spec				RJ-11			RJ-45	RJ-45
Nickel-Coaxial Jack Protection						X		X
6' Phone Cable (6P2C)				X			X	X
6' Coax Cable (Nickel Plated)						X		X
Molded Add-On Safety Covers	0	0	2	2	2	4	4	5
Molded Housing Color	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray	PC Gray
UL1449 2nd Edition	X	X	X	X	X	X	X	X


All devices listed on this page conform to NEMA WD-1 and WD-6.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES


Isolated Ground Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125V & 250V




IG26262GRY



IG5261

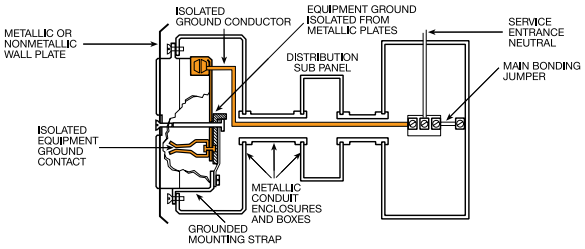

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
SPEC GRADE DUPLEX RECEPTACLES BACK & SIDE WIRE							
IG5262I	15	125	Ivory	5-15R	•	•	•
IG5262W	15	125	White	5-15R	•	•	•
IG5262	15	125	Orange	5-15R	•	•	•
IG5262GRY	15	125	Gray	5-15R	•	•	•
IG5262RED	15	125	Red	5-15R	•	•	•
IG5262LA	15	125	Light Almond	5-15R	•	•	•
IG5362I	20	125	Ivory	5-20R	•	•	•
IG5362W	20	125	White	5-20R	•	•	•
IG5362	20	125	Orange	5-20R	•	•	•
IG5362GRY	20	125	Gray	5-20R	•	•	•
IG5362BK	20	125	Black	5-20R	•	•	•
IG5362RED	20	125	Red	5-20R	•		•
IG5362LA	20	125	Light Almond	5-20R	•	•	•
IG5662	15	250	Orange	6-15R	•	•	•
IG5862	20	250	Orange	6-20R	•	•	•
SPEC GRADE DECORATOR DUPLEX RECEPTACLES BACK & SIDE WIRE							
IG26262I	15	125	Ivory	5-15R	•	•	•
IG26262W	15	125	White	5-15R	•	•	•
IG26262	15	125	Orange	5-15R	•	•	•
IG26262GRY	15	125	Gray	5-15R	•	•	•
IG26262BK	15	125	Black	5-15R	•	•	•
IG26362I	20	125	Ivory	5-20R	•	•	•
IG26362W	20	125	White	5-20R	•	•	•
IG26362	20	125	Orange	5-20R	•	•	•
IG26362GRY	20	125	Gray	5-20R	•	•	•
IG26362BK	20	125	Black	5-20R	•	•	•
IG26362RED	20	125	Red	5-20R	•	•	•
IG26362LA	20	125	Light Almond	5-20R	•	•	•
SPEC GRADE SINGLE RECEPTACLES BACK & SIDE WIRE							
IG5261	15	125	Orange	5-15R	•	•	•
IG5361	20	125	Orange	5-20R	•	•	•



NEMA 5-15R

NEMA 6-15R



NEMA 5-20R



NEMA 6-20R


For Wall Plates for Isolated Ground Systems, consult Wall Plates Section I.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

Tamper-Resistant Isolated Ground Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125V



TRIG5362



TRIG26362

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
SPEC GRADE TAMPER-RESISTANT DUPLEX RECEPTACLES BACK & SIDE WIRE						
TRIG5262I	15	125	Ivory	5-15R	•	•
TRIG5262W	15	125	White	5-15R	•	•
TRIG5262	15	125	Orange	5-15R	•	•
TRIG5262BK	15	125	Black	5-15R	•	•
TRIG5262GRY	15	125	Gray	5-15R	•	•
TRIG5262LA	15	125	Light Almond	5-15R	•	•
TRIG5362I	20	125	Ivory	5-20R	•	•
TRIG5362W	20	125	White	5-20R	•	•
TRIG5362	20	125	Orange	5-20R	•	•
TRIG5362BK	20	125	Black	5-20R	•	•
TRIG5362GRY	20	125	Gray	5-20R	•	•
TRIG5362RED	20	125	Red	5-20R	•	•
TRIG5362LA	20	125	Light Almond	5-20R	•	•
SPEC GRADE TAMPER-RESISTANT DECORATOR RECEPTACLES BACK & SIDE WIRE						
TRIG26262I	15	125	Ivory	5-15R	•	•
TRIG26262W	15	125	White	5-15R	•	•
TRIG26262	15	125	Orange	5-15R	•	•
TRIG26262BK	15	125	Black	5-15R	•	•
TRIG26262GRY	15	125	Gray	5-15R	•	•
TRIG26262LA	15	125	Light Almond	5-15R	•	•
TRIG26362I	20	125	Ivory	5-20R	•	•
TRIG26362W	20	125	White	5-20R	•	•
TRIG26362	20	125	Orange	5-20R	•	•
TRIG26362BK	20	125	Black	5-20R	•	•
TRIG26362GRY	20	125	Gray	5-20R	•	•
TRIG26362LA	20	125	Light Almond	5-20R	•	•



NEMA 5-15R




NEMA 5-20R

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

ISOLATED GROUND & SURGE PROTECTIVE DEVICES

PlugTail® Isolated Ground Receptacles 15 & 20A, 125V



PTIG5362LA



PTIG26362W




Features

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger-safe housing.
- Crimped and welded contacts.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- Isolated ground version features a plastic barrier that isolates grounding terminal from mounting strap and metal boxes.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498	3rd PARTY COMPLIANCE FSUL WC596
SPEC GRADE ISOLATED GROUND DUPLEX RECEPTACLES						
PTIG5262W	15	125	White	5-15R	•	•
PTIG5262	15	125	Orange	5-15R	•	•
PTIG5262RED	15	125	Red	5-15R	•	•
PTIG5262LA	15	125	Light Almond	5-15R	•	•
PTIG5362I	20	125	Ivory	5-20R	•	•
PTIG5362W	20	125	White	5-20R	•	•
PTIG5362	20	125	Orange	5-20R	•	•
PTIG5362GRY	20	125	Gray	5-20R	•	•
PTIG5362RED	20	125	Red	5-20R	•	•
PTIG5362LA	20	125	Light Almond	5-20R	•	•
ISOLATED GROUND DUPLEX RECEPTACLES						
PTIG26262W	15	125	White	5-15R	•	•
PTIG26262	15	125	Orange	5-15R	•	•
PTIG26262RED	15	125	Red	5-15R	•	•
PTIG26362I	20	125	Ivory	5-20R	•	•
PTIG26362W	20	125	White	5-20R	•	•
PTIG26362	20	125	Orange	5-20R	•	•
PTIG26362GRY	20	125	Gray	5-20R	•	•

2 Pole, 3 Wire



NEMA 5-15R NEMA 5-20R


For PlugTail Connectors, see Page B-21.

For Bulk Packaging Solutions consult factory.


All devices listed on this page conform to NEMA WD-1 and WD-6.

SURGE PROTECTIVE & ISOLATED GROUND DEVICES


Turnlok® Isolated Ground Receptacles 2 Pole, 3 Wire 15, 20 & 30A




IG4700




IG4710



20 Amp Receptacle




30 Amp Receptacle




IGL620P

CATALOG NUMBER	RATING A.	RATING V.	NEMA CONFIG. NO.	COLOR	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42
2 POLE, 3 WIRE GROUNDING, ORANGE BACK WIRE						
IG4700RED	15	125	L5-15R	Red	•	•
IG4700	15	125	L5-15R	Orange	•	•
IG4710	15	125	L5-15R	Orange	•	•
IG4760	15	277	L7-15R	Orange	•	•
IGL520R	20	125	L5-20R	Orange	•	•
IGL620R	20	250	L6-20R	Orange	•	•
IGL720R	20	277	L7-20R	Orange	•	•
IGL820R	20	480	L8-20R	Orange	•	•
IGL530R	30	125	L5-30R	Orange	•	•
IGL630R	30	250	L6-30R	Orange	•	•
3 POLE, 4 WIRE GROUNDING, ORANGE BACK WIRE						
IGL1420R	20	125/250	L14-20R	Orange	•	•
IGL1520R	20	3ø, 250	L15-20R	Orange	•	•
IGL1620R	20	3ø, 480	L16-20R	Orange	•	•
IGL1430R	30	125/250	L14-30R	Orange	•	•
IGL1530R	30	3ø, 250	L15-30R	Orange	•	•
4 POLE, 5 WIRE GROUNDING, ORANGE BACK WIRE						
IGL2120R	20	3øY, 120/208	L21-20R	Orange	•	•
IGL2220R	20	3øY, 277/480	L22-20R	Orange	•	•
IGL2320R	20	3øY, 347/600	L23-20R	Orange	•	•
IGL2130R	30	3øY, 120/208	L21-30R	Orange	•	•
IGL2230R	30	3øY, 277/480	L22-30R	Orange	•	•
IGL2330R	30	3øY, 347/600	L23-30R	Orange	•	•



NEMA L5-15R **NEMA L5-20R** **NEMA L5-30R** **NEMA L6-20R** **NEMA L6-30R** **NEMA L7-15R** **NEMA L7-20R** **NEMA L8-20R** **NEMA L14-20R** **NEMA L14-30R**




NEMA L15-20R **NEMA L15-30R** **NEMA L16-20R** **NEMA L21-20R** **NEMA L22-20R** **NEMA L23-20R** **NEMA L21-30R** **NEMA L22-30R** **NEMA L23-30R**

Consult Turnlok Section D for complete line of Turnlok Locking Devices.

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES

Table of Contents

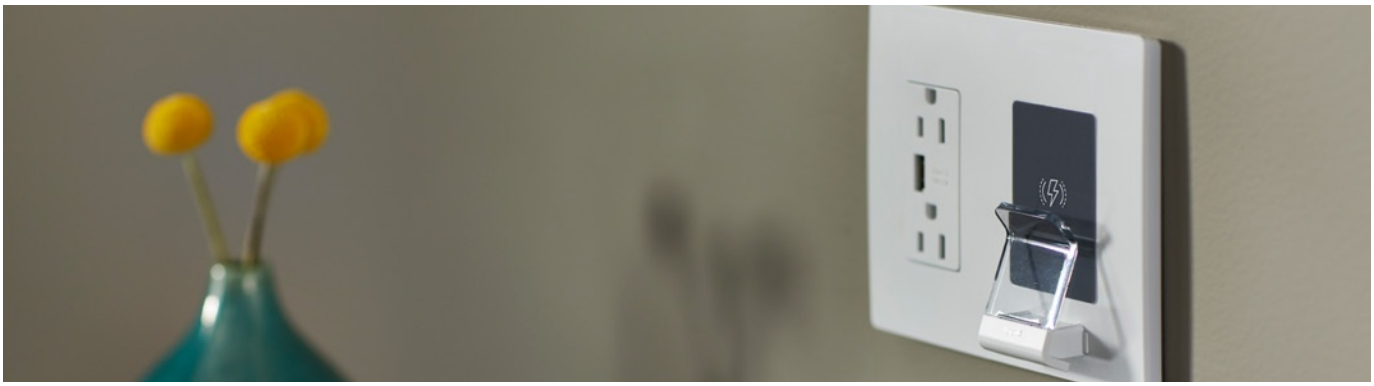



RESIDENTIAL

WIRELESS CHARGING

radiant® Wireless Charger B-102

TWO OUTLETS/TWO 6A USB PORTS

Tamper-Resistant Receptacle With One Type-A & One Type-C Port B-103

Tamper-Resistant Receptacle With Two Type-C Ports B-103

TWO OUTLETS/TWO 3.1A USB PORTS

Tamper-Resistant Receptacle With Two Type-A Ports B-104

Tamper-Resistant Receptacle With One Type-A & One Type-C Port B-104

Tamper-Resistant Receptacle With Two Type-C Ports B-104

ONE OUTLET/TWO 2.1A USB PORTS

Tamper-Resistant Receptacle With Two Type-A Ports B-105

4.2A QUAD

Four Type-A Ports B-106

ONE SINGLE POLE/3-WAY SWITCH WITH TWO 2.1A USB PORTS

Two 2.1A USB Ports with Switch B-107



COMMERCIAL

TWO OUTLETS/TWO 6A USB PORTS

Tamper-Resistant Receptacle With One Type-A & One Type-C Port B-108

Tamper-Resistant Receptacle With Two Type-C Ports B-108

TWO OUTLETS/TWO 3.1A USB PORTS

Tamper-Resistant Receptacle With Two Type-A Ports B-109

Tamper-Resistant Receptacle With One Type-A & One Type-C Port B-110

Tamper-Resistant Receptacle With Two Type-C Ports B-110

PlugTail® Tamper-Resistant Receptacle with One Type-A & One Type-C Port B-111

ONE OUTLET/TWO 2.1A USB PORTS

Tamper-Resistant Receptacle With Two Type-A Ports B-112



HOSPITAL GRADE

TWO OUTLETS/TWO 6A USB PORTS

Tamper-Resistant Receptacle With One Type-A & One Type-C Port B-113

Tamper-Resistant Receptacle With Two Type-C Ports B-113

TWO OUTLETS/TWO 3.1A USB PORTS

Tamper-Resistant Receptacle With Two Type-A Ports B-114

Tamper-Resistant Receptacle With One Type-A & One Type-C Port B-115

Tamper-Resistant Receptacle With Two Type-C Ports B-115

PlugTail® Tamper-Resistant Receptacle with One Type-A & One Type-C Port B-116

MOBILE CHARGING DEVICES

radiant® Wireless Charger RWC826USB

the radiant® collection



RWC826USB

The new radiant® Wireless Charger instantly provides a convenient, clutter-free space to charge your phone. It replaces any standard outlet in your home using the existing electrical wiring, making installation simple. The radiant® Wireless Charger works with phones equipped with Qi technology.

Features

- Tamper-resistant duplex receptacles meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect – helps prevent improper insertion of foreign objects.
- Combination duplex receptacle includes one 5-volt DC USB port that works with USB 2.0 and 3.0 devices.
- The wireless charge plate provides a convenient charging cradle that wirelessly charges all Qi-compatible devices.
- Overall 3.1-amp charging capability.
- Qi certification ensures a safe, reliable wireless charging experience.
- Back and side wiring terminals for installation flexibility; accommodates #14 AWG - #10 AWG stranded copper wires.
- Available in multiple colors: White, Ivory, Light Almond, and Black

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE UL498 UL1310	3rd PARTY COMPLIANCE c UL us	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223
RADIANT® WIRELESS CHARGER							
RWC826USBWCCV2	15	125	White	3.1 Amp	•	•	•
RWC826USBBKCCV2	15	125	Black	3.1 Amp	•	•	•
RWC826USBICCV2	15	125	Ivory	3.1 Amp	•	•	•
RWC826USBLACCV2	15	125	Light Almond	3.1 Amp	•	•	•




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


MOBILE CHARGING DEVICES – RESIDENTIAL

radiant® Tamper-Resistant Receptacle with Two 6A USB Ports

the radiant® collection



R26USBAC6W



R26USBCC6I

Features

- Combination AC USB receptacles include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.
- Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.
- Posted side-wire terminal screws and external back-wire pressure plates for faster termination.
- Overall 6-amp USB charging capability with smart current-sharing technology to allow for full 3A through a singular Type-C port.
- AC USB receptacles are tamper-resistant to meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end users – helps prevent improper insertion of foreign objects.
- Type-A and Type-C ports carry a minimum rating of 10,000 insertions.
- Back and side wire termination options accommodate #14 - #10 AWG stranded or solid copper wire.
- Multiple color options available.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE UL498 UL1310	3rd PARTY COMPLIANCE c UL us	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223
ULTRA-FAST USB TYPE AC CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
R26USBAC6BK	15	125	Black	6 Amp	•	•	•
R26USBAC6DBCCV4	15	125	Dark Bronze	6 Amp	•	•	•
R26USBAC6I	15	125	Ivory	6 Amp	•	•	•
R26USBAC6LA	15	125	Light Almond	6 Amp	•	•	•
R26USBAC6NICC6	15	125	Nickel	6 Amp	•	•	•
R26USBAC6W	15	125	White	6 Amp	•	•	•
ULTRA-FAST USB TYPE CC CHARGERS WITH DUPLEX TAMPER-RESISTANT							
R26USBCC6BK	15	125	Black	6 Amp	•	•	•
R26USBCC6DBCCV4	15	125	Dark Bronze	6 Amp	•	•	•
R26USBCC6I	15	125	Ivory	6 Amp	•	•	•
R26USBCC6LA	15	125	Light Almond	6 Amp	•	•	•
R26USBCC6NICCV6	15	125	Nickel	6 Amp	•	•	•
R26USBCC6W	15	125	White	6 Amp	•	•	•




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.


MOBILE CHARGING DEVICES – RESIDENTIAL

the radiant® collection


radiant® USB Chargers with Tamper-Resistant Receptacles 15A, 125V



TM826USBW



R26USBACLA



R26USBCCLA

Features

- Combination AC USB receptacles include two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.
- R26USB models available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices. TM826USB models available with (2) Type-A ports.
- Posted side-wire terminal screws and external back-wire pressure plates for more productive and reliable terminations.
- Overall 3.1-amp USB charging capability.
- AC USB receptacles are tamper-resistant to meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end users – helps prevent improper insertion of foreign objects.
- Back and side wire termination options accommodate #14 - #10 AWG stranded or solid copper wire.
- Multiple color options available.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE UL498 UL1310	3rd PARTY COMPLIANCE c UL us	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223
USB CHARGERS WITH DUPLEX DECORATOR TAMPER-RESISTANT RECEPTACLES							
TM826USBI	15	125	Ivory	3.1 Amp	•	•	•
TM826USBW	15	125	White	3.1 Amp	•	•	•
TM826USBK	15	125	Black	3.1 Amp	•	•	•
TM826USBLA	15	125	Light Almond	3.1 Amp	•	•	•
TM826USBNICC6	15	125	Nickel	3.1 Amp	•	•	•

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE UL498 UL1310	3rd PARTY COMPLIANCE c UL us	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223
USB TYPE AC CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
R26USBACBK	15	125	Black	3.1 Amp	•	•	•
R26USBACDBCCV4	15	125	Dark Bronze	3.1 Amp	•	•	•
R26USBACI	15	125	Ivory	3.1 Amp	•	•	•
R26USBACLA	15	125	Light Almond	3.1 Amp	•	•	•
R26USBACNICCV4	15	125	Nickel	3.1 Amp	•	•	•
R26USBACW	15	125	White	3.1 Amp	•	•	•
USB TYPE CC CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
R26USBCCBK	15	125	Black	3.1 Amp	•	•	•
R26USBCCDBCCV4	15	125	Dark Bronze	3.1 Amp	•	•	•
R26USBCCI	15	125	Ivory	3.1 Amp	•	•	•
R26USBCCLA	15	125	Light Almond	3.1 Amp	•	•	•
R26USBCCNICCV4	15	125	Nickel	3.1 Amp	•	•	•
R26USBCCW	15	125	White	3.1 Amp	•	•	•




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – RESIDENTIAL

radiant® USB Chargers with Tamper-Resistant Receptacles 15A, 125V



TM8USBW

Features

- Part of the radiant® collection.
- Charge multiple USB powered devices at the same time.
- Allow users to plug USB cables directly without AC adapters or transformer style plugs.
- Now with black "invisi-shutters" for an invisible effect preferred by end users.
- Back and side wire terminals.
- Compatible with USB 2.0 and 3.0 devices.
- Accepts standard Pass & Seymour wall plates and radiant® screwless wall plates.
- Compact design.
- All AC outlets are tamper-resistant.
- Meets NEC standards.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE	
USB CHARGERS WITH TAMPER-RESISTANT RECEPTACLE						
TM8USBICC6	15	125	Ivory	2.1 Amp	•	•
TM8USBW	15	125	White	2.1 Amp	•	•
TM8USBBK	15	125	Black	2.1 Amp	•	•
TM8USBLA	15	125	Light Almond	2.1 Amp	•	•
TM8USBNICC6	15	125	Nickel	2.1 Amp	•	•




NEMA 5-15R

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – RESIDENTIAL

Quad USB 4.2 Amp Chargers

the radiant® collection



TM8USB4ICC6

Features

- Overall 4.2-amp total charging capability – four 5-volt DC USB ports that work with USB 2.0 and 3.0 compatible devices.
- Slim 1.3-inch depth fits easily into any box.
- Charge multiple USB devices at the same time.
- Part of the radiant® collection.
- Multiple color options available.
- Accepts standard wall plates.
- Back- and side-wire terminals accommodate #14 AWG - #10 AWG solid or stranded wire.
- Zinc-plated ground terminal screw.


CATALOG NUMBER	VOLTS	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE	
				UL1310	c UL us
USB QUAD CHARGERS					
TM8USB4ICC6	125V	Ivory	4.2 Amp	•	•
TM8USB4WCC6	125V	White	4.2 Amp	•	•
TM8USB4BKCC6	125V	Black	4.2 Amp	•	•
TM8USB4LACC6	125V	Light Almond	4.2 Amp	•	•
TM8USB4GRYCC6	125V	Gray	4.2 Amp	•	•
TM8USB4NICC6	125V	Nickel	4.2 Amp	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – RESIDENTIAL

radiant® USB Chargers with Single Pole/3-Way Switch 15A, 120V

the radiant® collection



TM83USBW

Features

- Charge multiple USB powered devices at the same time.
- Allow users to plug USB cables directly without AC adapters or transformer style plugs.
- Back and side wire terminals.
- Compatible with USB 2.0 and 3.0 devices.
- Accepts standard Pass & Seymour wall plates and radiant® screwless wall plates.
- Compact design.
- Part of the radiant collection.
- Meets NEC standards.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE	
USB CHARGERS WITH SINGLE POLE/3-WAY SWITCH						
TM83USBICC6	15	120	Ivory	2.1 Amp	•	•
TM83USBWCC6	15	120	White	2.1 Amp	•	•
TM83USBBKCC6	15	120	Black	2.1 Amp	•	•
TM83USBLACC6	15	120	Light Almond	2.1 Amp	•	•
TM83USBNICC6	15	120	Nickel	2.1 Amp	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


MOBILE CHARGING DEVICES – COMMERCIAL

Heavy-Duty Decorator Specification Grade USB Charging Receptacles 15A, 20A, 125V


RoHS

Features

- Overall 6A charging capability with smart current-sharing technology to allow for full 3A through a singular Type-C port.
- Posted terminal screws and external back-wire pressure plates for more productive and reliable terminations.
- AC USB receptacles available in 15 and 20A, 125V Specification Grade and Hospital Grade.
- AC USB receptacles are tamper-resistant to meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end-users – helps prevent improper insertion of foreign objects.
- Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.
- Reinforced nylon USB Type-A ports to withstand abuse over the life of the product.
- Type-A and Type-C ports carry a minimum rating of 10,000 insertions.
- Stainless steel auto-ground clips assure positive ground.
- Slim design allows for installation in standard depth wall boxes.
- Multiple color options available.
- Efficient power supply meets the Department of Energy (DoE) Level VI no-load power requirement of 100mW max for external power supplies.



TR20USBAC6W



TR15USBCC6BK

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE UL1310	FSUL WC596	cULus
SPEC GRADE ULTRA-FAST USB TYPE-A/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
TR15USBAC6	15	125	Brown	6 Amp	•	•	•
TR15USBAC6BK	15	125	Black	6 Amp	•	•	•
TR15USBAC6GRY	15	125	Gray	6 Amp	•	•	•
TR15USBAC6I	15	125	Ivory	6 Amp	•	•	•
TR15USBAC6LA	15	125	Light Almond	6 Amp	•	•	•
TR15USBAC6W	15	125	White	6 Amp	•	•	•
TR20USBAC6	20	125	Brown	6 Amp	•	•	•
TR20USBAC6BK	20	125	Black	6 Amp	•	•	•
TR20USBAC6GRY	20	125	Gray	6 Amp	•	•	•
TR20USBAC6I	20	125	Ivory	6 Amp	•	•	•
TR20USBAC6LA	20	125	Light Almond	6 Amp	•	•	•
TR20USBAC6NI	20	125	Nickel	6 Amp	•	•	•
TR20USBAC6RED	20	125	Red	6 Amp	•	•	•
TR20USBAC6W	20	125	White	6 Amp	•	•	•
SPEC GRADE ULTRA-FAST USB TYPE-C/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
TR15USBCC6	15	125	Brown	6 Amp	•	•	•
TR15USBCC6BK	15	125	Black	6 Amp	•	•	•
TR15USBCC6GRY	15	125	Gray	6 Amp	•	•	•
TR15USBCC6I	15	125	Ivory	6 Amp	•	•	•
TR15USBCC6LA	15	125	Light Almond	6 Amp	•	•	•
TR15USBCC6W	15	125	White	6 Amp	•	•	•
TR20USBCC6	20	125	Brown	6 Amp	•	•	•
TR20USBCC6BK	20	125	Black	6 Amp	•	•	•
TR20USBCC6GRY	20	125	Gray	6 Amp	•	•	•
TR20USBCC6I	20	125	Ivory	6 Amp	•	•	•
TR20USBCC6LA	20	125	Light Almond	6 Amp	•	•	•
TR20USBCC6NI	20	125	Nickel	6 Amp	•	•	•
TR20USBCC6RED	20	125	Red	6 Amp	•	•	•
TR20USBCC6W	20	125	White	6 Amp	•	•	•



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – COMMERCIAL

Heavy-Duty Decorator Specification Grade USB Charging Receptacles 15A, 20A, 125V



TR5262USBLA



TR5362USBLA

Features

- Smart current-sharing technology to allow as much as 2.4A per port, or 3.1A in total for fast charging of mobile devices.
- Back and side wire terminals accommodate #14 AWG - #10 AWG stranded and solid copper wire.
- Stainless steel auto-ground clips assure positive ground
- Tamper-resistant 15 or 20A receptacles help prevent electrical shock.
- External back-wire pressure plates provide fast and easy wire terminations.
- Posted terminal screws and scalloped cover design for added productivity in side-wire applications.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT RECEPTACLES WITH USB CHARGER								
TR5262USB	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR5262USBW	15	125	White	3.1 Amp	5-15R	•	•	•
TR5262USBLA	15	125	Light Almond	3.1 Amp	5-15R	•	•	•
TR5262USBI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR5262USBBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR5262USBGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR5262USBNI	15	125	Nickel	3.1 Amp	5-15R	•	•	•
TR5362USB	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR5362USBW	20	125	White	3.1 Amp	5-20R	•	•	•
TR5362USBLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR5362USBI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR5362USBBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR5362USBGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR5362USBRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR5362USBNI	20	125	Nickel	3.1 Amp	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – COMMERCIAL

Heavy-Duty Specification Grade USB Charging Receptacles 15A, 20A, 125V



TR20USBCCLA

Features

- Overall 3.1A charging capability with smart current-sharing technology to allow for full 3.1A through a singular port.
- Slim design allows for installation in standard depth wall boxes.
- Posted terminal screws and external back-wire pressure plates for more productive and more reliable terminations.
- AC receptacles available in 15 and 20A, 125V Specification Grade and Hospital Grade.
- AC receptacles are tamper-resistant to meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end-users – helps prevent improper insertion of foreign objects.
- Multiple color options available.
- Available with (1) USB Type-A and (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.
- Reinforced nylon USB Type-A ports to withstand abuse over the life of the product.
- Stainless steel auto-ground clips assure positive ground.
- Efficient power supply meets the Department of Energy (DoE) Level VI no-load power requirement of 100mW max for external power supplies.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
SPEC GRADE USB TYPE-A/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES								
TR15USBAC	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR15USBACBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR15USBACGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR15USBACI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR15USBACLA	15	125	Light Almond	3.1 Amp	5-15R	•	•	•
TR15USBACW	15	125	White	3.1 Amp	5-15R	•	•	•
TR20USBAC	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR20USBACBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR20USBACGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR20USBACI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR20USBACLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR20USBACNI	20	125	Nickel	3.1 Amp	5-20R	•	•	•
TR20USBACRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR20USBACW	20	125	White	3.1 Amp	5-20R	•	•	•
SPEC GRADE USB TYPE-C/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES								
TR15USBCC	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR15USBCCBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR15USBCCGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR15USBCCI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR15USBCCLA	15	125	Light Almond	3.1 Amp	5-15R	•	•	•
TR15USBCCW	15	125	White	3.1 Amp	5-15R	•	•	•
TR20USBCC	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR20USBCCBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR20USBCCGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR20USBCCI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR20USBCCLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR20USBCCNI	20	125	Nickel	3.1 Amp	5-20R	•	•	•
TR20USBCCRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR20USBCCW	20	125	White	3.1 Amp	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – COMMERCIAL

PlugTail® Heavy-Duty Decorator Specification Grade USB Charging Receptacles 15A, 20A, 125V




PTTR15ACUSB

Features

- Overall 3.1A charging capability.
- 5Vdc Type-A USB port to charge USB Type-A compatible mobile devices.
- 5Vdc Type-C USB port to charge USB Type-C compatible mobile devices.
- Efficient, 15.5W power supply for fast charging of mobile phones and tablets.
- Available in 15 & 20A, Specification Grade and Hospital Grade configurations.
- PlugTail® termination allows for more productive, finger-safe installation and added future flexibility.
- Triple-wipe, brass line contacts for 15 & 20A commercial applications.
- Zinc-plated steel for corrosion resistance.
- Stainless steel auto-ground clips assure positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
PLUGTAIL® COMMERCIAL SPECIFICATION GRADE USB CHARGING RECEPTACLES								
PTTR15ACUSB	15	125	Brown	3.1A	5-15R	•	•	•
PTTR15ACUSBI	15	125	Ivory	3.1A	5-15R	•	•	•
PTTR15ACUSBW	15	125	White	3.1A	5-15R	•	•	•
PTTR15ACUSBLA	15	125	Light Almond	3.1A	5-15R	•	•	•
PTTR15ACUSBBK	15	125	Black	3.1A	5-15R	•	•	•
PTTR15ACUSBGRY	15	125	Gray	3.1A	5-15R	•	•	•
PTTR20ACUSB	20	125	Brown	3.1A	5-20R	•	•	•
PTTR20ACUSBI	20	125	Ivory	3.1A	5-20R	•	•	•
PTTR20ACUSBW	20	125	Gray	3.1A	5-20R	•	•	•
PTTR20ACUSBLA	20	125	Light Almond	3.1A	5-20R	•	•	•
PTTR20ACUSBBK	20	125	Black	3.1A	5-20R	•	•	•
PTTR20ACUSBGRY	20	125	Gray	3.1A	5-20R	•	•	•




NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – COMMERCIAL

Heavy-Duty Decorator Specification Grade USB Charging Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125V & 120V



TR5361USBW

Features


- Compact-design Tamper-Resistant receptacle and two 5-volt DC USB ports that work with USB 2.0 & 3.0 compatible devices.
- 2.1A USB type A receptacle charges fast, eliminates the need for bulky AC adapters.
- Back and side wire terminals accommodate #14 AWG - #10 AWG stranded and solid wire.
- Zinc-plated ground terminal screw.
- Stainless steel auto-ground clip assures positive ground.
- Tamper-Resistant, patented shutter system prevents improper insertion of foreign objects. Meets National Electric Code® Tamper-Resistant requirements.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE		
					ETL	c UL us UL498 UL1310	FSUL WC596
FED SPEC USB CHARGERS WITH TAMPER-RESISTANT RECEPTACLE							
TR5261USBI	15	125	Ivory	2.1 Amp	•	•	•
TR5261USBW	15	125	White	2.1 Amp	•	•	•
TR5261USB	15	125	Brown	2.1 Amp	•	•	•
TR5261USBGRY	15	125	Gray	2.1 Amp	•	•	•
TR5261USBBK	15	125	Black	2.1 Amp	•	•	•
TR5261USBLA	15	125	Light Almond	2.1 Amp	•	•	•
TR5361USBI	20	125	Ivory	2.1 Amp	•	•	•
TR5361USBW	20	125	White	2.1 Amp	•	•	•
TR5361USB	20	125	Brown	2.1 Amp	•	•	•
TR5361USBGRY	20	125	Gray	2.1 Amp	•	•	•
TR5361USBBK	20	125	Black	2.1 Amp	•	•	•
TR5361USBLA	20	125	Light Almond	2.1 Amp	•	•	•


All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – HOSPITAL GRADE

Heavy-Duty Decorator Hospital Grade USB Charging Receptacles 15A, 20A, 125V



TR15HUSBAC6W



TR20HUSBCC6W

Features

- Overall 6A charging capability with smart current-sharing technology to allow for full 3A through a singular Type-C port.
- Posted terminal screws and external back-wire pressure plates for more productive and reliable terminations.
- AC USB receptacles available in 15 and 20A, 125V Specification Grade and Hospital Grade.
- AC USB receptacles are tamper-resistant to meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end-users – helps prevent improper insertion of foreign objects.
- Available with (1) USB Type-A & (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.
- Reinforced nylon USB Type-A ports to withstand abuse over the life of the product.
- Type-A and Type-C ports carry a minimum rating of 10,000 insertions.
- Stainless steel auto-ground clips assure positive ground.
- Slim design allows for installation in standard depth wall boxes.
- Multiple color options available.
- Efficient power supply meets the Department of Energy (DoE) Level VI no-load power requirement of 100mW max for external power supplies.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	3rd PARTY COMPLIANCE ETL	UL498 UL1310	FSUL WC596
HOSPITAL GRADE ULTRA-FAST USB TYPE-A/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
TR15HUSBAC6	15	125	Brown	6 Amps	•	•	•
TR15HUSBAC6BK	15	125	Black	6 Amps	•	•	•
TR15HUSBAC6GRY	15	125	Gray	6 Amps	•	•	•
TR15HUSBAC6I	15	125	Ivory	6 Amps	•	•	•
TR15HUSBAC6RED	15	125	Red	6 Amps	•	•	•
TR15HUSBAC6W	15	125	White	6 Amps	•	•	•
TR20HUSBAC6	20	125	Brown	6 Amps	•	•	•
TR20HUSBAC6BK	20	125	Black	6 Amps	•	•	•
TR20HUSBAC6GRY	20	125	Gray	6 Amps	•	•	•
TR20HUSBAC6I	20	125	Ivory	6 Amps	•	•	•
TR20HUSBAC6LA	20	125	Light Almond	6 Amps	•	•	•
TR20HUSBAC6RED	20	125	Red	6 Amps	•	•	•
TR20HUSBAC6W	20	125	White	6 Amps	•	•	•
HOSPITAL GRADE ULTRA-FAST USB TYPE-C/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES							
TR15HUSBCC6	15	125	Brown	6 Amps	•	•	•
TR15HUSBCC6BK	15	125	Black	6 Amps	•	•	•
TR15HUSBCC6GRY	15	125	Gray	6 Amps	•	•	•
TR15HUSBCC6I	15	125	Ivory	6 Amps	•	•	•
TR15HUSBCC6RED	15	125	Red	6 Amps	•	•	•
TR15HUSBCC6W	15	125	White	6 Amps	•	•	•
TR20HUSBCC6	20	125	Brown	6 Amps	•	•	•
TR20HUSBCC6BK	20	125	Black	6 Amps	•	•	•
TR20HUSBCC6GRY	20	125	Gray	6 Amps	•	•	•
TR20HUSBCC6I	20	125	Ivory	6 Amps	•	•	•
TR20HUSBCC6LA	20	125	Light Almond	6 Amps	•	•	•
TR20HUSBCC6RED	20	125	Red	6 Amps	•	•	•
TR20HUSBCC6W	20	125	White	6 Amps	•	•	•



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – HOSPITAL GRADE

Heavy-Duty Decorator Hospital Grade USB Charging Receptacles 15 & 20A, 125V



TR8200HUSBLA



TR8300HUSBLA

Features

- Smart current-sharing technology to allow as much as 2.4A per port, or 3.1A in total for fast charging of mobile devices.
- Back and side wire terminals accommodate #14 AWG - #10 AWG stranded and solid copper wire.
- Stainless steel auto-ground clips assure positive ground
- Tamper-resistant 15 or 20A receptacles help prevent electrical shock.
- External back-wire pressure plates provide fast and easy wire terminations.
- Posted terminal screws and scalloped cover design for added productivity in side-wire applications.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
DUPLEX TAMPER-RESISTANT HOSPITAL GRADE RECEPTACLES WITH USB CHARGER								
TR8200HUSB	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR8200HUSBW	15	125	White	3.1 Amp	5-15R	•	•	•
TR8200HUSBI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR8200HUSBBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR8200HUSBGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR8200HUSBRED	15	125	Red	3.1 Amp	5-15R	•	•	•
TR8300HUSB	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR8300HUSBW	20	125	White	3.1 Amp	5-20R	•	•	•
TR8300HUSBLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR8300HUSBI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR8300HUSBBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR8300HUSBGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR8300HUSBRED	20	125	Red	3.1 Amp	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – HOSPITAL GRADE

Heavy-Duty Decorator Hospital Grade USB Charging Receptacles 15A, 20A, 125V



TR20HUSBACW



TR15HUSBCCW

Features

- Overall 3.1A charging capability with smart current-sharing technology to allow for full 3.1A through a singular port.
- Slim design allows for installation in standard depth wall boxes.
- Posted terminal screws and external back-wire pressure plates for more productive and more reliable terminations.
- AC receptacles available in 15 and 20A, 125V Specification Grade and Hospital Grade.
- AC receptacles are tamper-resistant to meet NEC®. Patented shutter system – now with black "invisi-shutters" for an invisible effect preferred by end-users – helps prevent improper insertion of foreign objects.
- Multiple color options available.
- Available with (1) USB Type-A and (1) USB Type-C port or (2) USB Type-C ports to charge the latest mobile devices.
- Reinforced nylon USB Type-A ports to withstand abuse over the life of the product.
- Stainless steel auto-ground clips assure positive ground.
- Efficient power supply meets the Department of Energy (DoE) Level VI no-load power requirement of 100mW max for external power supplies.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
HOSPITAL GRADE USB TYPE-A/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES								
TR15HUSBAC	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR15HUSBACBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR15HUSBACGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR15HUSBACI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR15HUSBACRED	15	125	Red	3.1 Amp	5-15R	•	•	•
TR15HUSBACW	15	125	White	3.1 Amp	5-15R	•	•	•
TR20HUSBAC	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR20HUSBACBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR20HUSBACGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR20HUSBACI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR20HUSBACLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR20HUSBACRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR20HUSBACW	20	125	White	3.1 Amp	5-20R	•	•	•
HOSPITAL GRADE USB TYPE-C/TYPE-C CHARGERS WITH DUPLEX TAMPER-RESISTANT RECEPTACLES								
TR15HUSBCC	15	125	Brown	3.1 Amp	5-15R	•	•	•
TR15HUSBCCBK	15	125	Black	3.1 Amp	5-15R	•	•	•
TR15HUSBCCGRY	15	125	Gray	3.1 Amp	5-15R	•	•	•
TR15HUSBCCI	15	125	Ivory	3.1 Amp	5-15R	•	•	•
TR15HUSBCCRED	15	125	Red	3.1 Amp	5-15R	•	•	•
TR15HUSBCCW	15	125	White	3.1 Amp	5-15R	•	•	•
TR20HUSBCC	20	125	Brown	3.1 Amp	5-20R	•	•	•
TR20HUSBCCBK	20	125	Black	3.1 Amp	5-20R	•	•	•
TR20HUSBCCGRY	20	125	Gray	3.1 Amp	5-20R	•	•	•
TR20HUSBCCI	20	125	Ivory	3.1 Amp	5-20R	•	•	•
TR20HUSBCCLA	20	125	Light Almond	3.1 Amp	5-20R	•	•	•
TR20HUSBCCRED	20	125	Red	3.1 Amp	5-20R	•	•	•
TR20HUSBCCW	20	125	White	3.1 Amp	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

MOBILE CHARGING DEVICES – HOSPITAL GRADE

PlugTail® Heavy-Duty Decorator Hospital Grade USB Charging Receptacles 15A, 20A, 125V



PTTR15HACUSBW

Features

- Overall 3.1A charging capability.
- 5Vdc Type-A USB port to charge USB Type-A compatible mobile devices.
- 5Vdc Type-C USB port to charge USB Type-C compatible mobile devices.
- Efficient, 15.5W power supply for fast charging of mobile phones and tablets.
- Available in 15 & 20A, Specification Grade and Hospital Grade configurations.
- PlugTail® termination allows for more productive, finger-safe installation and added future flexibility.
- Triple-wipe, brass line contacts for 15 & 20A commercial applications.
- Zinc-plated steel for corrosion resistance.
- Stainless steel auto-ground clips assure positive ground.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	TOTAL CHARGING CAPACITY	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE C22.2 No. 42 C22.2 No. 223	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE UL498 UL1310
PLUGTAIL® HOSPITAL GRADE USB CHARGING RECEPTACLES								
PTTR15HACUSB	15	125	Brown	3.1A	5-15R	•	•	•
PTTR15HACUSBI	15	125	Ivory	3.1A	5-15R	•	•	•
PTTR15HACUSBW	15	125	White	3.1A	5-15R	•	•	•
PTTR15HACUSBLA	15	125	Light Almond	3.1A	5-15R	•	•	•
PTTR15HACUSBBK	15	125	Black	3.1A	5-15R	•	•	•
PTTR15HACUSBGRY	15	125	Gray	3.1A	5-15R	•	•	•
PTTR15HACUSBRED	15	125	Red	3.1A	5-15R	•	•	•
PTTR20HACUSB	20	125	Brown	3.1A	5-20R	•	•	•
PTTR20HACUSBI	20	125	Ivory	3.1A	5-20R	•	•	•
PTTR20HACUSBW	20	125	White	3.1A	5-20R	•	•	•
PTTR20HACUSBLA	20	125	Light Almond	3.1A	5-20R	•	•	•
PTTR20HACUSBBK	20	125	Black	3.1A	5-20R	•	•	•
PTTR20HACUSBGRY	20	125	Gray	3.1A	5-20R	•	•	•
PTTR20HACUSBRED	20	125	Red	3.1A	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs & AFCIs





RESIDENTIAL/ COMMERCIAL GFCIs

GFCI Receptacles plus PlugTail®	C-2
Tamper-Resistant GFCI Receptacles plus PlugTail®	C-4
Tamper-Resistant Combination Night Light/ GFCI Receptacles plus PlugTail®	C-5
Tamper-Resistant Weather-Resistant GFCI Receptacles	C-6
Audible Alarm GFCI Receptacles	C-7
Tamper-Resistant Switch/GFCI Receptacles	C-8
Tamper-Resistant Isolated Ground GFCI Receptacles	C-9
NAFTA-Compliant GFCI Receptacles plus PlugTail®	C-10
Dead Front GFCI Receptacles	C-13
MISCELLANEOUS	
GFCI Extension Rings	C-21
Portable	C-22



HOSPITAL GRADE GFCIs

GFCI Receptacles plus PlugTail®	C-14
Tamper-Resistant GFCI Receptacles plus PlugTail®	C-15
Tamper-Resistant Weather-Resistant GFCI Receptacles plus PlugTail®	C-16
Tamper-Resistant Combination Night Light/ GFCI Receptacles plus PlugTail®	C-17
Tamper-Resistant Audible Alarm GFCI Receptacles	C-18
Isolated Ground Tamper-Resistant GFCI Receptacles	C-19
NAFTA-Compliant GFCI Receptacles plus PlugTail®	C-20



AFCIs/DUAL FUNCTION AFCI/GFCIs

Tamper-Resistant AFCI Receptacles	C-25
Dead Front AFCI Receptacles	C-25
Tamper-Resistant Dual Function AFCI/GFCI Receptacles	C-26
Dead Front Dual Function AFCI/GFCI Receptacles	C-26

GFCIs


the radiant® collection

radiant® & Specification Grade Self-Test GFCI Receptacle with SafeLock® Protection


1597TRW
Self-Test GFCI Receptacles with SafeLock® Protection

When we invented the first GFCI receptacle, our goal was to keep people safe. Today, because of their proven effectiveness, they are required by code in numerous locations. That's why we've made it our mission to offer intelligently designed solutions for every residential and commercial environment.

Whether the jobs call for receptacles, combination devices, portable, tamper-resistant, weather-resistant, NAFTA-compliant, hospital grade, audible alarm, or specification grade — there's a reliable P&S GFCI innovation for you.

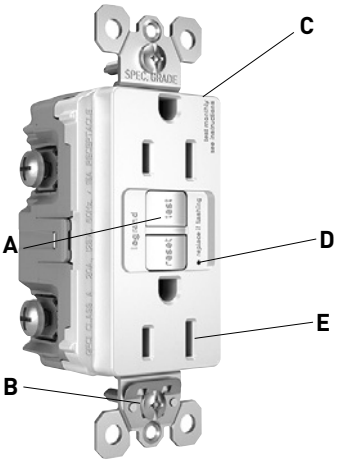

1597TRW

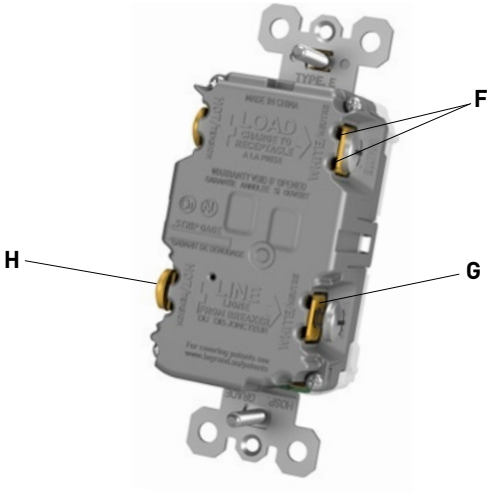

A. Self-Test GFCI with SafeLock® Protection – conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. If critical components are damaged and protection is lost, power to the receptacle is disconnected.

B. Auto-Ground clip assures a positive ground to metal box.

C. Ground terminal back-wire clamp for fast installation.

D. Indicator light makes it easy to identify status.

E. Tamper-Resistant: Automatic shutter system with black "invisi-shutters" prevents young children from inserting common objects such as hairpins or keys.

F. External back wire pressure plates with posted terminal screws for faster installation.

G. Redesigned side wire cavity improves speed of side wire installation.

H. Posted terminal screws allow for faster side-wire installation.

- **Prevents line-load miswire:** No power to the face or downstream receptacles if wired incorrectly.
- **High-impact-resistant, thermoplastic construction** for superior strength and durability.
- **The most durable GFCI receptacle available** – Exceeds UL943 voltage surge requirements.
- **Feed-thru wiring configuration** allows GFCI to protect downstream receptacles.
- **FSUL Listed** (Federal Specification WC596).
- **RoHS compliant.**
- **Proposition 65 compliant.**
- **Torque terminal screws** to 14-16 inch-pounds.

The radiant® collection is a step up from the standard with simple, classic options in wiring devices, home automation controls, and screwless wall plates that complement today's homes and hospitality settings.


RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs

radiant® Specification Grade Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597W



2097W

Features

- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Part of the radiant® collection of wiring devices, wall plates, and home systems.
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates with posted terminal screws for faster installation.
- Redesigned side-wire cavity improves speed of side-wire installation.
- Posted terminal screws for faster side-wire installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Ground screw has a back-wire clamp for easy installation.

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)



NEMA 5-15R



NEMA 5-20R

RoHS

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943	UL498	FSUL WC596
15 AMP DUPLEX GFCI								
1597I	**PT1597I**	15	125	Ivory	5-15R	•	•	•
1597W	**PT1597W**	15	125	White	5-15R	•	•	•
1597		15	125	Brown	5-15R	•	•	•
1597GRY	**PT1597GRY**	15	125	Gray	5-15R	•	•	•
1597BK		15	125	Black	5-15R	•	•	•
1597RED		15	125	Red	5-15R	•	•	•
1597LA	**PT1597LA**	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097I	**PT2097I**	20	125	Ivory	5-20R	•	•	•
2097W	**PT2097W**	20	125	White	5-20R	•	•	•
2097	**PT2097**	20	125	Brown	5-20R	•	•	•
2097GRY	**PT2097GRY**	20	125	Gray	5-20R	•	•	•
2097BK	**PT2097BK**	20	125	Black	5-20R	•	•	•
2097RED	**PT2097RED**	20	125	Red	5-20R	•	•	•
2097LA	**PT2097LA**	20	125	Light Almond	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs


the radiant® collection

radiant® Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Part of the radiant® collection of wiring devices, wall plates, and home systems.
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates with posted terminal screws for faster installation.
- Redesigned side-wire cavity improves speed of side-wire installation.
- Ground screw has a back-wire clamp for easy installation.
- Posted terminal screws for faster side-wire installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.



1597TRW



PT2097TRW

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)



NEMA 5-15R



NEMA 5-20R

RoHS

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI								
1597TRI	PT1597TRI	15	125	Ivory	5-15R	•	•	•
1597TRW	PT1597TRW	15	125	White	5-15R	•	•	•
1597TR		15	125	Brown	5-15R	•	•	•
1597TRBK		15	125	Black	5-15R	•	•	•
1597TRLA	PT1597TRLA	15	125	Light Almond	5-15R	•	•	•
1597TRNICC4		15	125	Nickel	5-15R	•	•	•
1597TRDBCC4		15	125	Dark Bronze	5-15R	•	•	•
	PT1597TRRED	15	125	Red	5-15R	•	•	•
	PT1597TRGRY	15	125	Gray	5-15R	•	•	•
1597TRGCC4		15	125	Graphite	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097TRI	PT2097TRI	20	125	Ivory	5-20R	•	•	•
2097TRW	PT2097TRW	20	125	White	5-20R	•	•	•
2097TR	PT2097TR	20	125	Brown	5-20R	•	•	•
2097TRGRY	PT2097TRGRY	20	125	Gray	5-20R	•	•	•
2097TRBK		20	125	Black	5-20R	•	•	•
2097TRRED	PT2097TRRED	20	125	Red	5-20R	•	•	•
2097TRLA	PT2097TRLA	20	125	Light Almond	5-20R	•	•	•
2097TRDBCC4		20	125	Dark Bronze	5-20R	•	•	•
2097TRNICC4		20	125	Nickel	5-20R	•	•	•
2097TRGCC4		20	125	Graphite	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs

radiant® Tamper-Resistant Self-Test Night Light/GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

the radiant® collection

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Sealed night light with high impact-resistant Lexan® lens prevents tampering.
- Night light uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- LED Rated at 186 milliwatts @ 120V.
- Photocell turns night light ON in dark, OFF in daylight.
- Two receptacles.
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Part of the radiant® collection of wiring devices, wall plates, and home systems.
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Two back-wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10-#14 AWG solid or stranded wire.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.



1597NTLTRWCC4

PlugTail® Models Features Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	LIGHT OUTPUT IN 1' FCD*	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP NIGHT LIGHT/GFCI									
1597NTLTRI		15	125	0.10	Ivory	5-15R	•	•	•
1597NTLTRW		15	125	0.10	White	5-15R	•	•	•
1597NTLTRBKCC4		15	125	0.10	Black	5-15R	•	•	•
1597NTLTRLA		15	125	0.10	Light Almond	5-15R	•	•	•
1597NTLTRNICC4		15	125	0.10	Nickel	5-15R	•	•	•
1597NTLTRDBCC4		15	125	0.10	Dark Bronze	5-15R	•	•	•
20 AMP NIGHT LIGHT/GFCI									
2097NTLTRI	**PT2097NTLTRI**	20	125	0.10	Ivory	5-20R	•	•	•
2097NTLTRW	**PT2097NTLTRW**	20	125	0.10	White	5-20R	•	•	•
2097NTLTRGRY		20	125	0.10	Gray	5-20R	•	•	•
2097NTLTRLA		20	125	0.10	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. K-20 for more information.


RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs

the radiant® collection

radiant® Tamper-Resistant and Weather-Resistant Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597TRWRW



2097TRWRW

Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Tamper-Resistant: Meets National Electrical Code® Tamper-Resistant requirements.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Listed to the Weather-Resistant supplement of UL498 meeting demanding UL requirements including:
  - Ultraviolet light exposure test
  - Cold impact test
  - Accelerated aging test
  - Stringent material requirements for current carrying parts, wire binding screws and mounting straps to ensure superior corrosion resistance.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED)
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- External back wire pressure plates with posted terminal screws for faster installation.
- Redesigned side wire cavity improves speed of side wire installation.
- Posted terminal screws for faster side-wire installation.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long nickel post-plated steel mounting strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI							
1597TRWRI	15	125	Ivory	5-15R	•	•	•
1597TRWRW	15	125	White	5-15R	•	•	•
1597TRWR	15	125	Brown	5-15R	•	•	•
1597TRWRGRY	15	125	Gray	5-15R	•	•	•
1597TRWRBK	15	125	Black	5-15R	•	•	•
1597TRWRLA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI							
2097TRWRI	20	125	Ivory	5-20R	•	•	•
2097TRWRW	20	125	White	5-20R	•	•	•
2097TRWR	20	125	Brown	5-20R	•	•	•
2097TRWRGRY	20	125	Gray	5-20R	•	•	•
2097TRWRBK	20	125	Black	5-20R	•	•	•
2097TRWRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R


RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

the radiant® collection

radiant® Audible Alarm Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

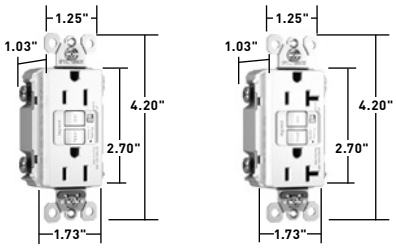

1597TRAW **2097TRAW**


Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Audible Alarm alert of tripped condition. Alarm can be turned ON/OFF.
- Alarm rated at 60 db at 10 feet.
- Rated as a 1.5 HP motor control switch.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
15 AMP DUPLEX GFCI							
1597TRAI	15	125	Ivory	5-15R	•	•	•
1597TRAW	15	125	White	5-15R	•	•	•
1597TRA	15	125	Brown	5-15R	•	•	•
1597TRALA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI							
2097TRAI	20	125	Ivory	5-20R	•	•	•
2097TRAW	20	125	White	5-20R	•	•	•
2097TRA	20	125	Brown	5-20R	•	•	•
2097TRALA	20	125	Light Almond	5-20R	•	•	•




NEMA 5-15R **NEMA 5-20R**

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

the radiant® collection

radiant® Switch /Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection 15A, 125VAC



1597SWTTRWCC4

Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- Trip indicator light (red LED).
- Two back wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	SWITCH RATING A.	SWITCH RATING VAC	RECEPTACLE RATING A.	RECEPTACLE RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	UL943 C22.2 No. 144
RADIANT® COMBINATION TAMPER-RESISTANT SINGLE POLE SWITCH/GFCI									
1597SWTTRICC4	15	120	15	125	Ivory	5-15R	•	•	•
1597SWTTRWCC4	15	120	15	125	White	5-15R	•	•	•
1597SWTTRBKCC4	15	120	15	125	Black	5-15R	•	•	•
1597SWTTRLACC4	15	120	15	125	Light Almond	5-15R	•	•	•
1597SWTTRGRY	15	120	15	125	Gray	5-15R	•	•	•




NEMA 5-15R


All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Tamper-Resistant Isolated-Ground Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597IGTRO



2097IGTRO

Features

- GFCI receptacle's grounding system is isolated from the building's grounding system.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Pre-stripped stranded wire lead for isolated ground termination.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
15 AMP DUPLEX GFCI							
1597IGTRI	15	125	Ivory	5-15R	•	•	•
1597IGTRO	15	125	Orange	5-15R	•	•	•
1597IGTRW	15	125	White	5-15R	•	•	•
1597IGTRLA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI							
2097IGTRI	20	125	Ivory	5-20R	•	•	•
2097IGTRW	20	125	White	5-20R	•	•	•
2097IGTRGRY	20	125	Gray	5-20R	•	•	•
2097IGTRO	20	125	Orange	5-20R	•	•	•
2097IGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs

radiant® NAFTA-Compliant Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



PT1597NAW



2097NAW

Features

- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Part of the radiant® collection of wiring devices, wall plates, and home systems.
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Two back-wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10-#14 AWG solid or stranded copper wire.
- Ground screw has a back-wire clamp for easy installation.

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)


CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
15 AMP DUPLEX GFCI								
	PT1597NAW	15	125	White	5-15R	•	•	•
	PT1597NAGRY	15	125	Gray	5-15R	•	•	•
	PT1597NALA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097NAI		20	125	Ivory	5-20R	•	•	•
2097NAW	**PT2097NAW**	20	125	White	5-20R	•	•	•
2097NA		20	125	Brown	5-20R	•	•	•
2097NAGRY		20	125	Gray	5-20R	•	•	•
2097NALA	**PT2097NALA**	20	125	Light Almond	5-20R	•	•	•
2097NABL		20	125	Blue	5-20R	•	•	•
	PT2097NABK	20	125	Black	5-20R	•	•	•
	PT2097NARED	20	125	Red	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6. For PlugTail Connector catalog numbers, see Page B-21.


GFCIs

radiant® NAFTA-Compliant, Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



2097TRNAW



PT2097NTLTRNAW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Part of the radiant® collection of wiring devices, wall plates, and home systems.
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Two back-wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10-#14 AWG solid or stranded copper wire.
- Ground screw has a back-wire clamp for easy installation.

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.
- * RoHS compliant.
- * Proposition 65 compliant.
- * Torque terminal screws to 14-16 inch-pounds.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)


CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	VAC			UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TAMPER-RESISTANT 15 AMP DUPLEX GFCI								
1597TRNAI		15	125	Ivory	5-15R	•	•	•
1597TRNAW		15	125	White	5-15R	•	•	•
1597TRNAGRY		15	125	Gray	5-15R	•	•	•
1597TRNALA		15	125	Light Almond	5-15R	•	•	•
TAMPER-RESISTANT 20 AMP DUPLEX GFCI								
2097TRNAI	PT2097TRNAI	20	125	Ivory	5-20R	•	•	•
2097TRNAW	PT2097TRNAW	20	125	White	5-20R	•	•	•
2097TRNAGRY	PT2097TRNAGRY	20	125	Gray	5-20R	•	•	•
2097TRNALA	PT2097TRNALA	20	125	Light Almond	5-20R	•	•	•
TAMPER-RESISTANT 15 AMP COMBINATION NIGHT LIGHT/GFCI								
	PT1597NTLTRNAI	15	125	Ivory	5-15R	•	•	•
	PT1597NTLTRNAW	15	125	White	5-15R	•	•	•
TAMPER-RESISTANT 20 AMP COMBINATION NIGHT LIGHT/GFCI								
	PT2097NTLTRNAI	20	125	Ivory	5-20R	•	•	•
	PT2097NTLTRNAW	20	125	White	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6. For PlugTail Connector catalog numbers, see Page B-21.


GFCIs

the radiant® collection

radiant® NAFTA-Compliant Tamper-Resistant and Weather-Resistant Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597TRWRNAW



2097TRWRNAW

Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Ground screw has a back wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- GFCIs with Auto-Ground assure a positive ground to metal box.
- WR models listed to the Weather-Resistant supplement of UL498, meet demanding UL requirements.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TAMPER-RESISTANT/WEATHER-RESISTANT 15 AMP DUPLEX GFCI							
1597TRWRNAI	15	125	Ivory	5-15R	•	•	•
1597TRWRNAW	15	125	White	5-15R	•	•	•
1597TRWRNA	15	125	Brown	5-15R	•	•	•
1597TRWRNALA	15	125	Light Almond	5-15R	•	•	•
TAMPER-RESISTANT/WEATHER-RESISTANT 20 AMP DUPLEX GFCI							
2097TRWRNAI	20	125	Ivory	5-20R	•	•	•
2097TRWRNAW	20	125	White	5-20R	•	•	•
2097TRWRNAGRY	20	125	Gray	5-20R	•	•	•
2097TRWRNALA	20	125	Light Almond	5-20R	•	•	•
2097TRNALA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R


RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

radiant® Dead Front Self-Test GFCI Receptacles with SafeLock® Protection

20A, 125VAC



2087W

Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Rated as a 1½ HP motor control switch.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the downstream load is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- Trip indicator light (red LED).
- Two back-wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10-#14 AWG solid or stranded copper wire.
- Ground screw has a back wire clamp for easy installation.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Class A rated GFCI.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING		COLOR	3rd PARTY COMPLIANCE	
	A	VAC		UL943 C22.2 No. 144	UL498 C22.2 No. 42
RADIANT® SPECIFICATION GRADE DEAD FRONT GFCI – 1 1/2 HP MOTOR CONTROL RATING					
2087I	20	125	Ivory	•	•
2087W	20	125	White	•	•
2087BK	20	125	Black	•	•
2087LA	20	125	Light Almond	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Features


- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates with posted terminal screws for faster installation.
- Redesigned side-wire cavity improves speed of side-wire installation.
- Posted terminal screws for faster side-wire installation.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

PlugTail® Models Only


- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.



1597HGW



2097HGW



PT2097HGW



PTRA6STR

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI								
1597HGI		15	125	Ivory	5-15R	•	•	•
1597HGW	**PT1597HGW**	15	125	White	5-15R	•	•	•
1597HGBK		15	125	Black	5-15R	•	•	•
1597HGGRY	**PT1597HGGRY**	15	125	Gray	5-15R	•	•	•
1597HGRED	**PT1597HGRED**	15	125	Red	5-15R	•	•	•
1597HGLA	**PT1597HGLA**	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097HGI	**PT2097HGI**	20	125	Ivory	5-20R	•	•	•
2097HGW	**PT2097HGW**	20	125	White	5-20R	•	•	•
2097HG	**PT2097HG**	20	125	Brown	5-20R	•	•	•
2097HGBK	**PT2097HGBK**	20	125	Black	5-20R	•	•	•
2097HGGRY	**PT2097HGGRY**	20	125	Gray	5-20R	•	•	•
2097HGRED	**PT2097HGRED**	20	125	Red	5-20R	•	•	•
2097HGLA	**PT2097HGLA**	20	125	Light Almond	5-20R	•	•	•

CATALOG NUMBER	WIRE TYPE	WIRE LENGTH
PLUGTAIL CONNECTORS – RIGHT ANGLE		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-21.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



NEMA 5-15R




NEMA 5-20R

RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Hospital Grade Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

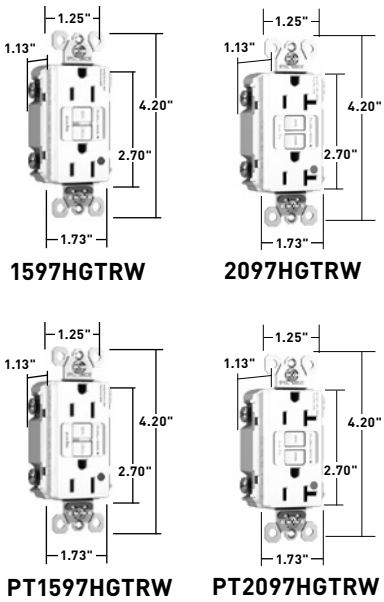

1597HGTRW 2097HGTRW

PT1597HGTRW PT2097HGTRW

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates with posted terminal screws for faster installation.
- Redesigned side-wire cavity improves speed of side-wire installation.
- Posted terminal screws for faster side-wire installation.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

NEMA 5-15R NEMA 5-20R


CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI								
1597HGTRI	PT1597HGTRI	15	125	Ivory	5-15R	•	•	•
1597HGTRW	PT1597HGTRW	15	125	White	5-15R	•	•	•
1597HGTR		15	125	Brown	5-15R	•	•	•
1597HGTRBK		15	125	Black	5-15R	•	•	•
1597HGTRGRY		15	125	Gray	5-15R	•	•	•
1597HGTRRED	PT1597HGTRRED	15	125	Red	5-15R	•	•	•
1597HGTRLA	PT1597HGTRLA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097HGTRI	PT2097HGTRI	20	125	Ivory	5-20R	•	•	•
2097HGTRW	PT2097HGTRW	20	125	White	5-20R	•	•	•
2097HGTR		20	125	Brown	5-20R	•	•	•
2097HGTRBK	PT2097HGTRBK	20	125	Black	5-20R	•	•	•
2097HGTRGRY	PT2097HGTRGRY	20	125	Gray	5-20R	•	•	•
2097HGTRRED	PT2097HGTRRED	20	125	Red	5-20R	•	•	•
2097HGTRLA	PT2097HGTRLA	20	125	Light Almond	5-20R	•	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs

Hospital Grade Tamper-Resistant Weather-Resistant Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC




1597HGTRWRW



2097HGTRWRW



PT1597HGTRWRW



PT2097HGTRWRW

Features

- Weather-Resistant: Meets National Electrical Code® Weather-Resistant requirements.
- Listed to the Weather-Resistant supplement of UL498 meeting demanding UL requirements including:
  - -Ultraviolet light exposure test
  - -Cold impact test
  - -Accelerated aging test
  - -Stringent material requirements for current-carrying parts, wire binding screws, and mounting straps to ensure superior corrosion resistance.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates with posted terminal screws for faster installation.
- Redesigned side-wire cavity improves speed of side-wire installation.
- Posted terminal screws for faster side-wire installation.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	VAC			UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI								
1597HGTRWRI	PT1597HGTRWRI	15	125	Ivory	5-15R	•	•	•
1597HGTRWRW	PT1597HGTRWRW	15	125	White	5-15R	•	•	•
1597HGTRWRBK	PT1597HGTRWRBK	15	125	Black	5-15R	•	•	•
1597HGTRWRGRY	PT1597HGTRWRGRY	15	125	Gray	5-15R	•	•	•
1597HGTRWRRED	PT1597HGTRWRRED	15	125	Red	5-15R	•	•	•
1597HGTRWRLA	PT1597HGTRWRLA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097HGTRWRI	PT2097HGTRWRI	20	125	Ivory	5-20R	•	•	•
2097HGTRWRW	PT2097HGTRWRW	20	125	White	5-20R	•	•	•
2097HGTRWRBK	PT2097HGTRWRBK	20	125	Black	5-20R	•	•	•
2097HGTRWRGRY	PT2097HGTRWRGRY	20	125	Gray	5-20R	•	•	•
2097HGTRWRRED	PT2097HGTRWRRED	20	125	Red	5-20R	•	•	•
2097HGTRWRLA	PT2097HGTRWRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R



NEMA 5-20R

RoHS


All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Hospital Grade Tamper-Resistant Self-Test Night Light/GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Sealed night light with high impact-resistant Lexan® lens prevents tampering.
- Night light uses cooler LED illumination.
- Energy-efficient LED has average 20-year life expectancy, eliminating bulb replacement.
- LED Rated at 186 milliwatts @ 120V.
- Photocell turns night light ON in dark, OFF in daylight.
- Two receptacles.
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Two back-wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10-#14 AWG solid or stranded copper wire.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Ground screw has a back-wire clamp for easy installation.



2097HGNTLTRW

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	LIGHT OUTPUT IN 1' FCD*	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
15 AMP NIGHT LIGHT/GFCI									
	PT1597HGNTLTRI	15	125	0.10	Ivory	5-15R	•	•	•
	PT1597HGNTLTRRED	15	125	0.10	Red	5-15R	•	•	•
20 AMP NIGHT LIGHT/GFCI									
2097HGNTLTRI	**PT2097HGNTLTRI**	20	125	0.10	Ivory	5-20R	•	•	•
2097HGNTLTRW	**PT2097HGNTLTRW**	20	125	0.10	White	5-20R	•	•	•
2097HGNTLTRGRY	**PT2097HGNTLTRGRY**	20	125	0.10	Gray	5-20R	•	•	•
2097HGNTLTRRED		20	125	0.10	Red	5-20R	•	•	•
2097HGNTLTRLA	**PT2097HGNTLTRLA**	20	125	0.10	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

*FCD = Foot Candle Distance, 1 Lumen = 1 FCD. See Page K-20 for more information.


All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Hospital Grade Audible Alarm Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597HGTRALA



2097HGTRAW

Features

- Audible Alarm alert of tripped condition. Alarm can be turned ON/OFF.
- Alarm rated at 60 db at 10 feet.
- Rated as a 1.5 HP motor control switch.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL943 C22.2 No. 144	c UL us UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI							
1597HGTRA	15	125	Brown	5-15R	•	•	•
1597HGTRALA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI							
2097HGTRAI	20	125	Ivory	5-20R	•	•	•
2097HGTRAW	20	125	White	5-20R	•	•	•
2097HGTRARED	20	125	Red	5-20R	•	•	•
2097HGTRALA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R


All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Hospital Grade Isolated-Ground Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597IGHGTRO



2097IGHGTRO

Features

- GFCI receptacle's grounding system is isolated from the building's grounding system.
- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Thinner than competitors' GFCI Receptacles: leaves more room for wires in the box.
- Auto-Ground clip assures a positive ground to metal box.
- Feed-thru wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Pre-stripped stranded wire lead for isolated ground termination.
- Exceeds UL943 voltage surge requirements.
- FSUL Listed (Federal Specification WC596).
- Trip indicator light (red LED).
- Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire.
- Two back wire holes per terminal.
- Ground screw has a back wire clamp for easy installation.
- 10kA short circuit rating.
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction.
- Extra-long strap.
- Button colors match the device face.
- Dual-direction test and reset buttons.
- Supplied with matching TP26 nylon wall plate.
- Tri-drive screws.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	RATING A.	RATING VAC	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
HOSPITAL GRADE ISOLATED GROUND TAMPER-RESISTANT DUPLEX GFCI							
1597IGHGTRO	15	125	Orange	5-15R	•	•	•
2097IGHGTRI	20	125	Ivory	5-20R	•	•	•
2097IGHGTRW	20	125	White	5-20R	•	•	•
2097IGHGTRRED	20	125	Red	5-20R	•	•	•
2097IGHGTRO	20	125	Orange	5-20R	•	•	•
2097IGHGTRLA	20	125	Light Almond	5-20R	•	•	•



NEMA 5-15R




NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


GFCIs

NAFTA-Compliant Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC




1597HGTRNAW




2097HGTRNAW



PT2097HGNAW



PT2097HGNTLTRW



PTRA6STR

Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Two back-wire holes per terminal.
- Side or internal screw-pressure-plate back wire with #10-#14 AWG solid or stranded copper wire.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

Specifications


- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING A.	RATING VAC	LIGHT OUTPUT IN 1' FCD*	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42	3rd PARTY COMPLIANCE FSUL WC596
20 AMP DUPLEX GFCI									
2097HGNAI	**PT2097HGNAI**	20	125	0.180	Ivory	5-20R	•	•	•
2097HGNAW	**PT2097HGNAW**	20	125	0.180	White	5-20R	•	•	•
2097HGNAGRY	**PT2097HGNAGRY**	20	125	0.180	Gray	5-20R	•	•	•
2097HGNARED	**PT2097HGNARED**	20	125	0.180	Red	5-20R	•	•	•
2097HGNALA		20	125	0.180	Light Almond	5-20R	•	•	•
TAMPER-RESISTANT 20 AMP DUPLEX GFCI									
2097HGTRNAI	**PT2097HGTRNAI**	20	125	0.180	Ivory	5-20R	•	•	•
2097HGTRNAW	**PT2097HGTRNAW**	20	125	0.180	White	5-20R	•	•	•
2097HGTRNARED		20	125	0.180	Red	5-20R	•	•	•
2097HGTRNALA		20	125	0.180	Light Almond	5-20R	•	•	•
	PT2097HGTRNAGRY	20	125	0.180	Gray	5-20R	•	•	•
TAMPER-RESISTANT 20 AMP COMBINATION NIGHT LIGHT/GFCI									
	PT2097HGNTLTRNAI	20	125	0.180	Ivory	5-20R	•	•	•

CATALOG NUMBER	WIRE TYPE	WIRE LENGTH
PLUGTAIL CONNECTORS – RIGHT ANGLE		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.

NAFTA-Compliant GFCI Receptacles are ideal for use on projects subject to the provisions of the Buy American Act.



NEMA 5-15R



NEMA 5-20R

RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Extension Rings



1594TPAW
EXTENSION RING

CATALOG NUMBER	COLOR
GFCI EXTENSION RINGS	
1594TPAI	7.0 cu. in. Extension Ring, Ivory
1594TPAW	7.0 cu. in. Extension Ring, White
1594TPA	7.0 cu. in. Extension Ring, Brown
1594TPALA	7.0 cu. in. Extension Ring, Light Almond
1594TPABK	7.0 cu. in. Extension Ring, Black

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Portables

Applications

All Pass & Seymour Portable GFCIs meet OSHA and NEC requirements to provide ground fault protection for personnel utilizing temporary power during construction, remodeling, maintenance, repair and demolition. Can be used with power tools, high-pressure power washers, wet vacuums, and grounds keeping equipment. Also used on spas, hot tubs, vending machines, and portable signs to provide ground fault protection.

Open Neutral Protection

All Pass & Seymour Portable GFCIs have an open neutral relay that automatically cuts off power to the line (hot) conductor of the device in the event that the neutral wire preceding the GFCI becomes severed. For example, if your portable GFCI were plugged into an extension cord that was supplying the power and the neutral conductor on that extension cord was accidentally cut (as can happen on a job site), the open neutral relay would shut off power to the hot conductor. This provides an additional level of safety from possible ground faults.

Manual Reset GFCI

Requires the GFCI to be manually set for use by pressing the reset button upon plug in and after loss of primary power (power failure or unplugging the device). Must be manually reset after a ground fault condition. Ideal for applications where operator injury might occur if equipment were to restart after a power failure. Typical equipment includes power drills, saws, lathes, and grinders.

Automatic Reset GFCI

Automatically energizes or sets the GFCI for use upon plug in and after the loss of primary power (power failure or unplugging the device). After a ground fault condition, must be reset by pushing the reset button. This feature eliminates the need for unit to be reset each time it is plugged in or powered up. Ideal for equipment intended for continuous use where a temporary power failure is likely and undesirable. Examples are pumps, pressure washers, portable signs, or lighting and engine heaters.

Features and Specifications

- Durable polycarbonate case withstands hard use.
- Indicator light is on when power is available.
- Open neutral protection.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage: 120-132VAC
- Operating Temperature: -35°C (-30°F) to +66°C (150°F)
- Trip Time: .025 sec., nominal per UL Standard
- Trip Threshold: 5 ±1mA
- Cord Grip Range: .30"-.46"
- RoHS-Compliant.

CATALOG NUMBER	RESET	COLOR	RATING A.	RATING V.	NEMA CONFIG. NO.	GFCI	RIGHT ANGLE PLUG	3rd PARTY COMPLIANCE UL943	UL498	C22.2 No. 144
RIGHT ANGLE PLUG – PORTABLE GFCI										
1594CMM	Manual	Yellow	15	125	5-15P		User attachable	•	•	•
1594CMA	Automatic	Black	15	125	5-15P		User attachable	•	•	•

RoHS-Compliant Portable GFCIs meet the requirements of Restriction of Hazardous Substances directives and regulations.



1594CMM


All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs


Portables



1594PC2A



1594PC2A



1594CS1M
1594CS1A

Features and Specifications

- Durable polycarbonate case withstands hard use.
- Indicator light is on when power is available.
- Open neutral protection.
- Optional Turnlok® plugs and connectors prevent accidental disconnection.
- Optional tri-cord connector handles up to three loads.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage: 120-132VAC
- Operating Temperature: -35°C (-30°F) to +66°C (150°F)
- Trip Time: .025 sec., nominal per UL Standard
- Trip Threshold: 5 ±1mA
- RoHS-Compliant.

CATALOG NUMBER	DESCRIPTION	RESET	COLOR	RATING A.	RATING V.	NEMA CONFIG NO.	PLUG	CONN.	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42
15 AMP IN-LINE PORTABLE GFCI										
1594PC6M	6' cord, straight blade	Manual	Yellow	15	125	5-15P/R			•	•
1594PC2M	2' cord, straight blade	Manual	Yellow	15	125	5-15P/R			•	•
1594PC2A	2' cord, straight blade	Auto.	Black	15	125	5-15P/R			•	•
1594TC2M	2' cord with tri-cord connector	Manual	Yellow	15	125	5-15P/R			•	•
1594TC2A	2' cord with tri-cord connector	Auto.	Black	15	125	5-15P/R			•	•
1594TL2M	2' cord, Turnlok®	Manual	Yellow	15	125	L5-15P/R				
1594TL2A	2' cord, Turnlok®	Auto.	Black	15A	125	L5-15P/R				
20 AMP IN-LINE PORTABLE GFCI										
2094PC2A	2' cord, straight blade	Auto.	Black	20	125	5-20P/R			•	•
2094PC2M	2' cord, straight blade	Manual	Yellow	20	125	5-20P/R			•	•
2094TL2A	2' cord, Turnlok®	Auto.	Black	20	125	L5-20P/R			•	•
2094TL2M	2' cord, Turnlok®	Manual	Yellow	20	125	L5-20P/R			•	•

CATALOG NUMBER	DESCRIPTION	RESET	COLOR	RATING A.	RATING V.	NEMA CONFIG. NO.	RIGHT ANGLE PLUG	3rd PARTY COMPLIANCE UL943 C22.2 No. 144	3rd PARTY COMPLIANCE UL498 C22.2 No. 42
RIGHT ANGLE PLUG – PORTABLE GFCI									
1594CS1M	1' cord with connector	Manual	Yellow	15	125	5-15P/R		•	•
1594CS1A	1' cord with connector	Automatic	Black	15	125	5-15P/R		•	•

RoHS-Compliant Portable GFCIs meet the requirements of Restriction of Hazardous Substances directives and regulations.

All devices listed on this page conform to NEMA WD-1 and WD-6.

GFCIs

Portables



PL204L

Features and Specifications

- Handles up to four loads.
- Open neutral protection.
- High-impact-resistant thermoplastic housing.
- Optional Turnlok® plugs and connectors prevent accidental disconnection.
- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage: 120-132VAC
- Trip Threshold: 5 ±1mA
- Trip Time: .025 sec., nominal per UL Standard
- Case Material: Yellow Thermoplastic

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING V.	NEMA CONFIG. NO.	PLUG	RECEPTACLE	3rd PARTY COMPLIANCE UL943	3rd PARTY COMPLIANCE UL498
AUTO RESET BOXES – PORTABLE GFCI								
PS154S	Four 15A, 125V straight blade outlets. Cord has 15A, 125V plug	15	125	5-15P 5-15R		 	•	•
PS204S	Four 20A, 125V straight blade outlets. Cord has 20A, 125V plug	20	125	5-20P 5-20R		 	•	•
PL204L	Two 20A, 125V straight blade outlets and one 20A 125V locking outlet has 20A, 125V locking plug	20	125	L5-20P L5-20R 5-20R		 	•	•


RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.


AFCIs

radiant® Tamper-Resistant and Dead Front AFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



AF152TRW




AF202DFLA

Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Protects against electrical fires by detecting arc faults and denergizing the circuit.
- Compliant with NEC® AFCI requirements
- Patented SafeLock® Protection – if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- FSUL listed (Federal Specification WC596).
- Readily accessible – TEST and RESET buttons located on face of device at point of use. Easier to troubleshoot for homeowner, means less callbacks for contractor.
- Easier installation than breakers. Fits any wall box: no need to match the brand of the breaker box.
- Can be installed on a circuit with shared neutrals on the line side.
- Trip indicator light. Red when device is tripped.
- Feed-through protection.
- Two back wire holes per termination add wiring flexibility, eliminate pigtailing and save box space.
- High impact-resistant, thermoplastic construction for superior strength and durability.
- Ground terminal back wire for fast installation.
- Tamper-Resistant – automatic shutter system prevents young children from inserting common household objects. Black shutters essentially disappear into the background for an invisible effect preferred by end users.
- Auto-ground clip assures a positive ground to a metal box.
- Dead Front is rated as 1 1/2 HP motor control switch.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1699A	UL498	FSUL WC596	CSA C22.2 No. 42
RADIANT® TAMPER-RESISTANT OUTLET BRANCH CIRCUIT AFCI RECEPTACLE								
AF152TRW	15A	125V	White	5-15R	•	•	•	•
AF152TRI	15A	125V	Ivory	5-15R	•	•	•	•
AF152TR	15A	125V	Brown	5-15R	•	•	•	•
AF152TRBK	15A	125V	Black	5-15R	•	•	•	•
AF152TRLA	15A	125V	Light Almond	5-15R	•	•	•	•
AF152TRGRY	15A	125V	Gray	5-15R	•	•	•	•
RADIANT® TAMPER-RESISTANT OUTLET BRANCH CIRCUIT AFCI RECEPTACLE								
AF202TRW	20A	125V	White	5-20R	•	•	•	•
AF202TRI	20A	125V	Ivory	5-20R	•	•	•	•
AF202TR	20A	125V	Brown	5-20R	•	•	•	•
AF202TRBK	20A	125V	Black	5-20R	•	•	•	•
AF202TRLA	20A	125V	Light Almond	5-20R	•	•	•	•
AF202TRGRY	20A	125V	Gray	5-20R	•	•	•	•
RADIANT® DEAD FRONT OUTLET BRANCH CIRCUIT AFCI								
AF202DFW	20A	125V	White	—	•	•	•	•
AF202DFI	20A	125V	Ivory	—	•	•	•	•
AF202DFLA	20A	125V	Light Almond	—	•	•	•	•

2 Pole, 3 Wire



NEMA 5-15R **NEMA 5-20R**


All devices listed on this page conform to NEMA WD-1 and WD-6.

AFCIs

the radiant® collection

radiant® Tamper-Resistant and Dead Front Dual Function AFCI/GFCI Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



AFGF152TRW

Features

- Part of the radiant® collection of wiring devices, wall plates and home systems.
- Protects against electrical fires caused by arc faults and injury due to electrical shock.
- Compliant with NEC® AFCI and GFCI requirements.
- Self-Test GFCI – conducts an automatic test periodically, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced.
- Patented SafeLock® Protection – if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- FSUL listed (Federal Specification WC596).
- Readily accessible – TEST and RESET buttons located on face of device at point of use. Easier to troubleshoot for homeowner, means less callbacks for contractor.
- Easier installation than breakers. Fits any wall box: no need to match the brand of the breaker box.
- Can be installed on a circuit with shared neutrals on the line side.
- Two indicator lights, one for GFCI and one for AFCI. Easy to distinguish between trip caused by arc fault and trip caused by ground fault. GFCI indicator light flashes if device fails the GFCI self-test, signaling that device should be replaced.
- Feed-through protection.
- Two back wire holes per termination add wiring flexibility, eliminate pigtailing and save box space.
- High impact-resistant, thermoplastic construction for superior strength and durability.
- Ground terminal back wire for fast installation.
- Tamper-Resistant – automatic shutter system prevents young children from inserting common household objects. Black shutters essentially disappear into the background for an invisible effect preferred by end users.
- Auto-ground clip assures a positive ground to a metal box.
- Dead Front is rated as 1 1/2 HP motor control switch.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.

CATALOG NUMBER	RATING A.	RATING V.	COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL1699A	UL943	UL498	FSUL WC596	CSA C22.2 No. 42
RADIANT® TAMPER-RESISTANT DUAL FUNCTION AFCI/GFCI RECEPTACLE									
AFGF152TRW	15A	125V	White	5-15R	•	•	•	•	•
AFGF152TRI	15A	125V	Ivory	5-15R	•	•	•	•	•
AFGF152TR	15A	125V	Brown	5-15R	•	•	•	•	•
AFGF152TRBK	15A	125V	Black	5-15R	•	•	•	•	•
AFGF152TRLA	15A	125V	Light Almond	5-15R	•	•	•	•	•
AFGF152TRGRY	15A	125V	Gray	5-15R	•	•	•	•	•
AFGF202TRW	20A	125V	White	5-20R	•	•	•	•	•
AFGF202TRI	20A	125V	Ivory	5-20R	•	•	•	•	•
AFGF202TR	20A	125V	Brown	5-20R	•	•	•	•	•
AFGF202TRBK	20A	125V	Black	5-20R	•	•	•	•	•
AFGF202TRLA	20A	125V	Light Almond	5-20R	•	•	•	•	•
AFGF202TRGRY	20A	125V	Gray	5-20R	•	•	•	•	•
RADIANT® DEAD FRONT OUTLET BRANCH CIRCUIT AFCI/GFCI RECEPTACLE									
AFGF202DFW	20A	125V	White	5-20R	•	•	•	•	•
AFGF202DFI	20A	125V	Ivory	5-20R	•	•	•	•	•
AFGF202DFLA	20A	125V	Light Almond	5-20R	•	•	•	•	•

2 Pole, 3 Wire



NEMA 5-15R



NEMA 5-20R

RoHS

All devices listed on this page conform to NEMA WD-1 and WD-6.

INDUSTRIAL PRODUCTS





STRAIGHT BLADE PLUGS & CONNECTORS D-2



TURNLOK LOCKING DEVICES D-18



CAM-TYPE DEVICES D-60



PIN & SLEEVE/ MECHANICAL INTERLOCKS D-72



FLEXCOR WIRE MESH GRIPS D-105



RUBBER & WATERTIGHT DEVICES D-135



SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS D-147



CABLE REELS D-171

STRAIGHT BLADE PLUGS & CONNECTORS



Ready-to-wire and ready-to-perform under adverse plant conditions — our Straight Blade Plug & Connector line is an industrial-strength, on-the-job asset.



HOSPITAL GRADE PLUGS & CONNECTORS D-4

Plugs & Connectors	D-4
MaxGrip® M³	D-4
Angled Devices	D-4
Accessories	D-4



EXTRA-HARD USE PLUGS & CONNECTORS D-5

Plugs & Connectors	D-5
Angled Devices	D-6
Ground Continuity Monitoring Devices	D-7
Accessories	D-5




STANDARD PLUGS & CONNECTORS D-8

Dead Front Plugs & Connectors	D-8
Flanged Inlets & Outlets	D-9
Gator Grip Devices	D-10
Clamp-Lock Devices	D-11
MaxGrip M³	D-12
Misc. Configurations	D-13
REFERENCE	
NEMA Configurations	D-14
Product Specifications & Performance	D-15

STRAIGHT BLADE PLUGS & CONNECTORS

PS5266X & PS5269X
Straight Blade Plugs & Connectors - EHU

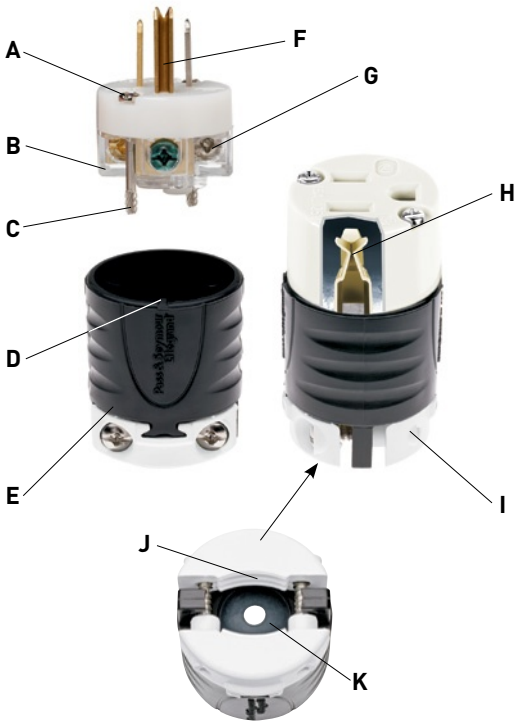

A. Quick-thread assembly screws and cord-grip screws come backed-out, ready-to-wire.

B. See-through, thermoplastic terminal chamber for clear view of terminals and wire connections.

C. Tapered wire wells guide conductors into captivated, staked clamping nuts.

D. Housing is keyed for fast alignment with terminal section.

E. Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.

F. Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity; ground pin is reinforced for added strength and safety.

G. Color-coded terminal screws are positioned on same plane and backed-out for fast installation.

H. Double-wipe, firm-grip ground contact and triple-wipe power contacts guarantee a superior connection.

I. Recessed cord-grip screw reduces screwdriver slippage, improves safety.

J. Rugged external two-piece cord grip provides uniform pressure for superior retention of conductors.


K. Internal dust shield keeps terminals free of contaminants.

All devices listed on this page conform to NEMA WD-1 and WD-6.


STRAIGHT BLADE PLUGS & CONNECTORS

IP20 Suitability

Hospital Grade Plugs & Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V




PS5266XHG



PS5269XHG



PS5266HGAN



PS8115




PS8119

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA C22.2 No. 42
HOSPITAL GRADE – EXTRA-HARD USE (EHU)								
PS5266XHG	15	125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266HGAN	15	125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269XHG	15	125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366XHG	20	125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366HGAN	20	125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369XHG	20	125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666XHG	15	250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666HGAN	15	250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669XHG	15	250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466XHG	20	250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466HGAN	20	250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469XHG	20	250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
HOSPITAL GRADE MAXGRIP® M³								
PS8115	15	125	Plug, White	.230"-.720"	5-15P	•	•	•
PS8119	15	125	Connector, White	.230"-.720"	5-15R	•	•	•
PS8115BK	15	125	Plug, Black	.230"-.720"	5-15P	•	•	•
PS8119BK	15	125	Connector, Black	.230"-.720"	5-15R	•	•	•




NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22GL	EHU-Strain Relief Grip*
FC30GL	EHU-Strain Relief Grip*
FC40GL	EHU-Strain Relief Grip*
FC52GL	EHU-Strain Relief Grip*

*For further information consult the Flexcor® pages in this section.

All devices listed on this page conform to NEMA WD-1 and WD-6.



EHU15AN




FC52GL


STRAIGHT BLADE PLUGS & CONNECTORS

IP20 Suitability


Extra-Hard Use (EHU) Specification Grade 2 Pole, 3 Wire Grounding 15 & 20A, 125, 250 & 277V



PS5266X



PS5269X



CR5266X

Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on all Specification Grade plugs and connectors.
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
EHU – SPECIFICATION GRADE								
PS5266X	15	125	Plug, Black & White	.230"-.720"	5-15P	•		•
PS5266XGRY	15	125	Plug, Black & Gray	.230"-.720"	5-15P	•		•
PS5266XBK	15	125	Plug, Black	.230"-.720"	5-15P	•		•
CR5266X	15	125	Plug, Corrosion-Resistant, Yellow & White	.230"-.720"	5-15P	•		•
PS5269X	15	125	Connector, Black & White	.230"-.720"	5-15R	•		•
PS5269XGRY	15	125	Connector, Black & Gray	.230"-.720"	5-15R	•		•
PS5269XBK	15	125	Connector, Black	.230"-.720"	5-15R	•		•
CR5269X	15	125	Connector, Corrosion-Resistant, Yellow & White	.230"-.720"	5-15R	•		•
PS5366X	20	125	Plug, Black & White	.230"-.720"	5-20P	•	•	•
PS5369X	20	125	Connector, Black & White	.230"-.720"	5-20R	•	•	
PS5666X	15	250	Plug, Black & White	.230"-.720"	6-15P	•	•	•
PS5669X	15	250	Connector, Black & White	.230"-.720"	6-15R	•	•	•
PS5466X	20	250	Plug, Black & White	.230"-.720"	6-20P	•	•	•
PS5469X	20	250	Connector, Black & White	.230"-.720"	6-20R	•	•	
PS5766X	15	277	Plug, Black & White	.230"-.720"	7-15P	•		•
PS5866X*	20	277	Plug, Black & White	.385"-1.150"	7-20P	•		•

*For PS5866X right-angle applications, use L20303AN right-angle adapter.

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
L15RBC	Weatherproof Boot-Connector**
L15RBP	Weatherproof Boot-Plug**
FC22GL	EHU-Strain Relief Grip†
FC30GL	EHU-Strain Relief Grip†
FC40GL	EHU-Strain Relief Grip†
FC52GL	EHU-Strain Relief Grip†

**For further information consult the Turnlok® pages in this Section.
†For further information consult the Flexcor® pages in this Section.


NEMA 5-15P

NEMA 5-15R


NEMA 6-15P

NEMA 6-15R

NEMA 5-20P


NEMA 5-20R


NEMA 6-20P


NEMA 6-20R


NEMA 7-15P



NEMA 7-20P

All devices listed on this page conform to NEMA WD-1 and WD-6.


STRAIGHT BLADE PLUGS & CONNECTORS

IP20 Suitability

Extra-Hard Use (EHU) Angled Devices 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5266SSAN




EHU15AN

Features

- Angle plugs and adapters both allow for 4-position face rotation.
- Tri-drive assembly and cord-grip screws are standard on all angle adapters.
- Angle adapter (sold separately as catalog number EHU15AN) will accommodate all Pass & Seymour EHU-style Straight Blade plugs and connectors on a retrofit basis. Simply remove the straight handle body from the plug or connector face assembly, and replace with the angle adapter.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
EHU – SPECIFICATION GRADE								
PS5266SSAN	15	125	Plug, Black & White	.320"-.655"	5-15P	•	•	•
PS5366SSAN	20	125	Plug, Black & White	.320"-.655"	5-20P	•	•	•
PS5666SSAN	15	250	Plug, Black & White	.320"-.655"	6-15P	•	•	•
PS5466SSAN	20	250	Plug, Black & White	.320"-.655"	6-20P	•	•	•

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter




NEMA 5-15P **NEMA 5-20P** **NEMA 6-15P** **NEMA 6-20P**

All devices listed on this page conform to NEMA WD-1 and WD-6.


STRAIGHT BLADE PLUGS & CONNECTORS

Extra-Hard Use Ground Continuity Monitoring (GCM) Plugs & Connectors

2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5266XGCM




PS5269XGCM

Features – Extra-Hard Use (EHU) Straight Blade GCM

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive two-piece cord grip accepts a wide range of cord widths. Provides more consistent pressure for superior conductor retention.
- Internal dust shield keeps terminals free of contaminants.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are positioned on the same plane and backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE cULus	3rd PARTY COMPLIANCE FSUL WC596
EHU – GCM							
PS5266XGCM	15	125	Plug, Black & White	.230"-.720"	5-15P	•	•
PS5269XGCM	15	125	Connector, Black & White	.230"-.720"	5-15R	•	•
PS5366XGCM	20	125	Plug, Black & White	.230"-.720"	5-20P	•	•
PS5369XGCM	20	125	Connector, Black & White	.230"-.720"	5-20R	•	•
PS5666XGCM	15	250	Plug, Black & White	.230"-.720"	6-15P	•	•
PS5669XGCM	15	250	Connector, Black & White	.230"-.720"	6-15R	•	•
PS5466XGCM	20	250	Plug, Black & White	.230"-.720"	6-20P	•	•
PS5469XGCM	20	250	Connector, Black & White	.230"-.720"	6-20R	•	•

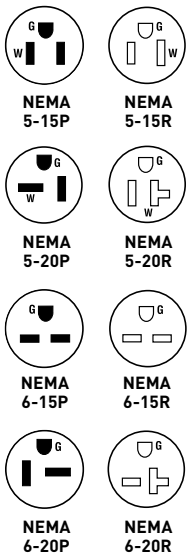



Green LED

Plug – There is proper ground continuity from the panel to the outlet and power is present.

Connector – Power is present and there is proper ground continuity throughout the cordset and back to the panel.

250V products will show red and green when hot and ground are reversed.



Red LED

Plug – Power is present, but there is a ground continuity fault or miswire between the receptacle and the panel.

Connector – Power is present, but there's a ground continuity fault or miswire in the cordset (or, if there's a red indication in the plug as well, between the receptacle and the panel). It's also possible there could be a problem in both.



No LED

Plug – Power loss, open hot or neutral conductor, or hot/ground reversal.

Connector – Assuming power is present at the outlet, there's an open hot or open neutral conductor in the cordset, or a hot/ground reversal.

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS

IP20 Suitability

Dead Front & Medium-Duty Plugs & Connectors


2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



5276BK



5296BK



4867Y

Features


- All nylon construction, provides excellent impact and chemical resistance.
- Simple turn and twist assembly for quick installation.
- Ready-to-wire from factory, saves time and money.
- All black, perfect for stage and entertainment applications.
- Internal finger grips automatically adjust to securely grip the cord jacket.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us UL498
DEAD FRONT PLUGS & CONNECTORS						
5276BK	15	125	Plug, Black	.230"-.655"	5-15P	•
5296BK	15	125	Connector, Black	.230"-.655"	5-15R	•
5765BK	20	125	Plug, Black	.230"-.655"	5-20P	•
5374BK	20	125	Connector, Black	.230"-.655"	5-20R	•
5666BK	15	250	Plug, Black	.230"-.655"	6-15P	•
5669BK	15	250	Connector, Black	.230"-.655"	6-15R	•
5864BK	20	250	Plug, Black	.230"-.655"	6-20P	•
5866BK	20	250	Connector, Black	.230"-.655"	6-20R	•

Features

- All nylon construction.
- Termination saddle clamps securely capture stranded wires.
- All yellow, perfect for high-visibility cords.
- External cord grips are one-size-fits-all, no inserts or flipping the clamps to fit the proper cord OD.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE c UL us cULus
MEDIUM-DUTY PLUGS & CONNECTORS						
4867Y	15	125	Plug, Yellow	.250-.600"	5-15P	•
4887Y	15	125	Connector, Yellow	.250-.600"	5-15R	•




NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.


STRAIGHT BLADE PLUGS & CONNECTORS

IP20 Suitability


Flanged Inlets & Outlets 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



5278SS



5279SS




WPG1

Features

- All thermoplastic construction, provides excellent impact and chemical resistance.
- Available in Gray or Black.
- NEMA configuration molded on flange, easy field identification.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE FSUL WC596
FLANGED INLETS & OUTLETS – GRAY						
5278SS	15	125	Inlet, Gray	5-15P	•	•
5279SS	15	125	Outlet, Gray	5-15R	•	•
5378SS	20	125	Inlet, Gray	5-20P	•	•
5379SS	20	125	Outlet, Gray	5-20R	•	•
5678SS	15	250	Inlet, Gray	6-15P	•	•
5679SS	15	250	Outlet, Gray	6-15R	•	•
5478SS	20	250	Inlet, Gray	6-20P	•	•
5479SS	20	250	Outlet, Gray	6-20R	•	•

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE FSUL WC596
FLANGED INLETS & OUTLETS – BLACK						
5278SSBK	15	125	Inlet, Black	5-15P	•	•
5279SSBK	15	125	Outlet, Black	5-15R	•	•



NEMA 5-15P | NEMA 5-15R | NEMA 6-15P | NEMA 6-15R | NEMA 5-20P | NEMA 5-20R | NEMA 6-20P | NEMA 6-20R

Features

- Glass-filled polycarbonate, impact- and corrosion-resistant.
- Stainless steel hardware.
- Molded-in flat surface label area.
- OSHA lock-out/tag-out provision molded-in.
- Accepts competitor inlets and outlets.


CATALOG NUMBER	DESCRIPTION
WEATHERPROOF COVER FOR FLANGED DEVICES	
WPG1	Weatherproof Cover for Flanged Inlets and Outlets

For further information consult the Weatherproof Section G.


All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS


Gator Grip Devices




D0531




D0533



D0651



D0653




1431

Features – Gator Grip Devices

- Gator Grip Jaws grab cord tighter as you hand turn the housing.
- Nylon jaws grip securely, but won't damage insulation.
- Self-locking Dardelet Thread holds securely and assures firm clamping.
- Fast wiring — simply insert stranded conductors into individual wiring chambers and tighten oversized terminal screws.
- Transparent wiring chamber cover allows visual inspection of wiring chambers to assure proper connections.
- Sloped shoulders won't catch or snap.
- Automatic cord centering.
- Brilliant high-visibility yellow.
- Neoprene Dust Seal helps keep out dirt and debris.
- Dead front construction.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE FSUL WC596
2 POLE, 3 WIRE GROUNDING 30 & 50A, 125, 250 & 277V							
D0531	30	125	Plug, Yellow	.57"-1.26"	5-30P	•	•
D0533	30	125	Connector, Yellow	.57"-1.26"	5-30R	•	•
D0551	50	125	Plug, Yellow	.57"-1.26"	5-50P	•	•
D0553	50	125	Connector, Yellow	.57"-1.26"	5-50R	•	•
D0631	30	250	Plug, Yellow	.57"-1.26"	6-30P	•	•
D0633	30	250	Connector, Yellow	.57"-1.26"	6-30R	•	
D0651	50	250	Plug, Yellow	.57"-1.26"	6-50P	•	•
D0653	50	250	Connector, Yellow	.57"-1.26"	6-50R	•	•
D0731	30	277	Plug, Yellow	.57"-1.26"	7-30P	•	•
D0751	50	277	Plug, Yellow	.57"-1.26"	7-50P	•	•
3 POLE, 3 WIRE 30 & 50A, 125/250V							
1031	30	125/250	Plug, Yellow	.57"-1.26"	10-30P	•	•
1033	30	125/250	Connector, Yellow	.57"-1.26"	10-30R	•	
1051	50	125/250	Plug, Yellow	.57"-1.26"	10-50P	•	•
1053	50	125/250	Connector, Yellow	.57"-1.26"	10-50R	•	•
3 POLE, 4 WIRE 30 & 50A, 125/250V							
1431	30	125/250	Plug, Yellow	.57"-1.26"	14-30P	•	•
1451	50	125/250	Plug, Yellow	.57"-1.26"	14-50P	•	•
4 POLE, 4 WIRE 60A, 3øY 120/208V							
D1861	60	3øY, 120/208	Plug, Yellow	.57"-1.26"	18-60P	•	•


NEMA 5-30P | NEMA 5-30R | NEMA 5-50P | NEMA 5-50R | NEMA 6-30P | NEMA 6-30R | NEMA 6-50P | NEMA 6-50R


NEMA 7-30P | NEMA 7-50P | NEMA 10-30P | NEMA 10-30R | NEMA 10-50P | NEMA 10-50R | NEMA 14-30P | NEMA 14-50P | NEMA 18-60P

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS

Clamp-Lock™ Devices 2 Pole, 3 Wire Grounding 15A, 125V; 20A, 125V

PS515CCLB
Clamp-Lock™ Straight Blade Plugs & Connectors

A. Self-centering cord grip helps speed assembly.

B. Removable inserts accommodate the widest possible range of cable diameters.

C. Rugged nylon housing and backbody withstand chemicals, heat, wear and impact.


D. Color-coded levers enable terminal identification at a glance and reduce the chance of wiring errors.

E. Speedy, patented cam-lever termination provides solid, dependable connections.

F. Molded-in guide shows correct wire stripping length.


G. Solid brass blades and contacts provide excellent conductivity.

H. Transparent polycarbonate terminal cover makes terminals visible for visual termination verification.

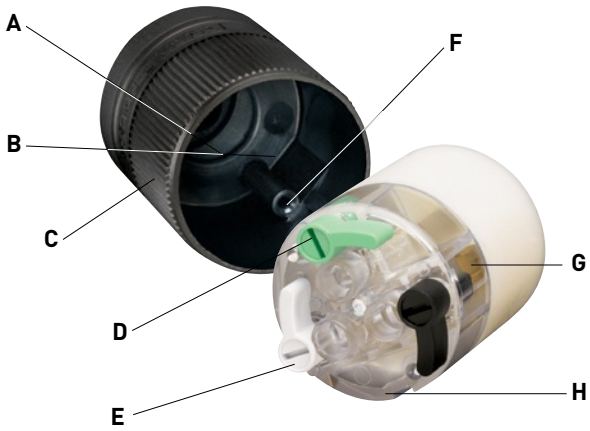

U-drive combination slot/crosshead screws ensure easy assembly.

Long, deep channels guide conductors and prevent over-insertion.



PS515PCLB



PS515CCLB

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE cULus	3rd PARTY COMPLIANCE FSUL WC596
P&S CLAMP-LOCK™ STRAIGHT BLADE PLUGS & CONNECTORS							
PS515PCLBCCV4	15	125	Plug, Black & White	.20"-.470"	5-15P	•	•
PS515CCLBCCV4	15	125	Connector, Black & White	.20"-.470"	5-15R	•	•
PS520PCLBCCV4	20	125	Plug, Black & White	.20"-.470"	5-20P	•	•
PS520CCLBCCV4	20	125	Connector, Black & White	.20"-.470"	5-20R	•	•



NEMA 5-15P



NEMA 5-15R



NEMA 5-20P



NEMA 5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS

MaxGrip® M³ 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

PS5965Y & PS5969Y
MaxGrip® M³


A. Enclosed terminals provide solid, internally-clamped connections.


B. Molded finger grips promote safe, sure handling.

C. Self-hinge swings wide open to make quick, easy work of tight, clean connections. Insert conductors into terminals and tighten terminal screws; close hinge housing around cord and tighten terminal screws.

D. Tough nylon construction with crush/impact resistance that exceeds hospital grade and Fed Spec requirements; arc resistance exceeds UL requirements.

High-visibility yellow and orange, or available in gray or black.

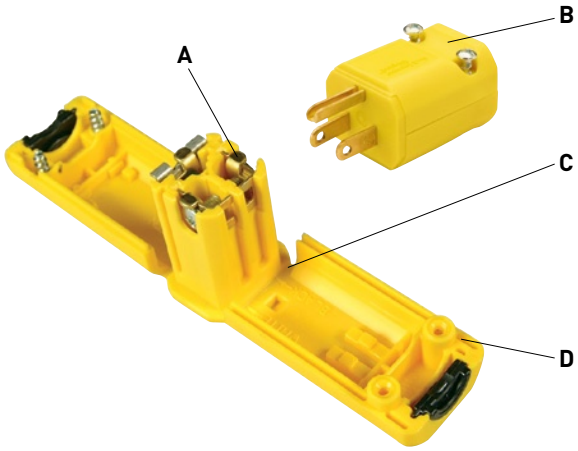




PS5965Y



PS5969Y




PS5965O



PS5969O

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE cULus	3rd PARTY COMPLIANCE FSUL WC596
MAXGRIP® M³							
PS5965Y	15	125	Plug, Yellow	.230"-.720"	5-15P	•	•
PS5965GRY	15	125	Plug, Gray	.230"-.720"	5-15P	•	•
PS5965O	15	125	Plug, Orange	.230"-.720"	5-15P	•	•
PS5965BK	15	125	Plug, Black	.230"-.720"	5-15R	•	•
PS5969Y	15	125	Connector, Yellow	.230"-.720"	5-15R	•	•
PS5969GRY	15	125	Connector, Gray	.230"-.720"	5-15R	•	•
PS5969O	15	125	Connector, Orange	.230"-.720"	5-15R	•	•
PS5969BK	15	125	Connector, Black	.230"-.720"	5-15R	•	•
PS5364Y	20	125	Plug, Yellow	.230"-.720"	5-20P	•	•
PS5364GRY	20	125	Plug, Gray	.230"-.720"	5-20P	•	•
PS5369Y	20	125	Connector, Yellow	.230"-.720"	5-20R	•	•
PS5369GRY	20	125	Connector, Gray	.230"-.720"	5-20R	•	•
PS5666Y	15	250	Plug, Yellow	.230"-.720"	6-15P	•	•
PS5669Y	15	250	Connector, Yellow	.230"-.720"	6-15R	•	•
PS5464Y	20	250	Plug, Yellow	.230"-.720"	6-20P	•	•
PS5469Y	20	250	Connector, Yellow	.230"-.720"	6-20R	•	•

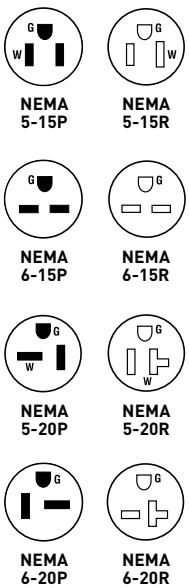

All devices listed on this page conform to NEMA WD-1 and WD-6.


STRAIGHT BLADE PLUGS & CONNECTORS

IP20 Suitability


Miscellaneous Configurations




3869




3861




3867



7088




7251DF



5741AN



9977



8302AN

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	C22.2 No. 42
2 POLE, 3 WIRE GROUNDING								
43379	30	125	Angled Plug, Yellow		5-30P	•		
43399	50	125	Angled Plug, Yellow		5-50P	•		
3869	30/50	250	Angled Plug, Black	.56"-1.1"	6-30P/6-50P	•		
3 POLE, 3 WIRE NON-GROUNDING								
3861	30/50	125/250	Angled Plug, Black	.56"-1.1"	10-30P/10-50P	•		•
9977	20	125/250	Plug, Nylon		10-20P	•		
7088	20	125/250	Connector, Armored		10-20R			
3 POLE, 4 WIRE GROUNDING								
5746AN	30	125/250	Angled Plug, Yellow		14-30P	•		•
5741AN	30	3ø, 250	Angled Plug, Yellow		15-30P	•		•
5745AN	50	125/250	Angled Plug, Yellow		14-50P	•		•
14629	60	125/250	Angled Plug, Yellow		14-60P	•		
5751AN	50	3ø, 250	Angled Plug, Yellow		15-50P	•		•
5761AN	60	3ø, 250	Angled Plug, Yellow		15-60P	•		•
3867	30/50	125/250	Angled Plug, Black	.56"-1.1"	14-30P/14-50P	•		•
4 POLE, 4 WIRE NON-GROUNDING								
7251DF	20	3øY, 120/208	Plug, Yellow	.365"-.775"	18-20P	•	•	
8302AN	60	3øY, 120/208	Angled Plug, Yellow		18-60P	•		


NEMA 5-30P


NEMA 5-50P


NEMA 6-30P


NEMA 6-50P


NEMA 10-20P


NEMA 10-20R


NEMA 10-30P


NEMA 10-50P


NEMA 14-30P


NEMA 14-50P


NEMA 14-60P


NEMA 15-30P


NEMA 15-50P


NEMA 15-60P


NEMA 18-20P


NEMA 18-60P

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS

NEMA Configurations

Straight Blade Plugs & Receptacles

	15 Ampere		20 Ampere		30 Ampere		50 Ampere		60 Ampere	
	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug	Receptacle	Plug
2 POLE, 2 WIRE NON-GROUNDING										
1 **125V**	1-15R	1-15P								
2 **250V**										
2 POLE, 3 WIRE GROUNDING										
5 **125V**	5-15R	5-15P	5-20R	5-20P	5-30R	5-30P	5-50R	5-50P		
6 **250V**	6-15R	6-15P	6-20R	6-20P	6-30R	6-30P	6-50R	6-50P		
7 **277VAC**	7-15R	7-15P	7-20R	7-20P	N/A	7-30P	N/A	7-50P		
3 POLE, 3 WIRE NON-GROUNDING										
10 **125/250V**			10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3 POLE, 4 WIRE GROUNDING										
14 **125/250V**			14-20R	14-20P	14-30R	14-30P	14-50R	14-50P	N/A	14-60P
15 **3ø250V**				15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P
4 POLE, 4 WIRE NON-GROUNDING										
18 **3øY 120/208V**			18-20R	18-20P					18-60R	18-60P

Labels and Their Meanings


X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots
Indicate receptacle configurations (female).



Closed Slots
Indicate plug blade configurations (male).



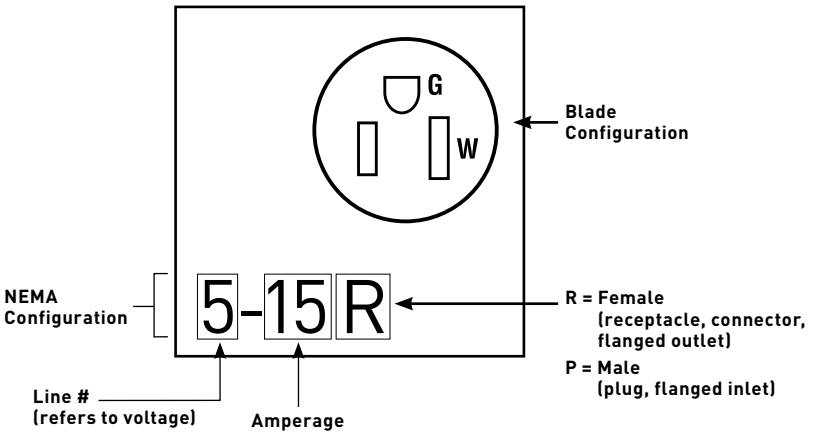

All devices listed on this page conform to NEMA WD-1 and WD-6.

STRAIGHT BLADE PLUGS & CONNECTORS

Product Specifications & Performance

EHU & Corrosion-Resistant Plugs & Connectors
15 & 20A Straight Blade

Plugs	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Blades	Brass*
Terminal Clamp	Zinc-Plated Steel*
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel

Connectors	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Contacts	Brass*
Terminal Clamp	Zinc-Plated Steel*
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel

Performance	
Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

*Nickel-Plated for Corrosion-Resistant Product.

EHU Ground Continuity Monitoring (GCM) Plugs & Connectors
15 & 20A Straight Blade

Plugs	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel

Connectors	
Back Body	Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel
Ground Screws	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel #8
Assembly Screws	Nickel-Plated Steel

Performance	
Electrical	
Dielectric Withstand Voltage	1500V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #10 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

STRAIGHT BLADE PLUGS & CONNECTORS

Product Specifications & Performance

Gator Grip Devices Plugs & Connectors

30, 50 & 60A Straight Blade

Plugs

Back Body	Glass-Filled Polypropylene
Front Body	Glass-Filled Polypropylene
Terminal Chamber	Polycarbonate
Cord Clamp	Glass-Filled Nylon
Insert	Nylon
Blades	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Tin- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Cord Clamp Screws	N/A
Assembly Screws	Zinc-Plated Steel

Connectors

Back Body	Glass-Filled Polypropylene
Front Body	Glass-Filled Polypropylene
Terminal Chamber	Polycarbonate
Cord Clamp	Glass-Filled Polypropylene
Insert	Nylon
Contacts	Brass
Terminal Clamp	Zinc-Plated Steel
Terminal Screws	Tin- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Cord Clamp Screws	N/A
Assembly Screws	Zinc-Plated Steel

Performance

Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	Up to 277V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.570"–1.260" diameter
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot
Terminal Accommodation	#10 AWG min.– #4 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 V0
Operating Temperature	Maximum continuous: +75°C Minimum: -40°C without impact

MaxGrip® M³ Plugs & Connectors

Plugs

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Blades	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Connectors

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Contacts	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Performance

Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.230"–.720" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperature	Maximum continuous: +75°C; Minimum: -40°C without impact

STRAIGHT BLADE PLUGS & CONNECTORS

Product Specifications & Performance

Clamp-Lock™ Plugs & Connectors

Plugs

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Blades	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Connectors

Part	Material
Body/Housing	Nylon
Cord Grip Insert	Nylon
Terminal Clamp	Brass
Terminal Screws	Zinc- or Brass-Plated Steel
Ground Screws	Zinc-Plated Steel
Contacts	Brass
Cord Clamp Assembly Screws	Zinc-Plated Steel

Performance

Electrical	
Dielectric Withstand Voltage	1500V
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodation	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodation	.20"–.470" diameter cord
Terminal Identification	Green = Ground, Silver = Neutral, Brass = Hot
Terminal Accommodation	#18 AWG min.– #12 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration
Environmental	
Flammability	UL94 HB
Operating Temperature	Maximum continuous: +75°C; Minimum: -40°C without impact

Straight Blade Horsepower Rating for NEMA Configuration Attachment Plugs & Receptacles

NEMA Configuration	AC HP Rating
5-15	½
6-15	1½*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

*Suitable for 208V motor applications at the HP rating specified.

TURNLOK® LOCKING DEVICES





NEMA-RATED TURNLOK DEVICES

Turnlok Features & Benefits	D-19
15 Amp	D-20
20 Amp	D-23
30 Amp	D-30
Heavy-Duty Ground Continuity Monitoring Plugs & Connectors	D-38
Angled Plugs & Connectors	D-40




NON-NEMA TURNLOK DEVICES

3 Wire Grounding & Non-Grounding	D-41
3 Pole, 4 Wire	D-42
4 Pole, 4 Wire	D-42
50 Amp California Standard & Corrosion Resistant	D-44



OTHER LOCKING DEVICES

Midget Plugs, Connectors, Inlets, & Outlets	D-46
Power-Interrupting Devices	D-47
Accessories	D-50

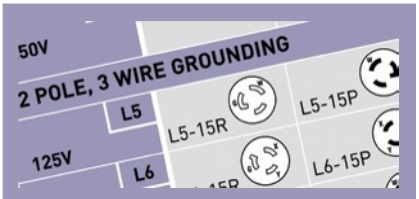


REFERENCE TABLES

NEMA Configuration Chart	D-52
Product Specifications & Performance	D-53

TURNLOK® LOCKING DEVICES

L630C & L630P
Connector & Plug

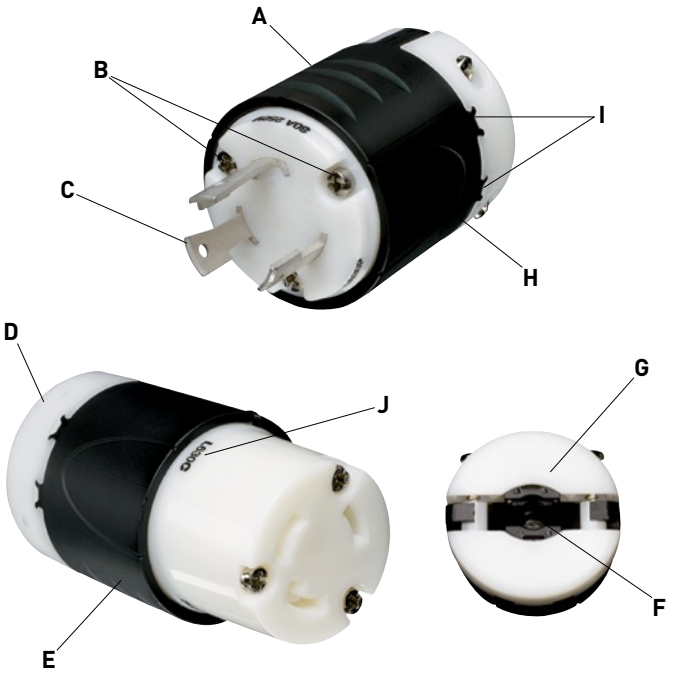

A. Raised ribs provide non-slip gripping profile for turning to lock and unlock.

B. Quick-thread assembly screws and cord-grip screws come backed-out, ready-to-wire.

C. Industrial-strength, brass alloy plug blades, and connector contacts resist heat rise, provide excellent conductivity.

D. Rounded back contour reduces snags and hang-ups on the job site.

E. Impact- and corrosion-resistant heavy-duty nylon shell material resistant to impacts and abuse.

F. Integral flexible rubber cord grommet conforms to and seals around SO cord to provide protection from oils, water, or chips entering wiring chamber.


G. New-design external cord grips provide visible assurance of safe and proper cord retention and a wide range of OD acceptance.

H. Scallop shell design provides non-slip gripping surface for insertion and withdrawal.

I. Double dovetail design provides superior protection against cord pull-out forces.

J. Visible stamped NEMA configuration and device rating.

L630R
Receptacles

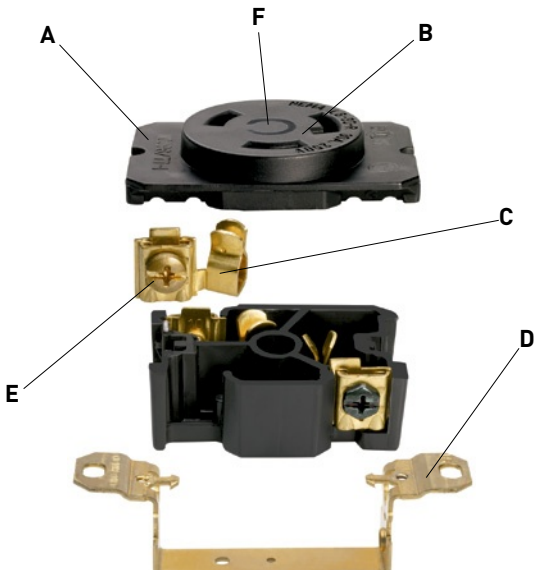

A. Compact, impact-resistant nylon face and body are ultrasonically welded together for unrivaled strength.

B. Clearly marked NEMA configuration, rating, and third party listing on each unit's face.

C. One-piece, high-grade brass contacts offer excellent conductivity and heat-rise resistance.

D. Single-piece, solid brass mounting strap is free of easily loosened rivets found on other brands.


E. Side and external screw-pressure-plate back wire capability. Accepts #14 - #10 AWG.

F. P&S Turnlok Receptacles. Voltage color coding on the outside. Proven designs and quality materials on the inside. Any way you look at them, they're the standard of the industry.


125V **250V** **277VAC** **480VAC** **600VAC** **125/250V**

TURNLOK® LOCKING DEVICES


15 & 20 Amp NEMA L115 & L220 2 Pole, 2 Wire Non-Grounding 15A, 125V & 20A, 250V




7535




7210




7506




7101



7526




7547DF




7102

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498
RECEPTACLES						
7535	15	125	Single Receptacle, Black		L1-15R	•
7210	20	250	Single Receptacle, Black		L2-20R	•
CONNECTORS						
7506*	15	125	Black	.296"-.562"	L1-15R	•
7101*	20	250	Black Back, White Front Body	.296"-.562"	L2-20R	•
PLUGS						
7547DF	15	125	Black	.296"-.625"	L1-15P	•
7102*	20	250	Black Back, White Front Body	.296"-.562"	L2-20P	•
FLANGED INLETS & OUTLETS						
L0115	15	125	Inlet		L1-15P	•
7526	15	125	Outlet		L1-15R	•



NEMA L1-15P **NEMA L1-15R**




NEMA L2-20P **NEMA L2-20R**


*For replacement use only.
Reference Pages D-50 and D-51 for Accessories.

TURNLOK® LOCKING DEVICES


15 Amp NEMA L515 2 Pole, 3 Wire 15A, 125V




4710




4700




15A Connector




4715SS



4792



15A Plug



4716SS

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
4710	15	125	Single Receptacle, Black		L5-15R	•		•
IG4710	15	125	Single Receptacle, Orange, Isolated Ground		L5-15R	•		•
4700	15	125	Duplex Receptacle, Black		L5-15R	•		•
IG4700	15	125	Duplex Receptacle, Orange, Isolated Ground		L5-15R	•		•
4792	15	125	Combination Straight Blade and Locking, Black		5-15R and L5-15R	•		
CONNECTORS IP20 SUITABILITY								
PSL515C	15	125	Black Back, White Front Body	.230"-.720"	L5-15R	•	•	•
CRL515C	15	125	Yellow Back, White Front Body, Corrrosion-Resistant	.230"-.720"	L5-15R	•	•	•
PLUGS IP20 SUITABILITY								
PSL515P	15	125	Black Back, White Front Body	.230"-.720"	L5-15P	•	•	•
CRL515P	15	125	Yellow Back, White Front Body, Corrrosion-Resistant	.230"-.720"	L5-15P	•	•	•
FLANGED INLETS & OUTLETS								
4716SS	15	125	Gray Inlet		L5-15P	•		•
4715SS	15	125	Gray Outlet		L5-15R	•		•

Reference Pages D-50 and D-51 for Accessories.



NEMA L5-15P




NEMA L5-15R




NEMA 5-15R

TURNLOK® LOCKING DEVICES


15 Amp NEMA L615 & L715 2 Pole, 3 Wire 15A, 250 & 277V




4560




4550




4760




4750



15A Connector



15A Plug



15 Amp Angle Plug

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
4560	15	250	Single Receptacle, Black		L6-15R	•		
4550*	15	250	Duplex Receptacle, Black		L6-15R	•		
4760	15	277	Single Receptacle, Black		L7-15R	•		•
IG4760	15	277	Single Receptacle, Orange, Isolated Ground		L7-15R	•		•
4750	15	277	Duplex Receptacle, Black		L7-15R	•		•
CONNECTORS IP20 SUITABILITY								
PSL615C	15	250	Black Back, White Front Body	.230"-.720"	L6-15R	•	•	•
PSL715C	15	277	Black Back, White Front Body	.230"-.720"	L7-15R	•	•	•
PLUGS IP20 SUITABILITY								
PSL615P	15	250	Black Back, White Front Body	.230"-.720"	L6-15P	•	•	•
PSL615PAN	15	250	Angled Plug, Black Back, White Front Body	.320"-.655"	L6-15P	•		
PSL715P	15	277	Black Back, White Front Body	.230"-.720"	L7-15P	•	•	•
PSL715PAN	15	277	Angled Plug, Black Back, White Front Body	.320"-.655"	L7-15P	•		



NEMA L6-15P



NEMA L6-15R



NEMA L7-15P




NEMA L7-15R


*Not designed for split circuits.
Reference Pages D-50 and D-51 for Accessories.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L520 2 Pole, 3 Wire 20A, 125V




20A Receptacle



20A Connector




20A Plug

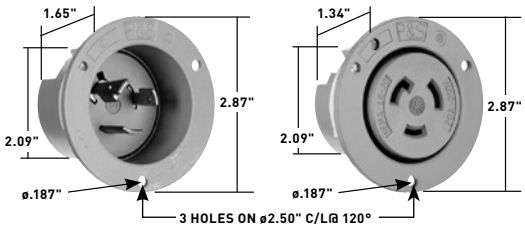

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L520R	20	125	Single Receptacle, Black		L5-20R	•	•	•
IGL520R	20	125	Single Receptacle, Orange, Isolated Ground		L5-20R	•		•
CRL520R	20	125	Single Receptacle, Yellow, Corrosion-Resistant		L5-20R	•	•	•
L520RBL	20	125	Single Receptacle, Blue		L5-20R	•	•	•
L520RR	20	125	Single Receptacle, Red		L5-20R	•	•	•
CONNECTORS IP20 SUITABILITY								
L520C	20	125	Black Back, White Front Body	.225"-1.150"	L5-20R	•	•	•
L520CBK	20	125	Black Back, Black Front Body	.225"-1.150"	L5-20R	•	•	•
CRL520C	20	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L5-20R	•	•	•
PLUGS IP20 SUITABILITY								
L520P	20	125	Black Back, White Front Body	.225"-1.150"	L5-20P	•	•	•
L520PBK	20	125	Black Back, Black Front Body	.225"-1.150"	L5-20P	•	•	•
IGL520P	20	125	Black Back, Orange Front Body, Isolated Ground	.225"-1.150"	L5-20P	•		•
CRL520P	20	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L5-20P	•	•	•
FLANGED INLETS & OUTLETS								
L520FI	20	125	Gray Inlet		L5-20P	•		•
L520FO	20	125	Gray Outlet		L5-20R	•		•



NEMA L5-20P **NEMA L5-20R**

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER		COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304
WEATHERPROOF BOOTS		
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
CORROSION-RESISTANT BOOTS		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow
RECEPTACLE COVERS		
7425Y	20/30A Receptacle Cover	Yellow
7425GRY	20/30A Receptacle Cover	Gray



SS720




7425GRY


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L620 & L720 2 Pole, 3 Wire 20A, 250 & 277V




20A Receptacle



20A Connector




20A Plug

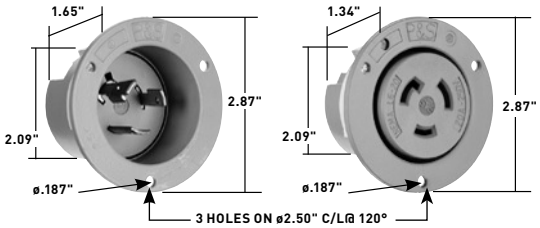


20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE CSA
RECEPTACLES								
L620R	20	250	Single Receptacle, Black		L6-20R	•	•	•
L620RBL	20	250	Single Receptacle, Blue		L6-20R	•	•	•
L620RR	20	250	Single Receptacle, Red		L6-20R	•	•	•
IGL620R	20	250	Single Receptacle, Orange, Isolated Ground		L6-20R	•		•
L720R	20	277	Single Receptacle, Black		L7-20R	•	•	•
IGL720R	20	277	Single Receptacle, Orange, Isolated Ground		L7-20R	•		•
CONNECTORS IP20 SUITABILITY								
L620C	20	250	Black Back, White Front Body	.225"-1.150"	L6-20R	•	•	•
L620CBK	20	250	Black Back, Black Front Body	.225"-1.150"	L6-20R	•	•	•
CRL620C	20	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L6-20R	•	•	•
L720C	20	277	Black Back, White Front Body	.225"-1.150"	L7-20R	•	•	•
PLUGS IP20 SUITABILITY								
L620P	20	250	Black Back, White Front Body	.225"-1.150"	L6-20P	•	•	•
L620PBK	20	250	Black Back, Black Front Body	.225"-1.150"	L6-20P	•	•	•
CRL620P	20	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L6-20P	•	•	•
L720P	20	277	Black Back, White Front Body	.225"-1.150"	L7-20P	•	•	•
FLANGED INLETS & OUTLETS								
L620FI	20	250	Gray Inlet		L6-20P	•		•
L620FO	20	250	Gray Outlet		L6-20R	•		•
L720FI	20	277	Gray Inlet		L7-20P	•		•
L720FO	20	277	Gray Outlet		L7-20R	•		•




NEMA L6-20P NEMA L6-20R



NEMA L7-20P NEMA L7-20R

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
RECEPTACLE COVERS		
7425Y	20/30 Amp Receptacle Cover	Yellow
7425GRY	20/30 Amp Receptacle Cover	Gray




WPG2


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L820, L920 & L2420 2 Pole, 3 Wire 20A, 347, 480 & 600V




20A Receptacle



20A Connector




20A Plug

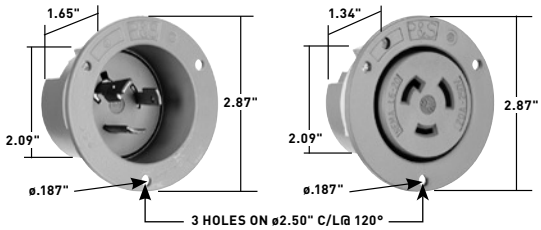

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L820R	20	480	Single Receptacle, Black		L8-20R	•		•
IGL820R	20	480	Single Receptacle, Orange, Isolated Ground		L8-20R	•		•
L920R	20	600	Single Receptacle, Black		L9-20R	•		•
L3720R	20	347	Single Receptacle, Black		L24-20R			•
CONNECTORS IP20 SUITABILITY								
L820C	20	480	Black Back, White Front Body	.225"-1.150"	L8-20R	•		•
L920C	20	600	Black Back, White Front Body	.225"-1.150"	L9-20R	•		•
L3720C	20	347	Black Back, White Front Body	.225"-1.150"	L24-20R			•
PLUGS IP20 SUITABILITY								
L820P	20	480	Black Back, White Front Body	.225"-1.150"	L8-20P	•		•
L920P	20	600	Black Back, White Front Body	.225"-1.150"	L9-20P	•		•
L3720P	20	347	Black Back, White Front Body	.225"-1.150"	L24-20P	•	•	•
FLANGED INLETS & OUTLETS								
L820FI	20	480	Gray Inlet		L8-20P	•		•
L820FO	20	480	Gray Outlet		L8-20R	•		•
L920FI	20	600	Gray Inlet		L9-20P	•		•
L920FO	20	600	Gray Outlet		L9-20R	•		•
L3720FO	20	347	Gray Outlet		L24-20R			•

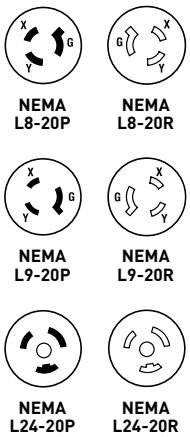

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




SS720


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L1020, L1120 & L1220 3 Pole, 3 Wire Non-Grounding, 20A, 125/250V; 3ø, 250 & 480V




20A Receptacle



20A Connector




20A Plug

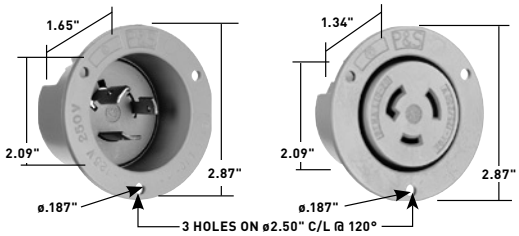


20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L1020R	20	125/250	Single Receptacle, Black		L10-20R	•	•	
L1120R	20	3ø, 250	Single Receptacle, Black		L11-20R	•	•	
L1220R	20	3ø, 480	Single Receptacle, Black		L12-20R	•	•	
CONNECTORS IP20 SUITABILITY								
L1020C	20	125/250	Black Back, White Front Body	.225"-1.150"	L10-20R	•	•	•
L1120C	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-20R	•	•	•
L1220C	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-20R	•	•	•
PLUGS IP20 SUITABILITY								
L1020P	20	125/250	Black Back, White Front Body	.225"-1.150"	L10-20P	•	•	•
L1120P	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-20P	•	•	•
L1220P	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-20P	•	•	•
FLANGED INLETS & OUTLETS								
L1020FI	20	125/250	Gray Inlet		L10-20P	•		•
L1020FO	20	125/250	Gray Outlet		L10-20R	•		
L1120FO	20	3ø, 250	Gray Outlet		L11-20R	•		
L1220FI	20	3ø, 480	Gray Inlet		L12-20P	•		•
L1220FO	20	3ø, 480	Gray Outlet		L12-20R	•		

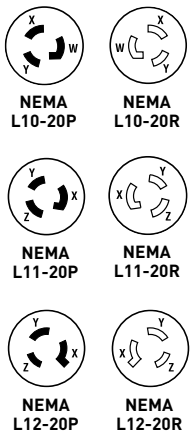

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
WEATHERPROOF BOOTS		
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L1420, L1520 & L1620 3 Pole, 4 Wire 20A, 125/250V; 3ø, 250 & 480V




20A Receptacle



20A Connector




20A Plug

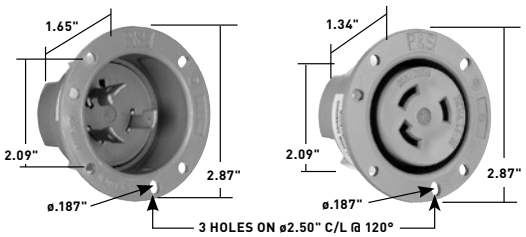

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L1420R	20	125/250	Single Receptacle, Black		L14-20R	•	•	•
L1420RR	20	125/250	Single Receptacle, Red		L14-20R	•	•	•
IGL1420R	20	125/250	Single Receptacle, Orange, Isolated Ground		L14-20R	•		•
L1520R	20	3ø, 250	Single Receptacle, Black		L15-20R	•	•	•
IGL1520R	20	3ø, 250	Single Receptacle, Orange, Isolated Ground		L15-20R	•		•
L1620R	20	3ø, 480	Single Receptacle, Black		L16-20R	•	•	•
IGL1620R	20	3ø, 480	Single Receptacle, Orange, Isolated Ground		L16-20R	•		•
CONNECTORS IP20 SUITABILITY								
L1420C	20	125/250	Black Back, White Front Body	.225"-1.150"	L14-20R	•	•	•
CRL1420C	20	125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-20R	•	•	•
L1520C	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20R	•	•	•
L1520CBK	20	3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-20R	•	•	•
L1620C	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20R	•	•	•
PLUGS IP20 SUITABILITY								
L1420P	20	125/250	Black Back, White Front Body	.225"-1.150"	L14-20P	•	•	•
CRL1420P	20	125/250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L14-20P	•	•	•
L1520P	20	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-20P	•	•	•
L1520PBK	20	3ø, 250	Black Back, Black Front Body	.225"-1.150"	L15-20P	•	•	•
L1620P	20	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-20P	•	•	•
FLANGED INLETS & OUTLETS								
L1420FI	20	125/250	Gray Inlet		L14-20P	•		•
L1420FO	20	125/250	Gray Outlet		L14-20R	•		•
L1520FI	20	3ø, 250	Gray Inlet		L15-20P	•		•
L1520FO	20	3ø, 250	Gray Outlet		L15-20R	•		•
L1520FIBK	20	3ø, 250	Black Inlet		L15-20P	•		•
L1520FOBK	20	3ø, 250	Black Outlet		L15-20R	•		•
L1620FI	20	3ø, 480	Gray Inlet		L16-20P	•		•
L1620FO	20	3ø, 480	Gray Outlet		L16-20R	•		•




Reference Pages D-50 and D-51 for Accessories.

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

20 Amp NEMA L1820, L1920 & L2020


4 Pole, 4 Wire Non-Grounding 20A, 3øY, 120/208, 277/480 & 347/600V




20A Receptacle



20A Connector




20A Plug

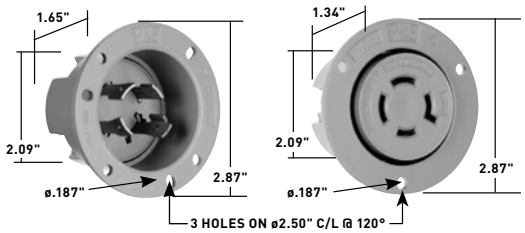


20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L1820R	20	3øY, 120/208	Single Receptacle, Black		L18-20R	•	•	
L1920R	20	3øY, 277/480	Single Receptacle, Black		L19-20R	•	•	
L2020R	20	3øY, 347/600	Single Receptacle, Black		L20-20R	•	•	
CONNECTORS IP20 SUITABILITY								
L1820C	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-20R	•	•	•
L1920C	20	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-20R	•	•	•
L2020C	20	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-20R	•	•	•
PLUGS IP20 SUITABILITY								
L1820P	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-20P	•	•	•
L1920P	20	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-20P	•	•	•
L2020P	20	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-20P	•	•	•
FLANGED INLETS & OUTLETS								
L1820FI	20	3øY, 120/208	Gray Inlet		L18-20P	•		•
L1820FO	20	3øY, 120/208	Gray Outlet		L18-20R	•		•
L1920FI	20	3øY, 277/480	Gray Inlet		L19-20P	•		•
L1920FO	20	3øY, 277/480	Gray Outlet		L19-20R	•		•
L2020FI	20	3øY, 347/600	Gray Inlet		L20-20P	•		•
L2020FO	20	3øY, 347/600	Gray Outlet		L20-20R	•		•








Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
RECEPTACLE COVERS		
7425Y	20/30A Receptacle Cover	Yellow
7425GRY	20/30A Receptacle Cover	Gray




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


20 Amp NEMA L2120, L2220 & L2320 4 Pole, 5 Wire 20A, 3øY, 120/208, 277/480 & 347/600V




20A Receptacle



20A Connector




20A Plug

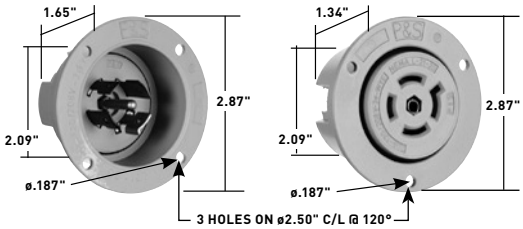


20A Flanged Inlet & Outlet


CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L2120R	20	3øY, 120/208	Single Receptacle, Black		L21-20R	•	•	•
L2120RBL	20	3øY, 120/208	Single Receptacle, Blue		L21-20R	•	•	•
IGL2120R	20	3øY, 120/208	Single Receptacle, Orange, Isolated Ground		L21-20R	•		•
L2220R	20	3øY, 277/480	Single Receptacle, Black		L22-20R	•	•	•
IGL2220R	20	3øY, 277/480	Single Receptacle, Orange, Isolated Ground		L22-20R	•		•
L2320R	20	3øY, 347/600	Single Receptacle, Black		L23-20R	•	•	•
IGL2320R	20	3øY, 347/600	Single Receptacle, Orange, Isolated Ground		L23-20R	•		•
CONNECTORS IP20 SUITABILITY								
L2120C	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-20R	•	•	•
L2120CBK	20	3øY, 120/208	Black Back, Black Front Body	.225"-1.150"	L21-20R	•	•	•
L2220C	20	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-20R	•	•	•
L2320C	20	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-20R	•	•	•
PLUGS IP20 SUITABILITY								
L2120P	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-20P	•	•	•
L2120PBK	20	3øY, 120/208	Black Back, Black Front Body	.225"-1.150"	L21-20P	•	•	•
L2220P	20	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-20P	•	•	•
L2320P	20	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-20P	•	•	•
FLANGED INLETS & OUTLETS								
L2120FI	20	3øY, 120/208	Gray Inlet		L21-20P	•		•
L2120FO	20	3øY, 120/208	Gray Outlet		L21-20R	•		•
L2220FI	20	3øY, 277/480	Gray Inlet		L22-20P	•		•
L2220FIBK	20	3øY, 277/480	Black Inlet		L22-20P	•		•
L2220FO	20	3øY, 277/480	Gray Outlet		L22-20R	•		•
L2220FOBK	20	3øY, 277/480	Black Outlet		L22-20R	•		•
L2320FI	20	3øY, 347/600	Gray Inlet		L23-20P	•		•
L2320FO	20	3øY, 347/600	Gray Outlet		L23-20R	•		•



NEMA L21-20P NEMA L21-20R



NEMA L22-20P NEMA L22-20R




NEMA L23-20P NEMA L23-20R

Reference Pages D-50 and D-51 for Accessories.


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp NEMA L530 2 Pole, 3 Wire 30A, 125V




30A Receptacle



30A Connector



30A Plug

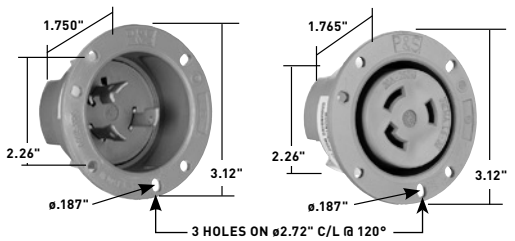

30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L530R	30	125	Single Receptacle, Black		L5-30R	•	•	•
L530RBL	30	125	Single Receptacle, Blue		L5-30R	•	•	•
L530RR	30	125	Single Receptacle, Red		L5-30R	•	•	•
IGL530R	30	125	Single Receptacle, Orange, Isolated Ground		L5-30R	•		•
CRL530R	30	125	Single Receptacle, Yellow Corrosion-Resistant		L5-30R	•	•	•
CONNECTORS IP20 SUITABILITY								
L530C	30	125	Black Back, White Front Body	.225"-1.150"	L5-30R	•	•	•
CRL530C	30	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L5-30R	•	•	•
PLUGS IP20 SUITABILITY								
L530P	30	125	Black Back, White Front Body	.225"-1.150"	L5-30P	•	•	•
CRL530P	30	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L5-30P	•	•	•
FLANGED INLETS & OUTLETS								
L530FI	30	125	Gray Inlet		L5-30P	•		•
L530FO	30	125	Gray Outlet		L5-30R	•		•




NEMA L5-30P



NEMA L5-30R

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
RECEPTACLE COVERS		
7425Y	20/30 Amp Receptacle Cover	Yellow
7425GRY	20/30 Amp Receptacle Cover	Gray




WPG2


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp NEMA L630 & L730 2 Pole, 3 Wire 30A, 250 & 277V




30A Receptacle



30A Connector




30A Plug

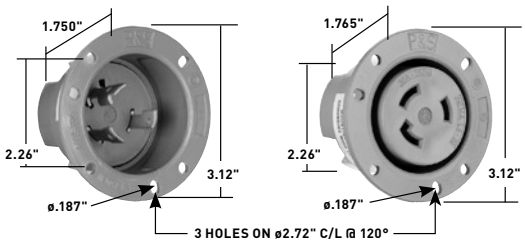


30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L630R	30	250	Single Receptacle, Black		L6-30R	•	•	•
L630RBL	30	250	Single Receptacle, Blue		L6-30R	•	•	•
L630RR	30	250	Single Receptacle, Red		L6-30R	•	•	•
IGL630R	30	250	Single Receptacle, Orange, Isolated Ground		L6-30R	•		•
L730R	30	277	Single Receptacle, Black		L7-30R	•	•	•
CONNECTORS IP20 SUITABILITY								
L630C	30	250	Black Back, White Front Body	.225"-.750"	L6-30R	•	•	•
CRL630C	30	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-30R	•	•	•
L730C	30	277	Black Back, White Front Body	.225"-.750"	L7-30R	•	•	•
PLUGS IP20 SUITABILITY								
L630P	30	250	Black Back, White Front Body	.225"-.750"	L6-30P	•	•	•
CRL630P	30	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-.750"	L6-30P	•	•	•
L730P	30	277	Black Back, White Front Body	.225"-.750"	L7-30P	•	•	•
FLANGED INLETS & OUTLETS								
L630FI	30	250	Gray Inlet		L6-30P	•		•
L630FO	30	250	Gray Outlet		L6-30R	•		•
L730FI	30	277	Gray Inlet		L7-30P	•		•
L730FO	30	277	Gray Outlet		L7-30R	•		•



Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




WPG2


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp NEMA L830 & L930 2 Pole, 3 Wire 30A, 480 & 600V




30A Receptacle



30A Connector




30A Plug

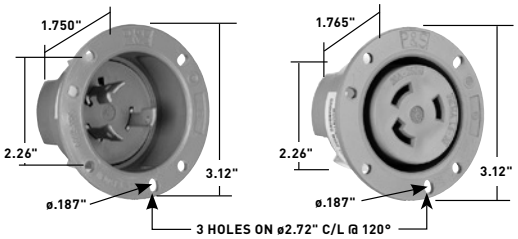


30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L830R	30	480	Single Receptacle, Black		L8-30R	•	•	•
L930R	30	600	Single Receptacle, Black		L9-30R	•	•	•
CONNECTORS IP20 SUITABILITY								
L830C	30	480	Black Back, White Front Body	.225"-1.150"	L8-30R	•	•	•
L930C	30	600	Black Back, White Front Body	.225"-1.150"	L9-30R	•	•	•
PLUGS IP20 SUITABILITY								
L830P	30	480	Black Back, White Front Body	.225"-1.150"	L8-30P	•	•	•
L930P	30	600	Black Back, White Front Body	.225"-1.150"	L9-30P	•	•	•
FLANGED INLETS & OUTLETS								
L830FI	30	480	Gray Inlet		L8-30P	•		•
L830FO	30	480	Gray Outlet		L8-30R	•		•
L930FI	30	600	Gray Inlet		L9-30P	•		•
L930FO	30	600	Gray Outlet		L9-30R	•		•



NEMA L8-30P

NEMA L8-30R



NEMA L9-30P

NEMA L9-30R

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




SS720

All devices listed on this page conform to NEMA WD-1 and WD-6.


TURNLOK® LOCKING DEVICES

30 Amp NEMA L1030, L1130, L1230 & L1330


3 Pole, 3 Wire Non-Grounding 30A, 125/250V; 3ø, 250, 480 & 600V




30A Receptacle



30A Connector





30A Plug

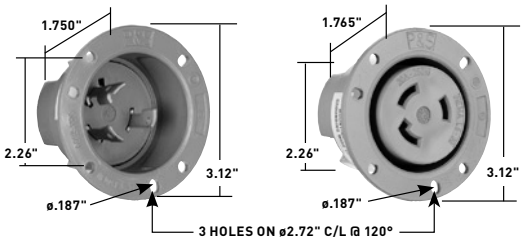



30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L1030R	30	125/250	Single Receptacle, Black		L10-30R	•	•	
L1130R	30	3ø, 250	Single Receptacle, Black		L11-30R	•	•	
L1230R	30	3ø, 480	Single Receptacle, Black		L12-30R	•	•	
L1330R	30	3ø, 600	Single Receptacle, Black		L13-30R	•	•	
CONNECTORS IP20 SUITABILITY								
L1030C	30	125/250	Black Back, White Front Body	.225"-1.150"	L10-30R	•	•	
L1130C	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-30R	•	•	•
L1230C	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-30R	•	•	•
L1330C	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L13-30R	•	•	•
PLUGS IP20 SUITABILITY								
L1030P	30	125/250	Black Back, White Front Body	.225"-1.150"	L10-30P	•	•	
L1130P	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L11-30P	•	•	•
L1230P	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L12-30P	•	•	•
L1330P	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L13-30P	•	•	•
FLANGED INLETS & OUTLETS								
L1030FI	30	125/250	Gray Inlet		L10-30P	•		
L1030FO	30	125/250	Gray Outlet		L10-30R	•		•
L1130FI	30	3ø, 250	Gray Inlet		L11-30P	•		•
L1130FO	30	3ø, 250	Gray Outlet		L11-30R	•		•
L1230FI	30	3ø, 480	Gray Inlet		L12-30P	•		•
L1230FO	30	3ø, 480	Gray Outlet		L12-30R	•		•
L1330FI	30	3ø, 600	Gray Inlet		L13-30P	•		•
L1330FO	30	3ø, 600	Gray Outlet		L13-30R	•		•










Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp NEMA L1430 & L1530 3 Pole, 4 Wire 30A, 125/250V; 3ø, 250V




30A Receptacle



30A Connector




30A Plug

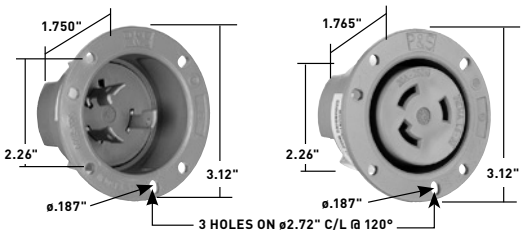

30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L1430R	30	125/250	Single Receptacle, Black		L14-30R	•	•	•
IGL1430R	30	125/250	Single Receptacle, Orange, Isolated Ground		L14-30R	•		•
L1530R	30	3ø, 250	Single Receptacle, Black		L15-30R	•	•	•
L1530RR	30	3ø, 250	Single Receptacle, Red		L15-30R	•	•	•
IGL1530R	30	3ø, 250	Single Receptacle, Orange, Isolated Ground		L15-30R	•		•
CONNECTORS IP20 SUITABILITY								
L1430C	30	125/250	Black Back, White Front Body	.225"-1.150"	L14-30R	•	•	•
CRL1430C	30	125/250	Yellow Back, White Front Body, Corrosion Resistant	.225"-1.150"	L14-30R	•	•	•
L1530C	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30R	•	•	•
PLUGS IP20 SUITABILITY								
L1430P	30	125/250	Black Back, White Front Body	.225"-1.150"	L14-30P	•	•	•
CRL1430P	30	125/250	Yellow Back, White Front Body, Corrosion Resistant	.225"-1.150"	L14-30P	•	•	•
L1530P	30	3ø, 250	Black Back, White Front Body	.225"-1.150"	L15-30P	•	•	•
FLANGED INLETS & OUTLETS								
L1430FI	30	125/250	Gray Inlet		L14-30P	•		•
L1430FO	30	125/250	Gray Outlet		L14-30R	•		•
L1530FI	30	3ø, 250	Gray Inlet		L15-30P	•		•
L1530FIBK	30	3ø, 250	Black Inlet		L15-30P	•		•
L1530FO	30	3ø, 250	Gray Outlet		L15-30R	•		•
L1530FOBK	30	3ø, 250	Black Outlet		L15-30R	•		•



NEMA L14-30P

NEMA L14-30R



NEMA L15-30P




NEMA L15-30R

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION
WEATHERPROOF LOCKING INLET KIT FOR GENERATOR APPLICATIONS	
L1430FIKIT	Kit includes 30A Locking Gray Flanged Inlet L1430FI, Weatherproof Cover WPG2, and Weatherproof Box WPB33

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp NEMA L1630 & L1730 3 Pole, 4 Wire 30A; 3ø, 480 & 600V




30A Receptacle



30A Connector




30A Plug

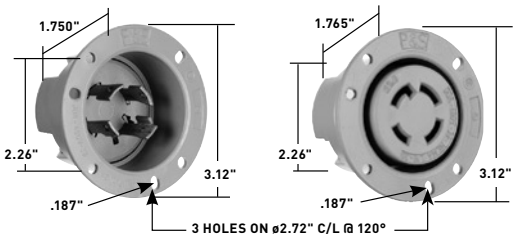

30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L1630R	30	3ø, 480	Single Receptacle, Black		L16-30R	•	•	•
L1730R	30	3ø, 600	Single Receptacle, Black		L17-30R	•	•	•
CONNECTORS IP20 SUITABILITY								
L1630C	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-30R	•	•	•
L1730C	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L17-30R	•	•	•
PLUGS IP20 SUITABILITY								
L1630P	30	3ø, 480	Black Back, White Front Body	.225"-1.150"	L16-30P	•	•	•
L1730P	30	3ø, 600	Black Back, White Front Body	.225"-1.150"	L17-30P	•	•	•
FLANGED INLETS & OUTLETS								
L1630FI	30	3ø, 480	Gray Inlet		L16-30P	•		•
L1630FO	30	3ø, 480	Gray Outlet		L16-30R	•		•
L1730FI	30	3ø, 600	Gray Inlet		L17-30P	•		•
L1730FO	30	3ø, 600	Gray Outlet		L17-30R	•		•




NEMA L16-30P | NEMA L16-30R


NEMA L17-30P | NEMA L17-30R

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
WEATHERPROOF BOOTS		
L15RBC	Boot for 15A Locking Connector	Black
L15RBP	Boot for 15A Locking Plug	Black
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
CORROSION-RESISTANT BOOTS		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow
STRAIN RELIEF GRIPS		
FC22GL	Strain Relief Grip – .220"-.320"	
FC30GL	Strain Relief Grip – .300"-.430"	
FC40GL	Strain Relief Grip – .400"-.560"	
FC52GL	Strain Relief Grip – .520"-.730"	
FC70GL	Strain Relief Grip – .700"-.940"	
FC94GL	Strain Relief Grip – .940"-1.250"	



WPG2




L15RBC

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

30 Amp NEMA L1830, L1930 & L2030


4 Pole, 4 Wire Non-Grounding 30A, 3øY, 120/208, 277/480 & 347/600V




30A Receptacle



30A Connector




30A Plug

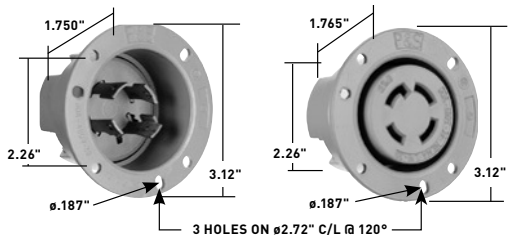


30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498
RECEPTACLES						
L1830R	30	3øY, 120/208	Single Receptacle, Black		L18-30R	•
L1930R	30	3øY, 277/480	Single Receptacle, Black		L19-30R	•
L2030R	30	3øY, 347/600	Single Receptacle, Black		L20-30R	•
CONNECTORS IP20 SUITABILITY						
L1830C	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-30R	•
L1930C	30	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-30R	•
L2030C	30	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-30R	•
PLUGS IP20 SUITABILITY						
L1830P	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L18-30P	•
L1930P	30	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L19-30P	•
L2030P	30	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L20-30P	•
FLANGED INLETS & OUTLETS						
L1830FI	30	3øY, 120/208	Gray Inlet		L18-30P	•
L1830FO	30	3øY, 120/208	Gray Outlet		L18-30R	•
L1930FI	30	3øY, 277/480	Gray Inlet		L19-30P	•
L1930FO	30	3øY, 277/480	Gray Outlet		L19-30R	•
L2030FI	30	3øY, 347/600	Gray Inlet		L20-30P	•
L2030FO	30	3øY, 347/600	Gray Outlet		L20-30R	•

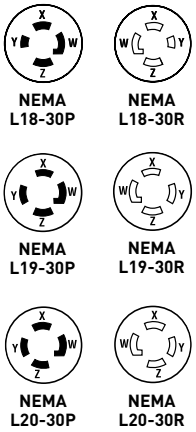

Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp L2130, L2230 & L2330 4 Pole, 5 Wire 30A, 3øY, 120/208, 277/480 & 347/600V




30A Receptacle



30A Connector




30A Plug

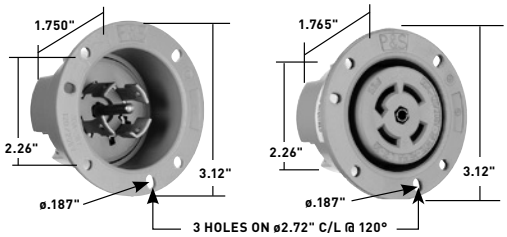

30A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES								
L2130R	30	3øY, 120/208	Single Receptacle, Black		L21-30R	•	•	•
L2130RBL	30	3øY, 120/208	Single Receptacle, Blue		L21-30R	•	•	•
IGL2130R	30	3øY, 120/208	Single Receptacle, Orange, Isolated Ground		L21-30R	•		•
L2230R	30	3øY, 277/480	Single Receptacle, Black		L22-30R	•	•	•
IGL2230R	30	3øY, 277/480	Single Receptacle, Orange, Isolated Ground		L22-30R	•		•
L2330R	30	3øY, 347/600	Single Receptacle, Black		L23-30R	•	•	•
IGL2330R	30	3øY, 347/600	Single Receptacle, Orange, Isolated Ground		L23-30R	•		•
CONNECTORS IP20 SUITABILITY								
L2130C	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-30R	•	•	•
L2230C	30	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-30R	•	•	•
L2330C	30	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-30R	•	•	•
PLUGS IP20 SUITABILITY								
L2130P	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	L21-30P	•	•	•
L2230P	30	3øY, 277/480	Black Back, White Front Body	.225"-1.150"	L22-30P	•	•	•
L2330P	30	3øY, 347/600	Black Back, White Front Body	.225"-1.150"	L23-30P	•	•	•
FLANGED INLETS & OUTLETS								
L2130FI	30	3øY, 120/208	Gray Inlet		L21-30P	•		•
L2130FO	30	3øY, 120/208	Gray Outlet		L21-30R	•		•
L2230FI	30	3øY, 277/480	Gray Inlet		L22-30P	•		•
L2230FO	30	3øY, 277/480	Gray Outlet		L22-30R	•		•
L2330FI	30	3øY, 347/600	Gray Inlet		L23-30P	•		•
L2330FO	30	3øY, 347/600	Gray Outlet		L23-30R	•		•

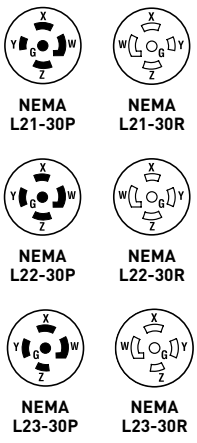


Reference Pages D-50 and D-51 for Accessories.

All devices listed on this page conform to NEMA WD-1 and WD-6.


TURNLOK® LOCKING DEVICES

Heavy-Duty Ground Continuity Monitoring (GCM) Plugs & Connectors

2 Pole, 3 Wire 15A, 125 & 250V & 277VAC



PSL515CGCM




PSL515PGCM

Features – Heavy-Duty Turnlok® GCM

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- NEMA configurations always visible for fast identification without disconnecting.
- Exclusive neoprene dust shield on devices seals cable entry. Optional weatherproof boots (sold separately).
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive, rugged two-piece cord grip (15 Amp only) accepts a wide range of cord widths. Provides uniform pressure for superior retention of conductors.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE cULUS	3rd PARTY COMPLIANCE FSUL WC596
2 POLE, 3 WIRE GROUNDING							
PSL515CGCM	15	125	Connector, Black & White	.230"-.720"	L5-15R	•	•
PSL515PGCM	15	125	Plug, Black & White	.230"-.720"	L5-15P	•	•
PSL615CGCM	15	250	Connector, Black & White	.230"-.720"	L6-15R	•	•
PSL615PGCM	15	250	Plug, Black & White	.230"-.720"	L6-15P	•	•
PSL715CGCM	15	277	Connector, Black & White	.230"-.720"	L7-15R	•	•
PSL715PGCM	15	277	Plug, Black & White	.230"-.720"	L7-15P	•	•

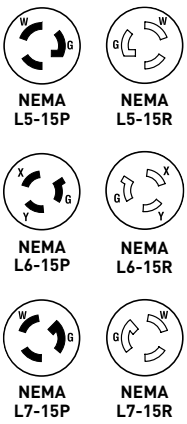



Green LED

Plug – There's proper ground continuity from the panel to the outlet and power's present.

Connector – Power's present and there's proper ground continuity throughout the cordset and back to the panel.



Red LED

Plug – Power's present, but there's a ground continuity fault or miswire between the receptacle and the panel.

Connector – Power's present, but there's a ground continuity fault or miswire in the cordset (or, if there's a red indication in the plug as well, between the receptacle and the panel). It's also possible there could be a problem in both.



No LED

Plug – Power loss, open hot or neutral conductor, or hot/ground reversal.


Connector – Assuming power is present at the outlet, there's an open hot or open neutral conductor in the cordset, or a hot/ground reversal.

250V products will show red and green when hot and ground are reversed.


TURNLOK® LOCKING DEVICES

Heavy-Duty Ground Continuity Monitoring (GCM) Plugs & Connectors

2 Pole, 3 Wire 20 & 30A; 125, 250, 277 & 347V; 3 Pole, 4 Wire 20 & 30A, 125/250V



L630CGCM




L630PGCM

Features

- Integral indication of ground continuity and power status. Continuous monitoring enhances personnel safety and adds convenience.
- Dual, bright LED indicators with 360° visibility. Green LEDs indicate proper ground continuity and power status. Red LEDs indicate ground continuity loss or reversed polarity. No LED indicates open hot, open neutral, or hot to ground cross. For 250V configurations: Hot to ground cross will be indicated by a green and red LED.
- NEMA configurations always visible for fast identification without disconnecting.
- Exclusive neoprene dust shield on devices seals cable entry. Optional weatherproof boots (sold separately).
- Chemical- and impact-resistant nylon housing features horizontal, easy-grip ribs on back body.
- Exclusive, rugged two-piece cord grip (15 Amp only) accepts a wide range of cord widths. Provides uniform pressure for superior retention of conductors.
- Recessed cord-grip screw reduces screwdriver slippage, improves safety. Quick-thread tri-drive assembly and cord-grip screws come backed-out and ready-to-wire.
- Color-coded terminal screws are backed-out for fast installation.
- Industrial-strength, brass alloy plug blades and connector contacts resist heat rise, provide excellent conductivity.


CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE cULUS	3rd PARTY COMPLIANCE FSUL WC596
2 POLE, 3 WIRE GROUNDING							
L520CGCM	20	125	Connector, Black & White	.225"-1.150"	L5-20R	•	•
L520PGCM	20	125	Plug, Black & White	.225"-1.150"	L5-20P	•	•
L530CGCM	30	125	Connector, Black & White	.225"-1.150"	L5-30R	•	•
L530PGCM	30	125	Plug, Black & White	.225"-1.150"	L5-30P	•	•
L620CGCM	20	250	Connector, Black & White	.225"-1.150"	L6-20R	•	•
L620PGCM	20	250	Plug, Black & White	.225"-1.150"	L6-20P	•	•
L630CGCM	30	250	Connector, Black & White	.225"-1.150"	L6-30R	•	•
L630PGCM	30	250	Plug, Black & White	.225"-1.150"	L6-30P	•	•
L720CGCM	20	277	Connector, Black & White	.225"-1.150"	L7-20R	•	•
L720PGCM	20	277	Plug, Black & White	.225"-1.150"	L7-20P	•	•
L730CGCM	30	277	Connector, Black & White	.225"-1.150"	L7-30R	•	•
L730PGCM	30	277	Plug, Black & White	.225"-1.150"	L7-30P	•	•
L3720CGCM	20	347	Connector, Black & White	.225"-1.150"	L24-20R	•	•
L3720PGCM	20	347	Plug, Black & White	.225"-1.150"	L24-20P	•	•
3 POLE, 4 WIRE GROUNDING							
L1420CGCM	20	125/250	Connector, Black & White	.225"-1.150"	L14-20R	•	•
L1420PGCM	20	125/250	Plug, Black & White	.225"-1.150"	L14-20P	•	•
L1430CGCM	30	125/250	Connector, Black & White	.225"-1.150"	L14-30R	•	•
L1430PGCM	30	125/250	Plug, Black & White	.225"-1.150"	L14-30P	•	•

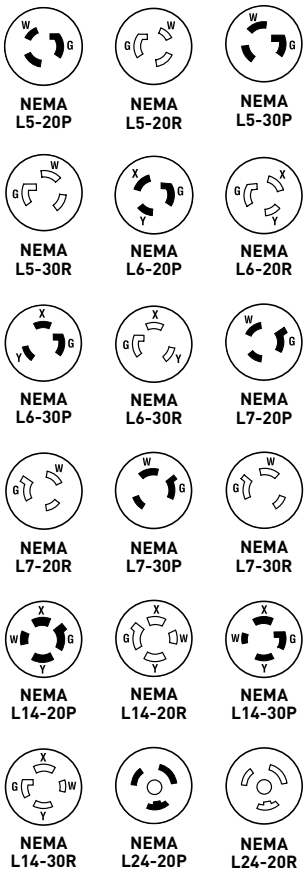


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


Angle Plugs & Adapters 2 Pole, 3 Wire 15A, 125, 250 & 277V; 3, 4 & 5 Wire 15, 20 & 30A Adapters




15 Amp Angle Plug



L15AN



L20303AN



L203045AN

Features

- Angle plugs and adapters both allow for 4-position face rotation. 20/30A 3 Wire Turnlok® Right Angle Adapters are adjustable up to 8 positions.
- Angle adapters (sold separately) will accommodate all P&S Turnlok style plugs and connectors on a retrofit basis. Simply remove the straight handle body from the plug or connector face assembly, and replace with the angle adapter.
- Tri-drive assembly and cord-grip screws are standard on all angle plugs and adapters.
- Angle plugs and adapters have the same wide cord diameter range (.230"-1.150") that is present on all Turnlok plugs and connectors.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE FSUL WC596
2 POLE, 3 WIRE GROUNDING							
PS4720SSAN	15	125	Black Back Body, White Front Body	.230"-.655"	L5-15P	•	•
PSL615PAN	15	250	Black Back Body, White Front Body	.230"-.690"	L6-15P	•	•
PSL715PAN	15	277	Black Back Body, White Front Body	.230"-.690"	L7-15P	•	•



NEMA L5-15P



NEMA L6-15P




NEMA L7-15P


CATALOG NUMBER	DESCRIPTION	CORD DIAMETER
ACCESSORIES		
L15AN	15A Turnlok Right Angle Adapter	.230"-1.150"
L20303AN	20/30A 3 Wire Turnlok Right Angle Adapter	.230"-1.150"
L203045AN	20/30A 4 and 5 Wire Turnlok Right Angle Adapter	.230"-1.150"

TURNLOK® LOCKING DEVICES


Non-NEMA 3 Wire Grounding & Non-Grounding 10 & 15A, 125 & 250V; 20 & 30A, 125/250 & 250V




7582




7580G



7555SS




7554SS



7556SS

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES							
7582*	15 10	125 250	Single Receptacle, Black				
7580	15 10	125 250	Duplex Receptacle, Black				
7580G	15 10	125 250	Duplex Receptacle, Grounding				
7310*	20	125/250	Single Receptacle, Black				
3330	30	125/250	Single Receptacle, Black				
3330G	30	125/250	Single Receptacle, Grounding				
CONNECTORS IP20 SUITABILITY							
7555SS*	15 10	125 250	Yellow	.296"-.625"			
7555G	15	125	Yellow	.280"-.710"			
7313SS	20	125/250	Black Back, White Front Body	.225"-.750"	•	•	•
7313SSBK	20	125/250	Black Back, Black Front Body	.225"-.750"	•	•	•
3333SS	30	125/250	Black Back, White Front Body	.225"-.750"	•		•
PLUGS IP20 SUITABILITY							
S2348DF	14	125-480	Black Back, White Front Body				
7554SS*	15 10	125 250	Yellow	.296"-.625"			
7572G	15	125	Yellow, Grounding	.280"-.710"			
7311SS	20	125/250	Black Back, White Front Body	.225"-.750"	•	•	•
7311SSBK	20	125/250	Black Back, Black Front Body	.225"-.750"	•	•	•
7311G	20	250	Yellow, Grounding	.410"-1.060"			
3331SS	30	125/250	Black Back, White Front Body	.225"-.750"	•	•	•
3331G	30	250	Yellow, Grounding	.410"-1.060"			
FLANGED INLETS & OUTLETS							
S2347	14	125-480	Outlet				
7556SS*	15 10	125 250	Gray Inlet				
7557SS*	15 10	125 250	Gray Outletw				
3334SS	30	125/250	Gray Inlet		•		
3335SS	30	125/250	Gray Outlet		•		



7557SS



Non-NEMA 7580, 7580G 7582, 7555SS 7557SS



Non-NEMA 7554SS 7556SS 7572G



Non-NEMA S2348DF



Non-NEMA S2347



Non-NEMA 7310 7313SS



Non-NEMA 7311SS 7311G



Non-NEMA 3331SS 3334SS 3331G




Non-NEMA 3330, 3330G 3333SS 3335SS

*For replacement use only.
Reference Pages D-50 and D-51 for Accessories.

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


20 Amp Non-NEMA 3 Pole, 4 Wire 20A, 3øY, 250V; 10A, 600V; 4 Pole, 4 Wire 20A, 3øY, 120/208V




20A Receptacle



20A Connector



20A Plug

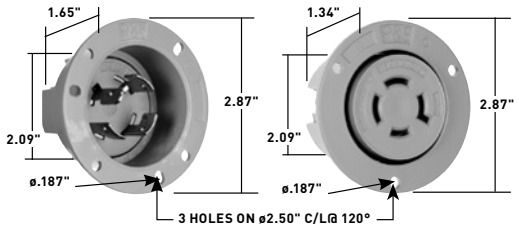

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES							
7410G*	20 10	3øY, 250 600	Single Receptacle, Grounded, Black			•	
7410	20	3øY, 120/208	Single Receptacle, Black		•	•	
CONNECTORS IP20 SUITABILITY							
7413G*	20 10	3øY, 250 600	Yellow	.333"-1.060"			
7413SS	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
PLUGS IP20 SUITABILITY							
7411G*	20 10	3øY, 250 600	Yellow	.333"-1.060"			
7411SS	20	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
FLANGED INLETS & OUTLETS							
7408SS	20	3øY, 120/208	Gray Inlet		•		
7409SS	20	3øY, 120/208	Gray Outlet		•		



Non-NEMA
7408SS
7411SS



Non-NEMA
7409SS, 7410
7413SS




Non-NEMA
7411G




Non-NEMA
7410G
7413G

*For replacement use only.
Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
WEATHERPROOF BOOTS		
L15RBC	Boot for 15A Locking Connector	Black
L15RBP	Boot for 15A Locking Plug	Black
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
CORROSION-RESISTANT BOOTS		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow



WPG2



L15RBC




L2030RBC
CRL2030RBC

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


30 Amp Non-NEMA 3 Pole, 4 Wire 30A, 3øY 250V; 10A, 600V; 4 Pole, 4 Wire 30A, 3øY, 120/208V




30A Receptacle



30A Connector



30A Plug

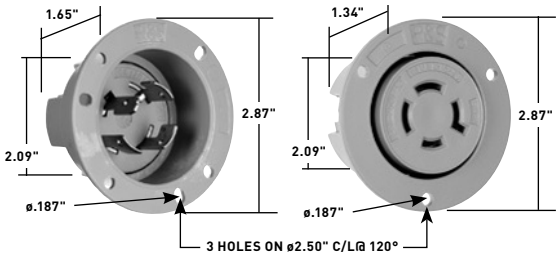

20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES							
3430	30	3øY, 120/208	Single Receptacle, Black		•	•	
CONNECTORS IP20 SUITABILITY							
3433SS	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
PLUGS IP20 SUITABILITY							
3431G*	30 10	3øY, 250 600	Yellow	.333"-1.060"			
3431SS	30	3øY, 120/208	Black Back, White Front Body	.225"-1.150"	•	•	
FLANGED INLETS & OUTLETS							
3434SS	20	3øY, 120/208	Gray Inlet		•		
3435SS	20	3øY, 120/208	Gray Outlet		•		



Non-NEMA 3431SS 3434SS



Non-NEMA 3430, 3433SS 3435SS




Non-NEMA 3431G



Non-NEMA 3430G 3433G

*For replacement use only.
Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S




WPG2

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

California Standard & Corrosion-Resistant


3 Wire Grounding 50A, 125, 250 & 480V; 250VDC, 600VAC




California Standard Receptacle



California Standard Connector



California Standard Plug



California Standard Flanged Inlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE UL498	FSUL WC596	CSA
RECEPTACLES							
CR6370	50	125	Corrosion-Resistant		•		•
CS6370	50	125	California Standard		•		•
CS8269	50	250	California Standard		•		•
CS8469	50	480	California Standard		•		•
3771	50	250VDC, 600VAC	Corrosion-Resistant		•		•
CONNECTORS IP20 SUITABILITY							
CR6360	50	125	Corrosion-Resistant	.680"-1.125"	•		•
CS6360	50	125	California Standard	.680"-1.125"	•		•
CS8264	50	250	California Standard	.680"-1.125"	•		•
CS8464	50	480	California Standard	.680"-1.125"	•		•
3762	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
PLUGS IP20 SUITABILITY							
CR6361	50	125	Corrosion-Resistant	.680"-1.125"	•		•
CS6361	50	125	California Standard	.680"-1.125"	•		•
CS8265	50	250	California Standard	.680"-1.125"	•		•
CS8465	50	480	California Standard	.680"-1.125"	•		•
3763M	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
FLANGED INLETS							
CS6377	50	125	California Standard		•		•
CS8275	50	250	California Standard		•		•
CS8475	50	480	California Standard		•		•
3777	50	250VDC, 600VAC	Corrosion-Resistant		•		•



Non-NEMA CR6370 CR6360




Non-NEMA CS6370 CS6360



Non-NEMA CS8269 CS8264



Non-NEMA CS8469 CS8464



Non-NEMA 3771 3762



Non-NEMA CR6361 CR6377




Non-NEMA CS6361 CS6377



Non-NEMA CS8265 CS8275



Non-NEMA CS8465 CS8475



Non-NEMA 3763 3777

Reference pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
7770GRY	Gray Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
CR7716N	Weatherproof Boot, 50A Locking Connector
CR7717N	Weatherproof Boot, 50A Locking Plug


Note: 7770 covers not to be used with flanged devices.

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

California Standard & Corrosion-Resistant


4 Wire Grounding 50A, 125/250V; 3ø, 250 & 480V; 250VDC, 600VAC




Corrosion-Resistant Receptacle



Corrosion-Resistant Connector



Corrosion-Resistant Plug



Corrosion-Resistant Flanged Inlet

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION/COLOR	CORD DIAMETER	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE FSUL WC596	3rd PARTY COMPLIANCE CSA
RECEPTACLES							
CR6369	50	125/250	Corrosion-Resistant		•		•
CS6369	50	125/250	California Standard		•		•
CS8369	50	3ø, 250	California Standard		•		•
CS8169	50	3ø, 480	California Standard		•		•
3769	50	250VDC, 600VAC	Corrosion-Resistant		•		•
7379*	50	250VDC, 600VAC	Corrosion-Resistant		•		•
CONNECTORS							
CR6364	50	125/250	Corrosion-Resistant	.680"-1.125"	•		•
CS6364	50	125/250	California Standard	.680"-1.125"	•		•
CS8364	50	3ø, 250	California Standard	.680"-1.125"	•		•
CS8164	50	3ø, 480	California Standard	.680"-1.125"	•		•
3764	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
7764*	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
PLUGS							
CR6365	50	125/250	Corrosion-Resistant	.680"-1.125"	•		•
CS6365	50	125/250	California Standard	.680"-1.125"	•		•
CS8365	50	3ø, 250	California Standard	.680"-1.125"	•		•
CS8165	50	3ø, 480	California Standard	.680"-1.125"	•		•
3765	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
7765*	50	250VDC, 600VAC	Corrosion-Resistant	.680"-1.125"	•		•
FLANGED INLETS							
CR6375	50	125/250	Corrosion-Resistant		•		•
CS6375	50	125/250	California Standard		•		•
CS8375	50	3ø, 250	California Standard		•		•
CS8175	50	3ø, 480	California Standard		•		•
CS8177	50	3ø, 480	California Standard with Fliplid		•		•
3775	50	250VDC, 600VAC	Corrosion-Resistant		•		•
7958P*	50	250VDC, 600VAC	Corrosion-Resistant		•		•



Non-NEMA CR6364 CR6369



Non-NEMA CS6364 CS6369



Non-NEMA CS8364 CS8369



Non-NEMA CS8164 CS8169



Non-NEMA 3764 3769



Non-NEMA 7379 7764



Non-NEMA CR6365 CR6375



Non-NEMA CS6365 CS6375



Non-NEMA 7765 7958



Non-NEMA CS8365 CS8375



Non-NEMA 3765 3775



Non-NEMA CS8165 CS8175

*Devices for replacement use only in existing installations. Reference Pages D-50 and D-51 for Accessories.

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
7770	Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
7770GRY	Gray Weatherproof Cover for 50A Locking Receptacles, Thermoplastic
CR7716N	Weatherproof Boot, 50A Locking Connector
CR7717N	Weatherproof Boot, 50A Locking Plug

Note: 7770 covers not to be used with flanged devices.


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


Midget Connectors, Plugs, Inlets, Outlets 2 Pole, 2 Wire Non-Grounding 15A, 125V 2 Pole, 3 Wire Grounding 15A, 125V 3 Pole, 3 Wire Non-Grounding 15A, 125/250V




7427




ML1133




ML2133




ML3113




ML115




ML215




ML315



ML114




ML214



ML314

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498
CONNECTORS						
7427	15	125	Black	.312"-.50"	ML1-15R	•
ML1133	15	125	Black	.10"-.35"	ML1-15R	•
ML2133	15	125	Black	.18"-.52"	ML2-15R	•
ML3133	15	125/250	Black	.18"-.52"	ML3-15R	•
PLUGS						
ML1113	15	125	Black	.10"-.35"	ML1-15P	•
ML2113	15	125	Black	.18"-.52"	ML2-15P	•
ML3113	15	125/250	Black	.18"-.52"	ML3-15P	•
FLANGED INLETS & OUTLETS						
ML115	15	125	Inlet, Black Face, Gray Flange		ML1-15P	•
ML114	15	125	Outlet, Black Face, Gray Flange		ML1-15R	•
ML215	15	125	Inlet, Black Face, Gray Flange		ML2-15P	•
ML214	15	125	Outlet, Black Face, Gray Flange		ML2-15R	•
ML315	15	125/250	Inlet, Black Face, Gray Flange		ML3-15P	•
ML314	15	125/250	Outlet, Black Face, Gray Flange		ML3-15R	•

2 Pole, 2 Wire




NEMA ML-1P **NEMA ML-1R**

2 Pole, 3 Wire



NEMA ML-2P **NEMA ML-2R**


3 Pole, 3 Wire




NEMA ML-3P **NEMA ML-3R**

TURNLOK® LOCKING DEVICES


Power Interrupting Devices 2 Pole, 3 Wire 20A, 125V Hospital Use; 2 Pole, 3 Wire 20A, 125V; 2 Pole, 3 Wire 20A, 125V; 10A, 250VDC, 480VAC




23000HG




23000




23005N



23056N
23035N



23002N



23054N


CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	3rd PARTY COMPLIANCE UL498
RECEPTACLES					
23000HG	20	125	Hospital Use, Non-Metallic		•
23050	20	125	Hospital Use, Black Bakelite		•
23000G	20 10	125 250VDC, 480VAC	Grounding, Non-Metallic		•
23000	20 10	125 250VDC, 480VAC	Non-Grounding, Non-Metallic		•
CONNECTORS					
23054N	20	125	Hospital Use, Non-Metallic	.250"-.656"	•
23002N	20 10	125 250VDC, 480VAC	Non-Metallic	.250"-.656"	•
PLUGS					
23056N	20	125	Hospital Use, Non-Metallic	.250"-.656"	•
23035N	20	125	Non-Metallic	.250"-.656"	•
23005N	20 10	125 250VDC, 480VAC	Non-Metallic	.250"-.656"	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


TURNLOK® LOCKING DEVICES

Power Interrupting Devices


3 Pole, 4 Wire 30A, 480V; 3 Pole, 4 Wire 30A, 600VAC; 20A, 250VDC; 3 Pole, 4 Wire 60A, 600V




20443N




26420



20444N, 20414N




26414




26427




20445N, 20415N




26415



26426



26415A



20418


CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	3rd PARTY COMPLIANCE UL498
RECEPTACLES					
20443N	30	480	Non-Metallic		
20403N	30 20	600VAC 250VDC	Non-Metallic		•
21420	30 20	600VAC 250VDC	Angled, 3/4" Tap for Conduit, Diecast		•
26420	60	600	Die-Cast with Lift Lid Enclosure		•
CONNECTORS					
20444N	30	480	Non-Metallic	.400"-1.062"	
20414	30 20	600VAC 250VDC	Metallic	.562"-1.000"	
20414N	30 20	600VAC 250VDC	Non-Metallic	.400"-1.062"	•
21414	30 20	600VAC 250VDC	Metallic with Rubber Cord Grip	.360"-0.484"	
26414	60	600	Metallic	.750"-1.250"	
26427	60	600	Metallic	.750"-1.250"	•
PLUGS					
20445N	30	480	Non-Metallic	.400"-1.062"	
20415	30 20	600VAC 250VDC	Metallic	.562"-1.000"	
20415N	30 20	600VAC 250VDC	Non-Metallic	.400"-1.062"	
21415	30 20	600VAC 250VDC	Metallic with Rubber Cord Grip	.360"-0.484"	
21426	30 20	600VAC 250VDC	Metallic with Rubber Cord Grip	.484"-0.750"	
21426S	30 20	600VAC 250VDC	Metallic with Tab with Rubber Cord Grip	.484"-0.750"	
26415	60	600	Metallic	.750"-1.250"	
26426	60	600	Metallic	.750"-1.250"	•
FLANGED INLETS & OUTLETS					
20418	30 20	600VAC 250VDC	Inlet, Die-Cast for FS and FD Box		•
26415A	60	600	Inlet, Die-Cast		

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
WPG1	Weatherproof Cover for 20403N
26400	Box and Plate for 26420
26401	Box only for 26404 Angle Adapter
26402	Mounting Plate only for 26401 Box
26404	45° Angle Adapter
20446N	Red Nylon Cover and Gasket for 20443N
20416N	Nylon Cover and Gasket for 20403N
20417N	Aluminum Cover (No Gasket) for 20403N


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

Power Interrupting Devices 4 Pole, 5 Wire 30A, 600VAC; 20A 250VDC; 4 Pole, 5 Wire 60A, 600V




25250




26520




25414N




26527




26526



26514A




26515A




26401

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	CORD DIAMETER	3rd PARTY COMPLIANCE UL498
RECEPTACLES					
25250	30 20	600VAC; 250VDC	Die-Cast with Lift Lid Enclosure		
26520	60	600	Die-Cast with Lift Lid Enclosure		•
CONNECTORS					
25414N	30 20	600VAC; 250VDC	Non-Metallic	.625"-1.000" .725"-1.250"	
25414	30 20	600VAC; 250VDC	Metallic	.625"-1.000"	
26514	60	600	Metallic	.750"-1.250"	•
26527	60	600	Metallic with Rubber Cord Grip	.750"-1.250"	•
PLUGS					
25415N	30 20	600VAC; 250VDC	Non-Metallic	.625"-1.000" .725"-1.250"	
25415	30 20	600VAC; 250VDC	Metallic	.625"-1.000"	
26515	60	600	Metallic	.750"-1.250"	•
26526	60	600	Metallic with Rubber Cord Grip	.750"-1.250"	•
FLANGED INLETS & OUTLETS					
26515A	60	600	Inlet, Die-Cast		•
26514A	60	600	Outlet, Die-Cast		•



26402



26404

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
26400	Box and Plate for 26520
26401	Box only for 26404 Angle Adapter

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
26402	Mounting Plate only for 26401 Box
26404	45° Angle Adapter


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

Accessories



L15RBC




L15RBP




L2030RBC
CRL2030RBC



L2030RBP
CRL2030RBP



CR7717N



CR7716N




DC1

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF BOOTS		
L15RBC	Boot for 15A Locking Connector	Black
L15RBP	Boot for 15A Locking Plug	Black
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
CORROSION-RESISTANT BOOTS		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow
CR7716N	Boot for 50A Locking Connector	Yellow
CR7717N	Boot for 50A Locking Plug	Yellow
DUST COVERS		
DC1	Replacement Cover, to be used with "old-style" 20 and 30A Turnlok Plugs and Connectors only.	Black


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


Accessories




WPG1



WPG2




7770



L15AN



L20303AN



L203045AN

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVERS		
WPG1	Cover for 15A Turnlok Flanged Inlets and Outlets	Gray
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
7770	Cover for 50A Locking Receptacle, Thermoplastic	Yellow
7770GRY	Cover for 50A Locking Receptacle, Thermoplastic	Gray
7425Y	Cover for 20 and 30A Receptacles, Thermoplastic	Yellow
7425GRY	Cover for 20 and 30A Receptacles, Thermoplastic	Gray
3720FS	Clear Cover for Single Receptacle, Thermoplastic	Gray
3710FS	Clear Cover for Duplex Receptacle, Thermoplastic	Gray
3722FS	Clear Cover for Power Outlet, Thermoplastic	Gray
3760	Cover for Single Receptacle	Gray
STAINLESS STEEL PLATES		
SS7	Plate for Single Receptacle	S/S
SS8	Plate for Duplex Receptacle	S/S
SS720	Plate for Locking Receptacle	S/S
WP7	Dustproof Cover for Single Receptacle	S/S
WP8	Dustproof Cover for Duplex Receptacle	S/S
STRAIN RELIEF GRIPS FOR PLUGS & CONNECTORS		
FC22GL	Strain Relief Grip – .220"-.320"	
FC30GL	Strain Relief Grip – .300"-.430"	
FC40GL	Strain Relief Grip – .400"-.560"	
FC52GL	Strain Relief Grip – .520"-.730"	
FC70GL	Strain Relief Grip – .700"-.940"	
FC94GL	Strain Relief Grip – .940"-1.250"	
TURNLOK RIGHT ANGLE ADAPTER		
L15AN	15A Turnlok Right Angle Adapter	Black
L20303AN	20 and 30A 3 Wire Turnlok Right Angle Adapter	Black
L203045AN	20 and 30A 4 and 5 Wire Turnlok Right Angle Adapter	Black

TURNLOK® LOCKING DEVICES

NEMA Configurations

Locking Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING						
L1 125V	L1-15R	L1-15P				
L2 250V			L2-20P	L2-20P		
2 POLE, 3 WIRE GROUNDING						
L5 125V	L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	5-30P
L6 250V	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	6-30P
L7 277VAC	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	7-30P
L24 347VAC			L24-20R	L24-20P		
L8 480VAC			L8-20R	L8-20P	L8-30R	L8-30P
L9 600VAC			L9-20R	L9-20P	L9-30R	L9-30P
3 POLE, 3 WIRE NON-GROUNDING						
L10 125/250V			L10-20R	L10-20P	L10-30R	L10-30P
L11 3ø250V			L11-20R	L11-20P	L11-30R	L11-30P
L12 3ø480V			L12-20R	L12-20P	L12-30R	L12-30P
L13 3ø600V					L13-30R	L13-30P
3 POLE, 4 WIRE GROUNDING						
L14 125/250V			L14-20R	L14-20P	L14-30R	L14-30P
L15 3ø250V			L15-20R	L15-20P	L15-30R	L15-30P
L16 3ø480V			L16-20R	L16-20P	L16-30R	L16-30P
L17 3ø600V					L17-30R	L17-30P
4 POLE, 4 WIRE NON-GROUNDING						
3øY L18 120/208V			L18-20R	L18-20P	L18-30R	L18-30P
3øY L19 277/480V			L19-20R	L19-20P	L19-30R	L19-30P
3øY L20 347/600V			L20-20R	L20-20P	L20-30R	L20-30P
4 POLE, 5 WIRE GROUNDING						
3øY L21 120/208V			L21-20R	L21-20P	L21-30R	L21-30P
3øY L22 277/480V			L22-20R	L22-20P	L22-30R	L22-30P
3øY L23 347/600V			L23-20R	L23-20P	L23-30R	L23-30P


Midget – Locking

	15 AMPERE	
	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING		
ML1 125V	ML-1R	ML-1P
2 POLE, 3 WIRE GROUNDING		
ML2 125V	ML-2R	ML-2P
3 POLE, 3 WIRE NON-GROUNDING		
ML3 125/250V	ML-3R	ML-3P

Labels & Their Meaning

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots
Indicate receptacle configurations (female).



Closed Slots
Indicate plug blade configurations (male).



TURNLOK® LOCKING DEVICES

Plugs & Connectors Product Specifications & Performance

15 Amp Turnlok Plugs & Connectors

PLUGS	Standard Product	Corrosion-Resistant
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Blades	Brass	Nickel-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Nickel-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel	Nickel-Plated Steel
Ground Screws	Nickel-Plated Steel	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
CONNECTORS		
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Contacts	Brass	Nickel-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Nickel-Plated Steel
Terminal Screws	Nickel- or Brass-Plated Steel	Nickel-Plated Steel
Ground Screws	Nickel-Plated Steel	Nickel-Plated Steel
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
PERFORMANCE		
Electrical		
Dielectric Withstand Voltage	1600V minimum	
Maximum Working Voltage	277VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62	
Cord Grip Accommodations	.230"–.720" diameter	
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot	
Terminal Accommodation	#18 AWG min. – #10 AWG max.	
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous: +75°C, Minimum: -40°C without impact	

TURNLOK® LOCKING DEVICES

Plugs & Connectors Product Specifications & Performance

20 & 30 Amp Turnlok Plugs & Connectors

PLUGS	Standard Product	Corrosion-Resistant
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Shield	Neoprene	Neoprene
Blades	Brass	20A = Nickel-Plated Brass 30A = Tin-Plated Brass
Terminal Clamp	20A = Nickel-Plated Steel 30A = Brass	20A = Nickel-Plated Steel 30A = Nickel-Plated Brass
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
CONNECTORS		
Back Body	Super Tough Nylon	Super Tough Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Polycarbonate	Polycarbonate
Cord Clamp	Nylon	Nylon
Insert	Nylon	Nylon
Dust Shield	Neoprene	Neoprene
Contacts	Brass	20A = Nickel-Plated Brass 30A = Tin-Plated Brass
Terminal Clamp	20A = Nickel-Plated Steel 30A = Brass	20A = Nickel-Plated Steel 30A = Nickel-Plated Brass
Terminal Screws	Brass	Nickel-Plated Brass
Ground Screws	Brass	Nickel-Plated Brass
Cord Clamp Screws	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel	Nickel-Plated Steel
PERFORMANCE		
Electrical		
Dielectric Withstand Voltage	2200V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Cord Accommodations	Round portable service cords of diameters in accordance with device rating as defined in UL62	
Cord Grip Accommodations	All 20 & 30A = .225"–1.150" diameter	
Terminal Identification	"GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot	
Terminal Accommodation	#18 AWG min. – #8 AWG max.	
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous: +75°C, Minimum: -40°C without impact	

TURNLOK® LOCKING DEVICES

Receptacles Products Specifications & Performance

15, 20 & 30 Amp Turnlok Receptacles

RECEPTACLES	Standard Product	Corrosion-Resistant
Front Body	Nylon	Nylon
Back Body	Nylon	Nylon
Mounting Strap	15A = Steel; 20 & 30A = Brass	Nickel-Plated Brass
Pressure Plate	Brass	Nickel-Plated Brass
Contacts	Brass	Nickel-Plated Brass
Terminal Clamps	Brass	Nickel-Plated Brass
Terminal Screws	Brass	Brass
Mounting Screws	Zinc-Plated Steel	Stainless Steel
PERFORMANCE		
Electrical		
Dielectric Withstand Voltage	2000V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Terminal Accommodation	15A = #18 AWG min. – #10 AWG max, 20 & 30A = #14 AWG min. – #10 AWG max.	
Product Identification	Amperage, Voltage, NEMA Configuration molded into face	
Environmental		
Flammability	UL94 V2	
Operating Temperature	Maximum continuous: +75°C, Minimum: -40°C without impact	

50 Amp Turnlok Receptacles

RECEPTACLES	Corrosion-Resistant	California Standard
Front Body	Glass-Filled Nylon	Glass-Filled Nylon
Back Body	Glass-Filled Nylon	Glass-Filled Nylon
Mounting Strap	Nickel-Plated Brass	Nickel-Plated Brass
Contacts	Nickel-Plated Brass	Brass
Terminal Clamps	Brass	Brass
Ground Shunt	Brass	Brass
Mounting Screws	Stainless Steel	Zinc-Plated Steel
PERFORMANCE		
Electrical		
Dielectric Withstand Voltage	3000V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Terminal Accommodation	#10 AWG min. – #6 AWG max.	
Product Identification	Amperage, Voltage molded into face	
Environmental		
Flammability	UL94 V0	
Operating Temperature	Maximum continuous: +115°C, Minimum: -40°C without impact	

TURNLOK® LOCKING DEVICES

Inlets & Outlets Product Specifications & Performance

15, 20 & 30 Amp Turnlok Inlets & Outlets

	15 Amp	20 Amp	30 Amp
FLANGED INLETS			
Flanged Casing	Polycarbonate	Polycarbonate	Polycarbonate
Blade Holder	Polycarbonate	Polycarbonate	Nylon
Blades	Nickel-Plated Brass	Brass	Tin-Plated Stresscon
Terminal Clamp	Zinc-Plated Steel	Zinc-Plated Steel	Brass
Terminal Screws	Zinc- or Brass-Plated Steel	Zinc- or Brass-Plated Steel	Brass
Ground Screws	Zinc-Plated Steel	Zinc-Plated Steel	Brass
Assembly Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
FLANGED OUTLETS			
Flanged Casing	Polycarbonate	Polycarbonate	Polycarbonate
Contact Carrier	Polycarbonate	Polycarbonate	Nylon
Contacts	Brass	Brass	Tin-Plated Brass
Terminal Clamp	Zinc-Plated Steel	Zinc-Plated Steel	Brass- or Nickel-Plated Steel
Terminal Screws	Zinc- or Brass- Plated Steel	Zinc- or Brass-Plated Steel	Brass- or Nickel-Plated Steel
Ground Screws	Zinc-Plated Steel	Zinc-Plated Steel	Nickel-Plated Brass
Assembly Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
PERFORMANCE			
Electrical			
Dielectric Withstand Voltage	15A = 2000V minimum, 20 & 30A = 3000V minimum		
Maximum Working Voltage	15A = 277VAC, 20 & 30A = 600VAC		
Current Interrupting	Certified for current interrupting at full-rated current		
Temperature Rise	30°C maximum after 50 cycles at 150% rated current		
Mechanical			
Terminal Identification	Green = Ground, White = Neutral, Brass = Hot		
Terminal Accommodation	15A = #18 AWG min.–#10 AWG max., 20 & 30A = #12 AWG min.– #8 AWG max.		
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration		
Environmental			
Flammability	UL94 V2		
Operating Temperature	Maximum continuous: 15 & 20A = +115°C, 30A = +75°C, Minimum: -40°C without impact		

TURNLOK® LOCKING DEVICES

Ground Continuity Monitoring Plugs & Connectors Product Specifications & Performance

15, 20 & 30 Amp Turnlok GCM Plugs & Connectors

PLUGS	
Back Body	Super Tough Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Dust Shield*	Neoprene
Blades	Brass
Terminal Clamp	15A = Zinc-Plated Steel, 20A = Nickel-Plated Steel, 30A = Brass
Terminal Screws	15A = Nickel- or Brass-Plated Steel, 20 & 30A = Brass
Ground Screws	15A = Nickel-Plated Steel, 20 & 30A = Brass
Cord Clamp Screws	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel
CONNECTORS	
Back Body	Super Tough Nylon
Front Body	Nylon
Terminal Chamber	Polycarbonate
Cord Clamp	Nylon
Insert	Nylon
Dust Shield*	Neoprene
Contacts	Brass
Terminal Clamp	15A = Zinc-Plated Steel, 20A = Nickel-Plated Steel, 30A = Brass
Terminal Screws	15A = Nickel- or Brass-Plated Steel, 20 & 30A = Brass
Ground Screws	15A = Nickel-Plated Steel, 20 & 30A = Brass
Cord Clamp Screws	Nickel-Plated Steel
Assembly Screws	Nickel-Plated Steel
PERFORMANCE	
Electrical	
Dielectric Withstand Voltage	15A = 1600V minimum, 20 & 30A = 2200V minimum
Maximum Working Voltage	15A = 277VAC, 20 & 30A = 600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
Mechanical	
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62
Cord Grip Accommodations	15A = .230"–.720" diameter, all 20 & 30A = .225"–1.150" diameter
Terminal Identification	15A = Green = Ground, White = Neutral, Brass = Hot, 20 & 30A = "GR" and Green Color = Ground, "WH" and White Color = Neutral, "X", "Y", "Z" = Hot
Terminal Accommodation	15A = #18 AWG min. – #10 AWG max, 20A = #18 AWG min. – #8 AWG max, 30A = #18 AWG min. – #6 AWG max.
Product Identification	Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous: +75°C, Minimum: -40°C without impact

*Dust Shield for 20 & 30 Amp Plugs & Connectors.

TURNLOK® LOCKING DEVICES

Plugs & Connectors Product Specifications & Performance

50 Amp Turnlok Plugs & Connectors

PLUGS	Corrosion-Resistant	California Standard
Plug Shroud	Zytel Super Tough Nylon	Zytel Super Tough Nylon
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Nylon	Nylon
Cord Clamp	Nylon	Nylon
Blades	Nickel-Plated Brass	Brass
Terminal Clamp	Nickel-Plated Brass	Brass
Terminal Screws	Nickel-Plated Brass	Brass
Ground Screw	Nickel-Plated Brass	Brass
Assembly Screws	Stainless Steel	Stainless Steel
CONNECTORS		
Back Body	Nylon	Nylon
Front Body	Nylon	Nylon
Terminal Chamber	Nylon	Nylon
Cord Clamp	Nylon	Nylon
Contacts	Nickel-Plated Brass	Brass
Terminal Clamp	Nickel-Plated Brass	Brass
Terminal Screws	Nickel-Plated Brass	Brass
Ground Screw	Nickel-Plated Brass	Brass
Assembly Screws	Stainless Steel	Stainless Steel
PERFORMANCE		
Electrical		
Dielectric Withstand Voltage	3000V minimum	
Maximum Working Voltage	600VAC	
Current Interrupting	Certified for current interrupting at full-rated current	
Temperature Rise	30°C maximum after 50 cycles at 150% rated current	
Mechanical		
Cord Accommodations	Round portable service cords of diameters in accordance with the device rating as defined in UL62	
Cord Grip Accommodations	.680"–1.125" diameter	
Terminal Identification	Color Coded Terminal Screws	
Terminal Accommodation	#10 AWG min. – #4 AWG max.	
Product Identification	Amperage, Voltage hot stamped on device	
Environmental		
Flammability	UL94 HB or better	
Operating Temperature	Maximum continuous: +75°C, Minimum: -40°C without impact	

TURNLOK® LOCKING DEVICES

Inlets Product Specifications & Performance & Horsepower Rating Chart

50 Amp Inlet

INLETS	
Flanged Casing	Nylon
Contact Carrier	Nylon
Blades	Brass
Terminal Clamps	Brass
Terminal Screws	Brass
Assembly Screws	Nickel-Plated Steel
PERFORMANCE	
Electrical	
Dielectric Withstand Voltage	3000V minimum
Maximum Working Voltage	600VAC
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	30°C maximum after 50 cycles at 150% rated current
MECHANICAL	
Terminal Accommodation	#10 AWG min. – #4 AWG max.
Product Identification	Amperage, Voltage hot stamped onto face
ENVIRONMENTAL	
Flammability	UL94 V0
Operating Temperature	Maximum continuous: +75°C, Minimum: -40°C without impact

Turnlok Horsepower Rating for NEMA Configuration Attachment Plugs & Receptacles

NEMA Configuration	AC HP Rating	NEMA Configuration	AC HP Rating
L1-15	1/2	**L21-20**	2
L5-15	1/2	**L22-20**	5
L6-15	1 1/2*	**L5-30**	2
L7-15	2	**L6-30**	2*
L2-20	2*	**L7-30**	3
L5-20	1	**L8-30**	5
L6-20	2*	**L10-30**	2 Line to Line*
L7-20	2		2 Line to Neutral
L8-20	3	**L11-30**	3
L10-20	2 Line to Line*	**L12-30**	10
	1 Line to Neutral	**L14-30**	2 Line to Line*
L11-20	3	**L15-30**	3
L12-20	5	**L16-30**	10
L14-20	2 Line to Line*	**L18-30**	3
L15-20	3	**L19-30**	10
L16-20	5	**L21-30**	3
L18-20	2	**L22-30**	10
L19-20	5		

*Suitable for 208V motor applications at the HP rating specified.

CAM-TYPE DEVICES



Pass & Seymour Cam-Type Devices are built with top-quality materials for enhanced durability and service life, with increased insulation protection for safety.



CAM-TYPE DEVICES

SERIES 15

In-Line Connectors, Protective Caps, & Adapters	D-61
Panel Mounts & Accessories	D-62

SERIES 16

In-Line Connectors	D-64
Panel Mounts	D-65
Protective Caps & Adapters	D-66
Flip Lid Covers	D-67
45° Angled Receptacles	D-68
Accessories	D-69

SERIES 18

In-Line Connectors	D-70



REFERENCE

REFERENCE TABLES

Dimensional Drawings	D-71

CAM-TYPE DEVICES

Series 15 In-Line Connectors, Protective Caps & Adapters

PSM2MBK



PSM2FBK

PSMFCBK



PSMMCBK

PSMADMF



PSMADFM

Features

- Thermoplastic elastomer housing for outstanding impact and chemical resistance, as well as an exceptional seal for maintaining NEMA Type 3R and 4 integrity.
- Non-conductive retaining screw helps to insure no contact with live parts, along with providing stability to the fully assembled product.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws allow greater termination torque.
- Copper wire provides quality strain relief.
- Copper shim bundles wire strands to reduce "splaying."

CATALOG NUMBER	RATING A.	RATING V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL	3rd PARTY COMPLIANCE cCSAus
SERIES 15 IN-LINE CONNECTORS – MALE						
PSM2MBK	150	600	#8 – #2	Black	•	•
PSM2MW	150	600	#8 – #2	White	•	•
PSM2MR	150	600	#8 – #2	Red	•	•
PSM2MBL	150	600	#8 – #2	Blue	•	•
PSM2MG	150	600	#8 – #2	Green	•	•
SERIES 15 IN-LINE CONNECTORS – FEMALE						
PSM2FBK	150	600	#8 – #2	Black	•	•
PSM2FW	150	600	#8 – #2	White	•	•
PSM2FR	150	600	#8 – #2	Red	•	•
PSM2FBL	150	600	#8 – #2	Blue	•	•
PSM2FG	150	600	#8 – #2	Green	•	•

CATALOG NUMBER	COLOR
SERIES 15 PROTECTIVE CAPS – MALE	
PSMMCBK	Black
SERIES 15 PROTECTIVE CAPS – FEMALE	
PSMFCBK	Black

Other colors available, please contact factory.

CATALOG NUMBER	RATING	COLOR
SERIES 15 ADAPTERS – CAM REDUCERS		
PSMADMFBK	400A M – 150A F	Black
PSMADMFW	400A M – 150A F	White
PSMADMFR	400A M – 150A F	Red
PSMADMFBL	400A M – 150A F	Blue
PSMADMFG	400A M – 150A F	Green
PSMADFMBK	400A F – 150A M	Black
PSMADFMW	400A F – 150A M	White
PSMADFMR	400A F – 150A M	Red
PSMADFMBL	400A F – 150A M	Blue
PSMADFMG	400A F – 150A M	Green


CAM-TYPE DEVICES

Series 15 Panel Mounts & Accessories



PSMMRSBK

PSMFRSBK



PS430244



PS430246



PS430171

*For double set screw, dimension is 1.000".

Features

- Nylon housing provides outstanding impact and chemical resistance.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws (available on double set screw version only) allow greater termination torque.

CATALOG NUMBER	RATING A.	RATING V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL	3rd PARTY COMPLIANCE cCSAus
SERIES 15 THREADED STUD PANEL MOUNTS – MALE						
PSMMRSBK	150	600	#8 – #2	Black	•	•
PSMMRSW	150	600	#8 – #2	White	•	•
PSMMRSR	150	600	#8 – #2	Red	•	•
PSMMRSBL	150	600	#8 – #2	Blue	•	•
PSMMRSG	150	600	#8 – #2	Green	•	•
SERIES 15 THREADED STUD PANEL MOUNTS – FEMALE						
PSMFRSBK	150	600	#8 – #2	Black	•	•
PSMFRSW	150	600	#8 – #2	White	•	•
PSMFRSR	150	600	#8 – #2	Red	•	•
PSMFRSBL	150	600	#8 – #2	Blue	•	•
PSMFRSG	150	600	#8 – #2	Green	•	•
SERIES 15 DOUBLE SET SCREW PANEL MOUNTS – MALE						
PSMMRBK	150	600	#8 – #2	Black	•	•
PSMMRW	150	600	#8 – #2	White	•	•
PSMMRR	150	600	#8 – #2	Red	•	•
PSMMRBL	150	600	#8 – #2	Blue	•	•
PSMMRG	150	600	#8 – #2	Green	•	•
SERIES 15 DOUBLE SET SCREW PANEL MOUNTS – FEMALE						
PSMFRBK	150	600	#8 – #2	Black	•	•
PSMFRW	150	600	#8 – #2	White	•	•
PSMFRR	150	600	#8 – #2	Red	•	•
PSMFRBL	150	600	#8 – #2	Blue	•	•
PSMFRG	150	600	#8 – #2	Green	•	•

CATALOG NUMBER	DESCRIPTION
SERIES 15 ACCESSORIES	
PS430246	Series 15 Strain Relief Wire
PS430244	Copper Shim
PS430171	Series 15 Set Screw

CAM-TYPE DEVICES

Series 16 In-Line Connectors

A. Thermoplastic elastomer housing is chemical- and impact-resistant.

B. Non-conductive retaining screw insures stability of the fully assembled product.

C. Heavy-duty brass contacts provide superior and consistent conductivity.

Rounded back contour reduces snags and hang-ups on the job site.

Impact- and corrosion-resistant durable nylon 6/6 shell material.




Heavy-duty hex set screws allow greater termination torque.



Copper shim bundles wire strands to reduce "splaying."

Copper wire provides superior strain relief.

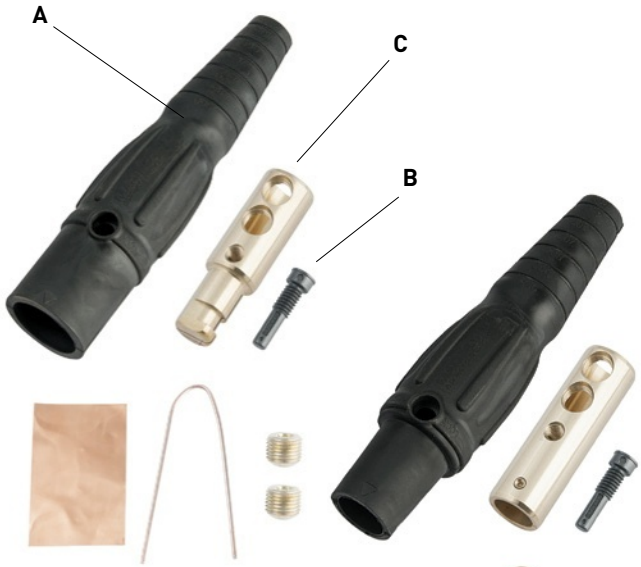

PS40MBBK
(unassembled)



PS40FBBK
(unassembled)



PS45MRBBK



PS45FRBBK

- **45° Angled Version** is perfect for applications where cables protruding 90° from the panel is impractical.
- Solid one-piece brass contacts provide superior and consistent connection under the most extreme conditions.
- Intermateable and compatible with competitive cam-type products.

CAM-TYPE DEVICES

Series 16 In-Line Connectors



PS40MBBK
(unassembled)



PS40FBBK
(unassembled)



PS40MBR
(unassembled)

Features

- Thermoplastic elastomer housing for outstanding impact and chemical resistance, as well as an exceptional seal for maintaining NEMA Type 3R and 4 integrity.
- Non-conductive retaining screw helps to insure no contact with live parts, along with providing stability to the fully assembled product.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws allow greater termination torque.
- Copper wire provides quality strain relief.
- Copper shim bundles wire strands to reduce "splaying."

CATALOG NUMBER	RATING* A.	RATING* V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL	3rd PARTY COMPLIANCE cCSAus
SERIES 16 IN-LINE CONNECTORS – MALE						
PS20MBBK	400	600	#2 - 2/0	Black	•	•
PS20MBW	400	600	#2 - 2/0	White	•	•
PS20MBR	400	600	#2 - 2/0	Red	•	•
PS20MBBL	400	600	#2 - 2/0	Blue	•	•
PS20MBG	400	600	#2 - 2/0	Green	•	•
PS20MBBR	400	600	#2 - 2/0	Brown	•	•
PS20MBO	400	600	#2 - 2/0	Orange	•	•
PS20MBY	400	600	#2 - 2/0	Yellow	•	•
PS40MBBK	400	600	2/0 - 4/0	Black	•	•
PS40MBW	400	600	2/0 - 4/0	White	•	•
PS40MBR	400	600	2/0 - 4/0	Red	•	•
PS40MBBL	400	600	2/0 - 4/0	Blue	•	•
PS40MBG	400	600	2/0 - 4/0	Green	•	•
PS40MBBR	400	600	2/0 - 4/0	Brown	•	•
PS40MBO	400	600	2/0 - 4/0	Orange	•	•
PS40MBY	400	600	2/0 - 4/0	Yellow	•	•

*All ratings both AC/DC.

CATALOG NUMBER	RATING* A.	RATING* V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE cULUS	3rd PARTY COMPLIANCE cCSAus
SERIES 16 IN-LINE CONNECTORS – FEMALE						
PS20FBBK	400	600	#2 - 2/0	Black	•	•
PS20FBW	400	600	#2 - 2/0	White	•	•
PS20FBR	400	600	#2 - 2/0	Red	•	•
PS20FBBL	400	600	#2 - 2/0	Blue	•	•
PS20FBG	400	600	#2 - 2/0	Green	•	•
PS20FBBR	400	600	#2 - 2/0	Brown	•	•
PS20FBO	400	600	#2 - 2/0	Orange	•	•
PS20FBY	400	600	#2 - 2/0	Yellow	•	•
PS40FBBK	400	600	2/0 - 4/0	Black	•	•
PS40FBW	400	600	2/0 - 4/0	White	•	•
PS40FBR	400	600	2/0 - 4/0	Red	•	•
PS40FBBL	400	600	2/0 - 4/0	Blue	•	•
PS40FBG	400	600	2/0 - 4/0	Green	•	•
PS40FBBR	400	600	2/0 - 4/0	Brown	•	•
PS40FBO	400	600	2/0 - 4/0	Orange	•	•
PS40FBY	400	600	2/0 - 4/0	Yellow	•	•

CAM-TYPE DEVICES

Series 16 Panel Mounts



PS40MRSBBK



PS40FRSBBK



PS40MRBBK PS40FRBBK

Features

- Nylon housing provides outstanding impact and chemical resistance.
- Heavy-duty brass male and female contacts provide a superior and consistent means of conductivity.
- Heavy-duty hex set screws (available on double set screw version only) allow greater termination torque.

CATALOG NUMBER	RATING* A.	V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL	cUL
SERIES 16 THREADED STUD PANEL MOUNTS – MALE						
PS40MRSBBK	400	600	#2 - 4/0	Black	•	•
PS40MRSBW	400	600	#2 - 4/0	White	•	•
PS40MRSBR	400	600	#2 - 4/0	Red	•	•
PS40MRSBBL	400	600	#2 - 4/0	Blue	•	•
PS40MRSBG	400	600	#2 - 4/0	Green	•	•
PS40MRSBO	400	600	#2 - 4/0	Orange	•	•
PS40MRSBY	400	600	#2 - 4/0	Yellow	•	•
SERIES 16 THREADED STUD PANEL MOUNTS – FEMALE						
PS40FRSBBK	400	600	#2 - 4/0	Black	•	•
PS40FRSBW	400	600	#2 - 4/0	White	•	•
PS40FRSBR	400	600	#2 - 4/0	Red	•	•
PS40FRSBBL	400	600	#2 - 4/0	Blue	•	•
PS40FRSBG	400	600	#2 - 4/0	Green	•	•
PS40FRSBBR	400	600	#2 - 4/0	Brown	•	•
PS40FRSBO	400	600	#2 - 4/0	Orange	•	•
PS40FRSBY	400	600	#2 - 4/0	Yellow	•	•

CATALOG NUMBER	RATING* A.	V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL	cUL
SERIES 16 DOUBLE SET SCREW PANEL MOUNTS – MALE						
PS40MRBBK	400	600	2/0 - 4/0	Black	•	•
PS40MRBW	400	600	2/0 - 4/0	White	•	•
PS40MRBR	400	600	2/0 - 4/0	Red	•	•
PS40MRBBL	400	600	2/0 - 4/0	Blue	•	•
PS40MRBG	400	600	2/0 - 4/0	Green	•	•
PS40MRBBR	400	600	2/0 - 4/0	Brown	•	•
PS40MRBO	400	600	2/0 - 4/0	Orange	•	•
PS40MRBY	400	600	2/0 - 4/0	Yellow	•	•
SERIES 16 DOUBLE SET SCREW PANEL MOUNTS – FEMALE						
PS40FRBBK	400	600	2/0 - 4/0	Black	•	•
PS40FRBW	400	600	2/0 - 4/0	White	•	•
PS40FRBR	400	600	2/0 - 4/0	Red	•	•
PS40FRBBL	400	600	2/0 - 4/0	Blue	•	•
PS40FRBG	400	600	2/0 - 4/0	Green	•	•
PS40FRBBR	400	600	2/0 - 4/0	Brown	•	•
PS40FRBO	400	600	2/0 - 4/0	Orange	•	•
PS40FRBY	400	600	2/0 - 4/0	Yellow	•	•

*All ratings both AC/DC.

CAM-TYPE DEVICES

Series 16 Protective Caps & Adapters

PS40FCBK



PS40MCBK





PSPTBK

PSTTBK



PS3MG

PS3FBK

PSMMBK



PSFFCBK

CATALOG NUMBER	COLOR	3rd PARTY COMPLIANCE cCSAus
SERIES 16 M-F-F TAPPING "T" ADAPTERS		
PSTTBK	Black	•
PSTTW	White	•
PSTTR	Red	•
PSTTBL	Blue	•
PSTTG	Green	•
PSTTBR	Brown	•
PSTTY	Yellow	•
SERIES 16 M-M-F PARALLELING "T" ADAPTERS		
PSPTBK	Black	•
PSPTBR	Brown	•
PSPTO	Orange	•
PSPTY	Yellow	•
SERIES 16 F-M-M-M 3FER ADAPTERS		
PS3MW	White	
PS3MG	Green	
SERIES 16 M-F-F-F 3FER ADAPTERS		
PS3FBK	Black	•
PS3FW	White	•
PS3FR	Red	•
PS3FBL	Blue	•
PS3FG	Green	•
PS3FBR	Brown	•
PS3FO	Orange	•
PS3FY	Yellow	•
SERIES 16 MALE-TO-MALE COUPLER		
PSMMBK	Black	•
PSMMW	White	•
PSMMR	Red	•
PSMMBL	Blue	•
PSMMG	Green	•
SERIES 16 FEMALE-TO-FEMALE COUPLER		
PSFFCBK	Black	•
PSFFCW	White	•
PSFFCR	Red	•
PSFFCBL	Blue	•
PSFFCG	Green	•

CATALOG NUMBER	COLOR
SERIES 16 PROTECTIVE CAPS – MALE	
PS40MCBK	Black
PS40MCW	White
PS40MCR	Red
PS40MCBL	Blue
PS40MCG	Green
PS40MCBR	Brown
PS40MCO	Orange
PS40MCY	Yellow

CATALOG NUMBER	COLOR
SERIES 16 PROTECTIVE CAPS – FEMALE	
PS40FCBK	Black
PS40FCW	White
PS40FCR	Red
PS40FCBL	Blue
PS40FCG	Green
PS40FCBR	Brown
PS40FCO	Orange
PS40FCY	Yellow


CAM-TYPE DEVICES

Series 16 Flip Lid Covers

Description

Manufactured in UV-resistant polycarbonate, all snap back plastic covers are made with stainless steel offset, spring and pin. Designed for surface mount or internal mount, the new snap back plastic covers are fully gasketed and NEMA 3R rated for weathertight protection.

CATALOG NUMBER	COLOR
PLASTIC FLIP LID, THROUGH-MOUNT FOR .070–.090 WALL THICKNESS	
PS40WTCLBK	Black
PS40WTCLW	White
PS40WTCLR	Red
PS40WTCLBL	Blue
PS40WTCLG	Green
PS40WTCLBR	Brown
PS40WTCLO	Orange
PS40WTCLY	Yellow
PLASTIC FLIP LID, THROUGH-MOUNT FOR .370–.400 WALL THICKNESS	
PS40WTCSBK	Black
PS40WTCSW	White
PS40WTCSR	Red
PS40WTCSBL	Blue
PS40WTCSG	Green
PS40WTCSBR	Brown
PS40WTCSO	Orange
PS40WTCSY	Yellow
PANEL-MOUNT NEMA 3R NON-METALLIC FLIP-LID COVERS	
PS40CLL3RBK	Black
PS40CLL3RBL	Blue
PS40CLL3RG	Green
PS40CLL3RBR	Brown
PS40CLL3RR	Red
PS40CLL3RO	Orange
PS40CLL3RW	White
PS40CLL3RY	Yellow
PS40CLL3RCL	Clear



PS40WTCL



PS40CLL3R

CAM-TYPE DEVICES

45° Angled Receptacles



PS45MRBBK



PS45FRBBK

Features

- Type 3R Rated for Indoor and Outdoor use.
- Solid one-piece brass contacts provide superior and consistent connection under the most extreme conditions.
- Housing is made of Santoprene for outstanding impact and chemical resistance.
- Heavy-duty hex set screws (available on double set version only) allow greater termination torque.
- Brass eyelets for #10-32 mounting through bolts (bolts not provided).


CATALOG NUMBER	RATING* A.	RATING* V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL 498 UL 1682	3rd PARTY COMPLIANCE CSA 22.2 No. 65-93 CSA 22.2 No. 94-M91 CSA 22.2 No. 182-1988
SERIES 16 45° 1 1/8" THREADED STUD PANEL MOUNT - MALE						
PS45MRSBBK	400	600	2/0 - 4/0	Black	•	•
PS45MRSBW	400	600	2/0 - 4/0	White	•	•
PS45MRSBR	400	600	2/0 - 4/0	Red	•	•
PS45MRSBBL	400	600	2/0 - 4/0	Blue	•	•
PS45MRSBG	400	600	2/0 - 4/0	Green	•	•
SERIES 16 45° 2" THREADED STUD PANEL MOUNT - MALE						
PS45MR2SBBK	400	600	2/0 - 4/0	Black	•	•
PS45MR2SBW	400	600	2/0 - 4/0	White	•	•
PS45MR2SBR	400	600	2/0 - 4/0	Red	•	•
PS45MR2SBBL	400	600	2/0 - 4/0	Blue	•	•
PS45MR2SBG	400	600	2/0 - 4/0	Green	•	•
SERIES 16 45° 1 1/8" THREADED STUD PANEL MOUNT - FEMALE						
PS45FRSBBK	400	600	2/0 - 4/0	Black	•	•
PS45FRSBW	400	600	2/0 - 4/0	White	•	•
PS45FRSBR	400	600	2/0 - 4/0	Red	•	•
PS45FRSBBL	400	600	2/0 - 4/0	Blue	•	•
PS45FRSBG	400	600	2/0 - 4/0	Green	•	•
SERIES 16 45° 2" THREADED STUD PANEL MOUNT - FEMALE						
PS45FR2SBBK	400	600	2/0 - 4/0	Black	•	•
PS45FR2SBW	400	600	2/0 - 4/0	White	•	•
PS45FR2SBR	400	600	2/0 - 4/0	Red	•	•
PS45FR2SBBL	400	600	2/0 - 4/0	Blue	•	•
PS45FR2SBG	400	600	2/0 - 4/0	Green	•	•
SERIES 16 45° DOUBLE SET SCREW PANEL MOUNT - MALE						
PS45MRBBK	400	600	2/0 - 4/0	Black	•	•
PS45MRBW	400	600	2/0 - 4/0	White	•	•
PS45MRBR	400	600	2/0 - 4/0	Red	•	•
PS45MRBBL	400	600	2/0 - 4/0	Blue	•	•
PS45MRBG	400	600	2/0 - 4/0	Green	•	•
SERIES 16 45° DOUBLE SET SCREW PANEL MOUNT - FEMALE						
PS45FRBBK	400	600	2/0 - 4/0	Black	•	•
PS45FRBW	400	600	2/0 - 4/0	White	•	•
PS45FRBR	400	600	2/0 - 4/0	Red	•	•
PS45FRBBL	400	600	2/0 - 4/0	Blue	•	•
PS45FRBG	400	600	2/0 - 4/0	Green	•	•

CAM-TYPE DEVICES

Series 16 Accessories




PS430245



PS430244



PS520710



PS16CLM

PS16CLF

CATALOG NUMBER	DESCRIPTION
SERIES 16 ACCESSORIES	
PS430245	Series 16 Strain Relief Wire
PS430244	Copper Shim
PS520710	Series 16 Retaining Screw
PS16CLM	Male Connector Extractor
PS16CLF	Female Connector Extractor

CAM-TYPE DEVICES

Series 18 In-Line Connectors Weatherproof



PLS182MBK



PLS182FBK

CATALOG NUMBER	RATING* A.	RATING* V.	CABLE SIZE	COLOR	3rd PARTY COMPLIANCE UL	cUL	cCSAus
SERIES 18 IN-LINE CONNECTORS – MALE							
PLS182MBK	400	600	#6 – #2	Black	•	•	•
PLS182MW	400	600	#6 – #2	White	•	•	•
PLS182MR	400	600	#6 – #2	Red	•	•	•
PLS182MBL	400	600	#6 – #2	Blue	•	•	•
PLS182MG	400	600	#6 – #2	Green	•	•	•
PLS1820MBK	400	600	#2 – 2/0	Black	•	•	•
PLS1820MW	400	600	#2 – 2/0	White	•	•	•
PLS1820MR	400	600	#2 – 2/0	Red	•	•	•
PLS1820MBL	400	600	#2 – 2/0	Blue	•	•	•
PLS1820MG	400	600	#2 – 2/0	Green	•	•	•
PLS1840MBK	400	600	4/0	Black	•	•	•
PLS1840MBL	400	600	4/0	Blue	•	•	•
SERIES 18 IN-LINE CONNECTORS – FEMALE							
PLS182FBK	400	600	#6 – #2	Black	•	•	•
PLS182FW	400	600	#6 – #2	White	•	•	•
PLS182FR	400	600	#6 – #2	Red	•	•	•
PLS182FBL	400	600	#6 – #2	Blue	•	•	•
PLS182FG	400	600	#6 – #2	Green	•	•	•
PLS1820FBK	400	600	#2 – 2/0	Black	•	•	•
PLS1820FW	400	600	#2 – 2/0	White	•	•	•
PLS1820FR	400	600	#2 – 2/0	Red	•	•	•
PLS1820FBL	400	600	#2 – 2/0	Blue	•	•	•
PLS1820FG	400	600	#2 – 2/0	Green	•	•	•
PLS1840FBK	400	600	4/0	Black	•	•	•
PLS1840FBL	400	600	4/0	Blue	•	•	•

*All ratings both AC/DC.


Features

- Interchangeable with Canadian CAM devices from other manufacturers.
- Ball nose design achieves NEMA 3R,4 rating.
- Designed specifically for Sea Way cable.
- Accepts #6 through 4/0 size wire.
- Double set screws for premium wire retention.
- Locking screw prevents contact from rotating inside housing.

CAM-TYPE DEVICES


Dimenstional Dawings

Series 16 Inline Connectors

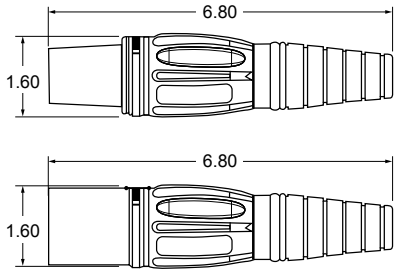


PS20MB, PS20FB
PS40MB, PS40FB

Series 18 Inline Connectors

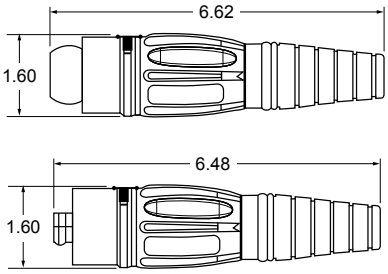


PLS182M, PLS182F
PLS1820M, PLS1820F
PLS1840M, PLS1840F

Series 15 Inline Connectors




PSM2M, PSM2F


Series 16 Panel Mounts



PS40MRB, PS40FRB




PS40MRSB, PS40FRSB




Series 16 Panel Mount
Family Cut-out


Series 15 Panel Mounts



PSMMRS, PSMFRS




PSMMR, PSMFR




Series 15 Panel Mount
Family Cut-out


Series 16 45 Degree Panel Mounts



PS45MRS, PS45FRS

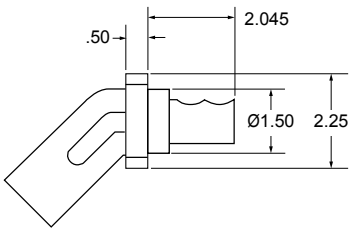


PS45MRB, PS45FRB

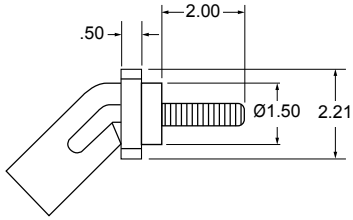

PS45MR2S, PS45FR2S

PIN & SLEEVE DEVICES/MECHANICAL INTERLOCKS



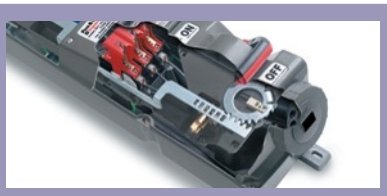


MECHANICAL INTERLOCKS

Fusible Mechanical Interlock	D-73
Non-Fusible Mechanical Interlock	D-78



PIN & SLEEVE DEVICES

WATERTIGHT	
North American Devices	D-85
International Devices	D-87
SPLASHPROOF	
North American Ordering Information	D-89
International Devices	D-90

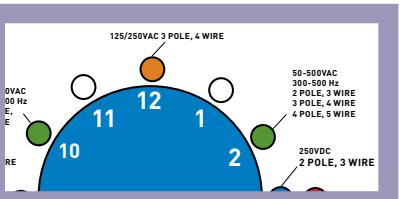

REFERENCE TABLES

REFERENCE TABLES	
Configuration Standards	D-91
Clocking System	D-92
Watertight Dimensional Information	D-93
Splashproof Dimensional Information	D-94
Watertight and Splashproof Material & Performance	D-95
Accessories/Dimensional Information	D-96
Technical Specifications	D-98
Product Selection Guide	D-100

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Mechanical Interlock



See everything you're looking for in a Fusible Mechanical Interlock. Even if it's a blown fuse.

Introducing the first interlocks to include visible blown-fuse indication, a hinged, easy-access fuse door, and integral fuse pullers. At last, you can easily locate and replace a blown fuse in less than a minute.

Of course, saving time isn't your only challenge. You face dirt and dust. Corrosive liquids or vapors. Water or high humidity. Heat. Vibration. And impacts. No wonder ensuring safe, dependable, locally fused power to portable industrial equipment can be tough! But now, these unique P&S Fusible Mechanical Interlocks bring you a better solution.


Here's the extra-rugged construction to stand up to the toughest plant environments. Complete IEC 309 interchangeability. And an easy-installing design that fits into most I-beams. Choose these 20 to 100 amp NEMA 4X and 12 watertight-rated Fusible Mechanical Interlocks for your most demanding applications — and Legrand's Pass & Seymour® devices are "designed to be better."

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Mechanical Interlock

Fusible Mechanical Interlock Operating Sequence

1. When there is no plug in the device, the lock tab is in the "off" position and prevents the lock gear from turning. The handle cannot be moved to the "on" position.
2. Upon inserting a plug, the lock tab moves from the "off" position, freeing the lock gear.
3. The handle can then be moved to the "on" position. This rotates the lock gear and engages the key on the plug to prevent it from being removed. At the same time, the rack is actuated and rotates the switch gear, turning on the switch and inducing power.
4. Returning the handle to the "off" position frees the lock gear, disengaging the plug key from the switch and allowing the plug to be removed.

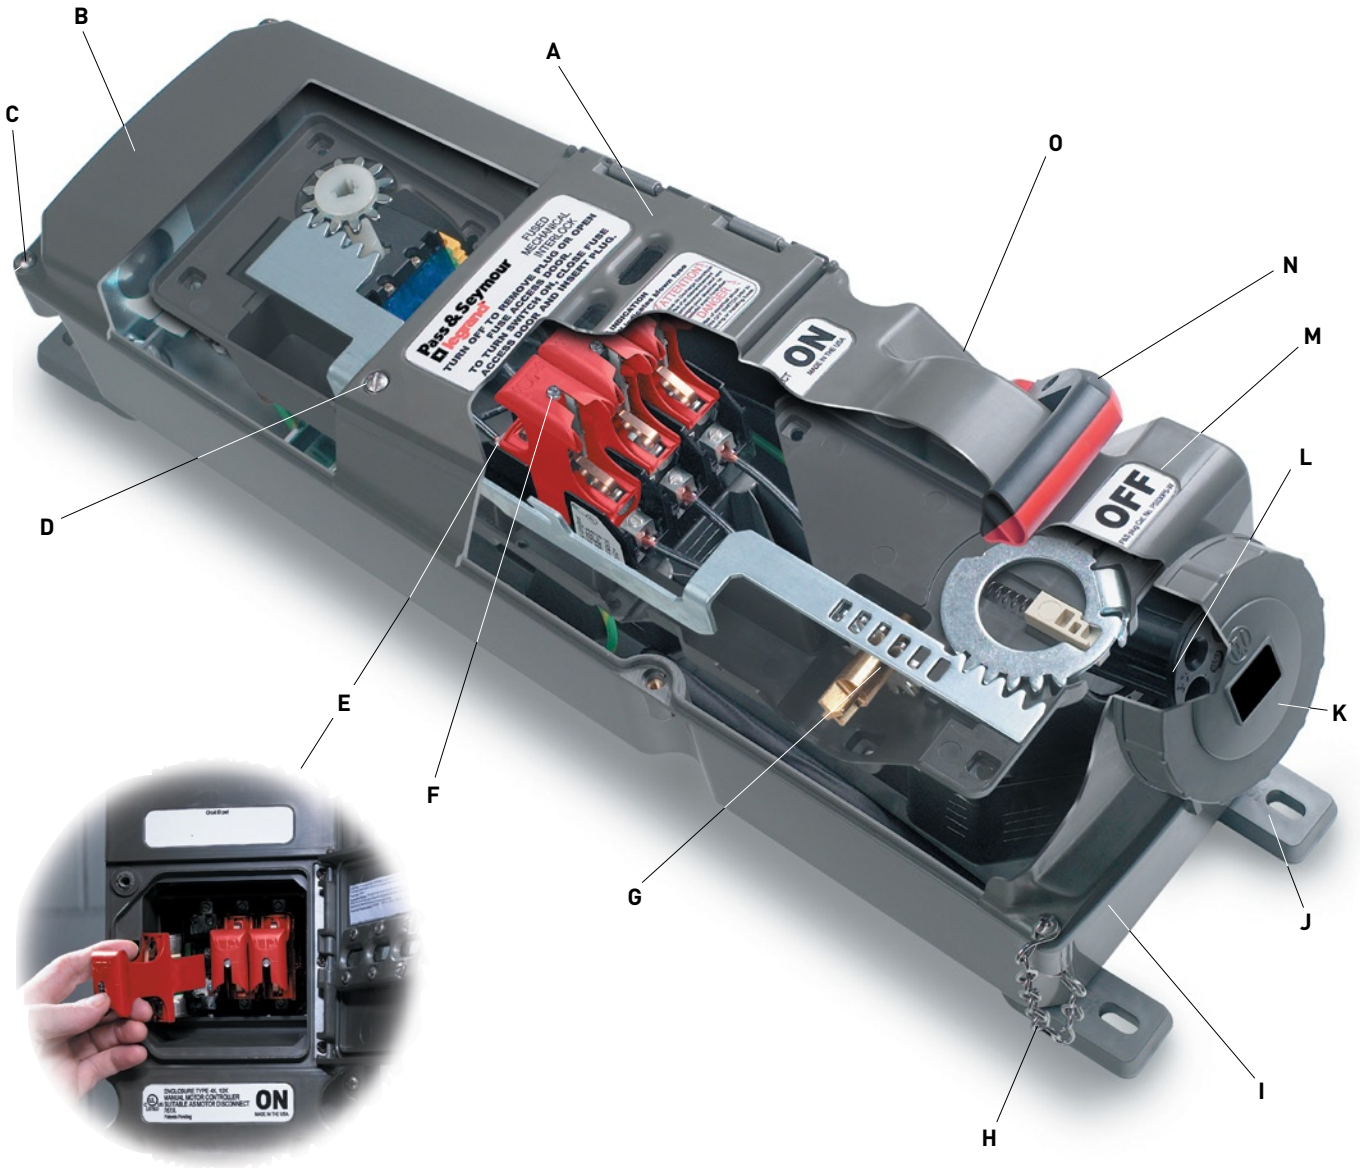

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Mechanical Interlock

Fusible Mechanical Interlock Features:

A. Hinged access door with windows allows clear viewing of blown-fuse LED indicators and provides fast, easy access to fuse pullers.

B. Compact design fits in most I-beams to provide mounting versatility, easy access, and reduced possibility of impact damage.

C. Corrosion-resistant, stainless steel captive screws speed installation, minimize risk of lost parts, and withstand abuse.

D. Captive, quick-release, stainless steel screws speed fuse removal, ensure a watertight access door seal, and won't fall out.

E. Patent-pending integral fuse pullers with easy-grip ergonomics make removing and replacing blown fuses simple, comfortable, and quick.

F. Time-saving LED indicators identify blown fuses at a glance.

G. Heavy-duty, steel-geared switch mechanism provides enhanced durability and extra-long service life.

H. Durable, stainless steel cover-retaining chain makes installation and maintenance more convenient.

I. Easy to drill for bottom wiring access, top wiring access — or both. Only one catalog number per amp rating — simplifies ordering and provides maximum application flexibility.

J. Adjustable mounting feet can be moved to center of unit for instant strut- or pole-mounting without special brackets or harnesses. Oversized foot design eliminates the need for washers.

K. Completely interchangeable with all manufacturers' IEC 309-1 and 309-2 plugs for economy and versatility.

L. Durable brass/nickel-plated contacts ensure reliable, long-lasting electrical performance and corrosion resistance.

M. Color-coded label clearly identifies voltage rating of mating IEC plug for fast identification.

N. Heavy-duty, ergonomic switch handle meets OSHA Lockout/ Tagout requirements and provides plenty of grip for sure, easy operation. Black/red color coding and high-visibility ON/OFF markings clearly indicate status from a distance and at any visual angle.

O. Nonconductive, watertight, corrosion- and impact-resistant Valox® enclosure ensures NEMA 4X and 12 ratings. Withstands the harshest industrial environments.

Valox® is a registered trademark of the General Electric Co.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS


Fusible Mechanical Interlock Ordering Information & Dimensions

POLES/WIRES	VOLTAGE	STANDARD HORSEPOWER RATING	MAXIMUM HORSEPOWER RATING	INTERLOCK RECEPTACLE CATALOG #	PIN & SLEEVE PLUG CATALOG #
20 AMPS					
3P4W	120/240VAC	1/4 HP @ 120VAC	1 HP @ 120VAC	PS420FMIR12W	PS420P12W
		1/2 HP @ 208VAC	2 HP @ 208VAC		
		1/2 HP @ 240VAC	2 HP @ 240VAC		
3P4W	3ø 240VAC	1 1/2 HP	5 HP	PS420FMIR9W	PS420P9W
3P4W	3ø 480VAC	3 HP	10 HP	PS420FMIR7W	PS420P7W
3P4W	3ø 600VAC	5 HP	15 HP	PS420FMIR5W	PS420P5W
30 AMPS					
2P3W	240VAC	1 HP @ 208VAC	3 HP @ 208VAC	PS330FMIR6W	PS330P6W
		1 1/2 HP @ 240VAC	3 HP @ 240VAC		
3P4W	120/240VAC	1/2 HP @ 120VAC	2 HP @ 120VAC	PS430FMIR12W	PS430P12W
		1 HP @ 208VAC	3 HP @ 208VAC		
		1 1/2 HP @ 240VAC	3 HP @ 240VAC		
3P4W	3ø 240VAC	3 HP	7 1/2 HP	PS430FMIR9W	PS430P9W
3P4W	3ø 480VAC	5 HP	15 HP	PS430FMIR7W	PS430P7W
3P4W	3ø 600VAC	7 1/2 HP	20 HP	PS430FMIR5W	PS430P5W
3P4W	380/440VAC	5 HP @ 380VAC	15 HP @ 380VAC	PS430FMIR3W	PS430P3W
		5 HP @ 440VAC	15 HP @ 440VAC		
4P5W	3øY 120/208VAC	2 HP	5 HP	PS530FMIR9W	PS530P9W
4P5W	3øY 277/480VAC	5 HP	15 HP	PS530FMIR7W	PS530P7W
4P5W	3øY 347/600VAC	7.5 HP	20 HP	PS530FMIR5W	PS530P5W
60 AMPS					
2P3W	240VAC	3 HP @ 208VAC	7 1/2 HP @ 208VAC	PS360FMIR6W	PS360P6W
		3 HP @ 240VAC	7 1/2 HP @ 240VAC		
3P4W	120/240VAC	1 1/2 HP @ 120VAC	3 HP @ 120VAC	PS460FMIR12W	PS460P12W
		3 HP @ 208VAC	7 1/2 HP @ 208VAC		
		3 HP @ 240VAC	10 HP @ 240VAC		
3P4W	3ø 240VAC	5 HP	15 HP	PS460FMIR9W	PS460P9W
3P4W	3ø 480VAC	10 HP	30 HP	PS460FMIR7W	PS460P7W
3P4W	3ø 600VAC	15 HP	40 HP	PS460FMIR5W	PS460P5W
4P5W	3øY 120/208VAC	5 HP	15 HP	PS560FMIR9W	PS560P9W
4P5W	3øY 277/480VAC	10 HP	30 HP	PS560FMIR7W	PS560P7W
4P5W	3øY 347/600VAC	15 HP	40 HP	PS560FMIR5W	PS560P5W
100 AMPS					
3P4W	120/240VAC	2 HP @ 120VAC	5 HP @ 120VAC	PS4100FMIR12W	PS4100P12W
		5 HP @ 208VAC	10 HP @ 208VAC		
		5 HP @ 240VAC	15 HP @ 240VAC		
3P4W	3ø 240VAC	10 HP	25 HP	PS4100FMIR9W	PS4100P9W
3P4W	3ø 480VAC	20 HP	50 HP	PS4100FMIR7W	PS4100P7W
3P4W	3ø 600VAC	30 HP	50 HP	PS4100FMIR5W	PS4100P5W
4P5W	3øY 120/208VAC	10 HP	20 HP	PS5100FMIR9W	PS5100P9W
4P5W	3øY 277/480VAC	20 HP	50 HP	PS5100FMIR7W	PS5100P7W
4P5W	3øY 347/600VAC	30 HP	50 HP	PS5100FMIR5W	PS5100P5W

(HP Ratings subject to change.)



Front



Side



Back

Fusible Mechanical Interlock Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
20	9.13	1.19	10.09	23.34	24.50	1.97	4.75	6.88	7.75	20.13	22.25	23.13
3 & 4 Wire - 30	9.13	1.19	9.53	23.69	24.50	1.97	4.75	6.88	7.75	20.13	22.25	23.13
5 Wire - 30	9.13	1.19	9.53	23.78	24.50	1.97	4.75	6.88	7.75	20.13	22.25	23.13
60	9.13	1.19	9.94	24.59	24.50	2.25	4.75	6.88	7.75	20.13	22.25	23.13
100	11.13	1.75	11.06	27.94	28.31	2.41	6.75	8.88	9.75	23.94	26.06	26.94

All measurements shown in inches.

Hub shown at bottom of unit for reference only; may be field-installed for top or bottom entry.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Mechanical Interlock Materials of Manufacture Typical/Sample Spec

Typical Specifications

- Manufacturer's Identification: Pass & Seymour® PS560FMIR5W
- Description: Fusible Pin & Sleeve Mechanical Interlock
- Electrical Type: 3 Pole + Neutral + Earth
- Rating: 60A 3ø 600VAC 15 HP standard, 50 HP maximum
- Configuration: IEC clock position 5
- Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67 suitability
- Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End user decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

MATERIALS	
Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Door	Valox 357®
Enclosure Gasket	Neoprene
Door Hinge	316 Stainless Steel
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Locktab	10% Glass-Filled Nylon
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Receptacle Lid	Valox 357®
Receptacle Gasketing	Neoprene
Receptacle Lid Hinge Spring	300 Series Stainless Steel
Receptacle Contact Carrier	Polyamide 6
Receptacle Sleeves	20-60 amp Brass/Nickel Plate 100 amp Brass/Silver Plate
Receptacle Terminal Screws	Zinc-Plated Steel
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc
	20/30 amp shipped with one (1) 1"
	60 amp shipped with one (1) $1^{1}/_{4}$"
	100 amp shipped with one (1) $1^{1}/_{2}$" (will also fit a 2" hub, not provided)
Viewing Slots in Fuse-Access Door	1/8" thick glass lens

PERFORMANCE	
Electrical:	
Fuse Type	Class "J"
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles
	Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL, CSA, and IEC specifications
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly wto channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown)
	Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt) IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C
	Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Mechanical Interlock



Performance and quality you can see at a distance. Now take a closer look.

P&S Non-Fusible Interlocks are easy to apply, thanks to their versatile, adjustable mounting feet, compact dimensions, and flexible wiring via either top or bottom feed. And once installed, they'll withstand tough conditions — including water in wash-down areas, contamination from shavings, dirt, and dust; accidental impacts, heat from furnaces, welding or other processes; and vibration from any type of equipment.

Here's the safety that goes beyond ordinary requirements. These Interlocks feature a patent-pending, tamper-resistant activating assembly and cover-integral switch mechanism that protect against unauthorized overrides. And high-visibility ON/OFF designations plus a hefty black/red handle make status easy to read at a glance.


Take a close look at our 20 to 100 amp Non-Fusible Interlocks — and see the design and construction that works for you.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Mechanical Interlock

Non-Fusible Mechanical Interlock Operating Sequence

1. When there is no plug in the device, the lock tab is in the "off" position and prevents the lock gear from turning. The handle cannot be moved to the "on" position.
2. Upon inserting a plug, the lock tab moves from the "off" position, freeing the lock gear.
3. The handle can then be moved to the "on" position. This rotates the lock gear and engages the key on the plug to prevent it from being removed. At the same time, the rack is actuated and rotates the switch gear, turning on the switch and inducing power.
4. Returning the handle to the "off" position frees the lock gear, disengaging the plug key from the switch and allowing the plug to be removed.

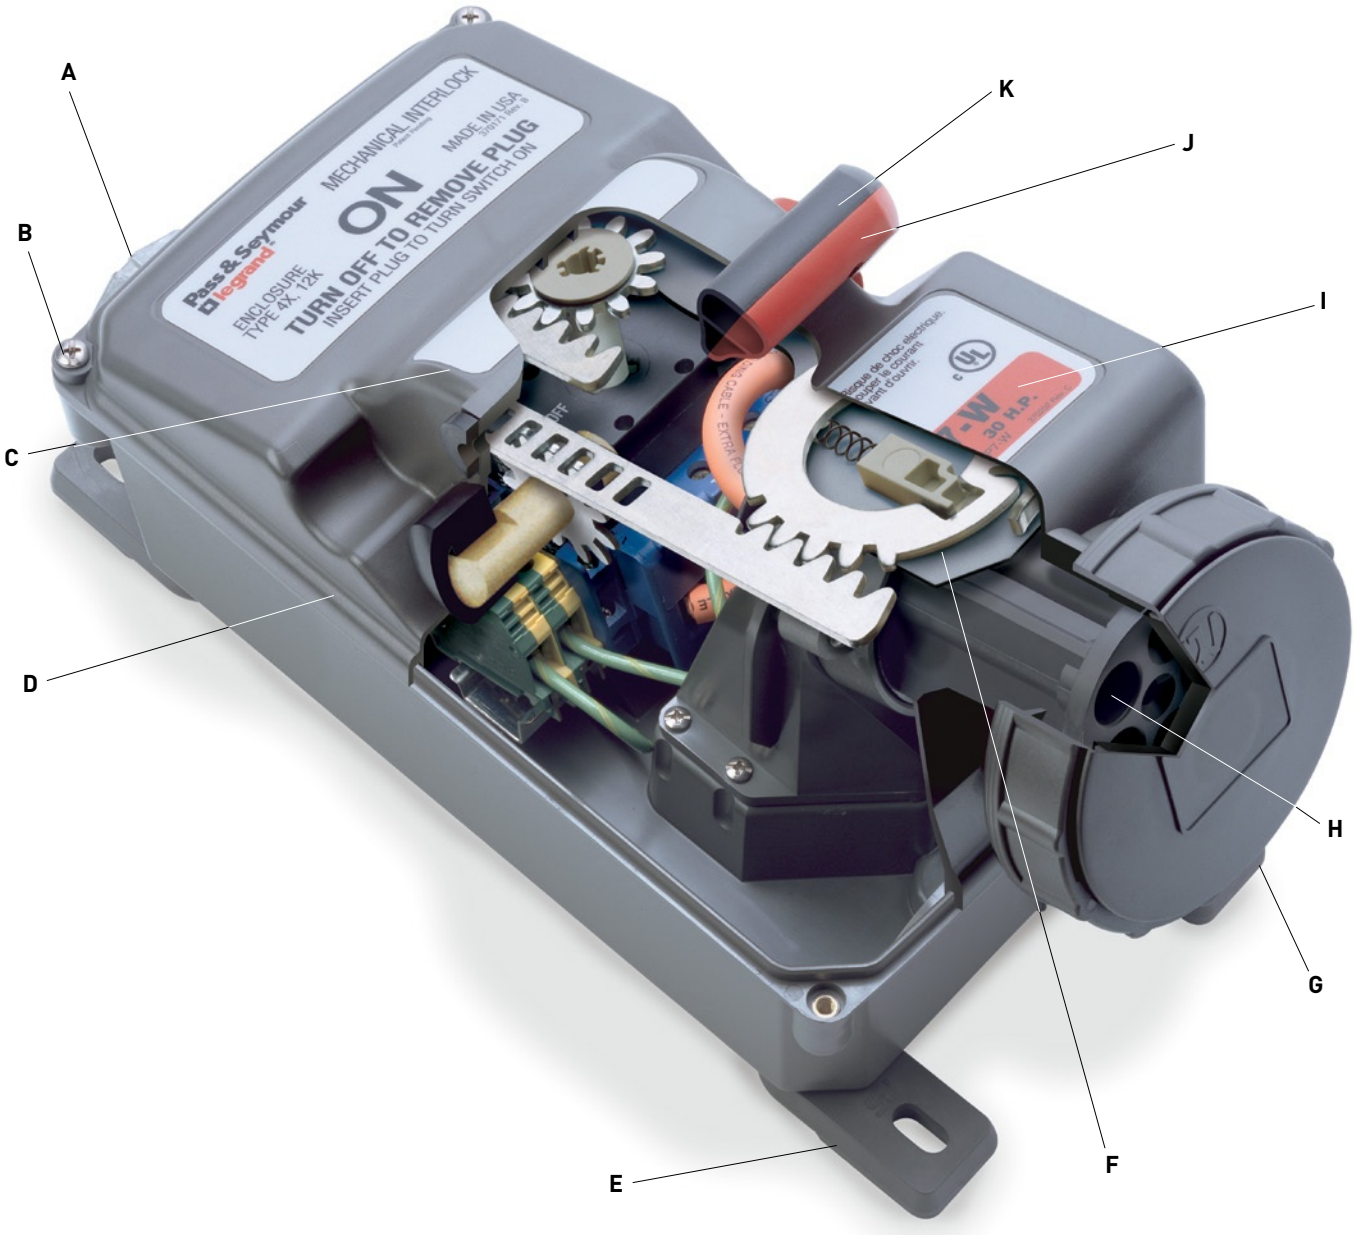

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

IP67 Suitability

Non-Fusible Mechanical Interlock

Non-Fusible Mechanical Interlock Features:

A. Top- or bottom-feed models offer installation flexibility and eliminate the need for time-consuming modifications like drilling and plugging that may nullify the NEMA 4X enclosure rating. Off-center cable entry directs condensation away from internal circuitry — reducing the risk of shorts and corrosion.

B. Stainless steel captive screws speed up installation, minimize risk of lost parts, and resist corrosion.

C. Exclusive circuit ID pad for fast identification of the motor circuit. Accepts preprinted labels or handwritten data.

D. Nonconductive, watertight, corrosion- and impact-resistant Valox® enclosure ensures NEMA 4X and 12 ratings, withstands the harshest industrial environments.

E. Adjustable mounting feet provide optimum flexibility when mounting to equipment and walls. Feet can also be moved to center of unit, for instant strut- or pole-mounting without special brackets or harnesses. And our oversized foot design eliminates the need for washers.

F. Patent-pending, tamper-resistant activating assembly and cover-integral switch mechanism protect against unauthorized overrides, ensuring operator safety.

G. Completely interchangeable with all manufacturers' IEC 309-1 and 309-2 plugs.

H. Durable brass/nickel-plated contacts ensure reliable, long-lasting electrical performance and corrosion resistance.

I. Label is color coded to correspond with the voltage ratings of all mating IEC plugs for easy visual identification.

J. Heavy-duty, lever-style switch handle ensures a firm grip — even with wet, greasy hands. Black/red color-coded handle and high-visibility ON/OFF markings clearly indicate power supply status from a distance and from all angles. Handle enters enclosure from one side to minimize damage due to frontal impacts; entry is offset and sealed to prevent moisture contamination during washdowns.

K. Handle meets OSHA Lockout/Tagout requirements.

Compact design doesn't protrude, avoids unnecessary knocks, allows for versatile mounting, and fits into standard I-beams and channels.

Top mount auxiliary contacts are standard to simplify ordering, purchasing, inventory, and installation requirements.


Stainless steel cover retaining chain allows for easy installation and maintenance.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS


Non-Fusible Mechanical Interlock Ordering Information & Dimensions

POLES/WIRES	VOLTAGE	HORSEPOWER RATING	RECEPTACLE CATALOG #	PIN & SLEEVE PLUG CATALOG #
20 AMPS				
2P3W	120VAC	1 HP	PS320MIR4W	PS320P4W
2P3W	240VAC	2 HP (208-240VAC)	PS320MIR6W	PS320P6W
2P3W	480VAC	5 HP	PS320MIR7W	PS320P7W
3P4W	120/240VAC	1 HP (120VAC); 2 HP (208-240VAC L-L)	PS420MIR12W	PS420P12W
3P4W	3ø 240VAC	5 HP	PS420MIR9W	PS420P9W
3P4W	3ø 480VAC	10 HP	PS420MIR7W	PS420P7W
3P4W	3ø 600VAC	15 HP	PS420MIR5W	PS420P5W
4P5W	3øY 120/208VAC	3 HP	PS520MIR9W	PS520P9W
30 AMPS				
2P3W	120VAC	2 HP	PS330MIR4W	PS330P4W
2P3W	240VAC	3 HP (208-240VAC)	PS330MIR6W	PS330P6W
2P3W	480VAC	7 1/2 HP	PS330MIR7W	PS330P7W
3P4W	120/240VAC	2 HP (120VAC); 3 HP (208-240VAC L-L)	PS430MIR12W	PS430P12W
3P4W	3ø 240VAC	7 1/2 HP	PS430MIR9W	PS430P9W
3P4W	3ø 480VAC	15 HP	PS430MIR7W	PS430P7W
3P4W	3ø 600VAC	20 HP	PS430MIR5W	PS430P5W
3P4W	380/440VAC	15 HP	PS430MIR3W	PS430P3W
4P5W	3øY 120/208VAC	5 HP	PS530MIR9W	PS530P9W
4P5W	3øY 277/480VAC	15 HP	PS530MIR7W	PS530P7W
4P5W	3øY 347/600VAC	20 HP	PS530MIR5W	PS530P5W
60 AMPS				
2P3W	120VAC	3 HP	PS360MIR4W	PS360P4W
2P3W	240VAC	7 1/2 HP (208-240VAC)	PS360MIR6W	PS360P6W
2P3W	480VAC	20 HP	PS360MIR7W	PS360P7W
3P4W	120/240VAC	3 HP (120VAC); 7 1/2 HP (208-240VAC L-L)	PS460MIR12W	PS460P12W
3P4W	3ø 240VAC	15 HP	PS460MIR9W	PS460P9W
3P4W	3ø 480VAC	30 HP	PS460MIR7W	PS460P7W
3P4W	3ø 600VAC	40 HP	PS460MIR5W	PS460P5W
4P5W	3øY 120/208VAC	15 HP	PS560MIR9W	PS560P9W
4P5W	3øY 277/480VAC	30 HP	PS560MIR7W	PS560P7W
4P5W	3øY 347/600VAC	40 HP	PS560MIR5W	PS560P5W
100 AMPS				
2P3W	120VAC	5 HP	PS3100MIR4W	PS3100P4W
2P3W	240VAC	10 HP (208VAC); 15 HP (240VAC)	PS3100MIR6W	PS3100P6W
2P3W	480VAC	30 HP	PS3100MIR7W	PS3100P7W
3P4W	3ø 600VAC	50 HP	PS4100MIR5W	PS4100P5W
3P4W	3ø 480VAC	50 HP	PS4100MIR7W	PS4100P7W
3P4W	3ø 240VAC	25 HP	PS4100MIR9W	PS4100P9W
3P4W	120/240VAC	5 HP (120VAC); 10 HP (208VAC L-L); 15 HP (240VAC L-L)	PS4100MIR12W	PS4100P12W
4P5W	3øY 347/600VAC	50 HP	PS5100MIR5W	PS5100P5W
4P5W	3øY 277/480VAC	50 HP	PS5100MIR7W	PS5100P7W
4P5W	3øY 120/208VAC	20 HP	PS5100MIR9W	PS5100P9W


All products are top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locking hole saw or knockout. End user decides whether top or bottom feed is appropriate. No closure plug kits required. HP ratings subject to change.



Front



Side



Back

(See dimensions in chart on D-82)

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Mechanical Interlock Materials of Manufacture Typical/Sample Spec

Typical Specifications

- Manufacturer's Identification: Pass & Seymour® PS560MIR5W
- Description: Non-Fusible Pin & Sleeve Mechanical Interlock
- Electrical Type: 3 Pole + Neutral + Earth
- Rating: 60A 3ø 600VAC 15 HP standard, 40 HP maximum
- Configuration: IEC clock position 5
- Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dust-tight, falling dirt), IP67 suitability
- Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End use r decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

MATERIALS	
Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Gasket	Neoprene
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Locktab	10% Glass-Filled Nylon
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Receptacle Lid	Valox 357®
Receptacle Gasketing	Neoprene
Receptacle Lid Hinge Spring	300 Series Stainless Steel
Receptacle Contact Carrier	Polyamide 6
Receptacle Sleeves	Brass/Nickel Plate
Receptacle Terminal Screws	Zinc-Plated Steel
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc
	20/30 amp shipped with one (1) 1"
	60 amp shipped with one (1) 11/4"
	100 amp shipped with one (1) 11/2" (will also fit a 2" hub, not provided)

PERFORMANCE	
Electrical:	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles
	Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL, CSA, and IEC specifications
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown)
	Per UL50, section 35, NEMA Enclosure Type 12K (dusttight, falling dirt) IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C
	Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

Non-Fusible Mechanical Interlock Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
20	1.38	6.88	9.13	8.00	12.38	11.06	4.75	6.88	7.75	8.00	10.13	11.00
30	1.38	6.88	9.13	8.25	12.38	11.50	4.75	6.88	7.75	8.00	10.13	11.00
60	1.19	6.88	9.13	9.00	13.63	14.13	4.75	6.88	7.75	9.75	11.88	12.75
100	1.19	6.88	9.13	9.50	14.13	14.13	4.75	6.88	7.75	9.75	11.88	12.75

All measurements shown in inches.

PIN & SLEEVE DEVICES



Take a closer look at fast-installing Pin & Sleeve products that work for you.

There's no better protection against moisture and industrial contaminants than P&S IEC Pin & Sleeve products. With spring-loaded covers, locking rings, and neoprene gaskets, everything from water to dirt is completely shut out of the electrical system — even if the connection is accidentally submerged!

All P&S Watertight Pin & Sleeve plugs, connectors, receptacles, and inlets bring you the features to enhance versatility, reliability, and safety. For example, North American products come completely ready to wire, for quick, simple installation. And all feature impact- and chemical-resistant thermoplastic construction. Shrouded, nickel-plated, solid-brass pins provide corrosion protection and excellent conductivity. And an exclusive, hinged cord grip eliminates loose parts that get lost.

With a complete range of choices rated from 20 to 100 amps, you'll find a Legrand works-for-you solution for every Pin & Sleeve application in and around your plant.

PIN & SLEEVE DEVICES

Ratings, compliances visible on strap for fast, long-lasting I.D.

A. Arrives ready to wire, with cord grip open and cable-ready; terminal screws come backed out and ready to wire; front and back body require no disassembly prior to assembly.

B. Nylon construction for high-impact and corrosion resistance.

C. Nickel-plated brass pins provide extracorrosion resistance without sacrificing electrical conductivity.

D. Locking ring with an integral neoprene gasket provides watertight seal when plug and connector/receptacle are mated.

E. Natural-rubber grommets provide watertight protection at cable entry.

F. Combination-head screws for added convenience and quick installation.

G. Revolutionary, hinged cord grip for durable performance and ease of installation.

H. Cover with integral neoprene gasket provides watertight seal.





P&S Pin & Sleeve products provide installation ease, enduring performance in harsh conditions, and guaranteed IEC 309 compatibility.

PIN & SLEEVE DEVICES

IP67 Suitability

North American Watertight Devices Ordering Information



PS330C4WL **PS330P4WL**

North American Product Offering

POLES & WIRES	CONFIGURATION RECEP./ CONN.	CONFIGURATION PLUG/ INLET	VOLTAGE/ COLOR CODING	WATERTIGHT RECEPTACLE	WATERTIGHT PLUG	WATERTIGHT CONNECTOR	BACK BOXES METALLIC BACK BOX	BACK BOXES NON-METALLIC BACK BOX	REPLACEMENT PARTS BODIES PLUG	REPLACEMENT PARTS BODIES CONNECTOR	REPLACEMENT PARTS CAPS RECEPTACLE	REPLACEMENT PARTS CAPS CONNECTOR
20 AMPS												
2P3W			125	PS320R4W	PS320P4W	PS320C4W	PSBB201W	PSBBN201W	PS320P4WR	PS320C4WR	PS320R4WL	
2P3W			250	PS320R6W	PS320P6W	PS320C6W	PSBB201W	PSBBN201W	PS320P6WR	PS320C6WR	PS320R6WL	
2P3W			480	PS320R7W	PS320P7W	PS320C7W	PSBB201W	PSBBN201W	PS320P7WR	PS320C7WR	PS320R7WL	
2P3W			277	PS320R5W	PS320P5W	PS320C5W	PSBB201W	PSBBN201W	PS320P5WR	PS320C5WR	PS320R5WL	
3P4W			125/250	PS420R12W	PS420P12W	PS420C12W	PSBB202W	PSBBN202W		PS420C12WR	PS420R12WL	
3P4W			3ø 250	PS420R9W	PS420P9W	PS420C9W	PSBB202W	PSBBN202W	PS420P9WR	PS420C9WR		
3P4W			3ø 480	PS420R7W	PS420P7W	PS420C7W	PSBB202W	PSBBN202W		PS420C7WR		
3P4W			3ø 600	PS420R5W	PS420P5W	PS420C5W	PSBB202W	PSBBN202W	PS420P5WR	PS420C5WR		
4P5W			3øY 120/208	PS520R9W	PS520P9W	PS520C9W	PSBB202W	PSBBN202W	PS520P9WR	PS520C9WR		
4P5W			3øY 277/480	PS520R7W	PS520P7W	PS520C7W	PSBB202W	PSBBN202W	PS520P7WR	PS520C7WR		
4P5W			3øY 347/600	PS520R5W	PS520P5W	PS520C5W	PSBB202W	PSBBN202W	PS520P5WR	PS520C5WR		
30 AMPS												
2P3W			125	PS330R4W	PS330P4W	PS330C4W	PSBB301W	PSBBN301W			PS330R4WL	PS330C4WL
2P3W			250	PS330R6W	PS330P6W	PS330C6W	PSBB301W	PSBBN301W				PS330C6WL
2P3W			480	PS330R7W	PS330P7W	PS330C7W	PSBB301W	PSBBN301W	PS330P7WR	PS330C7WR	PS330R7WL	PS330C7WL
3P4W			125/250	PS430R12W	PS430P12W	PS430C12W	PSBB301W	PSBBN301W	PS430P12WR	PS430C12WR		PS430C12WL
3P4W			3ø 250	PS430R9W	PS430P9W	PS430C9W	PSBB301W	PSBBN301W	PS430P9WR	PS430C9WR	PS430R9WL	
3P4W			3ø 480	PS430R7W	PS430P7W	PS430C7W	PSBB301W	PSBBN301W	PS430P7WR	PS430C7WR		
3P4W			3ø 600	PS430R5W	PS430P5W	PS430C5W	PSBB301W	PSBBN301W				PS430C5WL
3P4W*			380/440	PS430R3W	PS430P3W	PS430C3W	PSBB301W	PSBBN301W	PS430P3WR	PS430C3WR	PS430R3WL	
4P5W			3øY 120/208	PS530R9W	PS530P9W	PS530C9W	PSBB301W	PSBBN301W	PS530P9WR	PS530C9WR	PS530R9WL	PS530C9WL
4P5W			3øY 277/480	PS530R7W	PS530P7W	PS530C7W	PSBB301W	PSBBN301W	PS530P7WR	PS530C7WR	PS530R7WL	PS530C7WL
4P5W			3øY 347/600	PS530R5W	PS530P5W	PS530C5W	PSBB301W	PSBBN301W	PS530P5WR	PS530C5WR	PS530R5WL	PS530C5WL





*Application specific, reference page D-93.

PIN & SLEEVE DEVICES

IP67 Suitability

North American Watertight Devices Ordering Information

North American Product Offering





				WATERTIGHT				BACK BOXES		REPLACEMENT PARTS			
										BODIES		CAPS	
	CONFIGURATION		VOLTAGE/ COLOR CODING										
POLES & WIRES	RECEP./ CONN.	PLUG/ INLET		RECEPTACLE†	PLUG	CONNECTOR	INLET	METALLIC BACK BOX	NON-METALLIC BACK BOX	PLUG	CONNECTOR	RECEPTACLE	CONNECTOR
60 AMPS													
2P3W			125	PS360R4W	PS360P4W	PS360C4W	PS360B4W	PSBB601W	PSBBN601W		PS360C4WR		PS360C4WL
2P3W			250	PS360R6W	PS360P6W	PS360C6W	PS360B6W	PSBB601W	PSBBN601W	PS360P6WR	PS360C6WR		
2P3W			480	PS360R7W	PS360P7W	PS360C7W	PS360B7W	PSBB601W	PSBBN601W	PS360P7WR	PS360C7WR	PS360R7WL	PS360C7WL
3P4W			125/250	PS460R12W	PS460P12W	PS460C12W	PS460B12W	PSBB601W	PSBBN601W	PS460P12WR	PS460C12WR		PS460C12WL
3P4W			3ø 250	PS460R9W	PS460P9W	PS460C9W	PS460B9W	PSBB601W	PSBBN601W		PS460C9WR		
3P4W			3ø 480	PS460R7W	PS460P7W	PS460C7W	PS460B7W	PSBB601W	PSBBN601W				
3P4W			3ø 600	PS460R5W	PS460P5W	PS460C5W	PS460B5W	PSBB601W	PSBBN601W			PS460R5WL	
4P5W			3øY 120/208	PS560R9W	PS560P9W	PS560C9W	PS560B9W	PSBB601W	PSBBN601W	PS560P9WR			
4P5W			3øY 277/480	PS560R7W	PS560P7W	PS560C7W	PS560B7W	PSBB601W	PSBBN601W	PS560P7WR	PS560C7WR	PS560R7WL	PS560C7WL
4P5W			3øY 347/600	PS560R5W	PS560P5W	PS560C5W	PS560B5W	PSBB601W	PSBBN601W	PS560P5WR	PS560C5WR	PS560R5WL	PS560C5WL
100 AMPS													
2P3W			125	PS3100R4W	PS3100P4W	PS3100C4W	PS3100B4W	PSBB1001W		PS3100P4WR	PS3100C4WR	PS3100R4WL	PS3100C4WL
2P3W			250	PS3100R6W	PS3100P6W	PS3100C6W	PS3100B6W	PSBB1001W			PS3100C6WR	PS3100R6WL	PS3100C6WL
2P3W			480	PS3100R7W	PS3100P7W	PS3100C7W	PS3100B7W	PSBB1001W		PS3100P7WR	PS3100C7WR	PS3100R7WL	PS3100C7WL
3P4W			125/250	PS4100R12W	PS4100P12W	PS4100C12W	PS4100B12W	PSBB1001W			PS4100C12WR		PS4100C12WL
3P4W			3ø 250	PS4100R9W	PS4100P9W	PS4100C9W	PS4100B9W	PSBB1001W			PS4100C9WR		PS4100C9WL
3P4W			3ø 480	PS4100R7W	PS4100P7W	PS4100C7W	PS4100B7W	PSBB1001W				PS4100R7WL	PS4100C7WL
3P4W			3ø 600	PS4100R5W	PS4100P5W	PS4100C5W	PS4100B5W	PSBB1001W			PS4100C5WR	PS4100R5WL	PS4100C5WL
4P5W			3øY 120/208	PS5100R9W	PS5100P9W	PS5100C9W	PS5100B9W	PSBB1001W		PS5100P9WR	PS5100C9WR		PS5100C9WL
4P5W			3øY 277/480	PS5100R7W	PS5100P7W	PS5100C7W	PS5100B7W	PSBB1001W		PS5100P7WR		PS5100R7WL	PS5100C7WL
4P5W			3øY 347/600	PS5100R5W	PS5100P5W	PS5100C5W	PS5100B5W	PSBB1001W		PS5100P5WR	PS5100C5WR	PS5100R5WL	PS5100C5WL

† Note: For straight 60 and 100 amp watertight receptacles, add "S" to catalog number after the R, example: PS4100RS5W.

PIN & SLEEVE DEVICES

International Watertight Ordering Information

International Watertight Product Offering






					WATERTIGHT				
									
		CONFIGURATION							
	POLES & WIRES	RECEP./CONN.	PLUG/INLET	VOLTAGE/ COLOR CODING	RECEPTACLE†	PLUG	CONNECTOR	INLET	NON-METALLIC BACK BOX
16 AMPS									
3 WIRE	2P3W			100/130	PS316R4W	PS316P4W	PS316C4W	100/130	PSBBN202W
	2P3W			200/250	PS316R6W	PS316P6W	PS316C6W		
	2P3W			380/415	PS316R9W	PS316P9W	PS316C9W		
4 WIRE	3P4W			200/250	PS416R9W	PS416P9W	PS416C9W		PSBBN202W
	3P4W			380/415	PS416R6W	PS416P6W	PS416C6W		
5 WIRE	4P5W			120/208 144/250	PS516R9W	PS516P9W	PS516C9W		
	4P5W			200/346 240/415	PS516R6W	PS516P6W	PS516C6W		
32 AMPS									
3 WIRE	2P3W			100/130	PS332R4W	PS332P4W	PS332C4W		PSBBN301W
	2P3W			200/250	PS332R6W	PS332P6W	PS332C6W		
	2P3W			380/415	PS332R9W	PS332P9W	PS332C9W		
4 WIRE	3P4W			200/250	PS432R9W	PS432P9W	PS432C9W		
	3P4W			380/415	PS432R6W	PS432P6W	PS432C6W		
5 WIRE	4P5W			120/208 144/250	PS532R9W	PS532P9W	PS532C9W		
	4P5W			200/346 240/415	PS532R6W	PS532P6W	PS532C6W		

† Note: For straight 60 and 100 amp watertight receptacles, add "S" to catalog number after the R, example: PS4100RS5W.

PIN & SLEEVE DEVICES

International Watertight Ordering Information

International Watertight Product Offering

					WATERTIGHT				
									
		CONFIGURATION							
	POLES & WIRES	RECEP./CONN.	PLUG/INLET	VOLTAGE/ COLOR CODING	RECEPTACLE†	PLUG	CONNECTOR	INLET	NON-METALLIC BACK BOX
63 AMPS									
5 WIRE	2P3W			100/130	PS363R4W	PS363P4W	PS363C4W		PSBBN601W
	2P3W			200/250	PS363R6W	PS363P6W	PS363C6W		
4 WIRE	3P4W			200/250	PS463R9W	PS463P9W	PS463C9W		
	3P4W			380/415	PS463R6W	PS463P6W	PS463C6W		
	3P4W			380 (50 Hz) 440 (60 Hz)	PS463R3W	PS463P3W	PS463C3W		
	3P4W			440/460 (60 Hz)	PS463R11W	PS463P11W	PS463C11W		
	3P4W			480/500	PS463R7W	PS463P7W	PS463C7W		
3 WIRE	4P5W			120/208 144/250	PS563R9W	PS563P9W	PS563C9W		
	4P5W			200/346 240/415	PS563R6W	PS563P6W	PS563C6W		
	4P5W			250/440 265/460 (60 Hz)	PS563R11W	PS563P11W	PS563C11W		
	4P5W			220/380 50Hz 250/440 60Hz (60Hz)	PS563R3W	PS563P3W	PS563C3W		
	4P5W			277/480 288/500	PS563R7W	PS563P7W	PS563C7W		
125 AMPS									
3 WIRE	2P3W			100/130	PS3125R4W	PS3125P4W	PS3125C4W	PS3125B4W	
	2P3W			200/250	PS3125R6W	PS3125P6W	PS3125C6W	PS3125B6W	
	2P3W			380/415	PS3125R9W	PS3125P9W	PS3125C9W	PS3125B9W	
4 WIRE	3P4W			200/250	PS4125R9W	PS4125P9W	PS4125C9W	PS4125B9W	
5 WIRE	4P5W			120/208 144/250	PS5125R9W	PS5125P9W	PS5125C9W	PS5125B9W	
	4P5W			200/346 240/415	PS5125R6W	PS5125P6W	PS5125C6W	PS5125B6W	





† Note: For straight 60 and 100 amp watertight receptacles, add "S" to catalog number after the R, example: PS4100RS5W.

PIN & SLEEVE DEVICES

IP44 Suitability

North American Splashproof Devices Ordering Information

North American Product Offering

	CONFIGURATION			SPLASHPROOF				BACK BOXES		NON-METALLIC BACK BOX
							 *	 ANGLED BOX	 **	
POLES & WIRES	RECEP./ CONN.	PLUG/ INLET	VOLTAGE/ COLOR CODING	RECEPTACLE	PLUG	CONNECTOR	INLET	RECEPTACLE	INLET	RECEPTACLE
20 AMPS										
2P3W			125		PS320P4S	PS320C4S		PSBB201W	PSBB201SP	PSBBN201W
2P3W			250	PS320R6S	PS320P6S	PS320C6S	PS320B6S	PSBB201W	PSBB201SP	PSBBN201W
2P3W			277	PS320R5S	PS320P5S			PSBB201W	PSBB201SP	PSBBN201W
3P4W			125/250	PS420R12S	PS420P12S	PS420C12S		PSBB202W	PSBB201SP	PSBBN202W
3P4W			3ø 250	PS420R9S	PS420P9S	PS420C9S	PS420B9S	PSBB202W	PSBB201SP	PSBBN202W
3P4W			3ø 480	PS420R7S	PS420P7S	PS420C7S	PS420B7S	PSBB202W	PSBB201SP	PSBBN202W
3P4W			3ø 600	PS420R5S			PS420B5S	PSBB202W	PSBB201SP	PSBBN202W
4P5W			3øY 120/208	PS520R9S		PS520C9S	PS520B9S	PSBB202W	PSBB201SP	PSBBN202W
4P5W			3øY 277/480			PS520C7S	PS520B7S	PSBB202W	PSBB201SP	PSBBN202W
4P5W			3øY 347/600	PS520R5S		PS520C5S	PS520B5S	PSBB202W	PSBB201SP	PSBBN202W
30 AMPS										
2P3W			125	PS330R4S	PS330P4S	PS330C4S	PS330B4S	PSBB301W	PSBB301SP	PSBBN301W
2P3W			250	PS330R6S	PS330P6S	PS330C6S	PS330B6S	PSBB301W	PSBB301SP	PSBBN301W
2P3W			480		PS330P7S	PS330C7S	PS330B7S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			125/250	PS430R12S		PS430C12S	PS430B12S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			3ø 250	PS430R9S	PS430P9S	PS430C9S	PS430B9S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			3ø 480	PS430R7S	PS430P7S	PS430C7S	PS430B7S	PSBB301W	PSBB301SP	PSBBN301W
3P4W			3ø 600	PS430R5S	PS430P5S	PS430C5S	PS430B5S	PSBB301W	PSBB301SP	PSBBN301W
4P5W			3øY 120/208	PS530R9S	PS530P9S	PS530C9S	PS530B9S	PSBB301W	PSBB301SP	PSBBN301W
4P5W			3øY 277/480		PS530P7S		PS530B7S	PSBB301W	PSBB301SP	PSBBN301W
4P5W			3øY 347/600	PS530R5S	PS530P5S	PS530C5S	PS530B5S	PSBB301W	PSBB301SP	PSBBN301W
60 AMPS										
2P3W			250	PS360R6S	PS360P6S	PS360C6S	PS360B6S	PSBB601W	PSBB601W	PSBBN601W
2P3W			480	PS360R7S	PS360P7S	PS360C7S	PS360B7S	PSBB601W	PSBB601W	PSBBN601W
3P4W			125/250	PS460R12S	PS460P12S	PS460C12S	PS460B12S	PSBB601W	PSBB601W	PSBBN601W
3P4W			3ø 250	PS460R9S	PS460P9S	PS460C9S	PS460B9S	PSBB601W	PSBB601W	PSBBN601W
3P4W			3ø 480	PS460R7S	PS460P7S	PS460C7S	PS460B7S	PSBB601W	PSBB601W	PSBBN601W
3P4W			3ø 600	PS460R5S	PS460P5S	PS460C5S	PS460B5S	PSBB601W	PSBB601W	PSBBN601W
4P5W			3øY 120/208	PS560R9S	PS560P9S	PS560C9S	PS560B9S	PSBB601W	PSBB601W	PSBBN601W
4P5W			3øY 277/480	PS560R7S	PS560P7S	PS560C7S	PS560B7S	PSBB601W	PSBB601W	PSBBN601W
4P5W			3øY 347/600	PS560R5S	PS560P5S	PS560C5S	PS560B5S	PSBB601W	PSBB601W	PSBBN601W

*Line art for 60 amp only. 20 and 30 amp inlets are angled.
**Line art for 20 and 30 amp only. 60 amp back box is angled.

PIN & SLEEVE DEVICES

International Splashproof Devices Ordering Information

International Product Offering

	POLES & WIRES	CONFIGURATION RECEP./ CONN.	CONFIGURATION PLUG/ INLET	VOLTAGE COLOR CODING	SPLASHPROOF (IP44 SUITABILITY) RECEPTACLE	PLUG	CONNECTOR	INLET	NON-METALLIC BACK BOX
16 AMPS									
3 WIRE	2P3W			100/130		PS316P4S	PS316C4S		PSBBN201W
	2P3W			200/250	PS316R6S	PS316P6S	PS316C6S	PS316B6S	
	2P3W			380/415					
4 WIRE	3P4W			200/250	PS416R9S	PS416P9S	PS416C9S	PS416B9S	PSBBN202W
	3P4W			380/415	PS416R6S	PS416P6S	PS416C6S	PS416B6S	
5 WIRE	4P5W			120/208 144/250	PS516R9S		PS516C9S	PS516B9S	
	4P5W			200/346 240/415			PS516C6S	PS516B6S	
32 AMPS									
3 WIRE	2P3W			100/130	PS332R4S	PS332P4S	PS332C4S	PS332B4S	PSBBN301W
	2P3W			200/250	PS332R6S	PS332P6S	PS332C6S	PS332B6S	
	2P3W			380/415	PS332R9S	PS332P9S	PS332C9S	PS332B9S	
4 WIRE	3P4W			200/250	PS432R9S	PS432P9S	PS432C9S	PS432B9S	
	3P4W			380/415	PS432R6S	PS432P6S	PS432C6S	PS432B6S	
5 WIRE	4P5W			120/208 144/250	PS532R9S	PS532P9S	PS532C9S	PS532B9S	
	4P5W			200/346 240/415	PS532R6S	PS532P6S	PS532C6S	PS532B6S	
63 AMPS									
3 WIRE	2P3W			100/130					PSBBN601W
	2P3W			200/250	PS363R6S	PS363P6S	PS363C6S	PS363B6S	
4 WIRE	3P4W			200/250	PS463R9S	PS463P9S	PS463C9S	PS463B9S	
	3P4W			380/415	PS463R6S	PS463P6S	PS463C6S	PS463B6S	
	3P4W			380 (50 Hz) 440 (60 Hz)	PS463R3S	PS463P3S	PS463C3S	PS463B3S	
	3P4W			440/460 (60 Hz)	PS463R11S	PS463P11S	PS463C11S	PS463B11S	
	3P4W			480/500	PS463R7S	PS463P7S	PS463C7S	PS463B7S	
5 WIRE	4P5W			120/208 144/250	PS563R9S	PS563P9S	PS563C9S	PS563B9S	
	4P5W			200/346 240/415	PS563R6S	PS563P6S	PS563C6S	PS563B6S	
	4P5W			250/440 (50 Hz) 265/460 (60 Hz)	PS563R11S	PS563P11S	PS563C11S	PS563B11S	
	4P5W			220/380 (50 Hz) 250/440 (60 Hz)	PS563R3S	PS563P3S	PS563C3S	PS563B3S	
	4P5W			277/480 288/500	PS563R7S	PS563P7S	PS563C7S	PS563B7S	

Additional international configuration available — consult Factory Export Department.

CONFIGURATION STANDARDS

Adapting To Worldwide Configuration Standards

Application

Pass & Seymour® Pin & Sleeve products are designed to meet IEC 309-1, 309-2 specifications. These specifications are recognized around the world and are intended to prevent the mating of plugs and receptacles of different voltage and current ratings (see Section 406.3(F) of the National Electrical Code® relating to this noninterchangeability feature).

Global Product Offering

Legrand provides Pass & Seymour® IEC 309-1, 309-2 Pin & Sleeve products in both Series I (International) and Series II (North American) current ratings:

Series I (International) 16, 32, 63, 125 Amps
Series II (North American) 20, 30, 60, 100 Amps

North American Catalog Numbering System

Catalog numbers within the North American product offering are structured to communicate the following: manufacturer, number of conductors, amperage rating, device type, clocking position of the ground sleeve, and environmental rating. This applies to all receptacles, inlets, plugs, and connectors in the Legrand North American Pass & Seymour® Pin & Sleeve product line (see sample at right).

Here's How It Works

The amperage rating is determined by the size of the device. Voltage rating is determined by the location of the ground sleeve on the receptacle and/or connector along with the number of conductors.

Ground sleeve position for all connectors and receptacles is based on a clock face with the keyway always being at 6 o'clock. The ground sleeve is positioned at a specific hour point, depending on the device's voltage rating.


The clocking position for plugs and inlets is a mirror image of the mating device, allowing for interconnection.

In addition, voltage ratings for all Pin & Sleeve products are color coded for visual identification.

IEC 309 INDUSTRIAL PRODUCTS


Clocking System

IEC 309 Clocking System
North American Catalog Numbering System

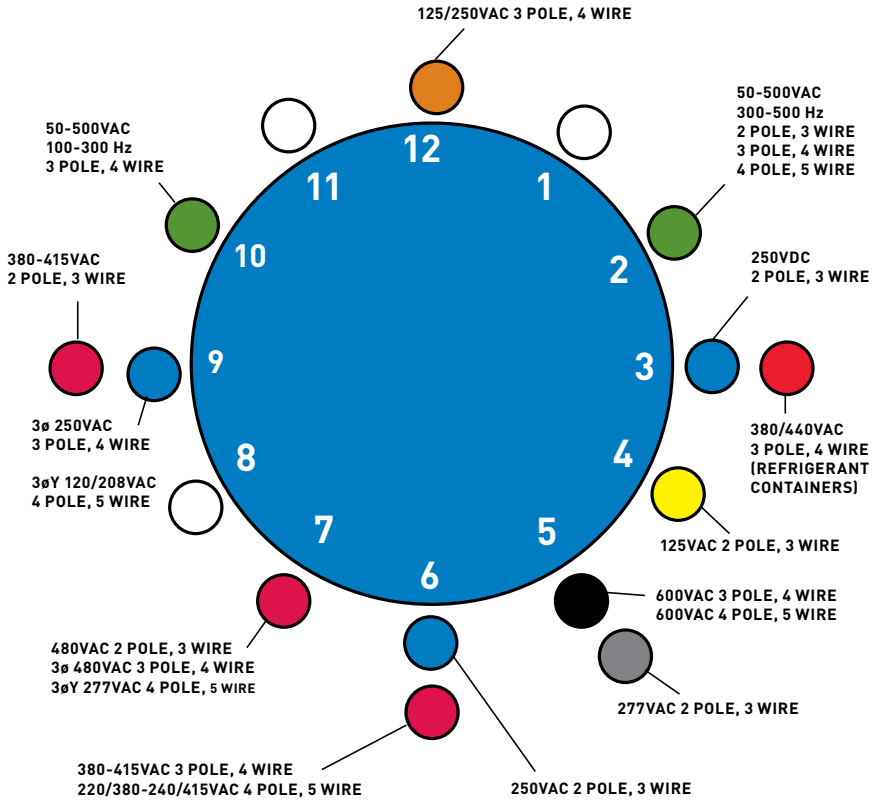

Application Specific

North American Catalog Numbering System

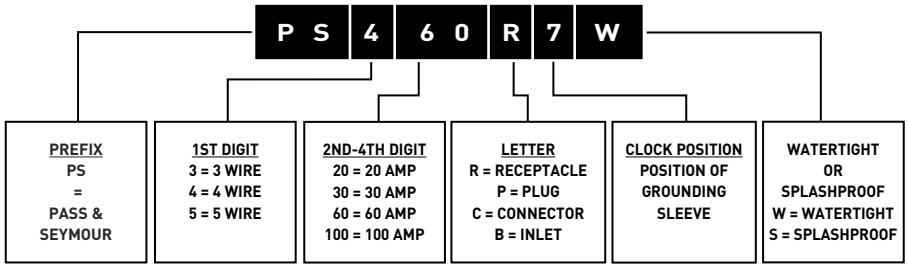

PIN & SLEEVE DEVICES

Watertight Dimensional Information

16/20 & 30/32 Amp Watertight Devices/Dimensional Information

AMPS	WIRE CONFIGURATIONS	A	B	C	D	E	F
WATERTIGHT RECEPTACLES							
16/20	2 Pole, 3 Wire	2.85	1.80	1.60	3.40	2.05	2.36
	3 Pole, 4 Wire	3.20	1.90	1.60	3.80	2.36	2.75
	4 Pole, 5 Wire	3.40	2.00	1.70	3.80	2.36	2.75
30/32	2 Pole, 3 Wire	3.72	2.60	1.80	4.30	2.75	3.15
	3 Pole, 4 Wire	3.72	2.60	1.90	4.30	2.75	3.15
	4 Pole, 5 Wire	3.98	2.70	1.95	4.30	2.75	3.15
WATERTIGHT PLUGS							
16/20	2 Pole, 3 Wire	5.30	2.85		.31-.59		
	3 Pole, 4 Wire	5.50	3.20		.31-.59		
	4 Pole, 5 Wire	6.00	3.40		.39-.71		
30/32	2 Pole, 3 Wire	6.50	3.70		.39-.71		
	3 Pole, 4 Wire	6.50	3.70		.47-.87		
	4 Pole, 5 Wire	6.70	3.98		.47-.87		
WATERTIGHT CONNECTORS							
16/20	2 Pole, 3 Wire	5.90	2.85	3.00	.31-.59		
	3 Pole, 4 Wire	6.00	3.20	3.40	.31-.59		
	4 Pole, 5 Wire	6.70	3.40	3.50	.39-.71		
30/32	2 Pole, 3 Wire	7.00	3.70	3.90	.39-.71		
	3 Pole, 4 Wire	7.00	3.70	3.90	.47-.87		
	4 Pole, 5 Wire	7.30	3.98	4.10	.47-.87		


60/63 Amp Watertight Devices/Dimensional Information

AMPS	WIRE CONFIGURATIONS	A	B	C	D	E	F
WATERTIGHT RECEPTACLES							
60/63	2 Pole, 3 Wire	4.20	3.10	3.50	5.00	3.03	3.35
	3 Pole, 4 Wire	4.20	3.10	3.50	5.00	3.03	3.35
	4 Pole, 5 Wire	4.20	3.10	3.50	5.00	3.03	3.35
WATERTIGHT PLUGS							
60/63	2 Pole, 3 Wire	10.00	4.50		.63-1.04		
	3 Pole, 4 Wire	10.00	4.50		.73-1.14		
	4 Pole, 5 Wire	10.00	4.50		.80-1.26		
WATERTIGHT CONNECTORS							
60/63	2 Pole, 3 Wire	10.90	4.50	4.70	.63-1.04		
	3 Pole, 4 Wire	10.90	4.50	4.70	.73-1.14		
	4 Pole, 5 Wire	10.90	4.50	4.70	.80-1.26		
WATERTIGHT INLETS							
60/63	2 Pole, 3 Wire	4.50	4.25			3.03	3.35
	3 Pole, 4 Wire	4.50	4.25			3.03	3.35
	4 Pole, 5 Wire	4.50	4.25			3.03	3.35


100/125 Amp Watertight Devices/Dimensional Information


AMPS	WIRE CONFIGURATIONS	A	B	C	D	E	F
WATERTIGHT RECEPTACLES							
100/125	2 Pole, 3 Wire	5.20	2.20	4.40	5.60	4.88	4.88
	3 Pole, 4 Wire	5.20	2.20	4.40	5.60	4.88	4.88
	4 Pole, 5 Wire	5.20	2.20	4.40	5.60	4.88	4.88
WATERTIGHT PLUGS							
100/125	2 Pole, 3 Wire	13.40	5.20		.59-1.97		
	3 Pole, 4 Wire	13.40	5.20		.59-1.97		
	4 Pole, 5 Wire	13.40	5.20		.59-1.97		
WATERTIGHT CONNECTORS							
100/125	2 Pole, 3 Wire	14.30	5.20	5.30	.59-1.97		
	3 Pole, 4 Wire	14.30	5.20	5.30	.59-1.97		
	4 Pole, 5 Wire	14.30	5.20	5.30	.59-1.97		
WATERTIGHT INLETS							
100/125	2 Pole, 3 Wire	5.75	5.71			4.88	4.88
	3 Pole, 4 Wire	5.75	5.71			4.88	4.88
	4 Pole, 5 Wire	5.75	5.71			4.88	4.88

All measurements shown in inches.





Receptacles







Plugs






Connectors






Inlets




Receptacle/Inlet Drilling Pattern


PIN & SLEEVE DEVICES


Splashproof Dimensional Information






Receptacles







Plugs






Connectors





Inlets



Receptacle/Inlet Drilling Pattern

16/20 & 30/32 Amp Splashproof Devices/Dimensional Information

AMPS	WIRE CONFIGURATIONS	A	B	C	D	E	F
SPLASHPROOF RECEPTACLES							
16/20	2 Pole, 3 Wire	2.50	1.57	1.60	3.10	2.05	2.36
	3 Pole, 4 Wire	2.90	1.57	1.73	3.46	2.36	2.75
	4 Pole, 5 Wire	2.90	1.73	1.73	3.66	2.36	2.75
30/32	2 Pole, 3 Wire	3.30	2.10	1.97	4.06	2.75	3.15
	3 Pole, 4 Wire	3.30	2.10	1.97	4.06	2.75	3.15
	4 Pole, 5 Wire	3.30	2.20	2.05	4.20	2.75	3.15
SPLASHPROOF PLUGS							
16/20	2 Pole, 3 Wire	5.30	2.17		.31-.59		
	3 Pole, 4 Wire	5.50	2.36		.31-.59		
	4 Pole, 5 Wire	6.00	2.60		.39-.71		
30/32	2 Pole, 3 Wire	6.50	2.78		.39-.71		
	3 Pole, 4 Wire	6.50	2.78		.47-.87		
	4 Pole, 5 Wire	6.70	3.03		.47-.87		
SPLASHPROOF CONNECTORS							
16/20	2 Pole, 3 Wire	5.79	2.15	2.91	.31-.59		
	3 Pole, 4 Wire	5.94	2.42	3.19	.31-.59		
	4 Pole, 5 Wire	6.77	2.73	3.54	.39-.71		
30/32	2 Pole, 3 Wire	6.97	2.80	3.66	.39-.71		
	3 Pole, 4 Wire	6.97	2.80	3.66	.47-.87		
	4 Pole, 5 Wire	7.20	3.05	3.94	.47-.87		
SPLASHPROOF INLETS							
16/20	2 Pole, 3 Wire	2.83	3.07			2.44	3.70
	3 Pole, 4 Wire	3.70	3.39			3.27	4.29
	4 Pole, 5 Wire	3.70	3.39			3.27	4.29
30/32	2 Pole, 3 Wire	3.98	4.37			3.54	5.86
	3 Pole, 4 Wire	3.98	4.37			3.54	5.86
	4 Pole, 5 Wire	3.98	4.25			3.54	5.86

60/63 Amp Splashproof Devices/Dimensional Information

AMPS	WIRE CONFIGURATIONS	A	B	C	D	E	F
SPLASHPROOF RECEPTACLES							
60/63	2 Pole, 3 Wire	4.20	3.50	2.76	5.08	3.03	3.35
	3 Pole, 4 Wire	4.20	3.50	2.76	5.08	3.03	3.35
	4 Pole, 5 Wire	4.20	3.50	2.76	5.08	3.03	3.35
SPLASHPROOF PLUGS							
60/63	2 Pole, 3 Wire	10.00	4.02		.63-1.04		
	3 Pole, 4 Wire	10.00	4.02		.73-1.14		
	4 Pole, 5 Wire	10.00	4.02		.80-1.26		
SPLASHPROOF CONNECTORS							
60/63	2 Pole, 3 Wire	10.75	3.78	4.67	.63-1.04		
	3 Pole, 4 Wire	10.75	3.78	4.67	.73-1.14		
	4 Pole, 5 Wire	10.75	3.78	4.67	.80-1.26		
SPLASHPROOF INLETS							
60/63	2 Pole, 3 Wire	4.50	4.25			3.03	3.35
	3 Pole, 4 Wire	4.50	4.25			3.03	3.35
	4 Pole, 5 Wire	4.50	4.25			3.03	3.35

All measurements shown in inches.

PIN & SLEEVE DEVICES

Watertight & Splashproof Material & Performance

Pin & Sleeve Product Specifications

	16/20 AMP	30/32 AMP	60/63 AMP	100/125 AMP
RECEPTACLES				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
INLETS				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Mounting Flange	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring*†	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
PLUGS				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring*†	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plate Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
CONNECTORS				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
METALLIC BACK BOX				
Housing	Cast Aluminum			
Hub	Cast Iron			
NON-METALLIC BACK BOX				
Housing	Polyamide 6			
Hub				

†Does not apply to splashproof.

*16/20A and 30/32A sleeves and pins on splashproof products are brass only. Splashproof inlets and plugs do not have locking rings.


Consult factory for additional details.

PERFORMANCE

Electrical:

Dielectric Voltage Withstand	3000V maximum
Maximum Working Voltage	600V RMS, 60Hz - 400Hz
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30˚C temperature rise at full-rated current after 50 cycles of 150% overload (at 0.75 to 0.80 power factor)
Endurance	20 amp: 5000 cycles with full-rated current and voltage
	30, 60, 100 amp: 2000 cycles with full-rated current and voltage applied on every other cycle

Mechanical:

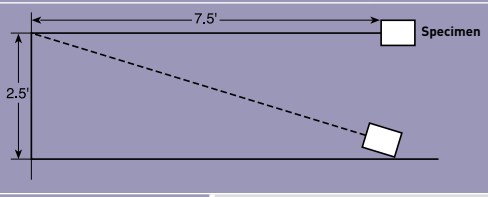

Impact Resistance	Device dropped 8 times from a height of 2.5 feet with 7.5 feet of cord attached (per CSA 182.1)

Cord Grip Retention

	Force, Lbs.**	Torque, Ft.lbs.**
20A	30	0.4
30A	75	0.5
60A	150	1.0
100A	150	1.0

**Applied to minimum recommended cable size.

Cord Accommodation	Round portable service cords
	Diameters commensurate with the device rating as defined in UL62, CSA C22.2, No. 49, and the harmonized (HAR) European Standard
Terminal Identification	Identified in accordance with North American convention, UL1682, and IEC 309-1, 309-2, rated for copper conductors only
Product Identification	Identification and ratings are labeled on the device housing

Environmental:

Moisture Resistance	Per IEC 309-1
Flammability	Contact with live parts: V2 or V0 Enclosure: HB or better per UL94
Operating Temperature	+80˚C maximum continuous; -50˚C minimum without impact
UV Resistance	All enclosure materials are UV stable


PIN & SLEEVE DEVICES

Accessories/Dimensional Information


Metallic Back Boxes Dimensions

Catalog Number	A	B	C	D	E	F	G	H	J DIA	K	L
PSBB201W	5.60	5.00	3.17	5.00	2.05	2.36	8-32UNC	2.04	.20 DIA	1/2" NPT	2.75
PSBB202W	6.82	6.12	4.11	6.07	2.36	2.76	8-32UNC	2.55	.20 DIA	3/4" NPT	3.61
PSBB201SP	7.00	5.98	2.00	6.00	3.27	4.29	8-32UNC	3.00	.20 DIA	3/4" NPT	3.96
PSBB301W	6.82	6.12	4.11	6.07	2.76	3.15	8-32UNC	2.55	.20 DIA	3/4" NPT	3.61
PSBB301SP	8.60	7.58	2.00	7.60	3.54	5.87	8-32UNC	3.00	.20 DIA	3/4" NPT	4.22
PSBB601W	8.63	7.75	4.92	7.70	3.03	3.35	10-24UNC	3.87	.28 DIA	1 1/2" NPT	4.75
PSBB1001W	12.50	11.00	6.25	11.00	4.88	4.88	1/4-20UNC	4.75	.28 DIA	1 1/2" NPT	6.25
PSBB1002W	12.50	11.00	6.25	11.00	4.88	4.88	1/4-20UNC	4.75	.28 DIA	2" NPT	6.25

Watertight: Inlets and Receptacles
Splashproof: 20, 30 & 60A Receptacl 60A Inlets

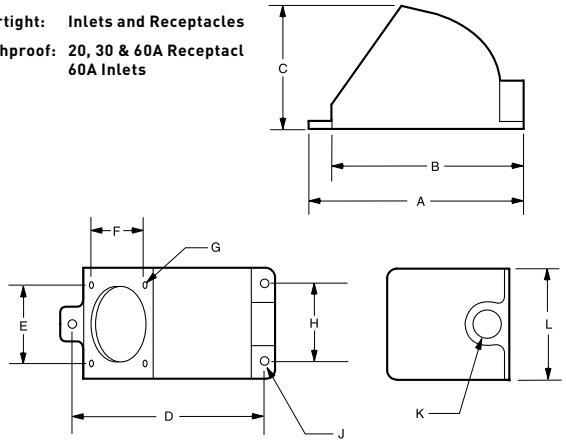


Splashproof: 20 & 30A Inlets

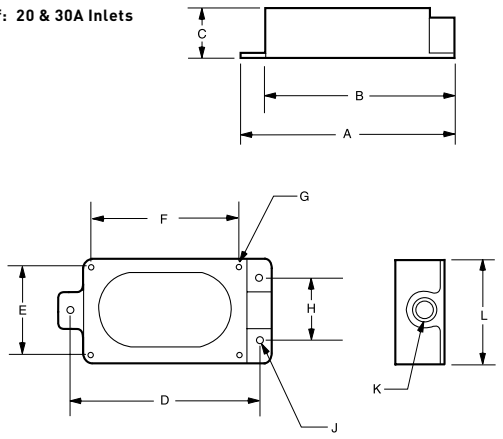


Non-Metallic Back Boxes Dimensions

Catalog Number	A	B	C	D	E	Hub Size
PSBBN201W	2.50	2.31	4.16	2.28	0.78	3/4" NPT
PSBBN202W	3.34	3.78	4.81	2.38	0.63	3/4" NPT
PSBBN301W	3.53	4.03	6.38	3.53	1.03	1" NPT
PSBBN601W	6.00	6.69	11.81	5.91	1.56	1 1/2" NPT

All measurements shown in inches.

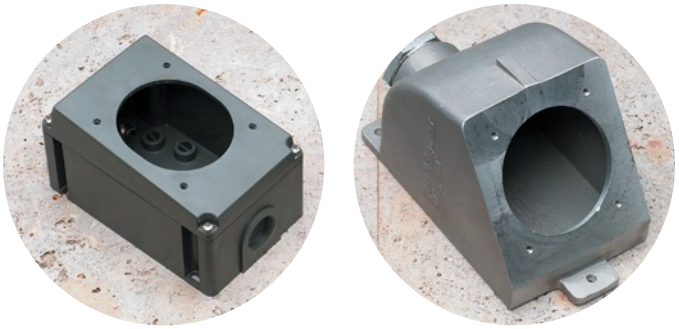

In both non-metallic (left) and metallic (right) Back Boxes, you'll find easy installation and no-compromises durability.

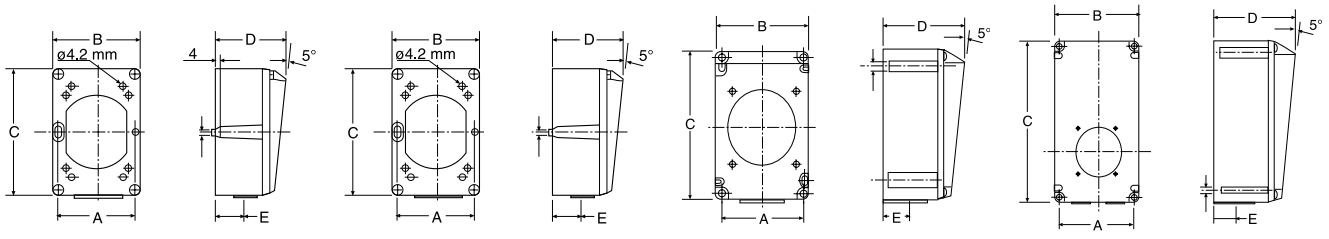

PSBBN201W **PSBBN202W** **PSBBN301W** **PSBBN601W**

PIN & SLEEVE DEVICES

Accessories/Dimensional Information

Pin & Sleeve Strain Relief Adapters


Catalog Number	A	B	C	D	E	F	G	H (Metric Thread)
PSAD3050	1/2" NPT	1.38	1.13	.54	.25	.47	.88	M32X1.5
PSAD3034	3/4" NPT	1.50	1.50	.56	.25	.47	.88	M32X1.5
PSAD301	1" NPT	1.75	1.75	.70	.25	.47	.88	M32X1.5
PSAD601	1" NPT	2.00	1.75	.70	.38	1.00	1.38	M45X2
PSAD60125	1 1/4" NPT	2.00	2.00	.70	.38	1.00	1.38	M45X2
PSAD60150	1 1/2" NPT	2.38	2.38	.70	.38	1.00	1.38	M45X2
PSAD100125	1 1/4" NPT	2.50	2.38	.70	.38	1.10	2.00	M60X2
PSAD100150	1 1/2" NPT	2.50	2.38	.70	.38	1.10	2.00	M60X2
PSAD1002	2" NPT	2.75	2.70	.75	.38	1.10	2.00	M60X2

All measurements shown in inches.

Back Box & Protective Covers

Device Type	Back Box	Hub Size	Protective Plug & Inlet Cover
20A 3 Wire	PSBB201W	1/2"	PSCP320
20A 4 Wire	PSBB202W	3/4"	PSCP420
20A 5 Wire	PSBB202W	3/4"	PSCP520
20A 3, 4, 5 Wire (Inlet)	PSBB201SP	3/4"	Use as required
30A 3, 4 Wire	PSBB301W	3/4"	PSCP3430
30A 5 Wire	PSBB301W	3/4"	PSCP530
30A 3, 4, 5 Wire (Inlet)	PSBB301SP	3/4"	Use as required
All 60A	PSBB601W*	1 1/2"	PSCP60
All 100A	PSBB1001W	1 1/2"	PSCP100
All 100A	PSBB1002W	2"	PSCP100

*11/4" Reducer Supplied

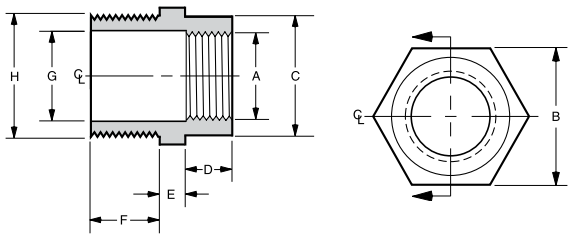



PSCP320



PSCP60

Strain Relief Adapter Fittings

Device Type	Fitting Size	Catalog Number
20A 3, 4 Wire	1/2" NPT	PSAD2050
20A 3, 4 Wire	3/4" NPT	PSAD2034
20A 5W, All 30A	1/2" NPT	PSAD3050
30A 3, 4 Wire	3/4" NPT	PSAD3034
30A 3, 4 Wire	1" NPT	PSAD301
All 60A	1" NPT	PSAD601
All 60A	1 1/4" NPT	PSAD60125
All 60A	1 1/2" NPT	PSAD60150
All 100A	1 1/4" NPT	PSAD100125
All 100A	1 1/2" NPT	PSAD100150
All 100A	2" NPT	PSAD1002



Choose from a full range of P&S Strain Relief Adapters, all built extra-tough for no-worries dependability.

PIN & SLEEVE DEVICES

Technical Specifications

	16/20 AMP	30/32 AMP	60/63 AMP	100/125 AMP
RECEPTACLES				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
INLETS				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Mounting Flange	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring*†	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Mounting Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
PLUGS				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Locking Ring*†	Polyamide 66	Polyamide 66	Valox	Valox
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Pins	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plate Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
CONNECTORS				
Housing	Polyamide 6	Polyamide 6	Valox	Valox
Cover	Polyamide 66	Polyamide 66	Valox	Valox
Cover Spring	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Sealing Gasket†	Neoprene	Neoprene	Neoprene	Neoprene
Housing Gasket	Neoprene	Neoprene	Neoprene	Neoprene
Back Body	Polyamide 6	Polyamide 6	Valox	Valox
Contact Carrier	Polyamide 6	Polyamide 6	Polyamide 6	Polyamide 6
Sleeves	Brass w/Nickel Plate*†	Brass w/Nickel Plate*†	Brass w/Nickel Plate	Brass w/Nickel Plate
Terminal Screws	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel	Zinc-Plated Steel
Cord Grip	Polyamide 6	Polyamide 6	Polyamide 66	Polyamide 66
Grommet	Natural Rubber	Natural Rubber	Natural Rubber	Natural Rubber
Cord Grip Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Assembly Screws	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
METALLIC BACK BOX				
Housing	Cast Aluminum			
Hub	Cast Iron			
NON-METALLIC BACK BOX				
Housing	Polyamide 6			
Hub				

†Does not apply to splashproof.

*16/20A and 30/32A sleeves and pins on splashproof products are brass only. Splashproof inlets and plugs do not have locking rings.

Consult factory for additional details.

PIN & SLEEVE DEVICES

Technical Specifications

IP Suitability Rating
IEC Enclosure Classification Designation

IP Suitability Ratings are an international system for classifying the degree of protection provided by enclosures of electrical equipment. The higher the number, the greater the degree of protection; they apply ONLY to properly installed equipment. The numerals stand for the following:

1. **First Number:** Degree of protection for persons against access to hazardous parts inside the enclosure and/or against solid bodies.
2. **Second Number:** Degree of protection of equipment inside enclosures against damage from the ingress of water.

IEC Enclosure Classification Designation		
Code Letters	**First Number**	**Second Number**
Ingress Protection	**Against Ingress of Solid Bodies**	**Against Ingress of Water with Harmful Effects**
IP	0 - Nonprotected	0 - Nonprotected
	1 - >=50 mm diameter	1 - Vertically dripping
	2 - >=12.5 mm diameter	2 - Dripping (15° Tilted)
	3 - >=2.5 mm diameter	3 - Spraying
	4 - >=1.0 mm	4 - Splashing
	5 - Dust-protected	5 - Jetting
	6 - Dusttight	6 - Power jetting
		7 - Temporary immersion
		8 - Continuous immersion

Note: >= denotes greater than or equal to. Dimensions in millimeters (mm).

Example: IP44 = Ingress Protection; Solid bodies >=1.0 mm; Splashing

$$\underset{\text{Suitability}}{\overset{\text{IP44}}{}}$$

Conversion Chart

Fractions to Decimals to Millimeters

Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm	Inches Fraction	Decimal	mm
1/64	0.0156	0.3969	17/64	0.2656	6.7469	33/64	0.5156	13.0969	49/64	0.7656	19.4469
1/32	0.0312	0.7938	9/32	0.2812	7.1438	17/32	0.5312	13.4938	25/32	0.7812	19.8437
3/64	0.0468	1.1906	19/64	0.2968	7.5406	35/64	0.5468	13.8906	51/64	0.7968	20.2406
1/16	0.0625	1.5875	5/16	0.3125	7.9375	9/16	0.5625	14.2875	13/16	0.8125	20.6375
5/64	0.0781	1.9844	21/64	0.3281	8.3344	37/64	0.5781	14.6844	53/64	0.8281	21.0344
3/32	0.0937	2.3812	11/32	0.3437	8.7312	19/32	0.5937	15.0812	27/32	0.8437	21.4312
7/64	0.1093	2.7781	23/64	0.3593	9.1281	39/64	0.6093	15.4781	55/64	0.8593	21.8281
1/8	0.1250	3.1750	3/8	0.3750	9.5250	5/8	0.6250	15.8750	7/8	0.8750	22.2250
9/64	0.1406	3.5719	25/64	0.3906	9.9219	41/64	0.6406	16.2719	57/64	0.8906	22.6219
5/32	0.1562	3.9688	13/32	0.4062	10.3188	21/32	0.6562	16.6688	29/32	0.9062	23.0188
11/64	0.1718	4.3656	27/64	0.4218	10.7156	43/64	0.6718	17.0656	59/64	0.9218	23.4156
3/16	0.1875	4.7625	7/16	0.4375	11.1125	11/16	0.6875	17.4625	15/16	0.9375	23.8125
13/64	0.2031	5.1594	29/64	0.4531	11.5094	45/64	0.7031	17.8594	61/ 64	0.9531	24.2094
7/32	0.2187	5.5562	15/32	0.4687	11.9062	23/32	0.7187	18.2562	31/32	0.9687	24.6062
15/64	0.2343	5.9531	31/64	0.4843	12.3031	47/64	0.7343	18.6531	63/64	0.9843	25.0031
1/4	0.2500	6.3500	1/2	0.5000	12.7000	3/4	0.7500	19.0500	1	1.0000	25.4000

PIN & SLEEVE DEVICES

Product Selection Guide

North American Watertight

D-153-157	D-148-152			Pg. D-73-77	Pg. D-78-82	Pg. D-85-86				Pg. D-85-86	
Fusible Safety Switches	Non-Fusible Safety Switches	Amps	Volts	Fusible Mech. Interlock	Non-Fusible Mech. Interlock	Plug	Receptacle	Connector	Inlet	Metallic Back Box	Non-Metallic Back Box
N/A	N/A	20	120VAC			PS320P4W	PS320R4W	PS320C4W		PSBB201W	PSBBN201W
			240VAC			PS320P6W	PS320R6W	PS320C6W		PSBB201W	PSBBN201W
			480VAC			PS320P7W	PS320R7W	PS320C7W		PSBB201W	PSBBN201W
			277VAC			PS320P5W	PS320R5W	PS320C5W		PSBB201W	PSBBN201W
			120/240VAC	PS420FMIR12W	PS420MIR12W	PS420P12W	PS420R12W	PS420C12W		PSBB202W	PSBBN202W
			3ø 240VAC	PS420FMIR9W	PS420MIR9W	PS420P9W	PS420R9W	PS420C9W		PSBB202W	PSBBN202W
			3ø 480VAC	PS420FMIR7W	PS420MIR7W	PS420P7W	PS420R7W	PS420C7W		PSBB202W	PSBBN202W
			3ø 600VAC	PS420FMIR5W	PS420MIR5W	PS420P5W	PS420R5W	PS420C5W		PSBB202W	PSBBN202W
			3øY 120/208VAC			PS520P9W	PS520R9W	PS520C9W		PSBB202W	PSBBN202W
			3øY 277/480VAC			PS520P7W	PS520R7W	PS520C7W		PSBB202W	PSBBN202W
			3øY 347/600VAC			PS520P5W	PS520R5W	PS520C5W		PSBB202W	PSBBN202W
PS30FSS	PS30SS	30	120VAC		PS330MIR4W	PS330P4W	PS330R4W	PS330C4W		PSBB301W	PSBBN301W
			240VAC	PS330FMIR6W		PS330P6W	PS330R6W	PS330C6W		PSBB301W	PSBBN301W
			480VAC			PS330P7W	PS330R7W	PS330C7W		PSBB301W	PSBBN301W
			120/240VAC	PS430FMIR12W		PS430P12W	PS430R12W	PS430C12W		PSBB301W	PSBBN301W
			3ø 240VAC	PS430FMIR9W	PS430MIR9W	PS430P9W	PS430R9W	PS430C9W		PSBB301W	PSBBN301W
			3ø 480VAC	PS430FMIR7W	PS430MIR7W	PS430P7W	PS430R7W	PS430C7W		PSBB301W	PSBBN301W
			3ø 600VAC	PS430FMIR5W	PS430MIR5W	PS430P5W	PS430R5W	PS430C5W		PSBB301W	PSBBN301W
			380/440 VAC	PS430FMIR3W	PS430MIR3W	PS430P3W	PS430R3W	PS430C3W		PSBB301W	PSBBN301W
			3øY 120/208VAC	PS530FMIR9W	PS530MIR9W	PS530P9W	PS530R9W	PS530C9W		PSBB301W	PSBBN301W
			3øY 277/480VAC	PS530FMIR7W	PS530MIR7W	PS530P7W	PS530R7W	PS530C7W		PSBB301W	PSBBN301W
			3øY 347/600VAC		PS530MIR5W	PS530P5W	PS530R5W	PS530C5W		PSBB301W	PSBBN301W
PS60FSS	PS60SS	60	120VAC			PS360P4W	PS360R4W	PS360C4W	PS360B4W	PSBB601W	PSBBN601W
			240VAC	PS360FMIR6W	PS360MIR6W	PS360P6W	PS360R6W	PS360C6W	PS360B6W	PSBB601W	PSBBN601W
			480VAC		PS360MIR7W	PS360P7W	PS360R7W	PS360C7W	PS360B7W	PSBB601W	PSBBN601W
			120/240VAC	PS460FMIR12W	PS460MIR12W	PS460P12W	PS460R12W	PS460C12W	PS460B12W	PSBB601W	PSBBN601W
			3ø 240VAC	PS460FMIR9W	PS460MIR9W	PS460P9W	PS460R9W	PS460C9W	PS460B9W	PSBB601W	PSBBN601W
			3ø 480VAC	PS460FMIR7W	PS460MIR7W	PS460P7W	PS460R7W	PS460C7W	PS460B7W	PSBB601W	PSBBN601W
			3ø 600VAC	PS460FMIR5W	PS460MIR5W	PS460P5W	PS460R5W	PS460C5W	PS460B5W	PSBB601W	PSBBN601W
			3øY 120/208VAC	PS560FMIR9W	PS560MIR9W	PS560P9W	PS560R9W	PS560C9W	PS560B9W	PSBB601W	PSBBN601W
			3øY 277/480VAC	PS560FMIR7W	PS560MIR7W	PS560P7W	PS560R7W	PS560C7W	PS560B7W	PSBB601W	PSBBN601W
			3øY 347/600VAC	PS560FMIR5W	PS560MIR5W	PS560P5W	PS560R5W	PS560C5W	PS560B5W	PSBB601W	PSBBN601W
PS100FSS	PS100SS	100	120VAC		PS3100MIR4W	PS3100P4W	PS3100R4W	PS3100C4W	PS3100B4W	PSBB1001W	
			240VAC		PS3100MIR6W	PS3100P6W	PS3100R6W	PS3100C6W	PS3100B6W	PSBB1001W	
			480VAC		PS3100MIR7W	PS3100P7W	PS3100R7W	PS3100C7W	PS3100B7W	PSBB1001W	
			120/240VAC	PS4100FMIR12W	PS4100MIR12W	PS4100P12W	PS4100R12W	PS4100C12W	PS4100B12W	PSBB1001W	
			3ø 240VAC	PS4100FMIR9W	PS4100MIR9W	PS4100P9W	PS4100R9W	PS4100C9W	PS4100B9W	PSBB1001W	
			3ø 480VAC	PS4100FMIR7W	PS4100MIR7W	PS4100P7W	PS4100R7W	PS4100C7W	PS4100B7W	PSBB1001W	
			3ø 600VAC	PS4100FMIR5W	PS4100MIR5W	PS4100P5W	PS4100R5W	PS4100C5W	PS4100B5W	PSBB1001W	
			3øY 120/208VAC	PS5100FMIR9W	PS5100MIR9W	PS5100P9W	PS5100R9W	PS5100C9W	PS5100B9W	PSBB1001W	
			3øY 277/480VAC	PS5100FMIR7W	PS5100MIR7W	PS5100P7W	PS5100R7W	PS5100C7W	PS5100B7W	PSBB1001W	
			3øY 347/600VAC	PS5100FMIR5W	PS5100MIR5W	PS5100P5W	PS5100R5W	PS5100C5W	PS5100B5W	PSBB1001W	

PIN & SLEEVE DEVICES

Product Selection Guide

International Watertight

Amps	Volts	Pg. D-87-88				Pg. D-87-88
		Receptacle	Plug	Connector	Inlet	Metallic Back Box
16	100/130	PS316R4W	PS316P4W	PS316C4W		PSBBN202W
	200/250	PS316R6W	PS316P6W	PS316C6W		
	380/415	PS316R9W	PS316P9W	PS316C9W		
	200/250	PS416R9W	PS416P9W	PS416C9W		PSBBN202W
	380/415	PS416R6W	PS416P6W	PS416C6W		
	120/208 144/250	PS516R9W	PS516P9W	PS516C9W		
	200/346 240/415	PS516R6W	PS516P6W	PS516C6W		
32	100/130	PS332R4S	PS332P4S	PS332C4S		PSBBN301W
	200/250	PS332R6S	PS332P6S	PS332C6S		
	380/415	PS332R9S	PS332P9S	PS332C9S		
	200/250	PS432R9S	PS432P9S	PS432C9S		
	380/415	PS432R6S	PS432P6S	PS432C6S		
	120/208 144/250	PS532R9S	PS532P9S	PS532C9S		
	200/346 240/415	PS532R6S	PS532P6S	PS532C6S		

Additional international configuration available - consult Factory Export Dept.

PIN & SLEEVE DEVICES

Product Selection Guide

International Watertight

Amps	Volts	Pg. D-87-88				Pg. D-87-88
		Receptacle	Plug	Connector	Inlet	Metallic Back Box
63	100/130	PS363R4W	PS363P4W	PS363C4W		PSBBN601W
	200/250	PS363R6W	PS363P6W	PS363C6W		
	200/250	PS463R9W	PS463P9W	PS463C9W		
	380/415	PS463R6W	PS463P6W	PS463C6W		
	380 (50 Hz) 440 (60 Hz)	PS463R3W	PS463P3W	PS463C3W		
	440/460 (60 Hz)	PS463R11W	PS463P11W	PS463C11W		
	480/500	PS463R7W	PS463P7W	PS463C7W		
	120/208 144/250	PS563R9W	PS563P9W	PS563C9W		
	200/346 240/415	PS563R6W	PS563P6W	PS563C6W		
	250/440 (50 Hz) 265/460 (60 Hz)	PS563R11W	PS563P11W	PS563C11W		
	220/380 (50 Hz) 250/440 (60 Hz)	PS563R3W	PS563P3W	PS563C3W		
	277/480 288/500	PS563R7W	PS563P7W	PS563C7W		
125 AMPS						
125	100/130	PS3125R4W	PS3125P4W	PS3125C4W	PS3125B4W	
	200/250	PS3125R6W	PS3125P6W	PS3125C6W	PS3125B6W	
	380/415	PS3125R9W	PS3125P9W	PS3125C9W	PS3125B9W	
	200/250	PS4125R9W	PS4125P9W	PS4125C9W	PS4125B9W	
	120/208 144/250	PS5125R9W	PS5125P9W	PS5125C9W	PS5125B9W	
	200/346 240/415	PS5125R6W	PS5125P6W	PS5125C6W	PS5125B6W	

Additional international configuration available - consult Factory Export Dept.

PIN & SLEEVE DEVICES

Product Selection Guide

North American Splashproof

Amps	Volts	Pg. D-89				Pg. D-89	
		Plug	Receptacle	Connector	Inlet	Metallic Back Box	Non-Metallic Back Box
20	120VAC	PS320P4S		PS320C4S		PSBB201W	PSBBN201W
	240VAC	PS320P6S	PS320R6S	PS320C6S	PS320B6S	PSBB201W	PSBBN201W
	277VAC	PS320P5S	PS320R5S			PSBB201W	PSBBN201W
	120/240VAC	PS420P12S	PS420R12S	PS420C12S		PSBB202W	PSBBN202W
	3ø 240VAC	PS420P9S	PS420R9S	PS420C9S	PS420B9S	PSBB202W	PSBBN202W
	3ø 480VAC	PS420P7S	PS420R7S	PS420C7S	PS420B7S	PSBB202W	PSBBN202W
	3ø 600VAC		PS420R5S		PS420B5S	PSBB202W	PSBBN202W
	3øY 120/208VAC		PS520R9S	PS520C9S	PS520B9S	PSBB202W	PSBBN202W
	3øY 277/480VAC			PS520C7S	PS520B7S	PSBB202W	PSBBN202W
	3øY 347/600VAC		PS520R5S	PS520C5S	PS520B5S	PSBB202W	PSBBN202W
30	120VAC	PS330P4S	PS330R4S	PS330C4S	PS330B4S	PSBB301W	PSBBN301W
	240VAC	PS330P6S	PS330R6S	PS330C6S	PS330B6S	PSBB301W	PSBBN301W
	480VAC	PS330P7S		PS330C7S	PS330B7S	PSBB301W	PSBBN301W
	120/240VAC		PS430R12S	PS430C12S	PS430B12S	PSBB301W	PSBBN301W
	3ø 240VAC	PS430P9S	PS430R9S	PS430C9S	PS430B9S	PSBB301W	PSBBN301W
	3ø 480VAC	PS430P7S	PS430R7S	PS430C7S	PS430B7S	PSBB301W	PSBBN301W
	3ø 600VAC	PS430P5S	PS430R5S	PS430C5S	PS430B5S	PSBB301W	PSBBN301W
	3øY 120/208VAC	PS530P9S	PS530R9S	PS530C9S	PS530B9S	PSBB301W	PSBBN301W
	3øY 277/480VAC	PS530P7S			PS530B7S	PSBB301W	PSBBN301W
	3øY 347/600VAC	PS530P5S	PS530R5S	PS530C5S	PS530B5S	PSBB301W	PSBBN301W
60	240VAC	PS360P6S	PS360R6S	PS360C6S	PS360B6S	PSBB601W	PSBBN601W
	480VAC	PS360P7S	PS360R7S	PS360C7S	PS360B7S	PSBB601W	PSBBN601W
	120/240VAC	PS460P12S	PS460R12S	PS460C12S	PS460B12S	PSBB601W	PSBBN601W
	3ø 240VAC	PS460P9S	PS460R9S	PS460C9S	PS460B9S	PSBB601W	PSBBN601W
	3ø 480VAC	PS460P7S	PS460R7S	PS460C7S	PS460B7S	PSBB601W	PSBBN601W
	3ø 600VAC	PS460P5S	PS460R5S	PS460C5S	PS460B5S	PSBB601W	PSBBN601W
	3øY 120/208VAC	PS560P9S	PS560R9S	PS560C9S	PS560B9S	PSBB601W	PSBBN601W
	3øY 277/480VAC	PS560P7S	PS560R7S	PS560C7S	PS560B7S	PSBB601W	PSBBN601W
	3øY 347/600VAC	PS560P5S	PS560R5S	PS560C5S	PS560B5S	PSBB601W	PSBBN601W

PIN & SLEEVE DEVICES

Product Selection Guide

International Splashproof

Amps	Volts	Pg. D-90				Pg. D-90
		Receptacle	Plug	Connector	Inlet	Non-Metallic Back Box
16	100/130		PS316P4S	PS316C4S		PSBBN201W
	200/250	PS316R6S	PS316P6S	PS316C6S	PS316B6S	PSBBN201W
	380/415					PSBBN201W
	200/250	PS416R9S	PS416P9S	PS416C9S	PS416B9S	PSBBN202W
	380/415	PS416R6S	PS416P6S	PS416C6S	PS416B6S	PSBBN202W
	120/208; 144/250	PS516R9S		PS516C9S	PS516B9S	PSBBN202W
	200/346; 240/415			PS516C6S	PS516B6S	PSBBN202W
32	100/130	PS332R4S	PS332P4S	PS332C4S	PS332B4S	PSBBN301W
	200/250	PS332R6S	PS332P6S	PS332C6S	PS332B6S	PSBBN301W
	380/415	PS332R9S	PS332P9S	PS332C9S	PS332B9S	PSBBN301W
	200/250	PS432R9S	PS432P9S	PS432C9S	PS432B9S	PSBBN301W
	380/415	PS432R6S	PS432P6S	PS432C6S	PS432B6S	PSBBN301W
	120/208; 144/250	PS532R9S	PS532P9S	PS532C9S	PS532B9S	PSBBN301W
	200/346; 240/415	PS532R6S	PS532P6S	PS532C6S	PS532B6S	PSBBN301W
63	100/130					PSBBN601W
	200/250	PS363R6S	PS363P6S	PS363C6S	PS363B6S	PSBBN601W
	200/250	PS463R9S	PS463P9S	PS463C9S	PS463B9S	PSBBN601W
	380/415	PS463R6S	PS463P6S	PS463C6S	PS463B6S	PSBBN601W
	380 (50 Hz); 440 (60 Hz)	PS463R3S	PS463P3S	PS463C3S	PS463B3S	PSBBN601W
	440/460 (60 Hz)	PS463R11S	PS463P11S	PS463C11S	PS463B11S	PSBBN601W
	480/500	PS463R7S	PS463P7S	PS463C7S	PS463B7S	PSBBN601W
	120/208; 144/250	PS563R9S	PS563P9S	PS563C9S	PS563B9S	PSBBN601W
	200/346; 240/415	PS563R6S	PS563P6S	PS563C6S	PS563B6S	PSBBN601W
	250/440 (50 Hz); 265/460 (60 Hz)	PS563R11S	PS563P11S	PS563C11S	PS563B11S	PSBBN601W
	220/380 (50 Hz); 250/440 (60 Hz)	PS563R3S	PS563P3S	PS563C3S	PS563B3S	PSBBN601W
	277/480; 288/500	PS563R7S	PS563P7S	PS563C7S	PS563B7S	PSBBN601W

FLEXCOR®





CORD GRIPS

Deluxe Aluminum Cord Grips	D-106
Strain Relief Deluxe Aluminum Cord Grips	D-108
Nylon Cord Grips	D-109
Nylon Strain Relief Cord Grips	D-110
Nylon Mesh Cord Grips	D-111
Deluxe Stainless Steel Cord Grips	D-112
Stainless Steel Strain Relief Cord Grips	D-113
Strain-Relief Grips	D-114
Strain-Relief Liquid-Tight Grips	D-115
Watertight Grips	D-116



SUPPORT GRIPS

Standard-Duty, Closed Mesh	D-117
Standard-Duty, Split Lace	D-118
Standard-Duty, Split Rod	D-119
Heavy-Duty	D-120
Service & Bus Drops	D-121



PULLING GRIPS

Junior-Duty & Light-Duty	D-122
Medium-Duty	D-123
Heavy-Duty	D-124
Multi-Weave	D-125
High Strength	D-126
Slack	D-127

REFERENCE TABLES

Flexcor Product Description	D-128
Flexcor Applications	D-130
Split Support Grip Lace & Rod Mesh Termination	D-132
How to Select Properly Sized Pulling & Support Grips	D-133
Pulling & Support Grips Strength Information	D-134

FLEXCOR® CORD GRIPS

Deluxe Aluminum Cord Grips

Description

Deluxe aluminum Cord Grips are UL Listed and CSA Certified for use in both indoor and outdoor applications to prevent cable pullout, to control arc of bend, and to provide a tight seal against environmental elements such as dirt, moisture and coolants. Cord Grips are available in a wide range of conduit sizes from 1/4" to 3" in straight, 90º and 45º styles. A unique design with a combination tightening surface that includes both a hex area and knurled surface provides extra gripping for initial hand tightening.



Aluminum Cord Grip 45°



Aluminum Cord Grip Straight



Aluminum Cord Grip 90°

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	45° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
1/4" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG25188	—	—	0.120" -0.180"
CG25250	—	—	0.180" -0.250"
CG25312	—	—	0.250" -0.310"
CG25375	—	—	0.310" -0.370"
CG25438	—	—	0.370" -0.430"
3/8" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG38188	CG3890188	—	0.120" - 0.180"
CG38250	CG3890250	—	0.180" - 0.250"
CG38312	CG3890312	—	0.250" - 0.310"
CG38375	CG3890375	—	0.310" - 0.370"
CG38438	CG3890438	—	0.370" - 0.430"
1/2" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG501881	CG5090188	CG5045188	0.120" - 0.180" F1
CG501882	—	—	0.120" - 0.180" F2
CG502501	CG5090250	CG5045250	0.180" - 0.250" F1
CG502502	—	—	0.180" - 0.250" F2
CG503121	CG5090312	CG5045312	0.250" - 0.310" F1
CG503122	—	—	0.250" - 0.310" F2
CG503751	CG5090375	CG5045375	0.310" - 0.370" F1
CG503752	—	—	0.310" - 0.370" F2
CG504381	CG5090438	CG5045438	0.370" - 0.430" F1
CG504382	—	—	0.370" - 0.430" F2
—	CG5090500	CG5045500	0.430" - 0.500"
—	CG5090562	CG5045562	0.500" - 0.560"
—	CG5090625	CG5045625	0.560" - 0.620"
CG505002	—	—	0.430" - 0.500" F2
CG505003	—	—	0.430" - 0.500" F3
CG505622	—	—	0.500" - 0.560" F2
CG505623	—	—	0.500" - 0.560" F3
CG506252	—	—	0.560" - 0.620" F2
CG506253	—	—	0.560" - 0.620" F3
CG506883	—	—	0.620" - 0.680" F3
CG507503	—	—	0.620" - 0.750" F3
CG508123	—	—	0.680" - 0.810" F3
CG7510004	—	—	0.870" - 1.000" F4
CG751882	—	—	0.120" - 0.180" F2
CG752502	—	—	0.180" - 0.250" F2
CG753122	—	—	0.250" - 0.310" F2
CG753752	—	—	0.310" - 0.370" F2
CG754382	—	—	0.370" - 0.430" F2
CG755002	CG7590500	CG7545500	0.430" - 0.500" F2
CG755003	—	—	0.430" - 0.500" F3
CG755622	CG7590562	CG7545562	0.500" - 0.560" F2
CG755623	—	—	0.500" - 0.560" F3
CG755624	—	—	0.500" - 0.560" F4
CG756252	CG7590625	CG7545625	0.560" - 0.620" F2
CG756253	—	—	0.560" - 0.620" F3
CG756254	—	—	0.560" - 0.620" F4
CG756883	CG7590688	CG7545688	0.560" - 0.680" F3
CG756884	—	—	0.560" - 0.680" F4
CG757503	CG7590750	CG7545750	0.620" - 0.750" F3
CG757504	—	—	0.620" - 0.750" F4
CG758123	CG7590812	CG7545812	0.680" - 0.810" F3
CG758124	—	—	0.680" - 0.810" F4
CG758754	—	—	0.750" - 0.870" F4
CG759384	—	—	0.810" - 0.930" F4
1" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG10010004	CG100901000	CG100451000	0.870" - 1.000" F4
CG10010005	—	—	0.870" - 1.000" F5
CG10011255	—	—	1.000" - 1.120" F5
CG10012505	—	—	1.120" - 1.250" F5
CG10013755	—	—	1.250" - 1.370" F5
CG1005624	CG10090562	CG10045562	0.440" - 0.560" F4
CG1006254	CG10090625	CG10045625	0.560" - 0.620" F4
CG1006884	CG10090688	CG10045688	0.560" - 0.680" F4
CG1007504	CG10090750	CG10045750	0.620" - 0.750" F4
CG1008124	CG10090812	CG10045812	0.680" - 0.810" F4
CG1008754	CG10090875	CG10045875	0.750" - 0.870" F4
CG1005624	—	—	0.440" - 0.560" F4
CG1006254	—	—	0.560" - 0.620" F4
CG1006884	—	—	0.560" - 0.680" F4
CG1007504	—	—	0.620" - 0.750" F4
CG1008124	—	—	0.680" - 0.810" F4
CG1008754	—	—	0.750" - 0.870" F4
CG1009384	CG10090938	CG10045938	0.810" - 0.930" F4

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

All devices listed on this page meet NEMA 3R standards.

FLEXCOR® CORD GRIPS

Deluxe Aluminum Cord Grips

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	45° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
1 1/4" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG12510005	CG125901000	CG125451000	0.870" - 1.000" F5
CG12511255	—	—	1.000" - 1.120" F5
CG12512505	—	—	1.120" - 1.250" F5
CG12513755	—	—	1.250" - 1.370" F5
—	CG125901125	CG125451125	1.000" - 1.130" F5
—	CG125901250	CG125451250	1.130" - 1.250" F5
—	CG125901375	CG125451375	1.250" - 1.380" F5
CG1256885	CG12590688	CG12545688	0.560" - 0.680" F5
CG1258125	CG12590812	CG12545812	0.680" - 0.810" F5
CG1258755	CG12590875	CG12545875	0.750" - 0.870 F5
1 1/2" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG15010005	CG150901000	CG150451000	0.870" - 1.000" F5
CG15011255	CG150901125	CG150451125	1.000" - 1.120" F5
CG15012505	CG150901250	CG150451250	1.120" - 1.250" F5
CG15013755	CG150901375	CG150451375	1.250" - 1.370" F5
CG15013756	—	—	1.250" - 1.370" F6
CG15015626	CG150901562	—	1.430" - 1.560" F6
CG15016886	CG150901688	—	1.560" - 1.680" F6
CG15018126	CG150901812	—	1.680" - 1.810" F6
CG1506885	CG15090688	CG15045688	0.560" - 0.680" F5
CG1508125	CG15090812	CG15045812	0.680" - 0.810" F5
CG1508755	CG15090875	CG15045875	0.750" - 0.870" F5
2" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG20013756	CG2009013756	—	1.250" - 1.370" F6
CG20014376	—	—	1.310" - 1.430" F6
CG20015626	CG2009015626	—	1.430" - 1.560" F6
CG20016886	CG2009016886	—	1.560" - 1.680" F6
CG20018126	CG2009018126	—	1.680" - 1.810" F6
CG20018127	—	—	1.680" - 1.810" F7
CG20019387	—	—	1.810" - 1.940" F7
CG20020627	—	—	1.940" - 2.060" F7
CG20021887	—	—	2.060" - 2.190" F7
CG20023127	—	—	2.190" - 2.310" F7
CG20024387	—	—	2.310" - 2.440" F7
2 1/2" ALUMINUM CORROSION-RESISTANT CORD GRIP			
CG25018127	—	—	1.680" - 1.810" F7
CG25019387	—	—	1.810" - 1.940" F7
CG25020627	—	—	1.680" - 1.810" F7
CG25021887	—	—	1.680" - 1.810" F7
CG25023127	—	—	1.680" - 1.810" F7
CG25024387	—	—	1.680" - 1.810" F7



Aluminum Cord Grip 45°



Aluminum Cord Grip Straight



Aluminum Cord Grip 90°

STRAIGHT MALE CATALOG NUMBER	CABLE DIAMETER RANGE
3" ALUMINUM CORROSION-RESISTANT CORD GRIP	
CG30018127	1.680" - 1.810" F7
CG30019387	1.810" - 1.940" F7
CG30020627	1.940" - 2.060" F7
CG30021887	2.060" - 2.180" F7
CG30023127	2.180" - 2.310" F7
CG30024387	2.310" - 2.440" F7
CG30026259	2.440" - 2.630" F9
CG30028129	2.630" - 2.810" F9
CG30030009	2.810" - 3.000" F9
CG30032509	3.000" - 3.250" F9
3 1/2" ALUMINUM CORROSION-RESISTANT CORD GRIP	
CG35031808	3.000" - 3.180" F8
CG35033358	3.180" - 3.340" F8
CG35035308	3.340" - 3.530" F8
4" ALUMINUM CORROSION-RESISTANT CORD GRIP	
CG40036909	3.500" - 3.690" F9
CG40038559	3.690" - 3.860" F9
CG40040259	3.860" - 4.030" F9

All devices listed on this page meet NEMA 3R standards.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Strain Relief Deluxe Aluminum Cord Grips


Straight Male Connector


90º Male Connector


45º Male Connector


Straight Female Connector

Description

Deluxe cord grips are woven of stainless steel mesh with an aluminum body for corrosion resistance. They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain. They are recommended for indoor or outdoor use where subjected to moisture in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets.

NOTE: Stainless steel mesh is not suitable for marine use.

STRAIGHT MALE CATALOG NO.	90° MALE CATALOG NO.	45° MALE CATALOG NO.	STRAIGHT FEMALE CATALOG NO.	CABLE DIAMETER RANGE
1/4" NPT DELUXE CORD GRIPS				
CG204	—	—	CG204F	0.187"-0.250"
CG206	—	—	CG206F	0.250"-0.312"
CG208	—	—	CG208F	0.312"-0.375"
CG210	—	—	CG210F	0.375"-0.437"
1/2" NPT DELUXE CORD GRIPS				
CG404	CG40490	CG40445	CG404F	0.187"-0.250"
CG406	CG40690	CG40645	CG406F	0.250"-0.375"
CG408	CG40890	CG40845	CG408F	0.375"-0.500"
—	—	CG40945	—	0.500"-0.550"
CG410	CG41090	CG41045	CG410F	0.500"-0.625"
CG411	—	—	—	0.625"-0.750"
CG412	—	—	—	0.750"-0.875"
3/4" NPT DELUXE CORD GRIPS				
CG604	—	CG60445	—	0.187"-0.250"
CG606	CG60690	CG60645	CG606F	0.250"-0.375"
CG608	CG60890	CG60845	CG608F	0.375"-0.500"
—	—	CG60945	—	0.500"-0.550"
CG610	CG61090	CG61045	CG610F	0.500"-0.625"
CG612	CG61290	CG61245	CG612F	0.625"-0.750"
CG614	—	—	—	0.750"-0.875"

STRAIGHT MALE CATALOG NO.	CABLE DIAMETER RANGE
2-1/2" NPT DELUXE CORD GRIPS	
CG1630	1.687"-1.812"
CG1634	1.812"-1.937"
CG1636	1.937"-2.062"
CG1638	2.062"-2.187"
CG1640	2.187"-2.312"
CG1642	2.312"-2.437"

STRAIGHT MALE CATALOG NO.	CABLE DIAMETER RANGE
3" NPT DELUXE CORD GRIPS	
CG1830	1.688"-1.812"
CG1834	1.812"-1.937"
CG1836	1.937"-2.062"
CG1838	2.062"-2.187"
CG1840	2.187"-2.312"
CG1842	2.312"-2.437"
CG1844	2.437"-2.625"
CG1846	2.625"-2.812"
CG1848	2.812"-3.000"
CG1850	3.000"-3.250"

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	45° MALE CATALOG NUMBER	STRAIGHT FEMALE CATALOG NUMBER	CABLE DIAMETER RANGE
1" NPT DELUXE CORD GRIPS				
CG809	CG80990	CG80945	CG809F	0.375"-0.500"
CG811	CG81190	CG81145	CG811F	0.500"-0.625"
CG812	CG81290	CG81245	CG812F	0.625"-0.750"
CG814	CG81490	CG81445	CG814F	0.750"-0.875"
CG816	CG81690	CG81645	CG816F	0.875"-1.000"
CG818	—	—	—	1.000"-1.125"
CG820	—	—	—	1.125"-1.250"
1-1/4" NPT DELUXE CORD GRIPS				
CG1014	CG101490	CG101445	CG1014F	0.750"-0.875"
CG1016	CG101690	CG101645	CG1016F	0.875"-1.000"
CG1018	CG101890	CG101845	CG1018F	1.000"-1.125"
CG1020	CG102090	CG102045	CG1020F	1.125"-1.250"
CG1022	CG102290	CG102245	CG1022F	1.250"-1.375"
1-1/2" NPT DELUXE CORD GRIPS				
CG1214	CG121490	CG121445	CG1214F	0.750"-0.875"
CG1216	CG121690	CG121645	CG1216F	0.875"-1.000"
CG1218	CG121890	CG121845	CG1218F	1.000"-1.125"
CG1220	CG122090	CG122045	CG1220F	1.125"-1.250"
CG1222	CG122290	CG122245	CG1222F	1.250"-1.375"
2" NPT DELUXE CORD GRIPS				
CG1422	CG142290	—	CG1422F	1.250"-1.375"
CG1424	CG142490	—	CG1424F	1.312"-1.437"
CG1426	CG142690	—	CG1426F	1.437"-1.562"
CG1428	CG142890	—	CG1428F	1.562"-1.687"
CG1430	CG143090	—	CG1430F	1.687"-1.812"
CG1432	CG143290	—	CG1432F	1.750"-1.875"
CG1434	—	—	—	1.812"-1.937"
CG1436	—	—	—	1.937"-2.062"
CG1438	—	—	—	2.062"-2.187"
CG1440	—	—	—	2.187"-2.312"
CG1442	—	—	—	2.312"-2.437"

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Nylon Cord Grips

Description

Non-Metallic Cord Connectors are constructed of a durable, nylon material which offers excellent corrosion resistance, is lightweight, durable and ideal for use in damp environments. Nylon Cord Connectors are ideally suited for use in applications with moisture or washdowns and they provide an environmental seal against dirt, coolants, as well as other chemicals.



Black Nylon Cord Grip Straight



Nylon Cord Grip Straight



Nylon Cord Grip 90°

STRAIGHT MALE CATALOG NO.	90° MALE CATALOG NO.	NPT SIZE	CABLE DIAMETER RANGE
CGN25075	—	1/4" NPT	0.075 - 0.135
CGN25135	—		0.135 - 0.200
CGN25200	—		0.200 - 0.265
CGN38125	CGN3890125	3/8" NPT	0.125 - 0.187
CGN38187	CGN3890187		0.187 - 0.250
CGN38250	CGN3890250		0.250 - 0.312
CGN38312	CGN3890312		0.312 - 0.375
CGN38375	CGN3890375		0.375 - 0.437
CGN50062	CGN5090062	1/2" NPT	0.062 - 0.125
CGN50125	CGN5090125		0.125 - 0.187
CGN50187	CGN5090187		0.187 - 0.250
CGN50250	CGN5090250		0.250 - 0.312
CGN50312	CGN5090312		0.312 - 0.375
CGN50375	CGN5090375		0.375 - 0.437
CGN50437	CGN5090437		0.437 - 0.500
CGN50500	CGN5090500		0.500 - 0.562
CGN50562	CGN5090562		0.562 - 0.625
CGN50250BK	—	BLACK 1/2" NPT	0.250 - 0.312
CGN50312BK	—		0.312 - 0.375
CGN50375BK	—		0.375 - 0.437
CGN50437BK	—		0.437 - 0.500
CGN50500BK	—		0.500 - 0.562
CGN75187	CGN7590187	3/4" NPT	0.187 - 0.250
CGN75250	CGN7590250		0.250 - 0.375
CGN75375	CGN7590375		0.375 - 0.437
CGN75437	CGN7590437		0.437 - 0.562
CGN75500	CGN7590500		0.500 - 0.625
CGN75562	CGN7590562		0.562 - 0.687
CGN75625	CGN7590625		0.625 - 0.750
CGN75687	CGN7590687		0.687 - 0.812
CGN75187BK	—	BLACK 3/4" NPT	0.187 - 0.250
CGN75250BK	—		0.250 - 0.375
CGN75375BK	—		0.375 - 0.437
CGN75437BK	—		0.437 - 0.562
CGN75500BK	—		0.500 - 0.625
CGN75562BK	—		0.562 - 0.687
CGN75625BK	—		0.625 - 0.750

STRAIGHT MALE CATALOG NO.	90° MALE CATALOG NO.	NPT SIZE	CABLE DIAMETER RANGE
CGN100437	CGN10090437	1" NPT	0.437 - 0.562
CGN100500	CGN10090500		0.500 - 0.625
CGN100562	CGN10090562		0.562 - 0.687
CGN100625	CGN10090625		0.625 - 0.750
CGN100687	CGN10090687		0.687 - 0.812
CGN100750	CGN10090750		0.750 - 0.875
CGN100812	CGN10090812		0.812 - 0.937
CGN100875	CGN10090875		0.875 - 1.000
CGN1001000	CGN100901000		1.000 - 1.125
CGN100625BK	—	BLACK 1" NPT	0.625 - 0.750
CGN100687BK	—		0.687 - 0.812
CGN100750BK	—		0.750 - 0.875
CGN100812BK	—		0.812 - 0.937
CGN100875BK	—		0.875 - 1.000
CGN125750	CGN12590750	1 1/4" NPT	0.750 - 0.875
CGN125875	CGN12590875		0.875 - 1.000
CGN1251000	CGN125901000		1.000 - 1.125
CGN1251125	CGN125901125		1.125 - 1.250
CGN1251250	CGN125901250		1.250 - 1.355
CGN5042UF	—	1/2" NPT OVAL UF CABLE	0.218 - 0.421
CGN5064UF	—		0.218 - 0.640
—	CGN509042UF	90D 1/2" NPT OVAL UF CABLE	0.218 - 0.421
—	CGN509064UF		0.218 - 0.640
CGN7542UF	—	3/4" NPT OVAL UF CABLE	0.218 - 0.421
CGN7564UF	—		0.218 - 0.640
—	CGN759042UF	90D 3/4"NPT OVAL UF CABLE	0.218 - 0.421
—	CGN759064UF		0.218 - 0.640

All devices on this page meet NEMA 3R standards, except for Black, which meet NEMA 6P standards.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Nylon Strain Relief Cord Grips

Description

Nylon strain relief cord grips are woven of stainless steel mesh with a nylon body for corrosion resistance. They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain. They are recommended for indoor or outdoor use where subjected to moisture in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets.

NOTE: Stainless steel mesh is not suitable for marine use.

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
1/2" NPT NYLON STRAIN RELIEFCORD GRIPS WITH MESH		
CGN50187M	CGN5090187M	0.187 - 0.250
CGN50250M	CGN5090250M	0.250 - 0.312
CGN50312M	CGN5090312M	0.312 - 0.375
CGN50375M	CGN5090375M	0.375 - 0.437
CGN50437M	CGN5090437M	0.437 - 0.500
CGN50500M	CGN5090500M	0.500 - 0.562
CGN50562M	CGN5090562M	0.562 - 0.625



Nylon Cord Grip Straight Male with Stainless Steel Mesh

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
3/4" NPT NYLON STRAIN RELIEF CORD GRIPS WITH MESH		
CGN75187M	—	0.187 - 0.250
CGN75250M	CGN7590250M	0.250 - 0.375
CGN75375M	CGN7590375M	0.375 - 0.437
CGN75437M	CGN7590437M	0.437 - 0.562
CGN75500M	CGN7590500M	0.500 - 0.625
CGN75562M	CGN7590562M	0.562 - 0.687
CGN75625M	CGN7590625M	0.625 - 0.750
CGN75687M	CGN7590687M	0.687 - 0.812



90° Nylon Cord Grip with Stainless Steel Mesh

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
1" NPT NYLON STRAIN RELIEF CORD GRIPS WITH MESH		
CGN100437M	—	0.437 - 0.562
CGN100500M	—	0.500 - 0.625
CGN100562M	CGN10090562M	0.562 - 0.687
CGN100625M	CGN10090625M	0.625 - 0.750
CGN100687M	CGN10090687M	0.687 - 0.812
CGN100750M	CGN10090750M	0.750 - 0.875
CGN100812M	—	0.812 - 0.937
CGN100875M	CGN10090875M	0.875 - 1.000

All devices on this page meet NEMA 3R standards.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Nylon Mesh Cord Grips

Description

Nylon mesh cord grips are woven of nylon mesh with a nylon body for corrosion resistance. They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain. They are recommended for indoor or outdoor use where subjected to moisture in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets.

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
1/2" NPT NYLON MESH CORD GRIPS		
CGN50187NM	CGN5090187NM	0.187 - 0.250
CGN50250NM	CGN5090250NM	0.250 - 0.312
CGN50312NM	CGN5090312NM	0.312 - 0.375
CGN50375NM	CGN5090375NM	0.375 - 0.437
CGN50437NM	CGN5090437NM	0.437 - 0.500

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
3/4" NPT NYLON MESH CORD GRIPS		
CGN75187NM	—	0.187 - 0.250
CGN75250NM	CGN7590250NM	0.250 - 0.375
CGN75375NM	CGN7590375NM	0.375 - 0.437
CGN75437NM	CGN7590437NM	0.437 - 0.562
CGN75500NM	CGN7590500NM	0.500 - 0.625
CGN75562NM	CGN7590562NM	0.562 - 0.687
CGN75625NM	CGN7590625NM	0.625 - 0.750

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	CABLE DIAMETER RANGE
1" NPT NYLON MESH CORD GRIPS		
CGN100437NM	CGN10090437NM	0.437 - 0.562
CGN100500NM	CGN10090500NM	0.500 - 0.625
CGN100562NM	—	0.562 - 0.687
CGN100625NM	CGN10090625NM	0.625 - 0.750
CGN100687NM	CGN10090687NM	0.687 - 0.812
CGN100750NM	CGN10090750NM	0.750 - 0.875
CGN100812NM	—	0.812 - 0.937
CGN100875NM	CGN10090875M	0.875 - 1.000



Straight Nylon Cord Grips with Nylon Mesh



90° Nylon Cord Grips with Nylon Mesh

All devices on this page meet NEMA 3R standards.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Deluxe Stainless Steel Cord Grips

CATALOG NUMBER CORD GRIP	CABLE DIAMETER RANGE
3/8" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS38188	0.120" - 0.180"
CGSS38250	0.180" - 0.250"
CGSS38312	0.250" - 0.310"
CGSS38375	0.310" - 0.370"
CGSS38438	0.370" - 0.430"
1/2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS50188	0.120" - 0.180"
CGSS50250	0.180" - 0.250"
CGSS50312	0.250" - 0.310"
CGSS50375	0.310" - 0.370"
CGSS50438	0.370" - 0.430"
CGSS50500	0.430" - 0.500"
CGSS50562	0.500" - 0.560"
CGSS50625	0.560" - 0.620"
3/4" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS75500	0.430" - 0.500"
CGSS75562	0.500" - 0.560"
CGSS75625	0.560" - 0.620"
CGSS75688	0.560" - 0.680"
CGSS75750	0.620" - 0.750"
CGSS75812	0.680" - 0.810"
1" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS1001000	0.870" - 1.000"
CGSS100562	0.440" - 0.560"
CGSS100625	0.560" - 0.620"
CGSS100688	0.560" - 0.680"
CGSS100750	0.620" - 0.750"
CGSS100812	0.680" - 0.810"
CGSS100875	0.750" - 0.870"
CGSS100938	0.810" - 0.930"
1 1/4" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS1251000	0.870" - 1.000"
CGSS1251125	1.000" - 1.120"
CGSS1251250	1.120" - 1.250"
CGSS1251375	1.250" - 1.370"
CGSS125688	0.560" - 0.680"
CGSS125812	0.680" - 0.810"
CGSS125875	0.750" - 0.870"

Description

The Pass & Seymour series of corrosion-resistant cord connectors feature a body and compression nut made of Type 304 stainless steel with exceptional tensile strength and the highest levels of durability in severely corrosive environments. All stainless steel cord grips include an embedded Buna-N O-Ring. These connectors are recommended for use in washdowns or high moisture environments in food processing plants, petrochemical facilities, wastewater treatment plants, pulp & paper mills and chemical manufacturing factories. (Note: Type 316 stainless steel also available upon request and minimums may apply.)

NOTE: Stainless steel mesh is not suitable for marine use.

CATALOG NUMBER CORD GRIP	CABLE DIAMETER RANGE
1 1/2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS1501000	0.870" - 1.000"
CGSS1501125	1.000" - 1.120"
CGSS1501250	1.120" - 1.250"
CGSS1501375	1.250" - 1.370"
CGSS150688	0.560" - 0.680"
CGSS150812	0.680" - 0.810"
CGSS150875	0.750" - 0.870"
2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS2001375	1.250" - 1.370"
CGSS2001562	1.430" - 1.560"
CGSS2001688	1.560" - 1.680"
CGSS2001812	1.680" - 1.810"
CGSS2001938	1.810" - 1.940"
CGSS2002062	1.940" - 2.060"
CGSS2002188	2.060" - 2.190"
CGSS2002312	2.190" - 2.310"
CGSS2002438	2.310" - 2.440"
2 1/2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS2501812	1.680" - 1.810"
CGSS2501938	1.810" - 1.940"
CGSS2502062	1.940" - 2.060"
CGSS2502188	2.060" - 2.190"
CGSS2502312	2.190" - 2.310"
CGSS2502438	2.310" - 2.440"
3" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS3002635	2.440" - 2.630"
CGSS3002812	2.630" - 2.810"
CGSS3003000	2.810" - 3.000"
CGSS3003250	3.000" - 3.250"



Stainless Steel Deluxe Cord Grip

All devices listed on this page meet NEMA 3R standards.

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Stainless Steel Strain Relief Cord Grips



Stainless Steel Cord grip with Stainless Steel Mesh

Description

Stainless Steel strain relief cord grips are woven of stainless steel mesh with a Type 304 stainless steel body for corrosion resistance. They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain. They are recommended for indoor or outdoor use where subjected to moisture and corrosion in the wiring of pendant stations, processing equipment, hand tools and power cord sets.

NOTE: Stainless steel mesh is not suitable for marine use.

CATALOG NUMBER CG MESH	CABLE DIAMETER RANGE
3/8" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
—	0.120" - 0.180"
CGSS38250M	0.180" - 0.250"
CGSS38312M	0.250" - 0.310"
CGSS38375M	0.310" - 0.370"
CGSS38438M	0.370" - 0.430"
1/2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
—	0.120" - 0.180"
CGSS50250M	0.180" - 0.250"
CGSS50312M	0.250" - 0.310"
CGSS50375M	0.310" - 0.370"
CGSS50438M	0.370" - 0.430"
CGSS50500M	0.430" - 0.500"
CGSS50562M	0.500" - 0.560"
CGSS50625M	0.560" - 0.620"
3/4" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS75500M	0.430" - 0.500"
CGSS75562M	0.500" - 0.560"
CGSS75625M	0.560" - 0.620"
CGSS75687M	0.560" - 0.680"
CGSS75750M	0.620" - 0.750"
CGSS75812M	0.680" - 0.810"
1" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS1001000M	0.870" - 1.000"
CGSS100562M	0.440" - 0.560"
CGSS100625M	0.560" - 0.620"
CGSS100687M	0.560" - 0.680"
CGSS100750M	0.620" - 0.750"
CGSS100812M	0.680" - 0.810"
CGSS100875M	0.750" - 0.870"
CGSS100937M	0.810" - 0.930"
1 1/4" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS1251000M	0.870" - 1.000"
CGSS1251125M	1.000" - 1.120"
CGSS1251250M	1.120" - 1.250"
CGSS1251375M	1.250" - 1.370"
CGSS125688M	0.560" - 0.680"
CGSS125812M	0.680" - 0.810"
CGSS125875M	0.750" - 0.870"

CATALOG NUMBER CG MESH	CABLE DIAMETER RANGE
1 1/2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS1501000M	0.870" - 1.000"
CGSS1501125M	1.000" - 1.120"
CGSS1501250M	1.120" - 1.250"
CGSS1501375M	1.250" - 1.370"
CGSS150688M	0.560" - 0.680"
CGSS150812M	0.680" - 0.810"
CGSS150875M	0.750" - 0.870"
2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS2001375M	1.250" - 1.370"
CGSS2001562M	1.430" - 1.560"
CGSS2001688M	1.560" - 1.680"
CGSS2001812M	1.680" - 1.810"
CGSS2001938M	1.810" - 1.940"
CGSS2002062M	1.940" - 2.060"
CGSS2002188M	2.060" - 2.190"
CGSS2002312M	2.190" - 2.310"
CGSS2002438M	2.310" - 2.440"
2 1/2" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS2501812M	1.680" - 1.810"
CGSS2501938M	1.810" - 1.940"
CGSS2502062M	1.940" - 2.060"
CGSS2502188M	2.060" - 2.190"
CGSS2502312M	2.190" - 2.310"
CGSS2502438M	2.310" - 2.440"
3" STAINLESS STEEL 304 IP 67 68 CORD GRIP	
CGSS3002635M	2.440" - 2.630"
CGSS3002812M	2.630" - 2.810"
CGSS3003000M	2.810" - 3.000"
CGSS3003250M	3.000" - 3.250"

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Strain Relief Grips




Wide Range, Straight Male, Dust Tight

Description

Wide range grips are recommended for use in wiring of enclosures, power boxes, machine tools, and power centers. Includes insulated bushing.

CATALOG NUMBER	NPT SIZE	CABLE DIAMETER RANGE
WIDE RANGE, STRAIGHT MALE, DUST TIGHT GRIPS		
BOX22	1/2"	0.220"-0.320"
BOX30	1/2"	0.300"-0.430"
BOX40	1/2"	0.400"-0.540"
BOX52	3/4"	0.520"-0.730"
BOX70	1"	0.700"-1.000"
BOX94	1-1/4"	0.940"-1.250"
BOX120	1-1/2"	1.200"-1.500"
BOX140	2"	1.400"-1.750"

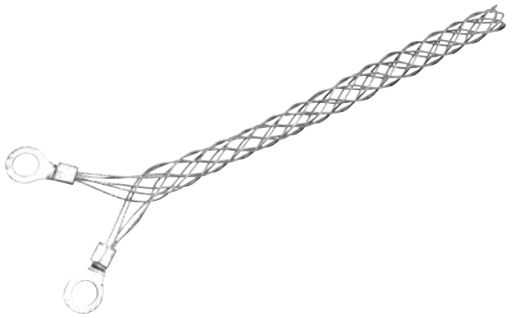

Turnlok/EHU Strain Relief Grips

Description


Wire mesh grips for Turnlok and EHU straight blade plugs and connectors provide additional strain-relief for wiring device plugs and connectors used on portable equipment in commercial and institutional applications, and industrial plant and construction site areas, which incur abnormally high abuse.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH
TURNLOK®/EHU STRAIN RELIEF GRIPS		
FC22GL	0.220"-0.320"	4.50"
FC30GL	0.300"-0.430"	4.50"
FC40GL	0.400"-0.560"	5.00"
FC52GL	0.520"-0.730"	6.50"
FC70GL	0.700"-0.850"	8.50"
FC94GL	0.940"-1.250"	11.75"

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Strain Relief Liquid-Tight Grips



Straight Male Connector



Non-Metallic
Straight Male Connector



90° Male Connector



45° Male Connector

Description

Rated IP68 and NEMA 4X, Stainless Steel Liquid-Tight Connectors offer corrosion resistance for the toughest environment. For use in wet or dry locations to seal electrical connections against dust, dirt, oil, water, chemicals and other corrosive elements. These are available in straight and 90 degree, 3/8" to 2" NPT. The stainless steel liquid-tight includes a nylon insulated throat and Viton® O-Ring.

NOTE: Stainless steel mesh is not suitable for marine use.

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	45° MALE CATALOG NUMBER	NPT SIZE	MESH LENGTH
LIQUID-TIGHT FOR METALLIC FLEXIBLE CONDUIT				
STB38SF	STB9038SF	STB4538SF	3/8"	2.625"
STB50SF	STB9050SF	STB4550SF	1/2"	3.875"
STB75SF	STB9075SF	STB4575SF	3/4"	4.375"
STB100SF	STB90100SF	STB45100SF	1"	5.25"
STB125SF	STB90125SF	STB45125SF	1-1/4"	5.625"
STB150SF	STB90150SF	STB45150SF	1-1/2"	5.75"
STB200SF	STB90200SF	STB45200SF	2"	7.5"
STB250SF	STB90250SF	STB45250SF	2-1/2"	9.625"
STB300SF	STB90300SF	STB45300SF	3"	10.625"
STB400SF	STB90400SF	STB45400SF	4"	16.25"

STRAIGHT MALE CATALOG NUMBER	NPT SIZE	MESH LENGTH
LIQUID-TIGHT GRIPS FOR NON-METALLIC TYPE "A" FLEXIBLE CONDUIT		
STBN38SF	3/8"	9"
STBN50SF	1/2"	10"
STBN75SF	3/4"	10.5"
STBN100SF	1"	12"
STBN125SF	1-1/4"	17"
STBN150SF	1-1/2"	21.5"
STBN200SF	2"	24"

STRAIGHT MALE CATALOG NUMBER	90° MALE CATALOG NUMBER	NPT SIZE
STAINLESS STEEL LIQUIDTIGHT FITTINGS		
LTB38SS	LTB3890SS	3/8"
LTB50SS	LTB5090SS	1/2"
LTB75SS	LTB7590SS	3/4"
LTB100SS	LTB10090SS	1"
LTB125SS	LTB12590SS	1 1/4"
LTB150SS	LTB15090SS	1 1/2"
LTB200SS	LTB20090SS	2"

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® CORD GRIPS

Watertight Grips

Description

Watertight cord grips are woven of stainless steel or nylon with a plastic body for corrosion resistance. They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain. They are recommended for indoor or outdoor use where subjected to moisture in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets.

NOTE: Stainless steel mesh is not suitable for marine use.

CATALOG NUMBER	DESCRIPTION	NPT SIZE	CABLE DIAMETER RANGE
WT50312NM	Watertight Grip with Nylon Mesh	1/2"	0.312 - 0.375
WT50375NM		1/2"	0.375 - 0.437
WT50437NM		1/2"	0.437 - 0.500
WT75437NM		3/4"	0.437 - 0.562
WT75500NM		3/4"	0.500 - 0.625
WT75562NM		3/4"	0.562 - 0.687
WT75625NM		3/4"	0.625 - 0.750
WT100562NM		1"	0.562 - 0.687
WT100625NM		1"	0.625 - 0.750
WT100750NM		1"	0.750 - 0.875
WT100875NM		1"	0.875 - 1.000
WT50312M	Watertight Grip with Stainless Steel Mesh	1/2"	0.312 - 0.375
WT50375M		1/2"	0.375 - 0.437
WT50437M		1/2"	0.437 - 0.500
WT50500M		1/2"	0.500 - 0.562
WT50562M		1/2"	0.562 - 0.625
WT75375M		3/4"	0.375 - 0.437
WT75437M		3/4"	0.437 - 0.562
WT75500M		3/4"	0.500 - 0.625
WT75562M		3/4"	0.562 - 0.687
WT75625M		3/4"	0.625 - 0.750
WT75687M		3/4"	0.687 - 0.812
WT100562M		1"	0.562 - 0.687
WT100625M		1"	0.625 - 0.750
WT100750M		1"	0.750 - 0.875
WT100812M		1"	0.812 - 0.370
WT100875M		1"	0.875 - 1.000



Watertight Strain Relief Cord Grip with Stainless Steel Mesh



Watertight Strain Relief Cord Grip with Nylon Mesh



Watertight Strain Relief Cord Grip with Nylon Mesh

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® SUPPORT GRIPS

Support Grips Standard-Duty, Closed Mesh

Description

Standard closed mesh support grips are designed for loads up to 600 lbs. and vertical runs of no more than 100 ft. They are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Closed mesh support grips are used when the end of the cable is accessible. Support grips are woven of corrosion-resistant tinned-bronze or stainless steel wire.

CATALOG NUMBER STAINLESS STEEL	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
STANDARD-DUTY, CLOSED MESH, SINGLE EYE GRIPS				
FC050U	0.50"-0.62"	7"	10"	567 lbs.
FC062U	0.63"-0.74"	8"	10"	890 lbs.
FC075U	0.75"-0.99"	21"	13"	1,040 lbs.
FC100U	1.00"-1.24"	9"	13.5"	1,700 lbs.
FC125U	1.25"-1.49"	10"	15"	1,700 lbs.
FC150U	1.50"-1.74"	12"	16.5"	1,700 lbs.
FC175U	1.75"-1.99"	14"	20"	2,640 lbs.
FC200U	2.00"-2.49"	16"	21"	3,760 lbs.
FC250U	2.50"-2.99"	18"	24"	3,760 lbs.
FC300U	3.00"-3.49"	21"	26"	5,040 lbs.
STANDARD-DUTY, CLOSED MESH, DOUBLE EYE GRIPS				
FC050UU	0.50"-0.62"	4.3"	9.7"	512 lbs.
FC062UU	0.63"-0.74"	4.3"	9.7"	740 lbs.
FC075UU	0.74"-0.99"	4"	13"	1,000 lbs.
FC100UU	1.00"-1.24"	5"	15"	1,540 lbs.
FC125UU	1.25"-1.49"	5"	16.5"	2,010 lbs.
FC150UU	1.50"-1.74"	5"	20"	3,230 lbs.
FC175UU	1.75"-1.99"	6"	21"	3,230 lbs.
FC200UU	2.00"-2.49"	6"	24"	4,000 lbs.
FC250UU	2.50"-2.99"	6"	26"	4,000 lbs.
STANDARD-DUTY, CLOSED MESH, OFFSET EYE GRIPS				
FC050OF	0.50"-0.62"	5"	10"	512 lbs.
FC062OF	0.63"-0.74"	5.5"	10"	740 lbs.
FC075OF	0.74"-0.99"	5.5"	13"	1,000 lbs.
FC100OF	1.00"-1.24"	6.5"	14"	1,540 lbs.
FC125OF	1.25"-1.49"	7"	15.5"	1,540 lbs.
FC150OF	1.50"-1.74"	7"	17"	1,540 lbs.
FC175OF	1.75"-1.99"	8.5"	19.5"	2,010 lbs.
FC200OF	2.00"-2.49"	10.5"	22"	3,230 lbs.
FC250OF	2.50"-2.99"	11"	23"	3,230 lbs.
FC300OF	3.00"-3.49"	13"	25"	4,000 lbs.
FC350OF	3.50"-3.99"	15"	27"	4,000 lbs.
STANDARD-DUTY, CLOSED MESH, LOCKING BALE GRIPS (UNIVERSAL EYE)				
FC050LB	0.50"-0.62"	18"	10"	530 lbs.
FC062LB	0.63"-0.74"	18"	10"	790 lbs.
FC075LB	0.74"-0.99"	18"	13"	1,020 lbs.
FC100LB	1.00"-1.24"	18"	14"	1,610 lbs.
FC125LB	1.25"-1.49"	18"	15"	1,610 lbs.
FC150LB	1.50"-1.74"	18"	17"	1,610 lbs.
FC175LB	1.75"-1.99"	18"	19"	2,150 lbs.
FC200LB	2.00"-2.49"	18"	21"	3,260 lbs.
FC250LB	2.50"-2.99"	18"	23"	3,260 lbs.
FC300LB	3.00"-3.49"	25"	18"	4,900 lbs.
FC350LB	3.50"-3.99"	27"	18"	4,900 lbs.

*To determine workload safety factor, divide approximate break strength by 10.
See Page D-134 for strength information.



Single Eye Grips



Double Eye Grips



Offset Eye Grips



Locking Bale Grips (Universal Eye)

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® SUPPORT GRIPS

Support Grips Standard-Duty, Split Lace


Description

Split lace support grips are designed for loads up to 600 lbs. and vertical runs of no more than 100 ft. They are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Split lace support grips are used when the end of the cable cannot easily be accessed and the support grip is intended for permanent installation. Support grips are woven of corrosion-resistant tinned-bronze or stainless steel wire.

CATALOG NUMBER STAINLESS STEEL	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
STANDARD-DUTY, CLOSED MESH, SINGLE EYE GRIPS				
FS050U	0.50"-0.62"	7"	10"	530 lbs.
FS062U	0.63"-0.74"	7"	10"	790 lbs.
FS075U	0.74"-0.99"	9"	13"	1,020 lbs.
FS100U	1.00"-1.24"	9.5"	13.5"	1,610 lbs.
FS125U	1.25"-1.49"	10"	15"	1,610 lbs.
FS150U	1.50"-1.74"	11"	16.5"	1,610 lbs.
FS175U	1.75"-1.99"	12"	20"	2,150 lbs.
FS200U	2.00"-2.49"	15"	21"	3,260 lbs.
FS250U	2.50"-2.99"	17"	24"	3,260 lbs.
FS300U	3.00"-3.49"	18.5"	26"	4,900 lbs.
FS350U	3.50"-3.99"	20.5"	29"	4,900 lbs.
STANDARD-DUTY, CLOSED MESH, DOUBLE EYE GRIPS				
FS050UU	0.50"-0.62"	4"	10"	530 lbs.
FS062UU	0.63"-0.74"	4"	10"	790 lbs.
FS100UU	1.00"-1.24"	5"	14"	1,610 lbs.
FS125UU	1.25"-1.49"	5"	15"	1,610 lbs.
FS150UU	1.50"-1.74"	5"	17"	1,610 lbs.
FS175UU	1.75"-1.99"	6"	19"	2,150 lbs.
FS200UU	2.00"-2.49"	6"	21"	3,260 lbs.
FS250UU	2.50"-2.99"	6"	23"	3,260 lbs.
FS300UU	3.00"-3.49"	8"	25"	4,900 lbs.
FS350UU	3.50"-3.99"	8"	27"	4,900 lbs.
STANDARD-DUTY, CLOSED MESH, OFFSET EYE GRIPS				
FS050OF	0.50"-0.62"	5"	10"	500 lbs.
FS062OF	0.63"-0.74"	5.5"	10"	750 lbs.
FS075OF	0.74"-0.99"	5.5"	13"	950 lbs.
FS100OF	1.00"-1.24"	6.5"	14"	1,500 lbs.
FS125OF	1.25"-1.49"	7.5"	15"	1,500 lbs.
FS150OF	1.50"-1.74"	7"	17"	1,500 lbs.
FS175OF	1.75"-1.99"	9"	19"	2,000 lbs.
FS200OF	2.00"-2.49"	11.5"	21"	2,150 lbs.
FS250OF	2.50"-2.99"	11"	23"	2,150 lbs.
FS300OF	3.00"-3.49"	13"	25"	3,800 lbs.
FS350OF	3.50"-3.99"	15"	27"	3,800 lbs.
STANDARD-DUTY, CLOSED MESH, LOCKING BALE (UNIVERSAL EYE)				
FS050LB	0.50"-0.62"	18"	10"	530 lbs.
FS062LB	0.63"-0.74"	18"	10"	790 lbs.
FS100LB	1.00"-1.24"	18"	14"	1,610 lbs.
FS125LB	1.25"-1.49"	18"	15"	1,610 lbs.
FS150LB	1.50"-1.74"	18"	17"	1,610 lbs.
FS175LB	1.75"-1.99"	19"	18"	2,150 lbs.
FS200LB	2.00"-2.49"	21"	18"	3,260 lbs.
FS250LB	2.50"-2.99"	23"	18"	3,260 lbs.
FS300LB	3.00"-3.49"	25"	18"	4,900 lbs.
FS350LB	3.50"-3.99"	27"	18"	4,900 lbs.



Split Lace, Single Eye



Split Lace, Double Eye



Split Lace, Offset Eye



Split Lace, Locking Bale (Universal Eye)

*To determine workload safety factor, divide approximate break strength by 10.
See Page D-134 for strength information.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® SUPPORT GRIPS

Support Grips Standard-Duty, Split Rod


Description

Split rod support grips are designed for loads up to 600 lbs. and vertical runs of no more than 100 ft. They are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Split rod support grips are used when the end of the cable cannot be easily accessed and the installation is temporary. Support grips are woven of corrosion-resistant tinned-bronze or stainless steel wire.


CATALOG NUMBER STAINLESS STEEL	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
STANDARD-DUTY, CLOSED MESH, SINGLE EYE GRIPS				
FR050U	0.50"-0.62"	7"	10"	567 lbs.
FR062U	0.63"-0.74"	8"	10"	890 lbs.
FR075U	0.74"-0.99"	8"	13"	1,040 lbs.
FR100U	1.00"-1.24"	8"	13.5"	1,700 lbs.
FR125U	1.25"-1.49"	10"	15"	1,700 lbs.
FR150U	1.50"-1.74"	12"	16.5"	1,700 lbs.
FR175U	1.75"-1.99"	14"	20"	2,300 lbs.
FR200U	2.00"-2.49"	16"	21"	3,400 lbs.
FR250U	2.50"-2.99"	18"	24"	3,400 lbs.
FR300U	3.00"-3.49"	21"	26"	5,000 lbs.
FR350U	3.50"-3.99"	25"	29"	5,000 lbs.
STANDARD-DUTY, CLOSED MESH, DOUBLE EYE GRIPS				
FR050UU	0.50"-0.62"	4"	8.5"	790 lbs.
FR062UU	0.63"-0.74"	4"	8.5"	790 lbs.
FR075UU	0.74"-0.99"	4"	10.5"	1,020 lbs.
FR100UU	1.00"-1.24"	5"	12.5"	1,610 lbs.
FR150UU	1.50"-1.74"	5"	14.5"	1,610 lbs.
FR175UU	1.75"-1.99"	6"	16.5"	2,150 lbs.
FR200UU	2.00"-2.49"	6"	19.5"	3,260 lbs.
FR250UU	2.50"-2.99"	6"	21.5"	3,260 lbs.
FR300UU	3.00"-3.49"	8"	23.5"	5,750 lbs.
FR350UU	3.50"-3.99"	8"	25.5"	5,750 lbs.
STANDARD-DUTY, CLOSED MESH, OFFSET EYE GRIPS				
FR050OF	0.50"-0.62"	4"	7"	500 lbs.
FR062OF	0.63"-0.74"	4"	9"	750 lbs.
FR075OF	0.74"-0.99"	5"	10"	950 lbs.
FR100OF	1.00"-1.24"	5"	12"	1,500 lbs.
FR125OF	1.25"-1.49"	5"	14"	1,500 lbs.
FR150OF	1.50"-1.74"	5"	15"	1,500 lbs.
FR175OF	1.75"-1.99"	6"	16"	2,000 lbs.
FR200OF	2.00"-2.49"	9"	19"	3,100 lbs.
FR250OF	2.50"-2.99"	11"	20"	3,100 lbs.
FR300OF	3.00"-3.49"	11"	21"	4,300 lbs.
FR350OF	3.50"-3.99"	11"	21"	4,900 lbs.
STANDARD-DUTY, CLOSED MESH, LOCKING BALE (UNIVERSAL EYE)				
FR050LB	0.50"-0.62"	18"	8.5"	790 lbs.
FR062LB	0.63"-0.74"	18"	8.5"	790 lbs.
FR075LB	0.74"-0.99"	18"	1.05"	1,020 lbs.
FR100LB	1.00"-1.24"	18"	12.5"	1,610 lbs.
FR125LB	1.25"-1.49"	18"	14.5"	1,610 lbs.
FR150LB	1.50"-1.74"	18"	15.5"	1,610 lbs.



Split Rod, Single Eye



Split Rod, Double Eye

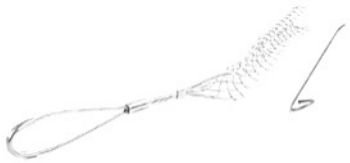

Split Rod, Offset Eye



Split Rod, Locking Bale (Universal Eye)

Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® SUPPORT GRIPS

Support Grips Heavy-Duty




Closed Mesh, Single Eye



Closed Mesh, Double Eye



Split Lace, Single Eye



Split Lace, Double Eye

Description

Heavy-duty support grips feature a double weave mesh and are available in a variety of eye styles and cable ranges for supporting electrical and fiber optic cable, metal rods, and tubing. Support grips are woven of corrosion-resistant tinned-bronze or stainless steel wire.

CATALOG NUMBER STAINLESS STEEL	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
HEAVY-DUTY, CLOSED MESH, SINGLE EYE				
FCHL075U	0.75"-0.99"	7.5"	13.8"	2,060 lbs.
FCHL100U	1.00"-1.24"	11.6"	14.7"	2,678 lbs.
FCHL125U	1.25"-1.49"	13"	16.9"	4,490 lbs.
FCHL150U	1.50"-1.74"	13.7"	21.3"	4,490 lbs.
FCHL175U	1.75"-1.99"	16.7"	21.3"	5,000 lbs.
FCHL250U	2.50"-2.99"	20.7"	25.6"	8,940 lbs.
HEAVY-DUTY, CLOSED MESH, DOUBLE EYE				
FCHL075UU	0.75"-0.99"	8"	13"	2,080 lbs.
FCHL100UU	1.00"-1.24"	7"	14"	2,870 lbs.
FCHL125UU	1.25"-1.49"	8"	15"	4,490 lbs.
FCHL150UU	1.50"-1.74"	8"	17"	4,490 lbs.
FCHL200UU	2.00"-2.49"	11"	21"	8,940 lbs.
FCHL250UU	2.50"-2.99"	11"	23"	8,940 lbs.
FCHL300UU	3.00"-3.49"	13"	25"	12,000 lbs.
FCHL350UU	3.50"-3.99"	13"	27"	12,000 lbs.

CATALOG NUMBER STAINLESS STEEL	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
HEAVY-DUTY, SPLIT LACE, SINGLE EYE				
FSHL075U	0.75"-0.99"	8"	13"	2,080 lbs.
FSHL100U	1.00"-1.24"	7"	14"	2,670 lbs.
FSHL125U	1.25"-1.49"	10"	15"	4,490 lbs.
FSHL150U	1.50"-1.74"	12"	17"	4,490 lbs.
HEAVY-DUTY, SPLIT LACE, DOUBLE EYE				
FSHL075UU	0.75"-0.99"	8"	13"	2,080 lbs.
FSHL100UU	1.00"-1.24"	7"	14"	2,678 lbs.
FSHL125UU	1.25"-1.49"	8"	15"	4,490 lbs.
FSHL150UU	1.50"-1.74"	8"	17"	4,490 lbs.
FSHL200UU	2.00"-2.49"	11"	21"	8,940 lbs.
FSHL250UU	2.50"-2.99"	11"	24"	8,940 lbs.
FSHL300UU	3.00"-3.49"	13"	31"	13,420 lbs.
FSHL350UU	3.50"-3.99"	13"	33"	13,420 lbs.
FSHL400UU	3.50"-4.50"	12"	27"	15,680 lbs.

*To determine workload safety factor, divide approximate break strength by 10.
See Page D-134 for strength information.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® SUPPORT GRIPS

Support Grips Service & Bus Drop



Service Drop Closed Mesh Single Eye



Service Drop Closed Mesh Locking Bale



Bus Drop Closed Mesh Single Eye



Bus Drop Closed Mesh Locking Bale



Bus Drop Accessories

Description

Service drop grips provide support for utility distribution lines from service pole to building or from pole to pole. They can also be used for cable TV and fiber optic cable support. They are woven from tinned bronze wire to provide superior corrosion resistance, and are available in single eye and locking bale configurations.

CATALOG NUMBER	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
SERVICE DROP, CLOSED MESH, SINGLE EYE				
FCSD22	0.24"-0.32"	4"	3.5"	350 lbs.
FCSD30	0.32"-0.43"	5"	4"	450 lbs.
FCSD40	0.43"-0.56"	6"	4.75"	550 lbs.
FCSD52	0.56"-0.73"	7"	6"	1,000 lbs.
FCSD70	0.73"-0.85"	8"	6.75"	1,400 lbs.
FCSD94	1.00"-1.25"	9"	9.5"	1,500 lbs.
SERVICE DROP, CLOSED MESH, LOCKING BALE				
FCSD30LB	0.30"-0.43"	12"	4.5"	1,100 lbs.
FCSD52LB	0.63"-0.74"	16"	10"	790 lbs.
FCSD70LB	0.75"-0.99"	16"	13"	1,020 lbs.
FCSD94LB	1.00"-1.24"	18"	14"	1,610 lbs.

*To determine workload safety factor, divide approximate break strength by 10.
See Page D-134 for strength information.

Description

Bus drop grips are used as cable support. They relieve any direct tension from the critical connection and absorb vibration and flexing. Bus drop grips are woven of galvanized steel wire. They are offered with either the single eye or locking bale attachment.

CATALOG NUMBER	CABLE DIAMETER RANGE	BALE LENGTH	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
BUS DROP, CLOSED MESH, SINGLE EYE				
FC22	0.22"-0.32"	9"	3.5"	1,100 lbs.
FC30	0.30"-0.43"	9"	4.5"	1,100 lbs.
FC40	0.41"-0.56"	9"	5.0"	1,100 lbs.
FC52	0.53"-0.73"	9"	6.5"	1,100 lbs.
FC70	0.70"-0.85"	9"	8.5"	1,900 lbs.
FC94	0.96"-1.25"	7"	11"	1,900 lbs.
BUS DROP, CLOSED MESH, LOCKING BALE				
FC30LB	0.30"-0.43"	12"	4.5"	1,100 lbs.
FC40LB	0.41"-0.56"	12"	5.0"	1,100 lbs.
FC52LB	0.53"-0.73"	15"	6.5"	1,100 lbs.
FC70LB	0.70"-0.85"	16"	8.5"	1,900 lbs.
FC94LB	0.82"-1.00"	16"	8.5"	1,900 lbs.

*To determine workload safety factor, divide approximate break strength by 10.
See Page D-134 for strength information.

CATALOG NUMBER	NPT SIZE
BUS DROP ACCESSORIES	
S40	Safety Spring, 40 Lb. Load
S80	Safety Spring, 80 Lb. Load

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® PULLING GRIPS

Pulling Grips Junior-Duty & Light-Duty



Junior-Duty Flexible Eye



Light-Duty Short Length Flexible Eye

Description

Junior-duty series grips are indispensable tools for electricians with small job requirements. They are used to connect insulated wire bundles to pulling tape or to pull wire or rope through conduit.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
JUNIOR-DUTY, FLEXIBLE EYE			
PJ25	0.25"-0.36"	7.5"	450 lbs.
PJ37	0.37"-0.49"	11"	900 lbs.
PJ50	0.50"-0.61"	12.5"	1,300 lbs.
PJ62	0.62"-0.74"	16.5"	1,950 lbs.
PJ75	0.75"-0.99"	17"	2,800 lbs.
PJ100	1.00"-1.24"	17.5"	3,900 lbs.

*To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

Description

Light-Duty grips are the most economical pulling grips for many applications, such as industrial plant wiring, and rewiring, and underground electrical pulls.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
LIGHT DUTY, SHORT LENGTH, FLEXIBLE EYE			
PL1251	1.00"-1.50"	18	7,840 lbs.
PL1501	1.50"-2.00"	21"	11,200 lbs.
LIGHT DUTY, STANDARD LENGTH, FLEXIBLE EYE			
PL1002	1.00"-1.50"	18"	7,840 lbs.
PL1502	1.50"-2.00"	21"	11,200 lbs.
PL2002	2.00"-2.50"	24"	11,200 lbs.
PL2502	2.50"-3.50"	27"	13,440 lbs.
PL3002	2.50"-3.50"	18.5"	13,440 lbs.

*To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® PULLING GRIPS

Pulling Grips Medium-Duty



Medium-Duty Flexible Eye



Short Length, Flexible Eye, T-Type

Description

Medium-duty pulling grips are ideal for overhead and underground pulling applications that require additional durability at an economical price. Medium-duty pulling grips are hand crafted with single weave strands that graduate to a double weave design for added strength and durability.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
MEDIUM-DUTY, FLEXIBLE EYE			
PM0501	0.50"-0.61"	21"	4,500 lbs.
PM0751	0.75"-0.99"	24"	5,600 lbs.
PM1001	1.00"-1.49"	24"	9,600 lbs.
PM1501	1.50"-1.99"	24"	16,400 lbs.
PM2001	2.00"-2.49"	24"	18,500 lbs.
PM2501	2.50"-2.99"	24"	24,500 lbs.
PM3001	3.00"-3.49"	24"	24,500 lbs.
PM3501	3.50"-3.99"	26"	31,000 lbs.

*To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

CATALOG NUMBER	DESCRIPTION
MEDIUM-DUTY, FLEXIBLE EYE KIT	
PM1KIT	Kit contains 1 each of PM037, PM050, PM075, PM100, PM125, PM150

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
MEDIUM-DUTY, STANDARD LENGTH, FLEXIBLE EYE, T-TYPE			
PM0752	0.75"-0.99"	36"	6,800 lbs
PM1002	1.00"-1.49"	36"	9,600 lbs
PM1502	1.50"-1.99"	36"	16,400 lbs
PM2002	2.00"-2.49"	36"	18,500 lbs
PM2502	2.50"-2.99"	36"	24,500 lbs
PM3002	3.00"-3.49"	28"	24,500 lbs
PM3502	3.50"-3.99"	40"	31,000 lbs

*To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® PULLING GRIPS

Pulling Grips Heavy-Duty



Short Length, Rotating Eye, K-Type

Description

K-type pulling grips feature a double weave of galvanized steel for greater strength and added mesh contact with the cable as well as a forged steel compact rotating eye, which can be attached to a swivel. They are designed to handle longer or heavier pulling jobs such as an installation of underground cables, communication lines and service lines.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
HEAVY DUTY, SHORT LENGTH, ROTATING EYE, K-TYPE			
PS0501	0.50"-0.62"	16"	5,600 lbs.
PS0751	0.75"-1.00"	26"	6,800 lbs.
PS1001	1.00"-1.50"	30.7"	12,800 lbs.
PS1251	1.50"-2.00"	32"	16,400 lbs.
PS1501	1.50"-2.00"	25"	16,400 lbs.
PS2001	2.00"-2.50"	34"	27,200 lbs.
PS2501	2.50"-3.00"	38"	33,000 lbs.
PS3001	3.00"-3.50"	40.9"	41,000 lbs.
PS3501	3.50"-4.00"	42"	43,000 lbs.
PS4001	4.00"-4.50"	43"	43,000 lbs.
HEAVY DUTY, STANDARD LENGTH, ROTATING EYE, K-TYPE			
PS0502	0.50"-0.62"	16"	5,600 lbs.
PS0622	0.62"-0.75"	16"	6,800 lbs.
PS0752	0.75"-1.00"	32"	9,600 lbs.
PS1002	1.00"-1.50"	33"	16,400 lbs.
PS1502	1.50"-2.00"	34"	16,400 lbs.
PS2002	2.00"-2.50"	36"	27,300 lbs.
PS2502	2.50"-3.00"	38"	33,000 lbs.
PS3002	3.00"-3.50"	39"	41,000 lbs.
PS3502	3.50"-4.00"	41"	43,000 lbs.
PS4002	4.00"-4.50"	42"	43,000 lbs.

*To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® PULLING GRIPS

Pulling Grips Multi-Weave



Multi-Weave Flexible Eye



Multi-Weave Rotating Eye

Description – Multi-Weave

Multi-weave pulling grips are constructed of high strength galvanized steel and are designed for pulling aluminum or copper bare conductor, wire rope and insulated cables. These grips are used in applications such as distribution line stringing and overhead transmission. Multi-weave pulling grips are available with a flexible and rotating eye, which can be attached to a swivel.

Description – Rotating Eye

The forged steel rotating eye will thread through sheaves and blocks without binding, but is not a swivel and will not turn under tension. The rotating eye can turn to relieve pulling torque when tension is relaxed.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*	COLOR CODE
MULTI-WEAVE, ROTATING EYE				
P0501	0.50"-0.75"	44.5"	10,662 lbs.	Brown
P0751	0.75"-1.00"	43.1"	14,325 lbs.	Light Blue
P1001	1.00"-1.20"	65"	25,402 lbs.	Gold
P1501	1.50"-1.70"	82"	31,505 lbs.	Red
P2001	2.00"-2.50"	72"	43,000 lbs.	Yellow
P2501	2.50"-3.00"	72"	43,000 lbs.	Orange
P3001	3.00"-3.50"	74"	43,000 lbs.	Aluminum
P3501	3.50-4.00	76"	43,000 lbs.	Light Green
MULTI-WEAVE, FLEXIBLE EYE				
P3502	3.50"-4.00"	76"	43,000 lbs.	Light Green

*To determine workload safety factor, divide approximate break strength by 5. See Page D-134 for strength information.

NOTE: it is recommended that a swivel be used for release of torque during a pull. Use a connecting link when a swivel is not needed. Do not run grips or swivels over bullwheels while under tension. Do not use multi-weave for pulling rope. When higher loads are required, use Pass & Seymour® high strength-style pulling grips. See installation instructions supplied with grip for recommended swivels, links and clamps or accessories listing.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® PULLING GRIPS

Pulling Grips High Strength

Description

High strength pulling grips are designed for situations where loads and safety considerations require an extra high strength grip. They are most commonly used for attaching pulling lines to conductors, conductors to running boards and conductor-to-conductor connections. These grips can be used for pulling bare or insulated conductor, wire rope or synthetic rope.

CATALOG NUMBER	CABLE DIAMETER RANGE*	MESH LENGTH	APPROXIMATE BREAK STRENGTH**	COLOR CODE
FLEXIBLE EYE HIGH STRENGTH DOUBLE WEAVE				
MSP025	0.25"-0.49"	31"	7,000 lbs.	Dark Green
MSP050	0.50"-0.74"	45"	10,500 lbs.	Brown
MSP075	0.75"-0.99"	43"	14,100 lbs.	Light Blue
MSP100	1.00"-1.24"	65"	25,000 lbs.	Gold
MSP125	1.25"-1.49"	59"	31,000 lbs.	Black
MSP150	1.50"-1.74"	82"	31,000 lbs.	Red
MSP175	1.75"-2.24"	82"	49,000 lbs.	Dark Blue
MSP200	2.00"-2.49"	65"	49,000 lbs.	Yellow

*For rope, select smallest size grip which meets required workload.

**To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

Rope Assembly Using High Strength Feed Tube

A feed tube is recommended when assembling synthetic rope into the High Strength Pulling Grip and is required on the two largest grip sizes.

1. Insert feed tube into high strength pulling grip.
2. Insert rope end fully into feed tube.
3. Hold rope in feed tube by pinning rope to the ground with end of tube. Pull mesh down onto feed so feed tube nose is protruding through shoulder protectors.
4. Push mesh to end of feed tube and pull feed tube through mesh. When pulled, the mesh gripping action will hold rope in place.
5. Position rope so that its end is inside the shoulder protectors. Remove slack by smoothing mesh tight to rope.
6. Apply clamps to mesh end as necessary.



High Strength Flexible Eye

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® PULLING GRIPS

Pulling Grips Slack



Double Weave, Standard Length, Closed Mesh, Offset Eye



Double Weave, Standard Length, Split Lace, Offset Eye



Single Weave, Standard Length, Split Rod, Offset Eye

Description

Slack grips are reusable grips used for pulling slack in underground cable preparatory to final placement. They may also be used for cable removal. Slack grips feature an offset eye for easy attachment to the pulling line.

CATALOG NUMBER	CABLE DIAMETER RANGE	MESH LENGTH	APPROXIMATE BREAK STRENGTH*
DOUBLE WEAVE, STANDARD LENGTH, CLOSED MESH, OFFSET EYE			
SCK0751	0.75"-1.00"	16"	5,600 lbs
SCK1001	1.00"-1.50"	16.9"	7,838 lbs
SCK1251	1.00"-1.50"	17"	7,838 lbs
SCK1501	1.50"-2.00"	21"	11,200 lbs
SCK1751	1.50"-2.00"	21"	11,200 lbs
SCK2501	2.50"-3.50"	24.2"	13,440 lbs
SCK3001	2.50"-3.50"	24"	13,440 lbs
SCK3501	3.50"-4.50"	27"	15,680 lbs
DOUBLE WEAVE, LONG LENGTH, CLOSED MESH, OFFSET EYE			
SCK1502	1.50"-2.00"	21"	11,200 lbs
SCK2002	2.00"-2.50"	24"	11,200 lbs
SCK2502	2.50"-3.50"	24"	13,440 lbs
SCK3002	2.50"-3.50"	24"	13,440 lbs

*To determine workload safety factor, divide approximate break strength by 5.
See Page D-134 for strength information.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® REFERENCE

Product Description

DELUXE CORD GRIPS



Key Features & Benefits:

- Deluxe cord grips are now available in aluminum, nylon and stainless steel. The mesh is woven of stainless steel for corrosion resistance.
- They are offered in single/double weave construction to help absorb direct pull, to resist flexing and binding, and to eliminate strain.
- They are recommended for indoor or outdoor use where subjected to moisture in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets.
- Deluxe grips are suitable for use in hazardous locations per Class I, Div. 2; Class II, Div. 1 & 2; and Class III, Div. 1 & 2.

LIQUID-TIGHT CORD GRIPS



Key Features & Benefits:

- Liquid-Tight Grips are woven of stainless steel mesh with zinc-plated steel or malleable iron bodies and nuts for corrosion resistance.
- They are used to connect liquid-tight flexible conduit to electrical enclosures to prevent conduit pullout.
- Each fitting is supplied with an insulated throat to provide conductor insulation and protect against damage by flexing, heat expansion and contraction.
- Liquid-Tight Grips are recommended in the wiring of motors and any electrical enclosure where liquid-tight conduit is subject to motion or strain.


WIDE RANGE, DUST-TIGHT GRIPS



Key Features & Benefits:

- Wide Range Cord Grips are recommended for use in wiring of enclosures, power boxes, machine tools and power centers.
- Includes insulated bushing.

SUPPORT GRIPS

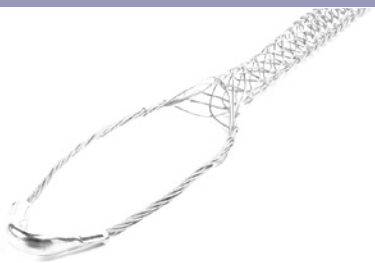

Key Features & Benefits:

- Available in Single Eye, Double Eye, Offset Eye and Universal Eye grips.
- Stainless steel mesh available.
- Used to support electrical and fiber optic cable, metal rods and tubing.
- Woven of corrosion-resistant tinned bronze wire.

SERVICE & BUS DROP



Key Features & Benefits:

- Service Drops provide support for utility distribution lines from service pole to building or from pole to pole.
- Woven from tinned bronze for superior corrosion resistance.
- Bus Drops relieve direct tension from critical connection and absorb vibration and flexing.
- Woven of galvanized steel wire.

PULLING GRIPS



Key Features & Benefits:

- Connect insulated wired bundles to pulling tape or to pull wire or rope through conduit.
- Ideal for overhead and underground pulling applications.
- Double weave or galvanized steel for greater strength.
- Flexible and Rotating Eye available.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® REFERENCE


Product Description

Application

Flexcor® Wire Mesh Grips are used to support cable or conductor after it has been installed, pull electrical cable or conductor into place, provide strain relief at the point of wiring connections. Flexcor® devices protect cables, relieve stress, and prevent cable pull-out from fittings and terminations.

Support Grip Attachments


Double Eye | **Single Eye** | **Offset Eye** | **Locking Bale Eye**

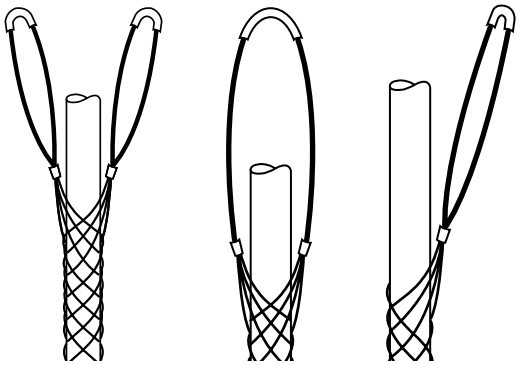

Available in four different attachments.
Load is distributed over entire length of grip and will not injure cable.

Support Grip Mesh Types

Closed Mesh | **Split Lace Mesh** | **Split Rod Mesh**

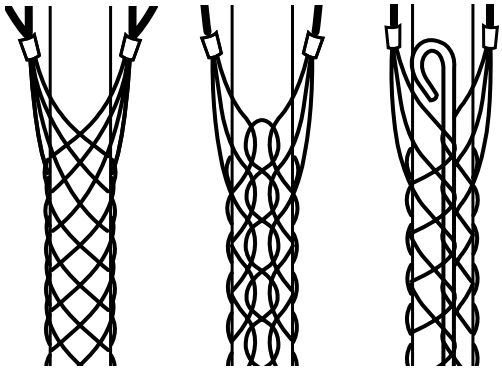


Available in three types and depends on availability of wire end.

Support Grips are designed to distribute weight of vertical or sloping runs in indoor or outdoor applications, providing direct tension and cable protection for electrical cable, metal rods, tubing or hose over the length of the grip.

Strain Relief Grip Fittings

Male Straight | **Female Straight** | **Male 45˚** | **Male 90˚**

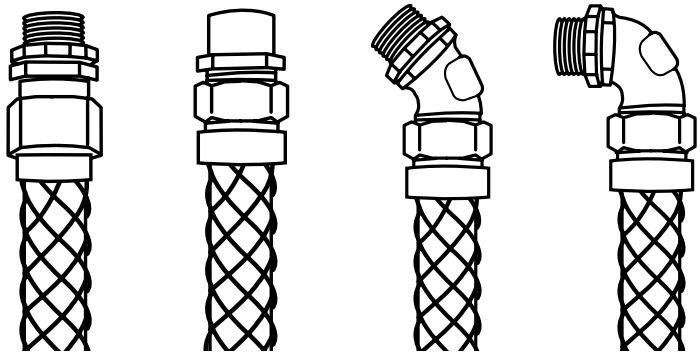


Prevents pull-out or damage to cable due to constant motion or flexing.
Also for Liquid-Tight, hose and box connections.

Strain Relief Grips offered in single/double weave provide the extra grip support needed in tough industrial environments subjected to moisture in wiring of pendant stations, processing equipment, hand tools and extension cords.

Pulling Grips

Flexible Eye | **Rotating Eye**

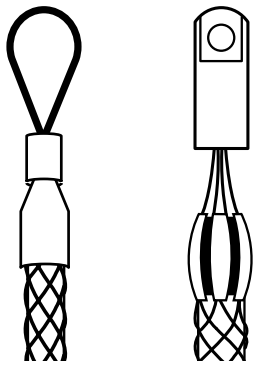


Assortment of rugged pulling grips available individually or in kits to make wire pulling easier.


Pulling Grips are ideal for overhead and underground pulling applications, such as industrial plant wiring, and rewiring and underground electrical pulls.

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® REFERENCE


Applications

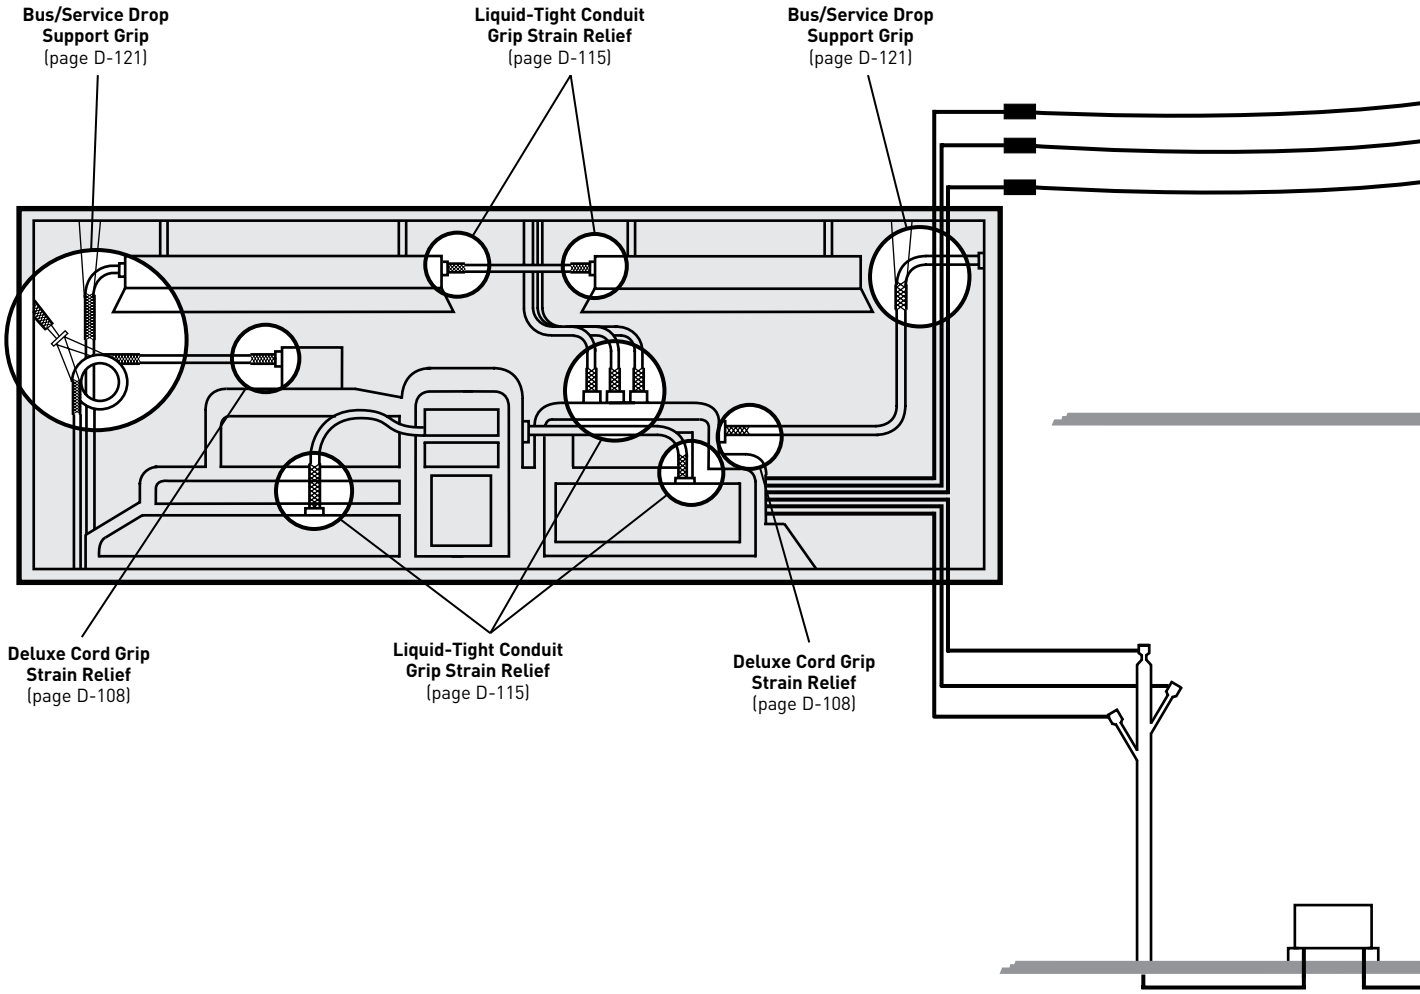


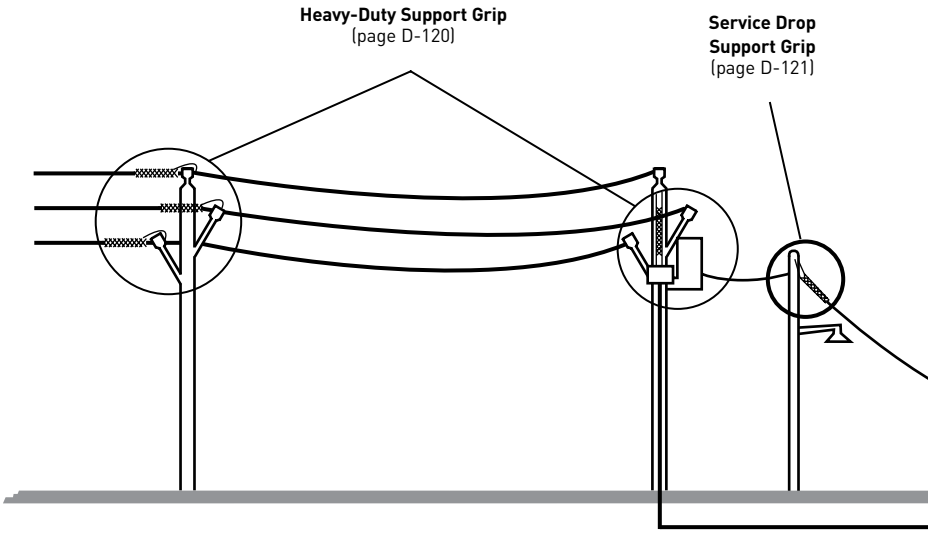

For assistance in selecting Flexcor Wire Mesh Grips, see page D-133.

FLEXCOR® REFERENCE

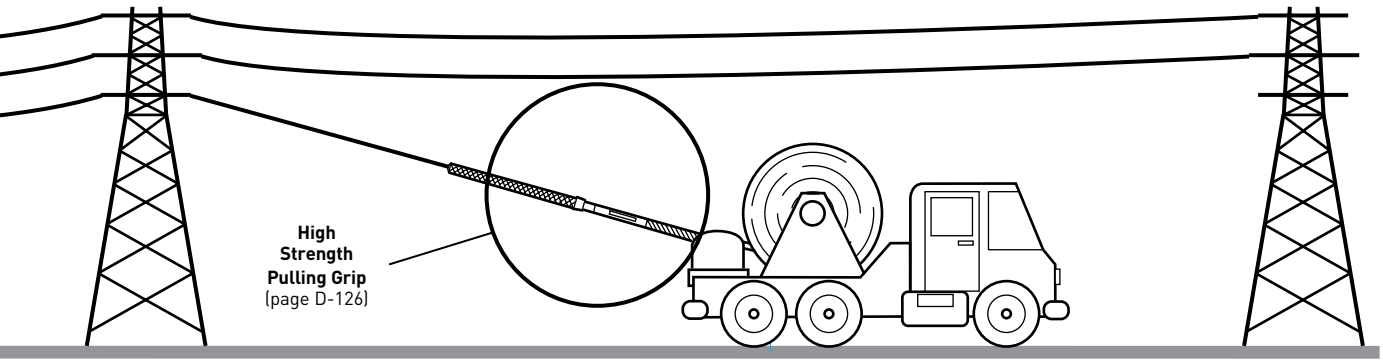

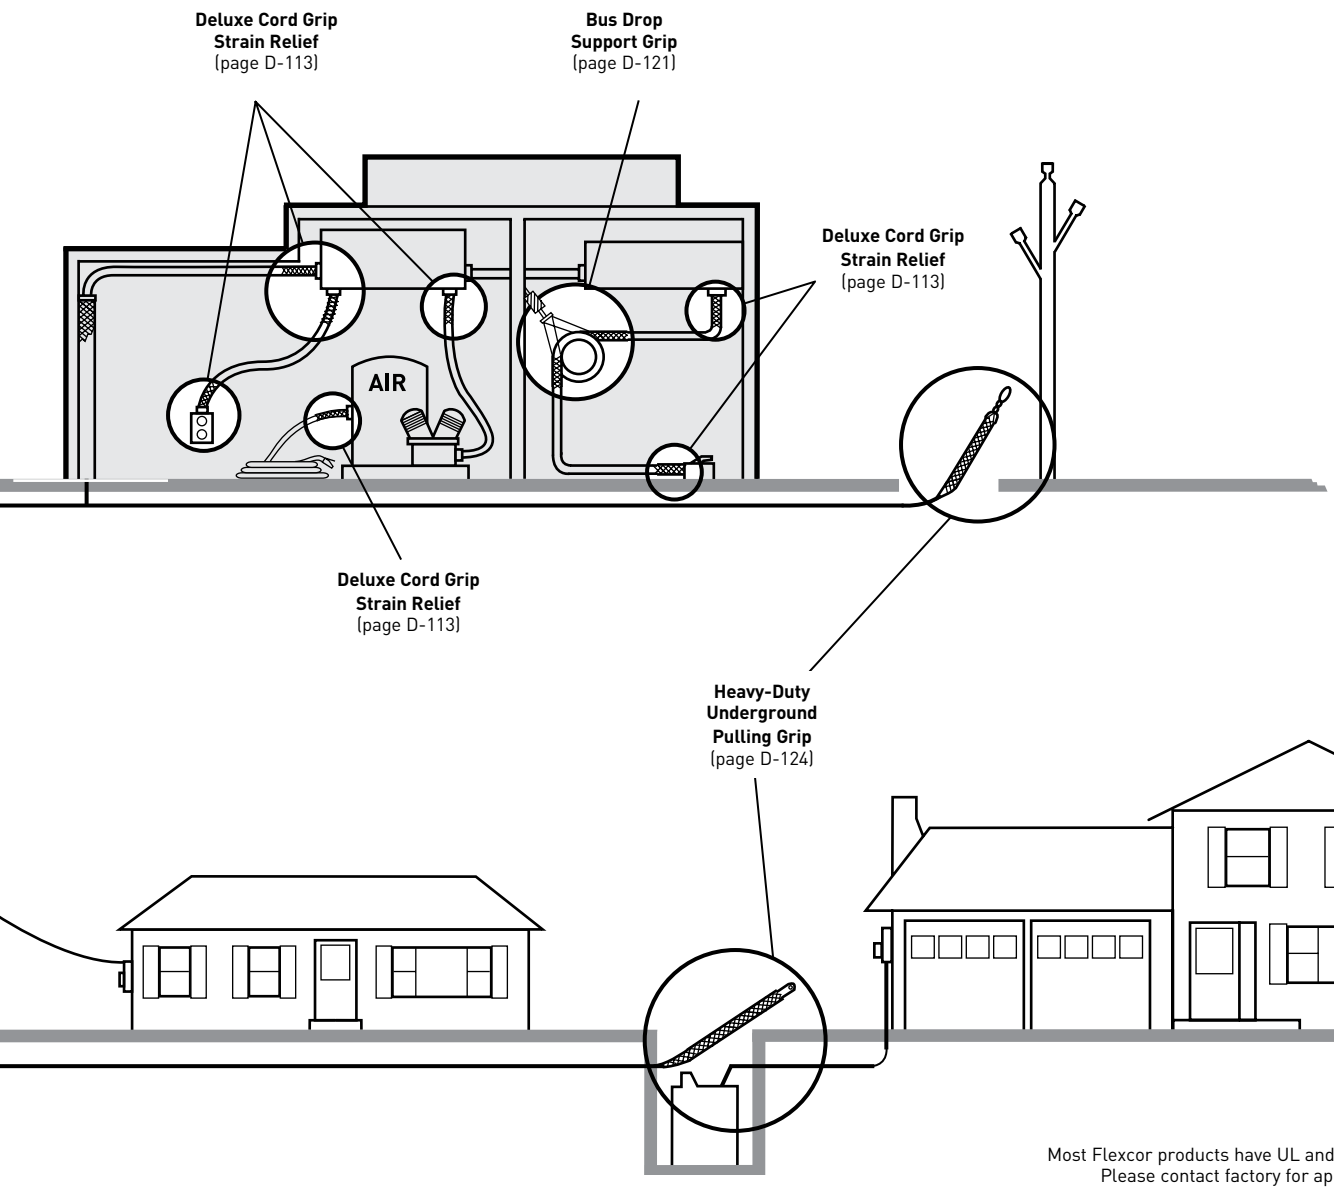

Most Flexcor products have UL and/or CSA Approvals.
Please contact factory for approval information.

FLEXCOR® REFERENCE


Product Split Support Grip Lace & Rod Mesh Termination

Split Lace/Split Rod Attachments
(for use where end of cable is not accessible)

Split Lace Support Grip Mesh Termination

For Split Lace mesh termination, Flexcor® single weave Split Lace grips are provided with an additional single lace, two laces are provided with each double weave Split Lace grip. Lace strands should be same material as the grip.


1. Wrap split mesh grip around cable. Start lacing at top or bottom end of mesh. Thread lace through first two loops of split mesh and pull through until the lace is centered at this point. Lace as you would your shoe, crossing laces before lacing the next two loops.
2. Leave a space between adjoining loops approximately equal to the width of one diamond of the mesh.
3. Twist ends of lace strands together at end of grip or tie in a knot.
4. Wrap ends of lace tightly around grip. Excess lace may be cut off.

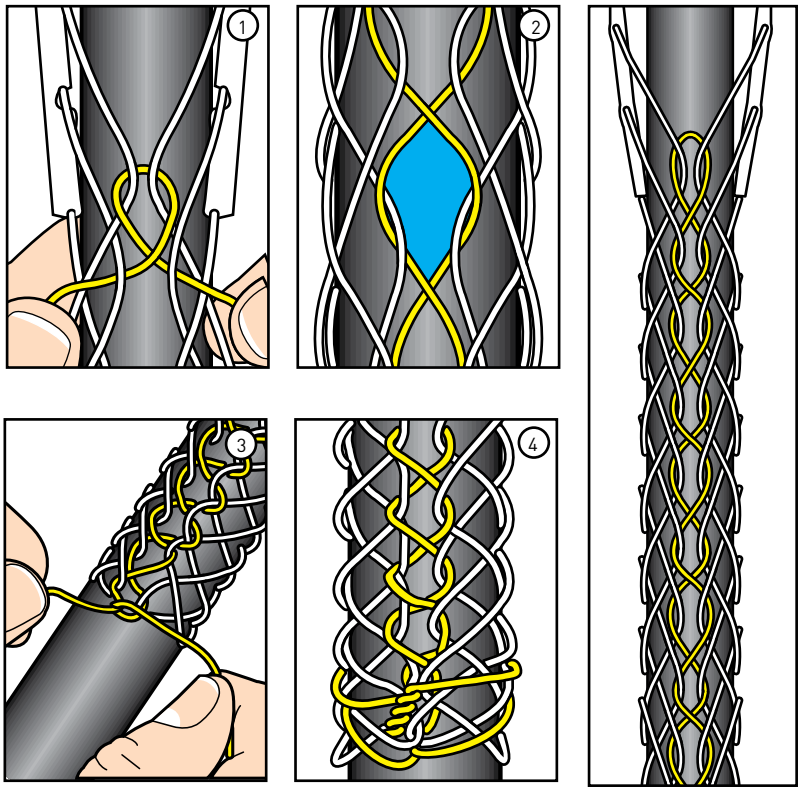

Split Rod Support Grip Mesh Termination

For Split Rod mesh termination, a weaving rod is supplied with each grip. The open mesh passes around the rod and matches up with the open mesh from the opposite direction. Split Rod support grips are quick and easy to use and reusable.

1. Wrap split mesh grip around cable. Thread rod through the open loops in a weaving motion, using end of the rod to engage loops.
2. A steady push and twist motion is required. Use other hand to bring mesh loops together so as to weave through them.
3. To remove, pull rod out.

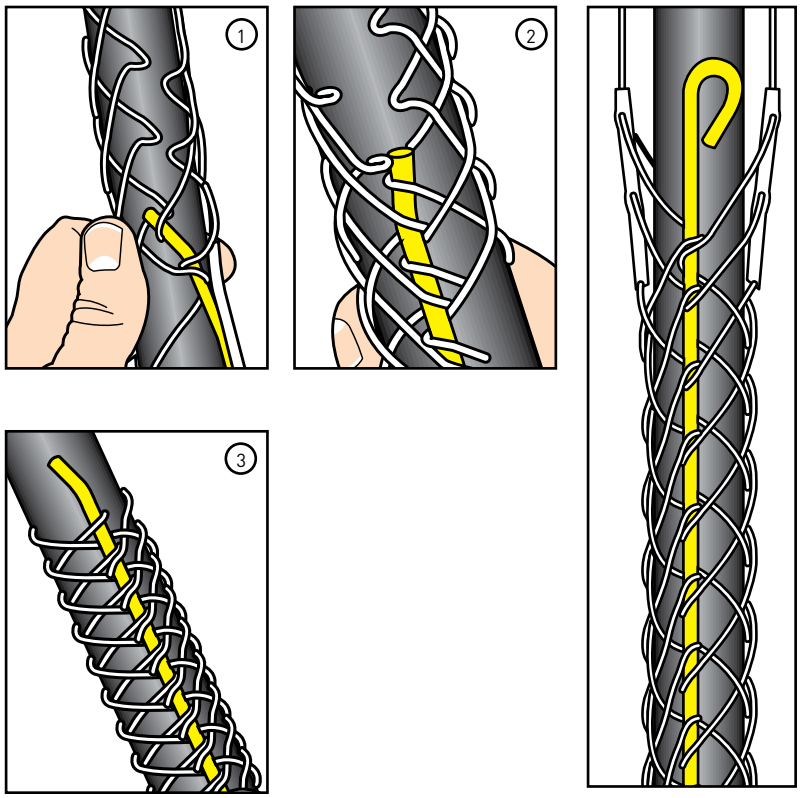


Most Flexcor products have UL and/or CSA Approvals. Please contact factory for approval information.

FLEXCOR® WIRE MESH GRIPS

Selecting Properly Sized Pulling & Support Grips

Select grip size based upon the outside diameter or circumference of the cable(s). See the following reference tables for convenience in determining cable diameters.

Use the following grip selection tables to determine the grip diameter range for your application.

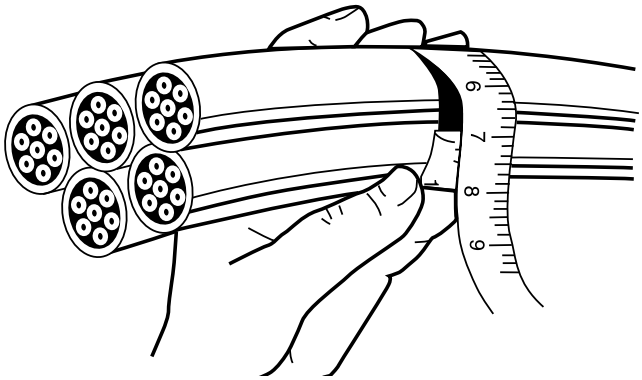

Grip selection for one or more cables of equal diameter

1. Read across top line for number of cables in one grip.
2. Read down for diameter of each cable.
3. Read across to the right to grip diameter range column.

Example: For five cables together with diameter of 0.42" each

1. Locate "5 cables" column.
2. Read down column to range (0.38"-0.48").
3. Read across line to grip diameter range (1.00"-1.25").

DECIMAL & FRACTIONAL INCH CABLE DIAMETERS – FOR ONE OR MORE CABLES OF EQUAL DIAMETER

1 CABLE	2 CABLE	3 CABLE	4 CABLE	GRIP DIAMETER RANGE
0.25-0.37 = ¼ - ⅜	0.16-0.25 = 1/64- ¼	0.15-0.22 = 5/32 - 7/32	0.12-0.20 = ⅛ - 13/64	0.25"-0.375"
0.37-0.50 = ⅜ - ½	0.25-0.36 = ¼ - 23/64	0.22-0.33 = 7/32 - 21/64	0.20-0.28 = 13/64 - 9/32	0.375"-0.50"
0.50-0. 62 = ½ - ⅝	0.27-0.36 = 17/64 - 23/64	0.26-0.33 = 17/64 - 21/64	0.24-0.28 = 15/64 - 9/32	0.50"-0.62"
0.62-0.75 = ⅝ - ¾	0.36-0.45 = 23/64 - 29/64	0.33-0.36 = 21/64 - 23/64	0.28-0.31 = 9/32 - 5/16	0.62"-0.75"
0.75-1.00 = ¾ - 1	0.45-0.60 = 29/64 - 39/64	0.36-0.49 = 23/64 - 31/64	0.31-0.42 = 5/16 - 27/64	0.75"-1.00"
1.00-1.25 = 1 - 1¼	0.60-0.76 = 39/64 - 49/64	0.49-0.63 = 31/64 - ⅝	0.42-0.54 = 27/64 - 35/64	1.00"-1.25"
1.25-1.50 = 1¼ - 1½	0.76-0.91 = 49/64 - 29/32	0.63-0.75 = ⅝ - 49/64	0.54-0.65 = 35/64 - 21/32	1.25"-1.50"
1.50-1.75 = 1½ - 1¾	0.91-1.23 = 29/32 - 1 15/64	0.76-0.89 = 49/64 - 57/64	0.65-0.77 = 21/32 - 49/64	1.50"-1.75"
1.75-2.00 = 1¾ - 2	1.23-1.54 = 1 15/64 - 1 35/64	0.89-1.02 = 57/64 - 1 1/64	0.77-0.88 = 49/64 - ⅞	1.75"-2.00"
2.00-2.50 = 2 - 2½	1.54-1.84 = 1 35/64 - 1 27/32	1.02-1.28 = 1 1/64 - 1 9/32	0.88-1.00 = ⅞ - 1	2.00"-2.50"
2.50-3.00 = 2½ - 3	1.84-2.15 = 1 27/32 - 2 5/32	1.28-1.53 = 1 9/32 - 1 11/32	1.10-1.32 = 1 3/32 - 1 21/64	2.50"-3.00"
3.00-3.50 = 3 - 3½	2.15-2.45 = 2 5/32 - 2 29/64	1.53-1.79 = 1 17/32 - 1 51/64	1.32-1.54 = 1 21/64 - 1 35/64	3.00"-3.50"
3.50-4.00 = 3½ - 4		1.79-2.05 = 1 51/64 - 2 3/64	1.54-1.76 = 1 35/64 - 1 49/64	3.50"-4.00"

DECIMAL & FRACTIONAL INCH CABLE DIAMETERS – FOR ONE OR MORE CABLES OF EQUAL DIAMETER

5 CABLE	6&7 CABLE	8 CABLE	9 CABLE	GRIP DIAMETER RANGE
0.11-0.14 = 7/64 - 9/64	0.10-0.11 = 3/32 - 7/64	0.09-0.10 = 3/32 - 7/64	0.06-0.09 = 1/16 - 3/32	0.25"-0.375"
0.14-0.21 = 9/64 - ¼	0.11-0.25 = 7/64 - ¼	0.10-0.20 = 7/64 - 13/64	0.09-0.19 = 3/32 - 3/16	0.375"-0.50"
0.21-0.25 = 7/32 - ¼	0.19-0.22 = 3/16 - 7/32	0.17-0.20 = 11/64 - 13/64	0.15-0.19 = 5/32 - 3/16	0.50"-0.62"
0.25-0.29 = ¼ - 19/64	0.22-0.26 = 7/32 - 17/64	0.20-0.23 = 13/64 - 15/64	0.19-0.22 = 3/16 - 7/32	0.62"-0.75"
0.29-0.38 = 19/64 - ⅜	0.26-0.34 = 17/64 - 11/32	0.23-0.31 = 15/64 - 5/16	0.22-0.31 = 7/32 - 5/16	0.75"-1.00"
0.38-0.48 = ⅜ - 31/64	0.34-0.43 = 11/32 - 7/16	0.31-0.39 = 5/16 - 25/64	0.29-0.36 = 19/64 - 23/64	1.00"-1.25"
0.48-0.58 = 31/64 - 41/64	0.43-0.52 = 7/16 - 33/64	0.39-0.46 = 25/64 - 15/32	0.36-0.43 = 23/64 - 7/16	1.25"-1.50"
0.58-0.67 = 37/64 - 43/64	0.52-0.60 = 33/64 - 39/64	0.46-0.54 = 15/32 - 35/64	0.43-0.49 = 7/16 - 31/64	1.50"-1.75"
0.67-0.77 = 43/64 - 49/64	0.60-0.69 = 39/64 - 11/16	0.54-0.62 = 35/64 - ⅝	0.49-0.57 = 31/64 - 37/64	1.75"-2.00"
0.77-0.96 = 49/64 - 31/32	0.69-0.86 = 11/16 - 55/64	0.62-0.77 = ⅝ - 49/64	0.57-0.72 = 37/64 - 23/32	2.00"-2.50"
0.96-1.16 = 31/32 - 15/32	0.86-1.03 = 55/64 - 11/32	0.77-0.93 = 49/64 - 15/16	0.72-0.86 = 23/32 - 55/64	2.50"-3.00"
1.16-1.35 = 15/32 - 1 23/64	1.03-1.20 = 1 1/32 - 1 13/64	0.93-1.08 = 15/16 - 1 5/64	0.86-1.00 = 55/64 - 1	3.00"-3.50"w
1.35-1.54 = 1 23/64 - 1 35/64	1.20-1.37 = 1 13/64 - 1⅜	1.08-1.24 = 1 5/64 - 1 15/64	1.00-1.14 = 1 - 1 9/64	3.50"-4.00"

FLEXCOR® WIRE MESH GRIPS

Pulling & Support Grips Strength Information

Strength Information

The approximate breaking strength of any Pass & Seymour wire mesh cable grip is based on working load information established by Legrand engineering laboratories. In making these determinations, it is not possible to cover all applications and operating conditions. Variables such as diameters, gripping surfaces, number of items gripped, tension, movement, attachment, abrasion, corrosion, prior use, or abuse must be assessed by the user. Greater safety factors should be utilized when the conditions of application are vague or unknown.

For specific applications where strength and holding power are important, consult the manufacturer. To determine the recommended working load safety factor for listed cable grips, divide the approximate breaking strength by 5 for pulling grips and 10 for support grips. Legrand maintains a 6 sigma safety factor for pulling grips and a 5 sigma safety factor for support grips for these recommended working loads (using average break strengths obtained on new grips under lab test conditions).

Example: For pulling grips – 33,000÷5=6,600 lbs. which is the workload factor.

Example: For support grips – 10,080÷10=1,008 lbs. which is the workload factor.

All warranties concerning product quality or performance are based on wire mesh grips that are properly stored and handled by the user, and grips that are maintained and inspected at a proper frequency in keeping with their use and condition.

GRIP CABLE RANGE CONVERSION

INCHES (FRACTIONAL)	INCHES (DECIMAL)	GRIP DIAMETER RANGE
¼ - 23/64"	0.25"-0.36"	6.35 mm-9.13 mm
3/8 - 31/64"	0.37"-0.49"	9.52 mm-12.30 mm
½ - 39/64"	0.50"-0.61"	12.70 mm-15.48 mm
5/8 - 47/64"	0.62"-0.74"	15.88 mm-18.65 mm
¾ - 63/64"	0.75"-0.99"	19.05 mm-25.00 mm
1 - 1 15/64"	1.00"-1.24"	25.40 mm-31.35 mm
1¼ - 1 31/64"	1.25"-1.49"	31.75 mm-37.70 mm
1½ - 1 63/64"	1.50"-1.99"	38.10 mm-50.40 mm
2 - 2 31/64"	2.00"-2.49"	50.80 mm-63.10 mm
2½ - 2 63/64"	2.50"-2.99"	63.50 mm-75.80 mm
3 - 3 31/64"	3.00"-3.49"	76.20 mm-88.50 mm
3½ - 3 63/64"	3.50"-3.99"	88.90 mm-101.20 mm

RUBBER & WATERTIGHT DEVICES





RUBBER DUST-TIGHT PLUGS & CONNECTORS

Straight Blade Plugs & Connectors	D-136
Turnlok® Plugs & Connectors	D-137



STERIGUARD® ANTIMICROBIAL PLUGS, CONNECTORS & CORD DROPS

Wiring Devices & Accessories	D-138
Bulk Portable Cord & Cord Drops	D-140



WATERTIGHT PLUGS, CONNECTORS & RECEPTACLES

Straight Blade Plugs, Connectors & Receptacles	D-141
Turnlok® Plugs, Connectors & Receptacles	D-142
Back Boxes	D-144
Industrial Grade Portable Outlet Boxes & Covers	D-145

RUBBER & WATERTIGHT DEVICES

Rubber Dust-Tight Plugs & Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

1447 & 1547
Rubber Dust-Tight Plugs & Connectors


A. Industrial-strength brass blades and contacts for long-lasting conductivity.


B. Rubber body construction stands up to impacts, oils, chemicals, heat, and weather.

C. Quick-drive assembly screws allow for fast installation, saving time and money.


Terminal screws backed-out, ready-to-wire, saving time and money.

Self-centering cord clamps provide superior strain relief.

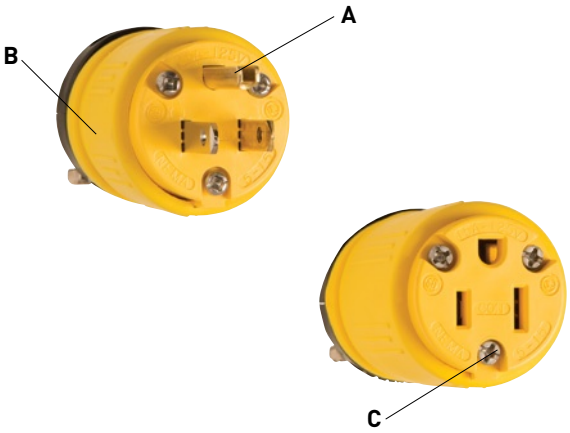



1447



1547

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42M
RUBBER DUSTTIGHT PLUGS & CONNECTORS						
1447	15	125	Plug, Yellow, Rubber	5-15P	•	•
1547	15	125	Connector, Yellow, Rubber	5-15R	•	•
1433P	20	125	Plug, Yellow, Rubber	5-20P	•	•
1533	20	125	Connector, Yellow, Rubber	5-20R	•	•
1449	15	250	Plug, Yellow, Rubber	6-15P	•	•
1549	15	250	Connector, Yellow, Rubber	6-15R	•	•
1448	20	250	Plug, Yellow, Rubber	6-20P	•	•
1548	20	250	Connector, Yellow, Rubber	6-20R	•	•



NEMA 5-15P



NEMA 5-15R



NEMA 6-15P



NEMA 6-15R



NEMA 5-20P



NEMA 5-20R



NEMA 6-20P



NEMA 6-20R

(INCH)	A	B	C	D	E
RUBBER STRAIGHT BLADE PLUG					
15A	2.27"	1.44"	1.53"	1.53"	
20A	2.59"	1.76"	1.93"	1.60"	
RUBBER STRAIGHT BLADE CONNECTOR					
15A	2.99"	2.16"	1.53"	1.66"	1.53"
20A	3.74"	2.19"	1.93"	2.07"	1.60"

Cord Grip Range: .335"-.640"

RUBBER & WATERTIGHT DEVICES

Rubber Dust-Tight Turnlok® Plugs & Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125, 250 & 277V
3 Pole, 4 Wire Grounding 20 & 30A, 125/250, 3ø250, 3ø480, 3ø600V; 3 Pole, 3 Wire 20A, 125/250V



2647




2747

Features

- Industrial-strength brass blades & contacts for long-lasting superior corrosion resistance.
- Thermoplastic elastomer construction stands up to impacts oils, chemicals, heat and weather.
- Quick-drive assembly screws allow for fast installation, saving time and money.
- Two-screw self-centering cable clamp secures wire and provides superior strain relief.
- Recessed assembly screws are isolated from live parts.
- Keyed body & cover for easy assembly and alignment.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42M
RUBBER DUSTTIGHT PLUGS & CONNECTORS						
2447	15	125	Plug, Yellow, Rubber	L5-15P	•	•
2547	15	125	Connector, Yellow, Rubber	L5-15R	•	•
2647	20	125	Plug, Yellow, Rubber	L5-20P	•	•
2747	20	125	Connector, Yellow, Rubber	L5-20R	•	•
2847	30	125	Plug, Yellow, Rubber	L5-30P	•	•
2947	30	125	Connector, Yellow, Rubber	L5-30R	•	•
2449	15	250	Plug, Yellow, Rubber	L6-15P	•	•
2549	15	250	Connector, Yellow, Rubber	L6-15R	•	•
2648	20	250	Plug, Yellow, Rubber	L6-20P	•	•
2748	20	250	Connector, Yellow, Rubber	L6-20R	•	•
2848	30	250	Plug, Yellow, Rubber	L6-30P	•	•
2948	30	250	Connector, Yellow, Rubber	L6-30R	•	•
2434	15	277	Plug, Yellow, Rubber	L7-15P	•	•
2534	15	277	Connector, Yellow, Rubber	L7-15R	•	•
2649	20	277	Plug, Yellow, Rubber	L7-20P	•	•
2749	20	277	Connector, Yellow, Rubber	L7-20R	•	•
2849	30	277	Plug, Yellow, Rubber	L7-30P	•	•
2949	30	277	Connector, Yellow, Rubber	L7-30R	•	•
2674	20	125/250	Plug, Yellow, Rubber	L14-20P	•	•
2774	20	125/250	Connector, Yellow, Rubber	L14-20R	•	•
2874	30	125/250	Plug, Yellow, Rubber	L14-30P	•	•
2974	30	125/250	Connector, Yellow, Rubber	L14-30R	•	•
2675	20	3ø250	Plug, Yellow, Rubber	L15-20P	•	•
2775	20	3ø250	Connector, Yellow, Rubber	L15-20R	•	•
2875	30	3ø250	Plug, Yellow, Rubber	L15-30P	•	•
2975	30	3ø250	Connector, Yellow, Rubber	L15-30R	•	•
2676	20	3ø480	Plug, Yellow, Rubber	L16-20P	•	•
2776	20	3ø480	Connector, Yellow, Rubber	L16-20R	•	•
2876	30	3ø480	Plug, Yellow, Rubber	L16-30P	•	•
2976	30	3ø480	Connector, Yellow, Rubber	L16-30R	•	•
2877	30	3øY 600	Plug, Yellow, Rubber	L17-30P	•	•
2977	30	3øY 600	Connector, Yellow, Rubber	L17-30R	•	•
2608	20	125/250	Plug, Yellow, Rubber	NON	•	•
2708	20	125/250	Connector, Yellow, Rubber	NON	•	•

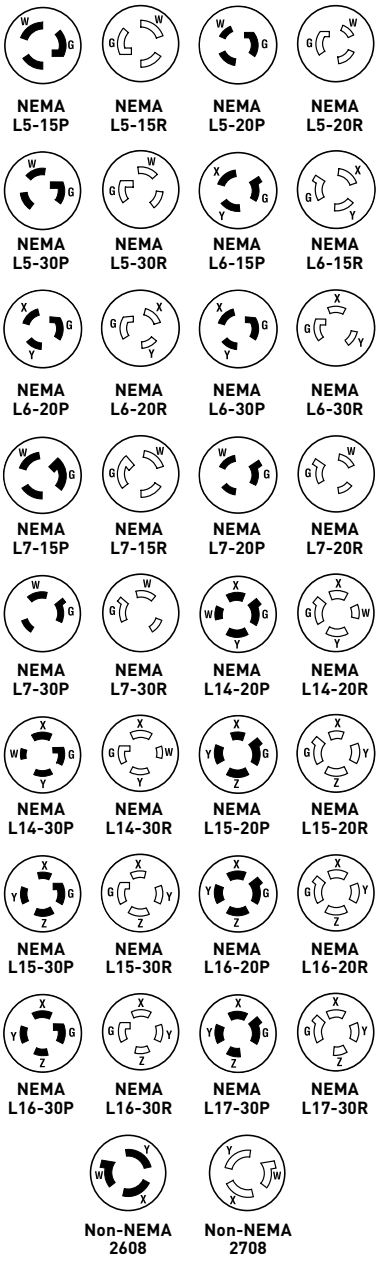

RUBBER & WATERTIGHT DEVICES

SteriGuard® Antimicrobial Wiring Devices & Accessories

15W47AM
Straight Blade and Turnlok® Plugs & Connectors


SteriGuard® Antimicrobial Wiring Solutions provide excellent protection against the growth of microbes on all surfaces. Independent testing proves the ability of these devices to inhibit the growth of Escherichia coli, Gram (-) and Staphylococcus aureus, Gram (+) providing long-lasting benefits to manufacturers beyond conventional cleaning methods.

Rated watertight for 1,500 psi high-pressure hosedown, these plugs and connectors feature multiple seals to ensure protection against the environment. SteriGuard provides a cost-effective way to add additional safety precautions and unequaled assurance that every feasible step has been taken in the interest of consumer protection.

- **National Sanitation Foundation (NSF) Certified.**
- **Antimicrobial additive additives** embedded in Polymer inhibits growth of bacteria, molds, mildews, and fungi.
- **Antimicrobial additive resistant to scuffing and cleaning.**
- **Independently tested and certified to JIS Z2801.**
- **Thermoplastic elastomer body construction** stands up to impacts, oils, heat, and weather.
- **Large ribs on body** for a superior grip when mating.
- **Quick-drive assembly screws** allow fast installation, saving time and money.
- **NEMA 4, 4X, 6, 6P Watertight. IP65, 66, 67.** Rated watertight for 1,500 psi high pressure hose-down.
- **Terminal screws backed-out, ready-to-wire,** saving time and money during installation.
- **Multipoint sealing system between plug and connector** ensures protection from water and contaminants.
- **Valox compression-type cord grip** provides watertight seal and great pull out strength.
- **Nickel-plated blades and contacts** for long-lasting, superior corrosion resistance.

Antimicrobial Reductions

- **Escherichia (E. Coli):** Log Reduction > 4.8, reduces surface bacteria by > 99.99%
- **Staphylococcus (Staph), MRSA:** Log Reduction > 3.9, reduces surface bacteria by > 99.98%
- **Listeria monocytogenes:** Log Reduction> 4.3, reduces surface bacteria by > 99.99%
- **Salmonella:** Log Reduction > 3.6, reduces surface bacteria by > 99.97%

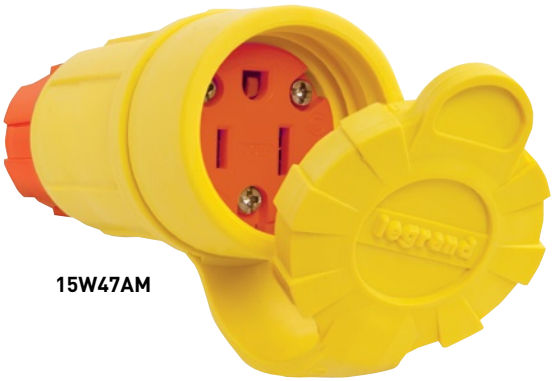

15W47AM



14W48AM



RUBBER & WATERTIGHT DEVICES

SteriGuard® Antimicrobial Wiring Devices & Accessories

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.
STRAIGHT BLADE 2 POLE/3 WIRE				
14W47AM	15	125	Plug	5-15P
15W47AM			Connector	5-15R
14W33AM	20	125	Plug	5-20P
15W33AM			Connector	5-20R
14W49AM	15	250	Plug	6-15P
15W49AM			Connector	6-15R
14W48AM	20	250	Plug	6-20P
15W48AM			Connector	6-20R
TURNLOK® 2 POLE/3 WIRE				
24W47AM	15	125	Plug	L5-15P
25W47AM			Connector	L5-15R
26W47AM	20	125	Plug	L5-20P
27W47AM			Connector	L5-20R
28W47AM	30	125	Plug	L5-30P
29W47AM			Connector	L5-30R
24W49AM	15	250	Plug	L6-15P
25W49AM			Connector	L6-15R
26W48AM	20	250	Plug	L6-20P
27W48AM			Connector	L6-20R
28W48AM	30	250	Plug	L6-30P
29W48AM			Connector	L6-30R
24W34AM	15	277	Plug	L7-15P
25W34AM			Connector	L7-15R
26W49AM	20	277	Plug	L7-20P
27W49AM			Connector	L7-20R
28W49AM	30	277	Plug	L7-30P
29W49AM			Connector	L7-30R
TURNLOK® 3 POLE/4 WIRE				
26W74AM	20	125/250	Plug	L14-20P
27W74AM			Connector	L14-20R
28W74AM	30	125/250	Plug	L14-30P
29W74AM			Connector	L14-30R
26W75AM	20	3Ø250	Plug	L15-20P
27W75AM			Connector	L15-20R
28W75AM	30	3Ø250	Plug	L15-30P
29W75AM			Connector	L15-30R
26W76AM	20	3Ø480	Plug	L16-20P
27W76AM			Connector	L16-20R



SteriGuard Straight Blade Plug



SteriGuard Turnlok Plug

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.
TURNLOK® 3 POLE/4 WIRE (con't)				
28W76AM	30	3Ø480	Plug	L16-30P
29W76AM			Connector	L16-30R
28W77AM	30	3Ø600	Plug	L17-30P
29W77AM			Connector	L17-30R
TURNLOK® NON-NEMA				
26W08AM	20	125/250	Plug, 3P/3W NG	•
27W08AM			Connector, 3P/3W NG	•
28W08AM	30	125/250	Plug, 3P/3W NG	•
29W08AM			Connector, 3P/3W NG	•
28W09AM	30	3ØY 120/208	Plug, 4P/4W NG	•
29W09AM			Connector, 4P/4W NG	•

CATALOG NUMBER	DESCRIPTION
STERIGUARD ACCESSORIES	
PS15WTAM	Female Watertight Cap 15/20A Straight Blade & 15A Locking Devices
PS27WTAM	Female Watertight Cap 20A Locking Devices
PS29WTAM	Female Watertight Cap 30A Locking Devices
PS14WTAM	Male Watertight Cap 15/20A Straight Blade & 15A Locking Devices

NSF®

RUBBER & WATERTIGHT DEVICES

SteriGuard® Antimicrobial Bulk Portable Cord & Antimicrobial Cord Drops



SteriGuard Bulk Portable Cord

Features & Benefits

- Custom cord drops are engineered to order for desired length specifications and NEMA configurations
- Antimicrobial additives embedded in polymer and inhibit growth of bacteria, molds, mildews, and fungi
  - Escherichia (E.Coli): Log reduction > 4.3, reduces surface bacteria by > 99.99%
  - Staphylococcus (Staph), MRSA: Log reduction > 4.3, reduces surface bacteria by > 99.97%
  - Salmonella: Log reduction > 3.6, reduces surface bacteria by > 99.97%
- RoHS compliant (non-halogenated)
- Antimicrobial additive is resistant to scuffing and cleaning
- Independently tested and certified to JIS Z2801 standards
- Ideal for use in food & beverage preparation, processing, and packaging; agriculture; pharmaceutical; health care; and more

CATALOG NUMBER	DESCRIPTION
STERIGUARD® ANTIMICROBIAL BULK PORTABLE CORD	
PS163AM	16/3 SEOW/STOW Antimicrobial cord
PS143AM	14/3 SEOW/STOW Antimicrobial cord
PS123AM	12/3 SEOW/STOW Antimicrobial cord
PS103AM	10/3 SEOW/STOW Antimicrobial cord
PS144AM	14/4 SEOW/STOW Antimicrobial Cord
PS124AM	12/4 SEOW/STOW Antimicrobial cord
PS104AM	10/4 SEOW/STOW Antimicrobial cord
PS084AM	08/4 SEOW/STOW Antimicrobial Cord

Bulk cord offered on reels in 250 foot and 1,000 foot lengths only.



SteriGuard Antimicrobial Cord Drop

SteriGuard® Antimicrobial Cord Drops

To ensure you get the right product for your application, use the charts and follow the example below to select the right cord size and type, your required length, and the device part number. To place the order contact Customer Service at **800-223-4162** or **customer.support@legrand.us**

PS	123	XX	14W47AM
Prefix	**Cord Size and Type** **143** = 14/3 SEOW **123** = 12/3 SEOW **124** = 12/4 SEOW **103** = 10/3 SEOW **104** = 10/4 SEOW Other sizes available upon request.	**Select Length (1 to 99 ft.)**	**SteriGuard Part No.** Select specific device from the chart. Part number shown above is an example only.

Bulk Cord — UL SEOW, cUL STOW
Cord Drops — Wiring Devices: UL/CSA Listed — Industrial Cord: UL SEOW, cUL STOW

RUBBER & WATERTIGHT DEVICES

IP67 Suitability

Watertight Plugs, Connectors & Receptacles 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

15W47 & 14W47
Watertight Plugs, Connectors & Receptacles

A. **Rubber body construction** stands up to impacts, oils, chemicals, heat, and weather.


B. **Floating blades** allow self-alignment with contacts for a firm, even electrical connection.

C. **Quick-drive assembly screws** allow for fast installation, saving time and money.

D. **Nickel-plated blades and contacts** for long-lasting, superior corrosion resistance.

NEMA 4, 4X, Watertight. IP65, 66, 67. Rated watertight for 1,500 psi high-pressure hose-down.







Terminal screws backed-out, ready-to-wire, saving time and money.

Multiple ring seals between plug and connector ensures protection from water and contaminants.

Compression-type cord grip provides watertight seal and 205 lb. pull out strength.



14W47



15W47 with cap


(INCH)	A	B
WATERTIGHT PLUG		
15A	2.62"	1.85"
20A	2.62"	1.85"
WATERTIGHT CONNECTOR		
15A	4.03"	1.85"
20A	4.03"	1.85"

Cord Grip Range: .250"-.625"



60W33DPLX

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42M
WATERTIGHT PLUGS, CONNECTORS & RECEPTACLES						
14W47	15	125	Plug, Yellow, NEMA 4X/6P	5-15P	•	•
14W47BK	15	125	Plug, Black, NEMA 4X/6P	5-15P	•	•
14W47GCM	15	125	Plug, Yellow, NEMA 4X/6P, Ground Continuity Monitoring	5-15P	•	•
15W47	15	125	Connector, Yellow, NEMA 4X/6P	5-15R	•	•
15W47BK	15	125	Connector, Black, NEMA 4X/6P	5-15R	•	•
15W47GCM	15	125	Connector, Yellow, NEMA 4X/6P, Ground Continuity Monitoring	5-15R	•	•
60W47	15	125	Single Receptacle, Yellow, NEMA 4X/6P	5-15R	•	•
60W47BK	15	125	Single Receptacle, Black, NEMA 4X/6P	5-15R	•	•
60W47DPLX	15	125	Duplex Receptacle, Yellow, NEMA 4X/6P	5-15R	•	•
14W33	20	125	Plug, Yellow, NEMA 4X/6P	5-20P	•	•
14W33BK	20	125	Plug, Black, NEMA 4X/6P	5-20P	•	•
14W33GCM	20	125	Plug, Yellow, NEMA 4X/6P, Ground Continuity Monitoring	5-20P	•	•
15W33	20	125	Connector, Yellow, NEMA 4X/6P	5-20R	•	•
15W33BK	20	125	Connector, Black, NEMA 4X/6P	5-20R	•	•
15W33GCM	20	125	Connector, Yellow, NEMA 4X/6P, Ground Continuity Monitoring	5-20R	•	•
60W33	20	125	Single Receptacle, Yellow, NEMA 4X/6P	5-20R	•	•
60W33DPLX	20	125	Duplex Receptacle, Yellow, NEMA 4X/6P	5-20R	•	•
14W49	15	250	Plug, Yellow, NEMA 4X/6P	6-15P	•	•
14W49BK	15	250	Plug, Black, NEMA 4X/6P	6-15P	•	•
15W49	15	250	Connector, Yellow, NEMA 4X/6P	6-15R	•	•
15W49BK	15	250	Connector, Black, NEMA 4X/6P	6-15R	•	•
60W49	15	250	Single Receptacle, Yellow, NEMA 4X/6P	6-15R	•	•
60W49DPLX	15	250	Duplex Receptacle, Yellow, NEMA 4X/6P	6-15R	•	•
14W48	20	250	Plug, Yellow, NEMA 4X/6P	6-20P	•	•
14W48BK	20	250	Plug, Black, NEMA 4X/6P	6-20P	•	•
15W48	20	250	Connector, Yellow, NEMA 4X/6P	6-20R	•	•
15W48BK	20	250	Connector, Black, NEMA 4X/6P	6-20R	•	•
60W48	20	250	Single Receptacle, Yellow, NEMA 4X/6P	6-20R	•	•
60W48DPLX	20	250	Duplex Receptacle, Yellow, NEMA 4X/6P	6-20R	•	•
14W07	15/10	125/250	Plug, Yellow, NEMA 4X/6P	NON	•	•
15W07	15/10	125/250	Connector, Yellow, NEMA 4X/6P	NON	•	•
60W07	15/10	125/250	Single Receptacle, Yellow, NEMA 4X/6P	NON	•	•

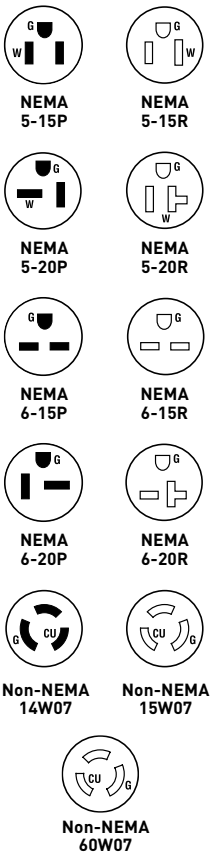


RUBBER & WATERTIGHT DEVICES

Watertight Turnlok® Plugs, Connectors & Receptacles

2 Pole, 3 Wire Grounding 15 & 20A, 125/250, 250 & 277V



24W47




25W47

Features


- Thermoplastic elastomer body construction stands up to impacts, oils, chemicals, heat, and weather.
- Large ribs on body for a superior grip when mating.
- Quick-drive assembly screws allow for fast installation, saving time and money.
- NEMA 4, 4X, 6, 6P Watertight. IP65, 66, 67. Rated watertight for 1,500 psi highpressure hose-down.
- Terminal screws backed-out, ready-to-wire, saving time and money.
- Multipoint sealing system between plug and connector ensures protection from water and contaminants.
- Valox compression-type cord grip provides watertight seal and great pull out strength.
- Nickel-plated blades and contacts for long-lasting, superior corrosion resistance.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42M
WATERTIGHT PLUGS, CONNECTORS & RECEPTACLES						
24W47	15	125	Plug, Yellow, NEMA 4X/6P	L5-15P	•	•
25W47	15	125	Connector, Yellow, NEMA 4X/6P	L5-15R	•	•
65W47	15	125	Single Receptacle, Yellow, NEMA 4X/6P	L5-15R	•	•
65W47DPLX	15	125	Duplex Receptacle, Yellow, NEMA 4X/6P	L5-15R	•	•
26W47	20	125	Plug, Yellow, NEMA 4X/6P	L5-20P	•	•
26W47GCM	20	125	Plug, Yellow, NEMA 4X/6P, Grd Continuity Monitoring	L5-20P	•	•
27W47	20	125	Connector, Yellow, NEMA 4X/6P	L5-20R	•	•
27W47GCM	20	125	Connector, Yellow, NEMA 4X/6P, Grd Continuity Monitoring	L5-20R	•	•
67W47	20	125	Single Receptacle, Yellow, NEMA 4X/6P	L5-20R	•	•
28W47	30	125	Plug, Yellow, NEMA 4X/6P	L5-30P	•	•
29W47	30	125	Connector, Yellow, NEMA 4X/6P	L5-30R	•	•
69W47	30	125	Single Receptacle, Yellow, NEMA 4X/6P	L5-30R	•	•
24W49	15	250	Plug, Yellow, NEMA 4X/6P	L6-15P	•	•
25W49	15	250	Connector, Yellow, NEMA 4X/6P	L6-15R	•	•
65W49	15	250	Single Receptacle, Yellow, NEMA 4X/6P	L6-15R	•	•
65W49DPLX	15	250	Duplex Receptacle, Yellow, NEMA 4X/6P	L6-15R	•	•
26W48	20	250	Plug, Yellow, NEMA 4X/6P	L6-20P	•	•
27W48	20	250	Connector, Yellow, NEMA 4X/6P	L6-20R	•	•
67W48	20	250	Single Receptacle, Yellow, NEMA 4X/6P	L6-20R	•	•
28W48	30	250	Plug, Yellow, NEMA 4X/6P	L6-30P	•	•
29W48	30	250	Connector, Yellow, NEMA 4X/6P	L6-30R	•	•
69W48	30	250	Single Receptacle, Yellow, NEMA 4X/6P	L6-30R	•	•
24W34	15	277	Plug, Yellow, NEMA 4X/6P	L7-15P	•	•
25W34	15	277	Connector, Yellow, NEMA 4X/6P	L7-15R	•	•
65W34	15	277	Single Receptacle, Yellow, NEMA 4X/6P	L7-15R	•	•
65W34DPLX	15	277	Duplex Receptacle, Yellow, NEMA 4X/6P	L7-15R	•	•
26W49	20	277	Plug, Yellow, NEMA 4X/6P	L7-20P	•	•
27W49	20	277	Connector, Yellow, NEMA 4X/6P	L7-20R	•	•
67W49	20	277	Single Receptacle, Yellow, NEMA 4X/6P	L7-20R	•	•
28W49	30	277	Plug, Yellow, NEMA 4X/6P	L7-30P	•	•
29W49	30	277	Connector, Yellow, NEMA 4X/6P	L7-30R	•	•
69W49	30	277	Single Receptacle, Yellow, NEMA 4X/6P	L7-30R	•	•

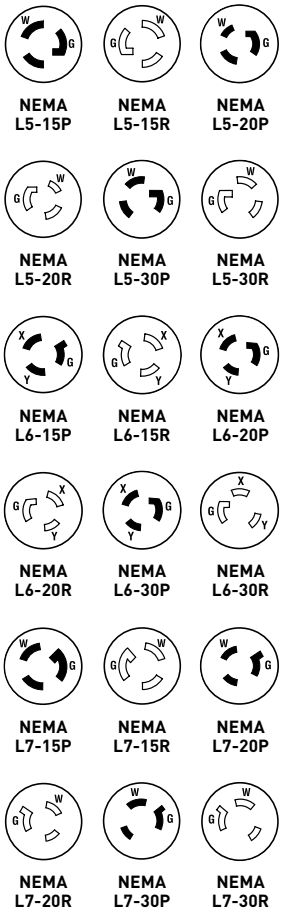


RUBBER & WATERTIGHT DEVICES

Watertight Turnlok® Plugs, Connectors & Receptacles 3 Pole, 4 Wire Grounding 20 & 30A, 125/250, 3ø250, 3ø480, 3ø600V; 3 Pole, 3 Wire 20A, 125/250V



26W74




27W74



69W74
(shown in Lift Lid Weatherproof Cover)


CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE UL498	3rd PARTY COMPLIANCE C22.2 No. 42M
WATERTIGHT PLUGS, CONNECTORS & RECEPTACLES						
26W74	20	125/250	Plug, Yellow, NEMA 4X/6P	L14-20P	•	•
27W74	20	125/250	Connector, Yellow, NEMA 4X/6P	L14-20R	•	•
67W74	20	125/250	Single Receptacle, Yellow, NEMA 4X/6P	L14-20R	•	•
28W74	30	125/250	Plug, Yellow, NEMA 4X/6P	L14-30P	•	•
29W74	30	125/250	Connector, Yellow, NEMA 4X/6P	L14-30R	•	•
69W74	30	125/250	Single Receptacle, Yellow, NEMA 4X/6P	L14-30R	•	•
26W75	20	3ø250	Plug, Yellow, NEMA 4X/6P	L15-20P	•	•
27W75	20	3ø250	Connector, Yellow, NEMA 4X/6P	L15-20R	•	•
67W75	20	3ø250	Single Receptacle, Yellow, NEMA 4X/6P	L15-20R	•	•
28W75	30	3ø250	Plug, Yellow, NEMA 4X/6P	L15-30P	•	•
29W75	30	3ø250	Connector, Yellow, NEMA 4X/6P	L15-30R	•	•
69W75	30	3ø250	Single Receptacle, Yellow, NEMA 4X/6P	L15-30R	•	•
26W76	20	3ø480	Plug, Yellow, NEMA 4X/6P	L16-20P	•	•
27W76	20	3ø480	Connector, Yellow, NEMA 4X/6P	L16-20R	•	•
67W76	20	3ø480	Single Receptacle, Yellow, NEMA 4X/6P	L16-20R	•	•
28W76	30	3ø480	Plug, Yellow, NEMA 4X/6P	L16-30P	•	•
29W76	30	3ø480	Connector, Yellow, NEMA 4X/6P	L16-30R	•	•
69W76	30	3ø480	Single Receptacle, Yellow, NEMA 4X/6P	L16-30R	•	•
28W77	30	3øY 600	Plug, Yellow, NEMA 4X/6P	L17-30P	•	•
29W77	30	3øY 600	Connector, Yellow, NEMA 4X/6P	L17-30R	•	•
69W77	30	3øY 600	Single Receptacle, Yellow, NEMA 4X/6P	L17-30R	•	•
26W08	20	125/250	Plug, Yellow, NEMA 4X/6P	NON	•	•
27W08	20	125/250	Connector, Yellow, NEMA 4X/6P	NON	•	•
67W08	20	125/250	Single Receptacle, Yellow, NEMA 4X/6P	NON	•	•
28W08	30	125/250	Plug, Yellow, NEMA 4X/6P	NON	•	•
29W08	30	125/250	Connector, Yellow, NEMA 4X/6P	NON	•	•
69W08	30	125/250	Single Receptacle, Yellow, NEMA 4X/6P	NON	•	•
28W09	30	3øY 120/208	Plug, Yellow, NEMA 4X/6P	NON	•	•
29W09	30	3øY 120/208	Connector, Yellow, NEMA 4X/6P	NON	•	•
69W09	30	3øY 120/208	Single Receptacle, Yellow, NEMA 4X/6P	NON	•	•




NEMA L14-20P **NEMA L14-20R** **NEMA L14-30P**




L14-30R NEMA **NEMA L15-20P** **NEMA L15-20R**




NEMA L15-30P **NEMA L15-30R** **NEMA L16-20P**




NEMA L16-20R **NEMA L16-30P** **NEMA L16-30R**




NEMA L17-30P **NEMA L17-30R**



Non-NEMA 26W08 **Non-NEMA 27W08**



Non-NEMA 28W08 **Non-NEMA 29W08**



Non-NEMA 28W09 **Non-NEMA 29W09**

RUBBER & WATERTIGHT DEVICES


Watertight Back Boxes




FD21



FDC23





Features

- Back Box available in 1/2", 3/4" and 1" NPT openings.
- Back Box available in both deep and feed-through configurations.
- Thermoplastic elastomer construction withstands chemicals and impacts.

CATALOG NUMBER	DESCRIPTION
WATERTIGHT BACK BOXES	
FD11	Yellow Back Box, Deep, 1/2" Single Receptacle
FD12	Yellow Back Box, Deep, 3/4" Single Receptacle
FD13	Yellow Back Box, Deep, 1" Single Receptacle
FD12BK	Black Back Box, Deep, 3/4" Single Receptacle
FD21	Yellow Back Box, Deep, 1/2" Duplex Receptacle
FD22	Yellow Back Box, Deep, 3/4" Duplex Receptacle
FD23	Yellow Back Box, Deep, 1" Duplex Receptacle
FD22BK	Black Back Box, Deep, 3/4" Duplex Receptacle
FDC21	Yellow Back Box, Deep, 1/2" Feed-Through Duplex Receptacle
FDC22	Yellow Back Box, Deep, 3/4" Feed-Through Duplex Receptacle
FDC23	Yellow Back Box, Deep, 1" Feed-Through Duplex Receptacle
FDC22BK	Black Back Box, Deep, 3/4" Feed-Through Duplex Receptacle
PSWALLKIT	Yellow Back Box, Wall Mount Kit
FO22	Yellow Back Box, Deep, Open, 1" Duplex Receptacle
PSGRIPKIT1	1/2" Bushing Kit .37 - .61 Range
PSGRIPKIT2	3/4" Bushing Kit .45 - .70 Range
PSGRIPKIT3	1" Bushing Kit .59 - 1.00 Range



PS14WT

CATALOG NUMBER	DESCRIPTION
WATERTIGHT ACCESSORIES	
PS15WT	Female Watertight Cap 15/20A Straight Blade & 15A Locking Devices
PS27WT	Female Watertight Cap 20A Locking Devices
PS29WT	Female Watertight Cap 30A Locking Devices
PS14WT	Male Watertight Cap 15/20A Straight Blade & 15A Locking Devices
6500	Cover for 15/20A Straight Blade & Turnlok Watertight Receptacles
6700	Cover for 20A Turnlok Watertight Receptacles
6800	Cover for 30A Turnlok Watertight Receptacles



6500/6700/6800

RUBBER & WATERTIGHT DEVICES


Industrial Grade Portable Outlet Boxes & Covers

Features & Benefits

- Available in both clamp and cord grip styles, covering a wide range of cable diameters.
- Molded of thermoplastic elastomer (TPE), these non-conductive boxes are crushproof, and resistant to jobsite abuse and electrical shock.
- Available in both pendant and feed-through types.
- Heavy-duty stainless steel spring-loaded fliplids provide NEMA Type 3R protection.
- A wide array of cover options are available.

CATALOG NUMBER	DESCRIPTION
PORTABLE OUTLET BOXES	
3050	Yellow Rubber Box, 1 Clamp, Standard Depth
3050BK	Black Rubber Box, 1 Clamp, Standard Depth
3059	Yellow Rubber Box, 1 Grip, Standard Depth
3059BK	Black Rubber Box, 1 Grip, Standard Depth
3059F	Yellow Rubber Box, 2 Grips, Standard Depth
3059FBK	Black Rubber Box, 2 Grips, Standard Depth
3090	Yellow Rubber Box, 1 Clamp, Deep Depth
3099	Yellow Rubber Box, 1 Grip, Deep Depth
3099BK	Black Rubber Box, 1 Grip, Deep Depth
3099F	Yellow Rubber Box, 2 Grips, Deep Depth
3099FBK	Black Rubber Box, 2 Grips, Deep Depth
3200	2G Yellow Rubber Box, 1 - 3/4 KO, Deep
3200BK	2G Black Rubber Box, 1 - 3/4 KO, Deep
3300	2G Yellow Rubber Box, 2 - 3/4 KO, Deep
3300BK	2G Black Rubber Box, 2 - 3/4 KO, Deep

Single Gang Outlet Boxes (Clamp Style)

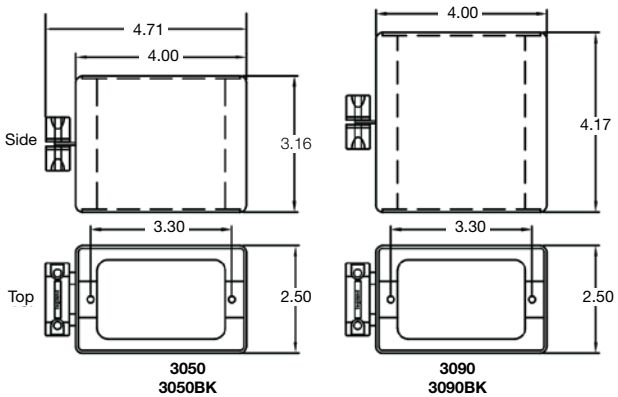

3050
3050BK
3090
3090BK

Includes: 1 Small and 1 Large Hog Ring


CATALOG NUMBER	DESCRIPTION
PORTABLE OUTLET BOXES	
3051BK	1G Black Duplex Cover Plate
3056BK	1G Black Flip Lid Dplx Cover Plate
3052BK	1G Black 1.39 Dia Rec Cover Plate
3057BK	1G Black Flip Lid 1.39 Dia Cover Plate
3055BK	1G Black 1.56 Dia Rec Cover Plate
3058BK	1G Black Flip Lid 1.56 Dia Cover Plate
3054BK	1G Black Blank Cover Plate
3060BK	1G Black GFCI Cover Plate
3061BK	1G Black Flip Lid GFCI Cover Plate
3260BK	2G Black 2-Duplex Cover Plate
3260WBK	2G Black Flip Lid 2-Dplx Cover Plate
3261BK	2G Black 1-1.56, 1-Blank Cover Plate
3261WBK	2G Black Flip Lid 1.56, Blank Cover Plate
3263BK	2G Black 2-1.56 Dia Cover Plate
3263WBK	2G BLCK Flip Lid 2-1.56 Dia Cover Plate
3265BK	2G Black Blank Cover Plate
3267BK	2G Black 1-GFCI, 1 Duplex Cover Plate
3267WBK	2G Black FlipLid 1 GFCI, 1 Duplex Cover Plate
3241BK	2G Black 1-GFCI, 1 Blank Cover Plate
3241WBK	2G Black FlipLid 1 GFCI, 1 Blank Cover Plate
3251BK	2G Black 2-GFCI Cover Plate
3251WBK	2G Black Flip Lid 2-GFCI Cover Plate
3262BK	2G Black 1-1.56 Dia, 1 Duplex Cover Plate
3262WBK	2G Black Flip Lid 1-1.56, 1-Duplex Cover




RUBBER & WATERTIGHT DEVICES

Industrial Grade Portable Outlet Boxes & Covers


Single Gang Outlet Boxes
(Cord Grip Style)

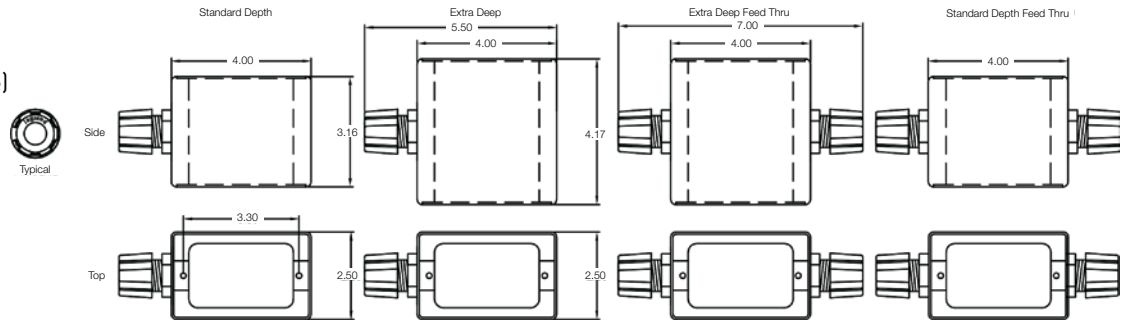


Single Gang Covers

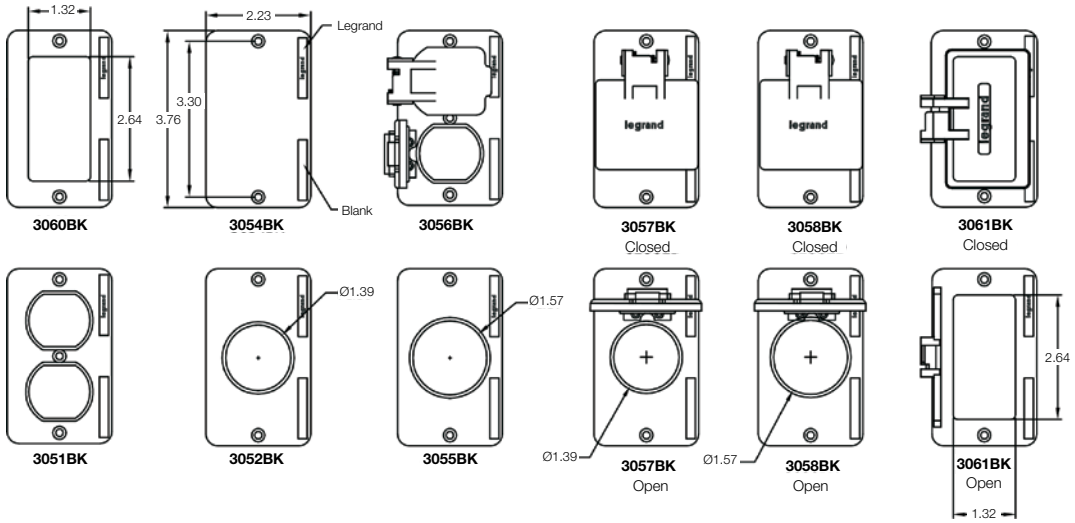

Double Gang Covers

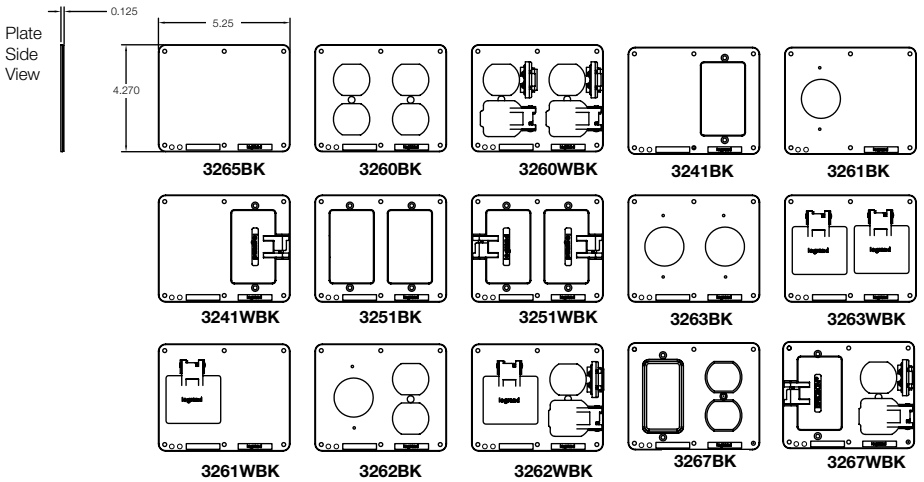

Double Gang Outlet Boxes

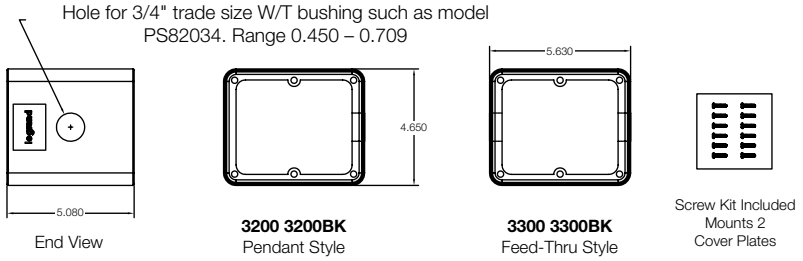

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS



P&S Safety Switches and Manual Motor Controllers provide maximum durability and minimum downtime in difficult industrial environments. P&S Fusible Safety Switches were the first with visible indication of a blown fuse, allowing for quick identification and replacement. All safety switches are constructed to provide maximum protection against water, dirt, heat and vibration – and just about anything else you can throw at it. See how P&S switches and controllers can help your plant or facility.



SWITCH DISCONNECTS

Non-Fusible Safety Switches	D-148
Fusible Safety Switches	D-153
Stainless Steel Safety Switches	D-158
Slope Top Stainless Steel Switches	D-161
Non-Metallic Safety Switches	D-164



MANUAL CONTROLLERS

30 Amp	D-167
40 Amp	D-168
60 Amp	D-169
Maintained & Momentary Contact	D-170

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Safety Switches



Non-Fusible Safety Switches UL Listed as "Suitable as Motor Disconnect."

Here's the first non-metallic NEMA 4X Non-Fusible Safety Switch line UL Listed as "Suitable as Motor Disconnect" — per NEC® Article 430.109(A)(6).

P&S Non-Fusible Safety Switches feature extra-tough components, including an impact-resistant Valox® NEMA 4X enclosure. And an innovative design that delivers safe, sure operation under the worst conditions. These rugged performers are available in capacities from 30 to 100 amps.

And when you take a closer look, you'll see even more to like. For example, the fits-anywhere compact design. The adjustable mounting feet that speed installation. Or the no-confusion, at-a-glance ON/OFF status indication.

See how P&S Non-Fusible Safety Switches work better for you.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Safety Switches

A. Compact design fits in most I-beams to provide mounting versatility, easy access, and reduced possibility of impact damage.

B. Nonconductive, watertight, corrosion-, heat-, and impact-resistant thermoplastic enclosure ensures NEMA 4X and 12 ratings. Withstands the harshest industrial environments.

C. Corrosion-resistant, stainless steel captive screws speed installation, minimize risk of lost parts, and withstand abuse.

D. Adjustable mounting feet can be moved to center of unit for instant strut- or pole-mounting without special brackets or harnesses.

E. Durable, stainless steel cover-retaining chain makes installation and maintenance more convenient.

F. Heavy-duty, ergonomic switch handle meets OSHA Lockout/Tagout provisions and provides plenty of grip for sure, easy operation. Black/red color coding and high-visibility ON/OFF markings clearly indicate status from a distance and at any visual angle. Switch entry into the enclosure is offset to the side and sealed to provide enhanced water resistance.


Bottom and top wiring access options. No unnecessary openings to compromise water resistance.

Top mount auxiliary contact enables additional control functions or signal lights.

Now certified for IP69 applications.

VFD Friendly – auxiliary contacts break before switch contacts break for use with VFD.

Conforms to the requirements of NSF/ANSI/3-A 14159-1 – Hygiene Requirements for the Design of Meat and Poultry Processing Equipment.

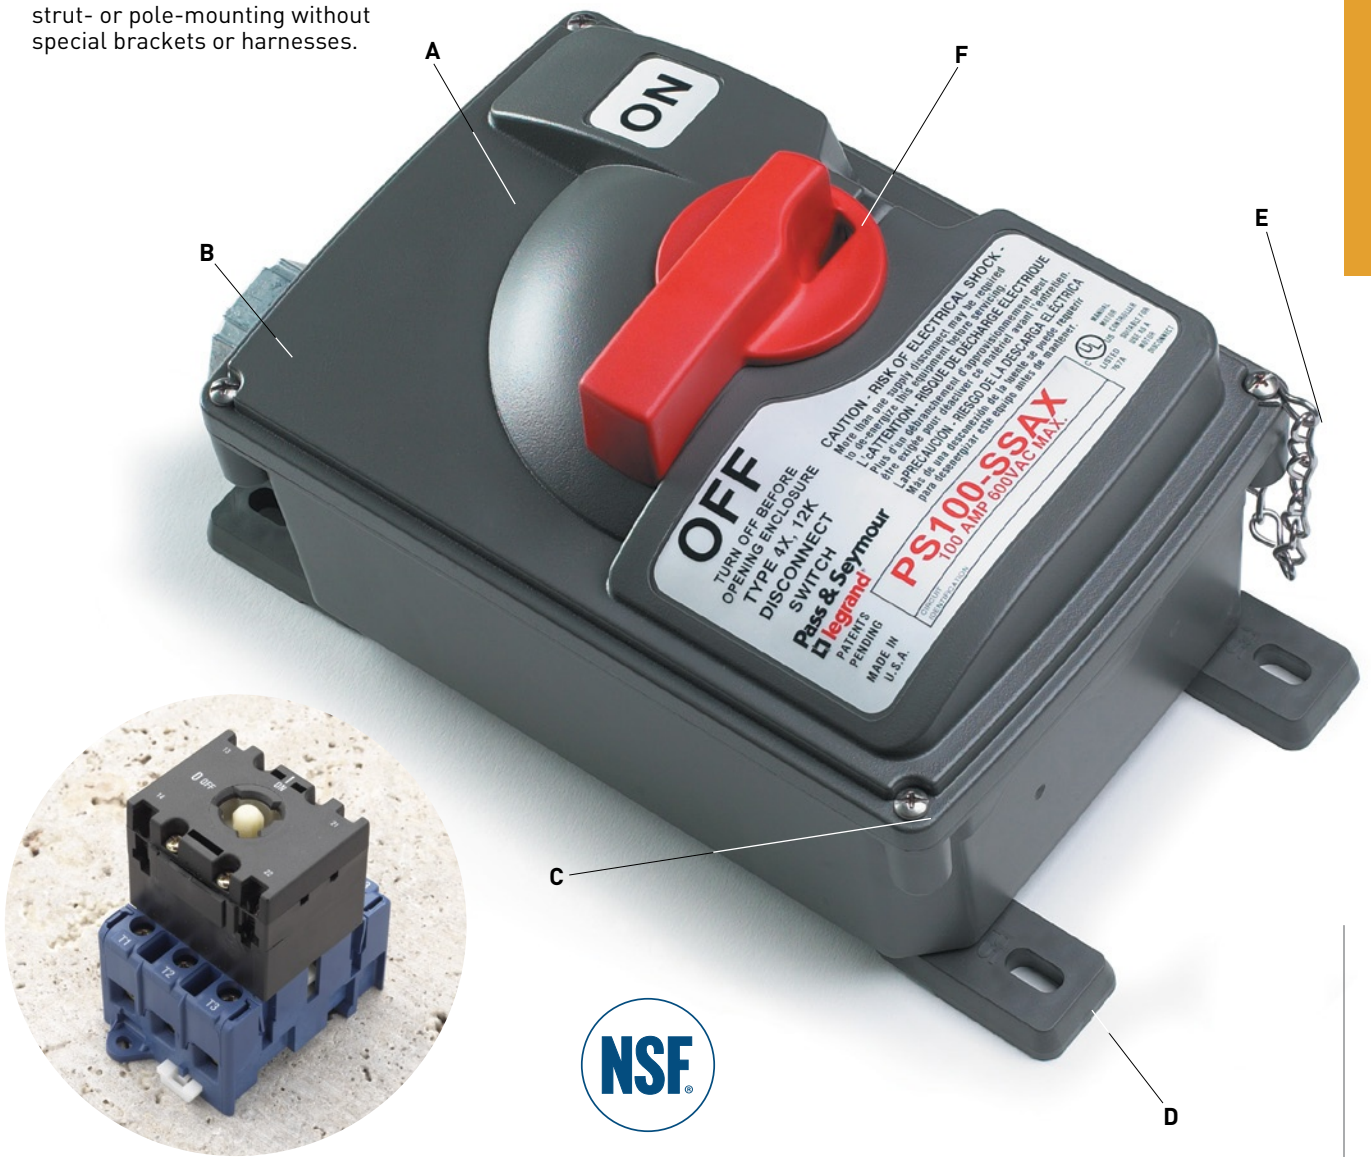

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Safety Switches Ordering Information

VOLTAGE	MAXIMUM HORSEPOWER RATING	NON-FUSIBLE SAFETY SWITCH CATALOG #	NON-FUSIBLE SAFETY SWITCH WITH AUXILIARY CONTACT** CATALOG #	NON-FUSIBLE SAFETY SWITCH WITH 3 AUXILIARY CONTACTS**	AUXILIARY CONTACT KIT*	REPLACEMENT SWITCH	REPLACEMENT SWITCH WITH AUXILIARY CONTACT	REPLACEMENT SWITCH WITH 3 AUXILIARY CONTACTS	REPLACEMENT COVER FOR STANDARD SWITCH	REPLACEMENT COVER FOR AUXILIARY TYPE
30 AMPS	**600VAC**									
120VAC	1 HP	PS30SS	PS30SSAX	PS30SSAX3	AX30	RS30	PS30RSAX	RS30AX3	PS30SSRC	PS30SSAXRC
208VAC	2 HP									
240VAC	5 HP									
277VAC	3 HP									
480VAC	5 HP									
600VAC	5 HP									
3ø 240VAC	10 HP									
3ø 480VAC	20 HP									
3ø 600VAC	25 HP									
60 AMPS	**600VAC**									
120VAC	3 HP	PS60SS	PS60SSAX	PS60SSAX3	AX60	RS60HP	RS60HPAX		PS60SSRC	PS60SSAXRC
240VAC	10 HP									
277VAC	15 HP									
480VAC	20 HP									
600VAC	30 HP									
3ø 240VAC	25 HP									
3ø 480VAC	50 HP									
3ø 600VAC	50 HP									
100 AMPS	**600VAC**									
120VAC	5 HP	PS100SS	PS100SSAX	PS100SSAX3	AX60	RS100	RS100AX		PS100SSRC	PS100SSAXRC
240VAC	15 HP									
277VAC	15 HP									
480VAC	30 HP									
600VAC	30 HP									
3ø 240VAC	25 HP									
3ø 480VAC	50 HP									
3ø 600VAC	50 HP									

* For replacement of side mount auxiliary contact on previous design.

****Auxiliary contacts break before switch contacts break for use with VFD.**

Mounting Feet Replacement Kit

CATALOG NUMBER	DESCRIPTION
SSMF	Mounting Feet Replacement Kit for PS30SS and PS30SSAX
SSMF2	Mounting Feet Replacement Kit for PS60/100A Switches





RS30



AX30

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Safety Switches Materials of Manufacture Typical/Sample Spec

Typical Specifications

- Manufacturer's Identification PS60SS
- Description: Non-Fusible Safety Switch
- Rating: 60A, 600VAC maximum
- Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dust-tight, falling dirt), IP67/IP69 suitability
- Conduit Location: Top, bottom, or back feed. Units are shipped without holes for conduit. Spot drills for locating hole saw or knockouts are provided for top, bottom, or back feed. End user decides at installation whether top, bottom, or back feed is appropriate. No closure plug kits required. Units are not provided with conduit hubs.

MATERIALS	
Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Gasket	Neoprene
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass (60 and 100 amp units only)
Grounding Plate	Galvanized Steel
Cover Chain	300 Series Stainless Steel

PERFORMANCE	
Electrical:	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than (see chart below) RMS amps at 600VAC
Operations	Mechanical: 15,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts (optional)	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL and CSA
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12 (dusttight, falling dirt) • IP66/67/69
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C • Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

Interrupting Ratings — RMS Symmetrical Amperes

Short Circuit Ratings: Suitable for use on circuits capable of delivering not more than (see chart below for cat. no. and application) RMS symmetrical amperes, 600VAC maximum.

CATALOG NUMBER	kA	FUSE/BREAKER	MAX SIZE
PS30SS (AX)	10	RK1	—
	65	Class J	40A
PS60SS (AX) PS100SS (AX)	10	RK1	—
	10	GE Circuit Breaker	—
	65	Class J	100A


SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Safety Switches Dimensions


Non-Fusible Safety Switches Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K
30	5.75	7.38	4.88	7.19	9.69	3.75	5.75	6.56	6.13	8.06	8.88
60	7.19	9.13	6.31	9.63	12.38	4.75	7.19	8.13	8.00	10.38	11.38
100	7.19	9.13	6.31	9.63	12.38	4.75	7.19	8.13	8.00	10.38	11.38


All measurements shown in inches.

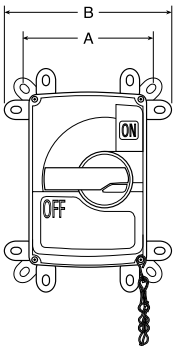

Front

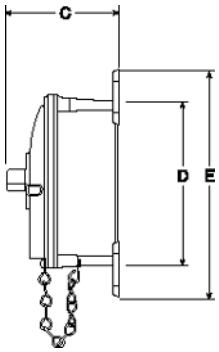

Side

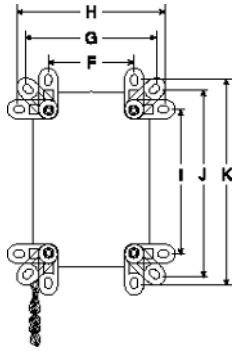

Back

(See dimensions above.)

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Safety Switches




See blown fuses at a glance in these Fusible Safety Switches.

Looking for safety switches that cut downtime? Take a close look at these innovative P&S Fusible Safety Switches. Here's the same first-ever blown-fuse indication system that's in our pacesetting Fusible Mechanical Interlocks — with individual LED indicators for each line, patent-pending integral fuse pullers, and a hinged fuse-access door. That means no time lost to locating a blown fuse — and no time wasted in fuse replacement.

P&S Fusible Safety Switches deliver the same ultra-heavy-duty construction as our Fusible Mechanical Interlocks, too. So they provide maximum protection against water, dirt, heat, and vibration — and just about any other harsh condition you'll encounter. You get the same installation flexibility, too. With capacities available from 30 to 100 amps, there's a P&S Fusible Safety Switch that's ready to work for you in any industrial environment.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Safety Switches

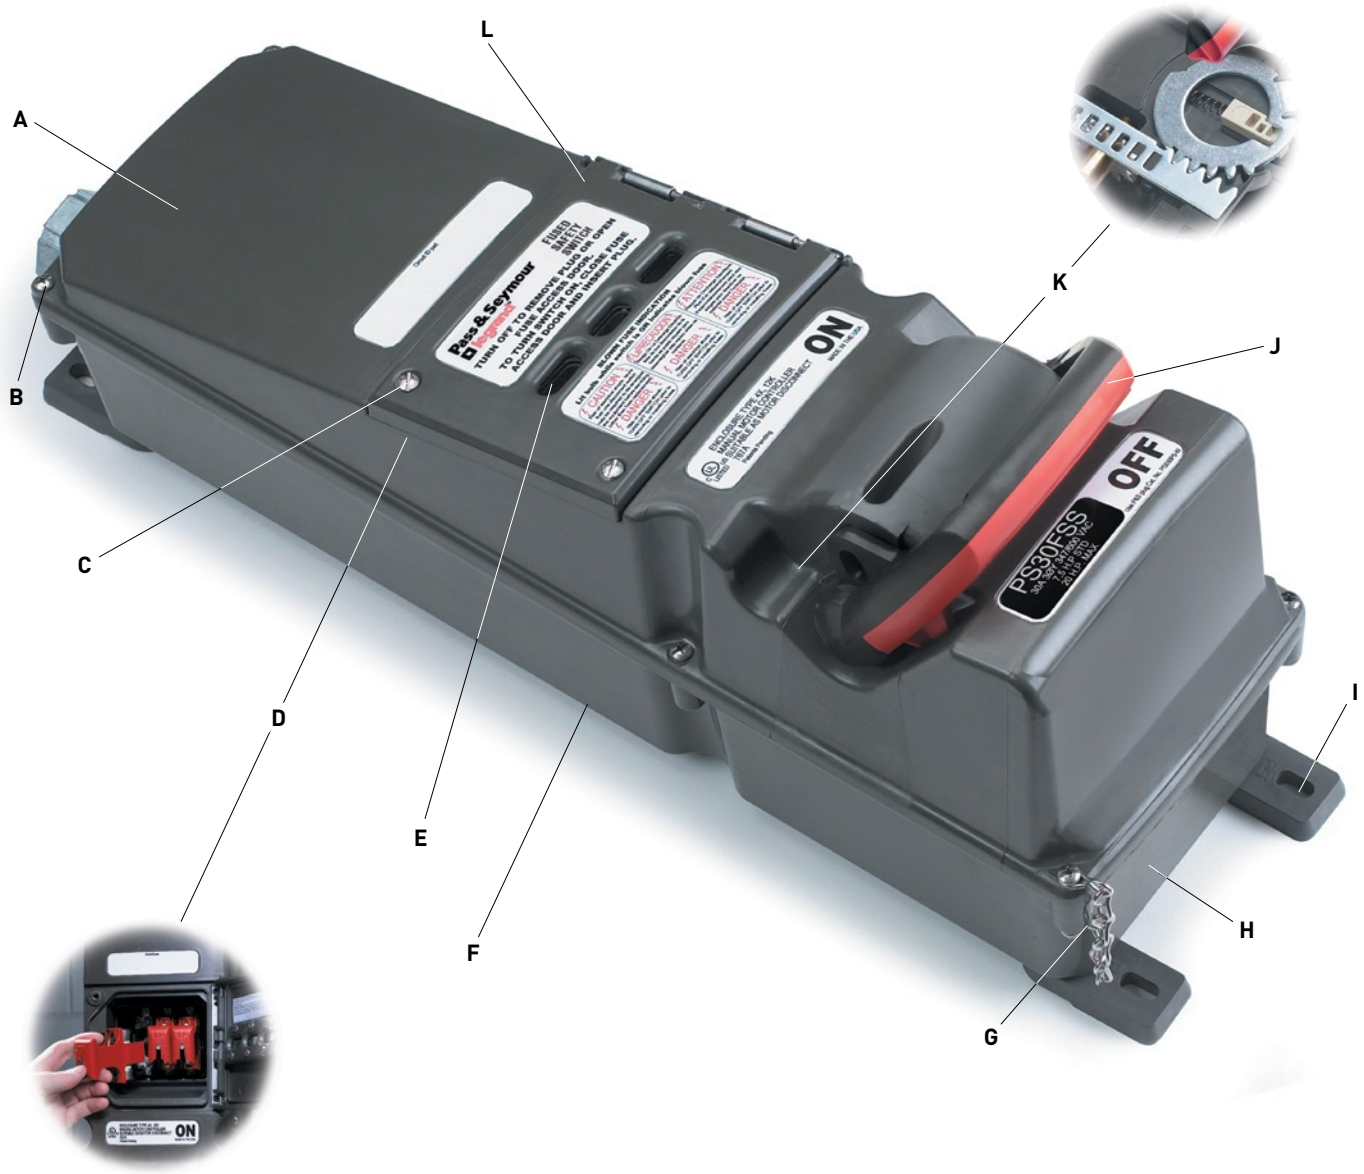

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Safety Switches

Fusible Safety Switch Features:

A. Compact design fits in most I-beams to provide mounting versatility, easy access, and reduced possibility of impact damage.

B. Corrosion-resistant, stainless steel captive screws speed installation, minimize risk of lost parts, and withstand abuse.

C. Captive, quick-release, stainless steel screws speed fuse removal, ensure a watertight access door seal, and won't fall out.

D. Patent-pending integral fuse pullers with easy-grip ergonomics make removing and replacing blown fuses simple, comfortable, and quick.

E. Time-saving LED indicators identify blown fuses at a glance.

F. Nonconductive, watertight, corrosion- and impact-resistant Valox® enclosure ensures NEMA 4X and 12 ratings. Withstands the harshest industrial environments.

G. Durable, stainless steel cover-retaining chain makes installation and maintenance more convenient.

H. Easy to drill for bottom wiring access, top wiring access — or both. Only one catalog number per amp rating — simplifies ordering and provides maximum application flexibility.

I. Adjustable mounting feet can be moved to center of unit for instant strut- or pole-mounting without special brackets or harnesses. Oversized foot design eliminates the need for washers.

J. Heavy-duty, ergonomic switch handle meets OSHA Lockout/ Tagout requirements and provides plenty of grip for sure, easy operation. Black/red color coding and high-visibility ON/OFF markings clearly indicate status from a distance and at any visual angle.

K. Heavy-duty steel-geared switch mechanism provides enhanced durability and extra-long service life.

L. Hinged access door with windows allows clear viewing of blown-fuse LED indicators and provides fast, easy access to fuse pullers.

VFD Friendly – fused safety switches come standard with one auxiliary contact allowing a "pre-break" auxiliary contact for VFDs.


Valox® is a registered trademark of the General Electric Co.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS


Fusible Safety Switches Ordering Information & Dimensions

VOLTAGE	STANDARD HORSEPOWER RATING	MAXIMUM HORSEPOWER RATING	FUSIBLE SAFETY SWITCH CATALOG #
30 AMPS	**600VAC**		
120VAC	1/2 HP	2 HP	PS30FSS
208VAC	1 HP	5 HP	
240VAC	1 1/2 HP	5 HP	
277VAC	1 1/2 HP	5 HP	
480VAC	3 HP	10 HP	
120/240VAC	1/2 HP @ 120VAC 1 1/2 HP @ 240VAC	2 HP @ 120VAC 5 HP @ 240VAC	
3ø 240VAC	3 HP	10 HP	
3ø 480VAC	5 HP	20 HP	
3ø 600VAC	7 1/2 HP	20 HP	
3øY 120/208VAC	2 HP	7 1/2 HP	
3øY 277/480VAC	5 HP	20 HP	
3øY 347/600VAC	7 1/2 HP	20 HP	
60 AMPS	**600VAC**		
120VAC	1 1/2 HP	3 HP	PS60FSS
208VAC	3 HP	7 1/2 HP	
240VAC	3 HP	10 HP	
277VAC	3 HP	10 HP	
480VAC	5 HP	20 HP	
120/240VAC	1 1/2 HP @ 120VAC 3 HP @ 240VAC	3 HP @ 120VAC 10 HP @ 240VAC	
3ø 240VAC	5 HP	20 HP	
3ø 480VAC	10 HP	40 HP	
3ø 600VAC	15 HP	50 HP	
3øY 120/208VAC	5 HP	20 HP	
3øY 277/480VAC	10 HP	40 HP	
3øY 347/600VAC	15 HP	50 HP	
100 AMPS	**600VAC**		
120VAC	2 HP	5 HP	PS100FSS
208VAC	5 HP	10 HP	
240VAC	5 HP	15 HP	
277VAC	7 1/2 HP	15 HP	
480VAC	10 HP	30 HP	
120/240VAC	2 HP @ 120VAC 5 HP @ 240VAC	5 HP @ 120VAC 15 HP @ 240VAC	
3ø 240VAC	10 HP	25 HP	
3ø 480VAC	20 HP	50 HP	
3ø 600VAC	30 HP	50 HP	
3øY 120/208VAC	10 HP	20 HP	
3øY 277/480VAC	20 HP	50 HP	
3øY 347/600VAC	30 HP	50 HP	


(HP Ratings subject to change.)



Front

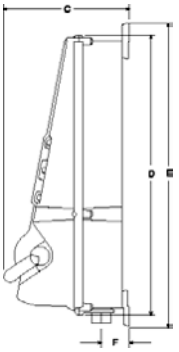

Side



Back

Hub shown at bottom of unit for reference only; may be field-installed for top or bottom entry.

(See dimensions below.)

Fusible Safety Switches Dimensions

Amps	A	B	C	D	E	F	G	H	I	J	K	L
30	9.13	1.19	10.09	22.59	22.59	1.97	4.75	6.88	7.75	20.13	22.25	23.13
60	9.13	1.19	10.09	22.59	22.59	2.25	4.75	6.88	7.75	20.13	22.25	23.13
100	11.13	1.75	11.06	26.59	28.31	2.41	6.75	8.88	9.75	23.94	26.06	26.94

All measurements shown in inches.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Fusible Safety Switches Materials of Manufacture Typical/Sample Spec

Typical Specifications

- Manufacturer's Identifications: Pass & Seymour® PS60FSS
- Description: Fusible Safety Switch
- Rating: 60A, 600VAC maximum
- Enclosure Type: NEMA 4X (watertight, hosedown), 12K (dusttight, falling dirt), IP67/IP69 suitability
- Conduit Location: Top or bottom feed. Unit shipped with no holes drilled; a top and bottom feed spot drill is provided for locating hole saw or knockout. End user decides at installation whether top or bottom feed is appropriate. No closure plug kits required.

MATERIALS	
Enclosure Cover	Valox 357®
Enclosure Base	Valox 357®
Enclosure Door	Valox 357®
Enclosure Gasket	Neoprene
Door Hinge	316 Stainless Steel
Switch Handle	Valox 357®
Switch Handle Seal	Neoprene
Shaft	Brass
Gear Mechanism	1/8" Zinc-Plated Steel
Switch Key	10% Glass-Filled Nylon
Mounting Feet	Valox 357®
Mounting Feet Screws	300 Series Stainless Steel
Enclosure Assembly Screws	300 Series Stainless Steel
Enclosure Assembly Inserts	Brass
Grounding Plate	Zinc-Plated Steel
Cover Chain	300 Series Stainless Steel
Conduit Hub	Aluminum/Zinc
	30 amp shipped with one (1) 1"
	60 amp shipped with one (1) 11/4"
	100 amp shipped with one (1) 11/2" (will also fit a 2" hub, not provided)
Viewing Slots in Fuse-Access Door	1/8" thick glass le ns

PERFORMANCE	
Electrical:	
Fuse Type	Class "J"
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than 10,000 RMS amps at receptacle voltage rating
Operations	Mechanical: 15,000 cycles
	Electrical: 10,000 cycles
Auxiliary Contacts	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL and CSA
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions Can be mounted directly to channel or strut (no washers required)
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown)
	Per UL50, section 35, NEMA Enclosure Type 12 (dusttight, falling dirt)
	IP67 suitability
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C
	Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stable

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Stainless Steel Safety Switches

A. Type 316 grade stainless steel provides superior resistance to corrosion.

B. 3/4" standoffs on mounting feet allow adequate space for runoff and inspection behind the switch.

C. High-visibility yellow and red handle can be padlocked to meet OSHA lockout/tagout requirements.


8 conduit entry points for flexible installation options.

National Sanitation Foundation (NSF) certified: conforms to the requirements of NSF/ANSI/3-A 14159-1 – Hygiene Requirements for the Design of Meat and Poultry Processing Equipment.

Can accommodate up to **3 sets of auxiliary contacts** for control circuit applications.

Water- and dust-tight enclosure rated **NEMA 4X,12** and **IP66,67,69** for protection against high-pressure, high-temperature water from multiple directions.

VFD Friendly – auxiliary contacts break before switch contacts break for use with VFD.

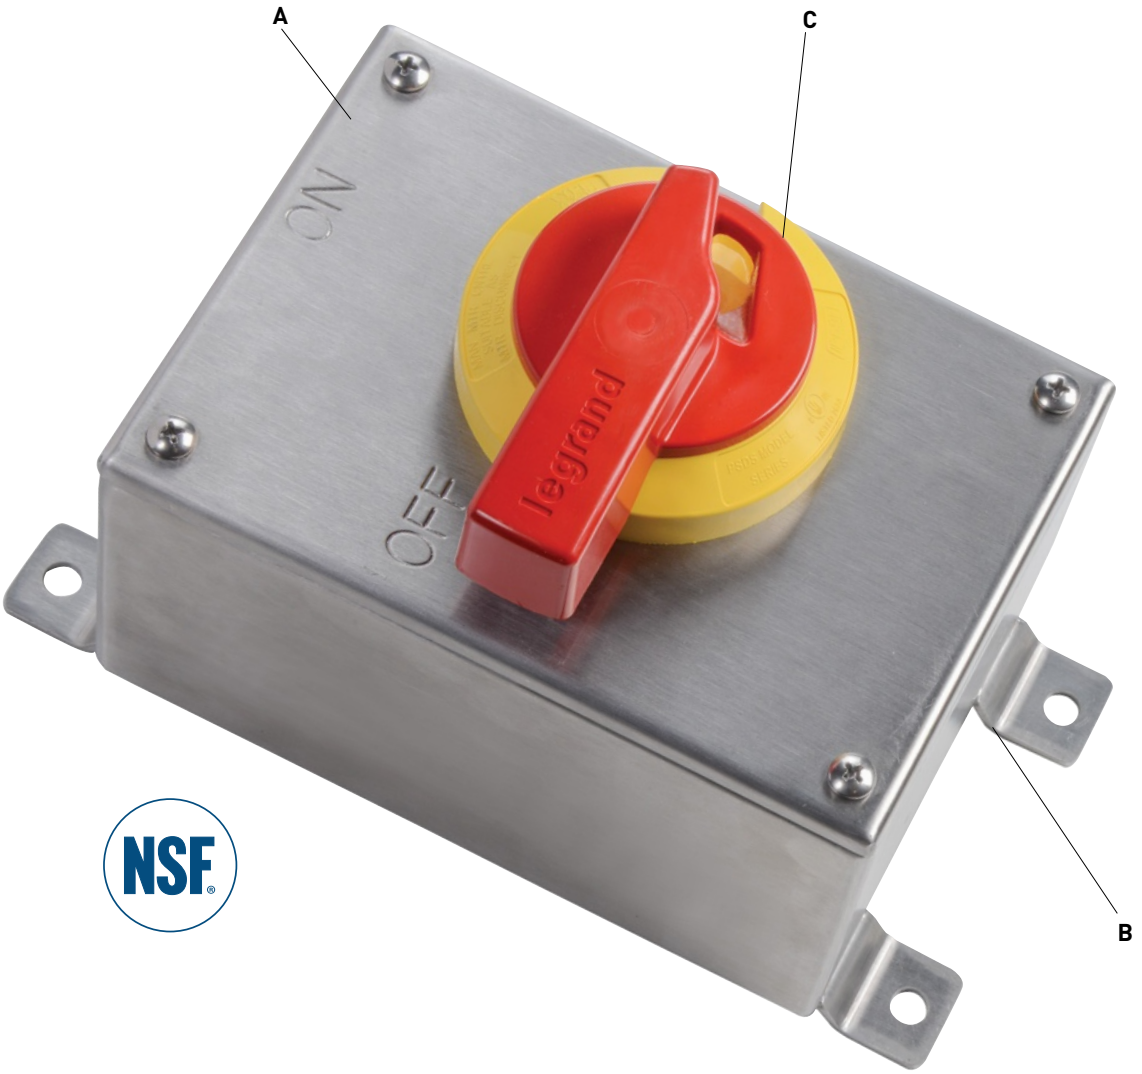

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Stainless Steel Safety Switches

VOLTAGE	MAXIMUM HORSEPOWER RATING	STAINLESS STEEL SAFETY SWITCH CATALOG NO.	STAINLESS STEEL SAFETY SWITCH WITH AUXILIARY CONTACT**	STAINLESS STEEL SAFETY SWITCH WITH 3 AUXILIARY CONTACTS**	AUXILIARY CONTACT KIT*	REPLACEMENT SWITCH	REPLACEMENT SWITCH WITH AUXILIARY CONTACT	REPLACEMENT SWITCH WITH 3 AUXILIARY CONTACTS	REPLACEMENT COVER FOR STANDARD SWITCH	REPLACEMENT COVER FOR AUXILIARY TYPE
30 AMPS	**600VAC**									
120VAC	1 HP	PSDS30	PSDS30AX	PSDS30AX3	AX30	RS30	RS30AX	RS30AX3	PSDS30RC	PSDS30AXRC
208VAC	2 HP									
240VAC	5 HP									
277VAC	3 HP									
480VAC	5 HP									
600VAC	5 HP									
3ø 240VAC	10 HP									
3ø 480VAC	20 HP									
3ø 600VAC	25 HP									
60 AMPS	**600VAC**									
120VAC	2 HP	PSDS60	PSDS60AX	—	AXD60	RS60	RS60AX	—	PSDS60RC	PSDS60AXRC
240VAC	7.5 HP									
277VAC	7.5 HP									
480VAC	10 HP									
600VAC	10 HP									
3ø 240VAC	15 HP									
3ø 480VAC	30 HP									
3ø 600VAC	40 HP									
60 AMPS HP	**600VAC**									
120VAC	3 HP	PSDS60HP	PSDS60HPAX	—	AX60	RS60HP	RS60HPAX	—	PSDS60HPRC	PSDS60HPAXRC
240VAC	10 HP									
277VAC	15 HP									
480VAC	20 HP									
600VAC	30 HP									
3ø 240VAC	25 HP									
3ø 480VAC	50 HP									
3ø 600VAC	50 HP									
100 AMPS	**600VAC**									
120VAC	5 HP	PSDS100	PSDS100AX	—	AX60	RS100	RS100AX	—	PSDS100RC	PSDS100AXRC
240VAC	15 HP									
277VAC	15 HP									
480VAC	30 HP									
600VAC	30 HP									
3ø 240VAC	25 HP									
3ø 480VAC	50 HP									
3ø 600VAC	50 HP									

* For replacement of side mount auxiliary contact on previous design.

****Auxiliary contacts break before switch contacts break for use with VFD.**

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Stainless Steel Safety Switches

MATERIALS	
Enclosure Cover	316 Stainless Steel
Enclosure Base	316 Stainless Steel
Enclosure DIN Rail	316 Stainless Steel
Switch Handle	Valox 357®
Switch Base	Valox 357®
Switch Key	14% Glass-Filled Nylon
Cover Gasket	Silicone Foam
Handle Gasket	Silicone Foam
Mounting Feet	316 Stainless Steel
Cover Screws	316 Stainless Steel
Cover Screw O-Ring	Neoprene
Assembly Screws/Hardware	300 Series Stainless Steel


PERFORMANCE	
Electrical:	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than (see chart below) RMS amps at 600VAC
Operations	Mechanical: 10,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts (optional)	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL and CSA
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions* Can be mounted directly to channel or strut
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12 (dusttight, falling dirt) • IP66/67/69
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C • Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stablilized

*Mounting feet are welded to enclosure with 3/4" standoff.

Interrupting Ratings — RMS Symmetrical Amperes

Short Circuit Ratings: Suitable for use on circuits capable of delivering not more than (see chart below for cat. no. and application) RMS symmetrical amperes, 600VAC maximum.

CAT NO.	KA	FUSE/BREAKER	MAX SIZE
PSDS30 (AX)	10	RK1	—
	65	Class J	40A
PSDS60 (AX)	10	RK1	125A
	65	Class J	70A
PSDS60HP (AX)	10	RK1	—
	10	GE Circuit Breaker	—
	65	Class J	100A

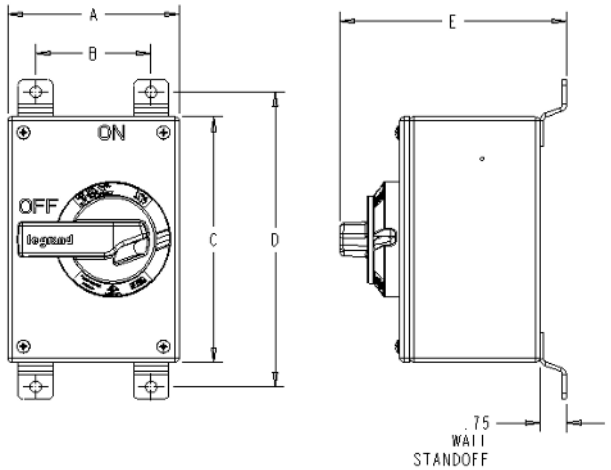

MOUNTING DIMENSION TABLE					
	A	B	C	D	E
30 Amp	4.90	3.30	7.00	8.40	6.52
60/100 Amp	7.30	5.50	10.30	11.60	7.10

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Slope Top Stainless Steel Safety Switches

A. Type 316 grade stainless steel provides superior resistance to corrosion.

B. 15° sloped roof helps to facilitate run-off and minimize the harborage of contaminants.

C. 3/4" standoffs on mounting feet allow adequate space for runoff and inspection behind the switch.

D. High-visibility yellow and red handle can be padlocked to meet OSHA lockout/tagout requirements.


6 conduit entry points for flexible installation options.

National Sanitation Foundation (NSF) certified: conforms to the requirements of NSF/ANSI/3-A 14159-1 – Hygiene Requirements for the Design of Meat and Poultry Processing Equipment.

Can accommodate up to **3 sets of auxiliary contacts** for control circuit applications.

Water- and dust-tight enclosure rated **NEMA 4X,12** and **IP66,67,69** for protection against high-pressure, high-temperature water from multiple directions.

VFD Friendly – auxiliary contacts break before switch contacts break for use with VFD.

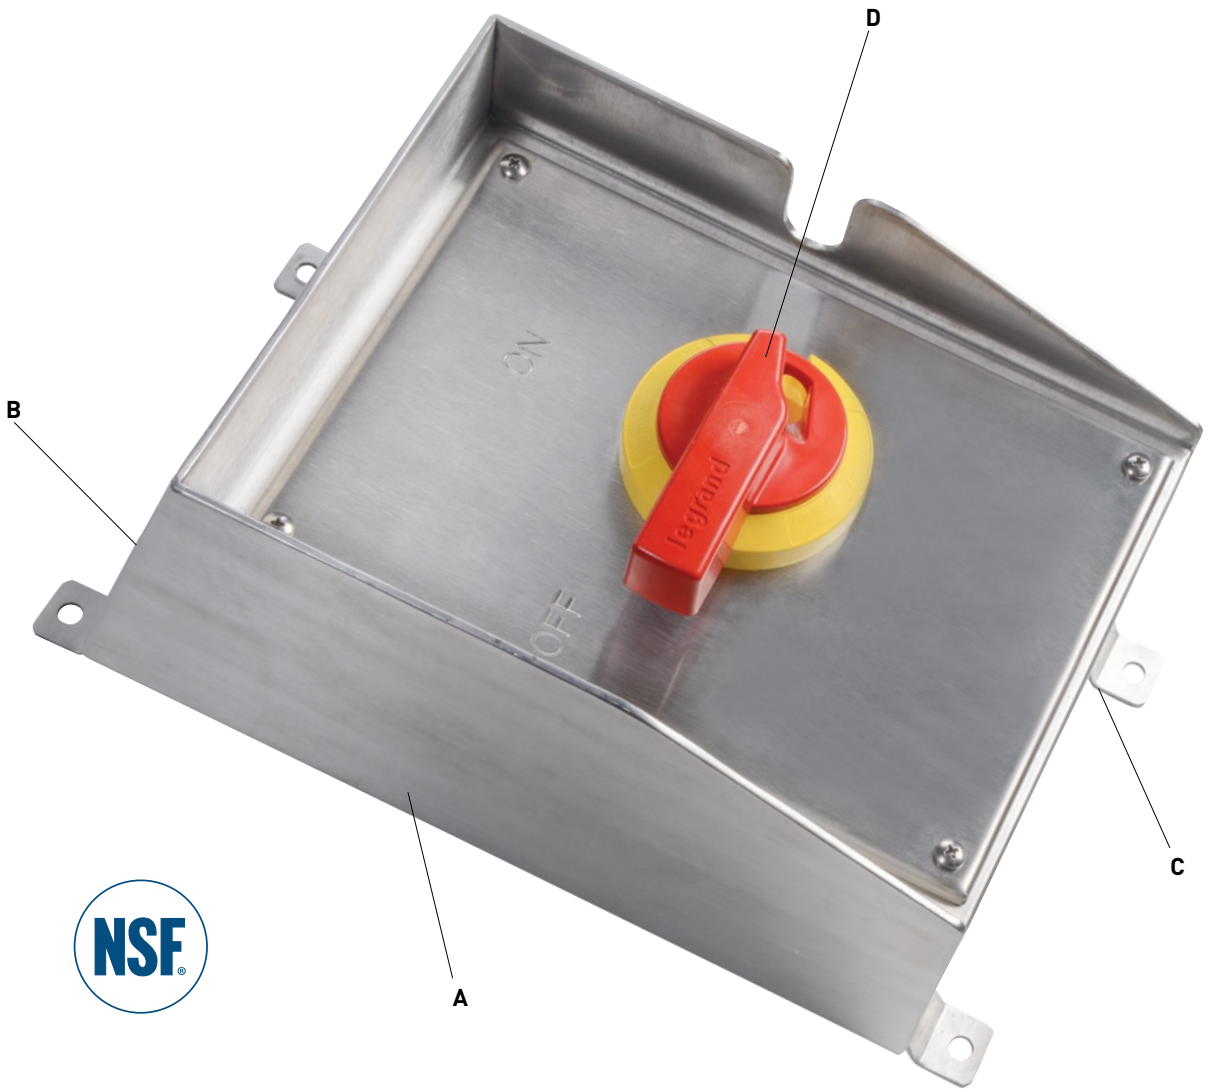

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Slope Top Stainless Steel Safety Switches

VOLTAGE	MAXIMUM HORSEPOWER RATING	SLOPE TOP SAFETY SWITCH CATALOG NO.	SLOPE TOP SAFETY SWITCH WITH AUXILIARY CONTACT**	SLOPE TOP SAFETY SWITCH WITH 3 AUXILIARY CONTACTS**	AUXILIARY CONTACT KIT*	REPLACEMENT SWITCH	REPLACEMENT SWITCH WITH AUXILIARY CONTACT	REPLACEMENT SWITCH WITH 3 AUXILIARY CONTACTS	REPLACEMENT COVER FOR STANDARD SWITCH	REPLACEMENT COVER FOR AUXILIARY TYPE
30 AMPS	**600VAC**									
120VAC	1 HP	PSDS30SR	PSDS30AXSR	PSDS30AX3SR	AX30	RS30	RS30AX	RS30AX3	PSDS30RC	PSDS30AXRC
208VAC	2 HP									
240VAC	5 HP									
277VAC	3 HP									
480VAC	5 HP									
600VAC	5 HP									
3ø 240VAC	10 HP									
3ø 480VAC	20 HP									
3ø 600VAC	25 HP									
60 AMPS	**600VAC**									
120VAC	2 HP	PSDS60SR	PSDS60AXSR	—	AXD60	RS60	RS60AX	—	PSDS60RC	PSDS60AXRC
240VAC	7.5 HP									
277VAC	7.5 HP									
480VAC	10 HP									
600VAC	10 HP									
3ø 240VAC	15 HP									
3ø 480VAC	30 HP									
3ø 600VAC	40 HP									
60 AMPS HP	**600VAC**									
120VAC	3 HP	PSDS60HPSR	PSDS60HPAXSR	—	AX60	RS60HP	RS60HPAX	—	PSDS60HPRC	PSDS60HPAXRC
240VAC	10 HP									
277VAC	15 HP									
480VAC	20 HP									
600VAC	30 HP									
3ø 240VAC	25 HP									
3ø 480VAC	50 HP									
3ø 600VAC	50 HP									
100 AMPS	**600VAC**									
120VAC	5 HP	PSDS100SR	PSDS100AXSR	—	AX60	RS100	RS100AX	—	PSDS100RC	PSDS100AXRC
240VAC	15 HP									
277VAC	15 HP									
480VAC	30 HP									
600VAC	30 HP									
3ø 240VAC	25 HP									
3ø 480VAC	50 HP									
3ø 600VAC	50 HP									

* For replacement of side mount auxiliary contact on previous design.

****Auxiliary contacts break before switch contacts break for use with VFD.**

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Fusible Slope Top Stainless Steel Safety Switches

MATERIALS	
Enclosure Cover	316 Stainless Steel
Enclosure Base	316 Stainless Steel
Enclosure DIN Rail	316 Stainless Steel
Switch Handle	Valox 357®
Switch Base	Valox 357®
Switch Key	14% Glass-Filled Nylon
Cover Gasket	Silicone Foam
Handle Gasket	Silicone Foam
Mounting Feet	316 Stainless Steel
Cover Screws	316 Stainless Steel
Cover Screw O-Ring	Neoprene
Assembly Screws/Hardware	300 Series Stainless Steel


PERFORMANCE	
Electrical:	
Dielectric Voltage Withstand	3000V minimum
Maximum Working Voltage	600V RMS
Current Interrupting	Listed for current interrupting at full-rated current and voltage
Short Circuit Withstand Rating	For use on circuit capable of delivering not more than (see chart below) RMS amps at 600VAC
Operations	Mechanical: 10,000 cycles Electrical: 10,000 cycles
Auxiliary Contacts (optional)	10A @ 600VAC 1 N.O. & 1 N.C.
Mechanical:	
Impact Resistance	Per UL746C
Terminal Identification	Per UL and CSA
Product Identification	Identification and rating on external and internal labels
Mounting	External adjustable feet with five (5) positions* Can be mounted directly to channel or strut
Environmental:	
Moisture Resistance	Per UL50, section 35, NEMA Enclosure Type 4X (watertight, hosedown) Per UL50, section 35, NEMA Enclosure Type 12 (dusttight, falling dirt) • IP66/67/69
Flammability	UL94 5VA and VO Classification
Operating Temperature	Maximum continuous: +60°C • Minimum continuous: -50°C without impact
UV Resistance	All enclosure materials are UV stablilized

*Mounting feet are welded to enclosure with 3/4" standoff.

Interrupting Ratings — RMS Symmetrical Amperes

Short Circuit Ratings: Suitable for use on circuits capable of delivering not more than (see chart below for cat. no. and application) RMS symmetrical amperes, 600VAC maximum.

CAT NO.	KA	FUSE/BREAKER	MAX SIZE
PSDS30 (AX)	10	RK1	—
	65	Class J	40A
PSDS60 (AX)	10	RK1	125A
	65	Class J	70A
PSDS60HP (AX)	10	RK1	—
	10	GE Circuit Breaker	—
	65	Class J	100A

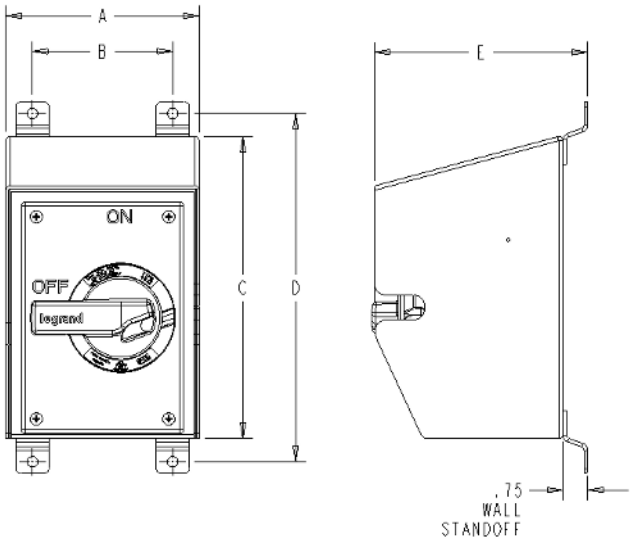

MOUNTING DIMENSION TABLE					
	A	B	C	D	E
30 Amp	5.84	4.24	9.10	10.50	6.52
60/100 Amp	8.30	6.70	12.64	14.03	7.10

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Metallic Safety Switches: Proximity Switching — 16 to 80A



022171

- Compatible with Auxiliary Contact
- IP 2X
- Double breaking on each phase
- Red rotary handle on yellow plate
- Immediate display of position
  - horizontal: open (O)
  - vertical: closed (I)



022700



022282

- Equipped with non-reversible terminals
- Conform to IEC EN 60947-3
- UL-cUL (USA and Canada) agreements (except boxes)
- IP 65 - IK 07 for boxes
- Can be equipped with auxiliary contact (Cat No 027700)



022174


- Padlockable boxes for on-load breaking, isolation and locking in O position
- Equipment located remotely from a control cabinet
- Applications: breaking of CMV (controlled mechanical ventilation), motors, fixes or moving machines, air conditioners

Non-Metallic Safety Switches


Dimensions

Proximity switching


Boxes 2 x 2 knock-out entries: PG 16 or ISO 25
Cat. Nos 0 221 71/72/73/79/81/82/83/88/89

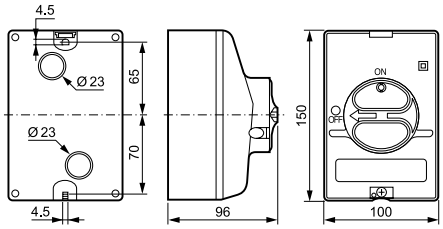


Boxes 2 x 2 knock-out entries: PG 21
Cat. Nos 0 221 74/75/84/85

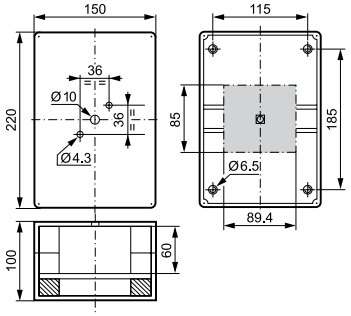

Boxes 2 x 2 knock-out entries: PG 29
Cat. Nos 0 221 76/77

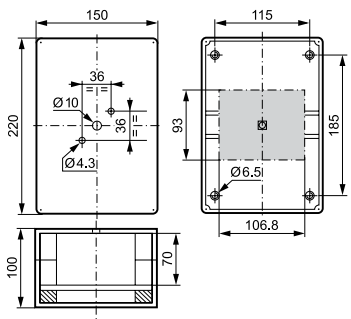


Boxes 2 x 4 knock-out entries: 2 x PG 21 and 2 x PG 29
Cat. Nos 0 221 86/87

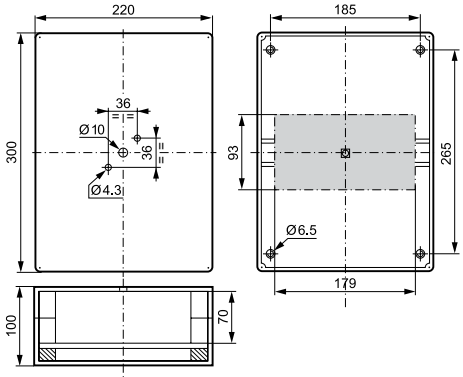

Auxiliary contact

Cat. No 0 227 00



Accessories

CATALOG NUMBER	NUMBER IN PACK	DESCRIPTION
Auxiliary contact		
0 227 00	1	N/O + N/C
Labels (Marked "Main Switch")		
0 222 82	5	Duty label for padlockable faceplate

Proximity Switching

CATALOG NUMBER	NUMBER IN PACK	RATING A.
3P		
0 221 71	1	16 A
0 221 72	1	20 A
0 221 73	1	25 A
0 221 74	1	40 A
0 221 75	1	50 A
0 221 76	1	63 A
0 221 77	1	80 A
3P + N/O + N/C		
0 221 89	1	16 a
0 221 79	1	20 a
0 221 88	1	25 a

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Non-Metallic Safety Switches

Isolating Switches

Technical characteristics


Conform to IEC EN 60947-3
UL - cUL (USA - Canada) agreements. Class II box installed (if correct use of isolating caps supplied with box)
IP 40 and IP 65 - IK 07
Operating temperature: - 30 °C to + 70 °C
Box self-extinguishing: 650 °C/ 960 °C (acc. to IEC 695-2-1)
Degree of protection: IP 2X (at back of panel)
IP 65 for boxes
IP 65 for complete devices
Tropical atmosphere acc. to:
IEC 682-3 constant humid heat
IEC 682-30 cyclical humid heat
Padlockable devices
General case: up to 3 padlocks Ø4 to 8 mm
Device with 1 auxiliary contact OF: up to 3 padlocks Ø6 to 8 mm

			20 A	25 A	40 A	50 A	63 A	80 A
Rated insulation voltage Ui		**V**	690	690	690	690	690	690
Conventional free air thermal current (Ith)								
Continuous rated current Iu		**A**	20	25	32	50	63	80
Conventional enclosed thermal current Ithe		**A**	16	20	25	40	50	63
Rated impulse withstand voltage Uimp[1] (kV)			4	6	6	6	6	6
Rated operating current (A)								
AC - 21 A / 22 A								
Conforming to IEC 60947-3		**A**	16	25	32	50	63	80
Rated operating power (kW)								
AC - 23 A	**3 x 230 V**	**kW**	4	5.5	5.5	15	15	18.5
		A	14.5	20	20	50	50	63
	3 x 400 V	**kW**	7.5	7.5	11	18.5	22	30
		A	15	15	21	35	42	57
	3 x 500 V	**kW**	7.5	7.5	11	22	30	37
		A	12	12	17	33	45	55
	3 x 690 V	**kW**	7.5	7.5	11	18.5	22	22
		A	9	9	12	20	24	24
AC - 3	**3 x 230 V**	**kW**	3	4	4	7.5	11	15
		A	11.5	14.5	14.5	26	38	51
	3 x 400 V	**KW**	4	5.5	7.5	15	18.5	22
		A	8	11	15	28	35	42
	3 x 500 V	**KW**	5.5	5.5	7.5	15	22	30
		A	9	9	12	23	33	45
	3 x 690 V	**KW**	5.5	5.5	7.5	15	18.5	18.5
		A	6	6.5	9	16.5	20	20
Closing/breaking characteristics:								
Rated closing capacity		**Aeff/400 V**	710	710	710	1270	1270	1970
Rated breaking capacity		**Aeff/400 V**	330	330	330	800	800	800
Short circuit characteristics:								
Rated short term withstand current Icw		**Aeff/400V/1s**	300	350	430	500	760	1100
Rated short circuit make capacity Icm		**kA peak/400 V**	1	1	1	1.8	1.8	2.8
Short circuit current		**kA eff/400 V**	6	10	10	10	10	10
With fuse gl/gG		**A**	16	25	32	50	63	80
Mechanical life AC - 20		**million**	1	0.1	0.1	0.04	0.04	0.04
Connection:								
Flexible + connector (max./min)		**mm²**	6/0.5	6/0.75	6/0.75	16/1.5	16/1.5	35/2.5
Rigid		**mm²**	10	10	10	25	25	50
Auxiliary contact electrical characteristics:								
Rated insulation voltage (Ui)		**V**	400	400	400	400	400	400
Conventional free air thermal current (Ith)								
Continuous rated current (Iu)		**A**	20	10	10	10	10	10
Rated operating current (Ie) AC - 15		**230 V A**	6	6	6	6	6	6
		400 V A	4	4	4	4	4	4
Protection against short circuit by fuse gG		**A**	16	10	10	10	10	10
Connection	**flexible wire mm² max**		2 x 2.5	2 x 2.5	2 x 2.5	2 x 2.5	2 x 2.5	2 x 2.5

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Manual Controllers

7803MD
Manual Controller

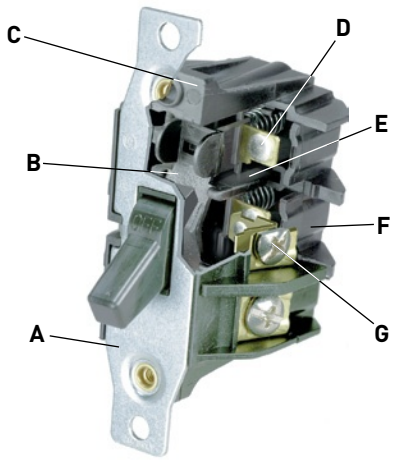

A. Heavy-duty, zinc-plated strap resists corrosion; two rolled-brass rivets secure the strap to the housing to avoid field tampering.

B. Two-point contact arm design reduces overall unit size; provides more enclosure space.

C. Thermoplastic housing resists tracking; withstands impacts.

D. Two oversized silver alloy contacts withstand years of use; improve heat dissipation by distributing arc energy.

E. One-piece contact carrier constructed of glass-reinforced thermoplastic ensures long-lasting "make and break" performance.

F. Exclusive, ready-to-wire external screw-pressure-plate back and side wire capability for easy installation with solid or stranded wire.

G. Oversized #10 terminal screws increase contact with wire and increase torque limit. Angled screw heads for easier access.

NEMA Type Enclosures

NEMA Type 1 Enclosures – Intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt in locations where unusual service conditions do not exist.


NEMA Type 7 Enclosures – Intended for indoor use in locations classified as Class 1, Group A, B, C, or D, as defined in the National Electrical Code. They shall be capable of withstanding the pressures resulting from an internal explosion of specified gases, and contain such an explosion sufficient that an explosive gas-air mixture existing in the atmosphere surrounding the enclosure will not be ignited. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting explosive gas-air mixtures in the surrounding atmosphere. Enclosures shall meet explosion, hydrostatic, and temperature design tests.

NEMA Type 3R Enclosures – Intended for outdoor use primarily to provide a degree of protection against rain and sleet; and to be undamaged by the formation of ice on the enclosure. They are not intended to provide protection against conditions such as internal condensation, or internal icing.

NEMA Type 9 Enclosures – Intended for indoor use in locations classified as Class II, Groups E, F, or G, as defined in the National Electrical Code. They shall be capable of preventing the entrance of dust. Enclosed heat generating devices shall not cause external surfaces to reach temperatures capable of igniting or discoloring dust on the enclosure or igniting dust-air mixtures in the surrounding atmosphere. Enclosures shall meet dust penetration and temperature design tests, and aging of gaskets (if used).

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS


Manual Controllers 30A, 1ø & 3ø




7802MD, 7803MD



7812PMD, 7813PMD



7812EX, 7813EX



7832MD, 7833MD

Features – 7802MD & 7803MD

- High horsepower rating of 20HP
- Compact design.
- Gull-wing shaped brass terminal pressure clamps.
- Constructed of glass-reinforced thermoplastic.
- Two-point contact arms.
- One-piece contact carrier.
- UL508 and cULus Listing of individual device and assembled device within enclosure.
- Heavy-duty zinc-plated steel strap.
- Two brass rivets secure strap to housing.
- External screw-pressure-plate back and side wire terminal screws unstaked for use with ring terminals.
- Oversized silver alloy contacts.
- 2-3/4" hubs (7812EX and 7813EX).
- 2-1/2" knockouts on back and 2-1/2"-3/4" knockouts on top and bottom (7812PMD, 7813PMD, 7806P).
- 2-1/2" knockouts on bottom and back (7832MD and 7833MD).
- Slotted opening on enclosures allows for lock-out, tag-out functionality.

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING V.	RATING HP	RATING VAC
DOUBLE POLE, SINGLE PHASE					
7802MD	Double Pole, Single Phase AC Manual Motor Controller (No overload protection), See Footnote 1	General Use 30	600 max.	2 3 7.5 10	120 240 480 600
7812PMD	7802MD in a NEMA 1 Enclosure, See Footnote 1	Same as 7802MD			
7812EX	7802MD in a NEMA 7 and 9 Enclosure for Hazardous Locations Class I - Groups C, D; Class II - Groups E, F, G	Same as 7802MD			
7832MD	7802MD in a NEMA 3R Enclosure, See Footnote 1	Same as 7802MD			
THREE POLE, THREE PHASE					
7803MD	Three Pole, Three Phase AC Manual Motor Controller (No overload protection), See Footnote 1	General Use 30	600 max.	3 7.5 10 20	120 240 480 600
7813PMD	7803MD in a NEMA 1 Enclosure, See Footnote 1	Same as 7803MD			
7813EX	7803MD in a NEMA 7 and 9 Enclosure for Hazardous Locations Class I - Groups C, D; Class II - Groups E, F, G	Same as 7803MD			
7833MD	7803MD in a NEMA 3R Enclosure, See Footnote 1	Same as 7803MD			
7806P	NEMA 1 Black Nylon Enclosure with 1/2" and 3/4" knockouts at each end.				
7801P	Handle Locking Guard has opening for padlock to secure control in either ON or OFF position.				
7830	NEMA 3R Aluminum Enclosure.				


All Industrial Control Equipment is suitable for use in a circuit capable of deliverable not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote 1. Suitable as Motor Disconnect – 10KA @ 600VAC, 30A max. Class J Fuse.

UL Listed. CSA Certified. All devices listed on this page conform to NEMA WD-1 and WD-6.

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Manual Controllers 40A, 1ø & 3ø



7842MD, 7843MD

Features – 7842MD & 7843MD


- High horsepower rating of 20HP
- Compact design.
- Gull-wing shaped brass terminal pressure clamps.
- Constructed of glass-reinforced thermoplastic.
- Two-point contact arms.
- One-piece contact carrier.
- Heavy-duty yellow chromate plated steel strap.
- Two brass rivets secure strap to housing.
- External screw-pressure-plate back and side wire terminal screws unstaked for use with ring terminals.
- Oversized silver alloy contacts.
- UL508 and cULus Listing of individual device and assembled device within enclosure.

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING VAC	RATING HP	RATING VAC
DOUBLE POLE, SINGLE PHASE					
7842MD	Double Pole, Single Phase AC Manual Motor Controller (No overload protection), See Footnote 2	40	600 max.	2 5 10 15	120 240 480 600
THREE POLE, THREE PHASE					
7843MD	Three Pole, Three Phase AC Manual Motor Controller (No overload protection), See Footnote 2	40	600 max.	2 7.5 15 20	120 240 480 600

All Industrial Control Equipment is suitable for use in a circuit capable of deliverable not more than 5,000 rms amperes at 600VAC maximum or equivalent.

Footnote 2. Suitable as Motor Disconnect – 10KA @ 600VAC, 60A max. Class J Fuse or 100A max. Mersen HSJ Fuse.

CATALOG NO.	PHASE	POLE
7802MD or 7842MD	1	2
7803MD or 7843MD	3	3

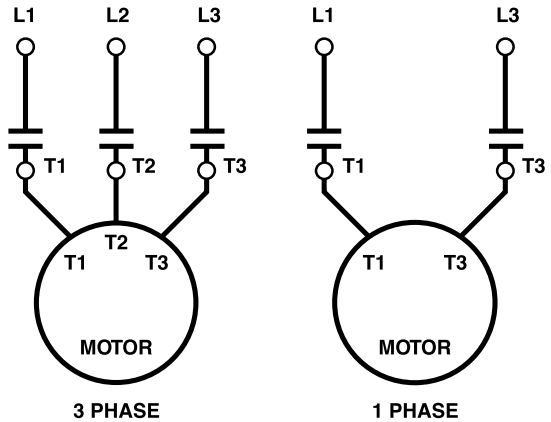

RATINGS

RESISTANCE		
7802MD / 7803MD	30 AMP	600 VAC MAX.
7842MD / 7843MD	40 AMP	600 VAC MAX.

MANUAL MOTOR CONTROLLER				
VAC	30A		40A	
	1 PHASE HP	3 PHASE HP	1 PHASE HP	3 PHASE HP
120	2	3	2	3
240	3	7.5	5	7.5
480	7.5	10	10	15
600	10	20	15	20

USE 60 / 75°C WIRING
TORQUE TERMINAL SCREWS TO 16 IN. LBS.



NO ALUMINUM



DO NOT REMOVE SCREWS FROM 30A DEVICES

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Manual Controllers 60A NEMA 3R Manual Controller 20 & 30A 1ø




7863R

Features

- High horsepower rating, up to 3 HP for heavy duty applications.
- Compact design provides ease of installation.
- Box lug terminals.
- Single piece moveable and stationary contact arms with oversized silver cadmium buttons provides excellent continuity and long life.
- Made in USA.
- Wire pockets and thick wall arc barriers.
- Cold-rolled steel NEMA 3R enclosure with polyester urethane finish conforms to OSHA lockout requirements.
- Type 3R enclosure has 2-1/2", 3/4" and 1" concentric knockouts on bottom.
- Accepts #4 AWG.
- cULus listed.
- Slotted opening on enclosure allows for lock-out, tag-out functionality

CATALOG NUMBER	DESCRIPTION	RATING A.	RATING VAC	RATING HP	RATING VAC
DOUBLE POLE MANUAL MOTOR CONTROLLER					
7862R	Double Pole AC Manual Motor Controller in a NEMA 3R Enclosure	60	600 max.	3 5 15 15	120 240 480 600
7862	Double Pole AC Manual Motor Controller	60	600 max	Same as 7862R	
THREE POLE MANUAL MOTOR CONTROLLER					
7863R	Three Pole AC Manual Motor Controller in a NEMA 3R Enclosure	60	600 max.	5 10 20 30	120 240 480 600
7863	Three Pole AC Manual Motor Controller	60	600 max	Same as 7863R	
NEMA 3R ENCLOSURE					
7860	NEMA 3R Enclosure for 7862 & 7863				

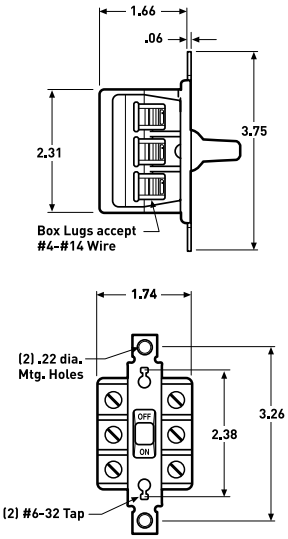


Horsepower Rated Switches

Features

- Oversize silver contacts for long life and better heat dissipation.
- Single phase switches are side wired with #14 AWG - #10 AWG copper or copper-clad conductors.
- Shallow design for ease of installation.
- 2-3/4" hubs (HP30EX).


CATALOG NUMBER	DESCRIPTION	RATING A.	RATING VAC	RATING HP	RATING VAC
DOUBLE POLE, SINGLE PHASE					
PS20AC2HP	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)	20	120/277	1 2	120 240
PS30AC2HP	Double Pole, Single Phase AC Manual Motor Starting Switch (No overload protection)	30	120/277	1 2	120 240
HP30EX	PS30AC2HP in a NEMA 7 & 9 Enclosure for Hazardous Locations Class I - Groups C, D; Class II - Groups E, F, G	Same as PS30AC2HP			




PS20AC2HP
PS30AC2HP

SWITCH DISCONNECTS & MANUAL MOTOR CONTROLLERS

Manual Controllers 15, 20 & 30A, 120/277VAC – Maintained Contact
15, 20 & 30A, 120/277VAC – Momentary Contact



Maintained and Momentary Contact



Locking

Applications

For ON-OFF control of motors on small machine tools, pumps, fans and air conditioning equipment that require heavy-duty AC Double Throw Center OFF controls.

Features

- Oversized silver alloy contacts for long life and better heat dissipation.
- Side wired terminals accept #14 AWG – #10 AWG copper or copper-clad conductors.
- Fiber terminal insulation barriers standard.
- Can be mounted in standard device boxes or in NEMA 1 sheet steel enclosures.
- Bodies, covers and toggles molded of durable nylon.
- Single Pole-Double Throw and Double Pole-Double Throw.
- Locking Switches supplied with one 1498 NT key.
- Normally open.

CATALOG NUMBER		RATING		
S.P.D.T.	D.P.D.T.	A.	VAC	COLOR
MAINTAINED CONTACT THREE POSITION – TWO CIRCUIT, CENTER OFF				
1221I	1222I	15	120/277	Ivory
1221W	1222W	15	120/277	White
1221	1222	15	120/277	Brown
1221LA		15	120/277	Light Almond
1221L	1222L	15	120/277	Locking
1225I	1226I	20	120/277	Ivory
1225W	1226W	20	120/277	White
1225	1226	20	120/277	Brown
1225GRY		20	120/277	Gray
1225LA		20	120/277	Light Almond
1225L	1226L	20	120/277	Locking
1227I	1228I	30	120/277	Ivory
1227	1228	30	120/277	Brown
MAINTAINED CONTACT EITHER DIRECTION TWO POSITION, NO CENTER OFF				
1275	1276	30	120/277	Brown
MOMENTARY CONTACT EITHER DIRECTION THREE POSITION, CENTER OFF				
1250I		15	120/277	Ivory
1250W		15	120/277	White
1250		15	120/277	Brown
1250GRY		15	120/277	Gray
1250RED		15	120/277	Red
1250L		15	120/277	Locking
1251I		20	120/277	Ivory
1251W		20	120/277	White
1251		20	120/277	Brown
1251GRY		20	120/277	Gray
1251RED		20	120/277	Red
1251LA		20	120/277	Light Almond
1251L		20	120/277	Locking
	1256I	30	120/277	Ivory
	1256W	30	120/277	White
1255	1256	30	120/277	Brown
1255L	1256L	30	120/277	Locking

CATALOG NUMBER	DESCRIPTION
LOCK SWITCH REPLACEMENT KEYS	
1498	Fits switches manufactured before 1976.
1498NT	Fits switches manufactured between 1976-present.

HP Conversion Table

1221 SERIES	
15 AMP	1/2 Horsepower at 120VAC 2 Horsepower at 240VAC
20 AMP	1 Horsepower at 120VAC 2 Horsepower at 240VAC
30 AMP	2 Horsepower at 120VAC 2 Horsepower at 240VAC
1250 SERIES	
15 AMP	1/2 Horsepower at 120VAC 2 Horsepower at 240VAC
20 AMP	1 Horsepower at 120VAC 2 Horsepower at 240VAC
30 AMP	2 Horsepower at 120VAC 2 Horsepower at 240VAC

CABLE REELS

1000, 1200, 1400 & SDR Series



Our high-performance, safety-driven solutions have the same unifying principle no matter where they are used: Difficult conditions don't mean products and devices need to be difficult to install and use.

As an addition to our growing industrial product line, Cable Reels from Legrand enhance any commercial or industrial application. They're easy to use and enhance productivity, maximizing efficiency by keeping cords and power control organized. Made in the USA, each reel is designed to work hard in hard environments with components that are high-quality, durable and dependable. Focus on getting the job done quickly and well — without interruption.



1000 SERIES CABLE REELS

10 Amp	D-172
15 Amp	D-172
20 Amp	D-172



1200 SERIES CABLE REELS

8 Amp	D-174
10 Amp	D-174
12 Amp	D-174
15 Amp	D-174
16 Amp	D-174
20 Amp	D-174



1400 SERIES CABLE REELS

10 Amp	D-176
12 Amp	D-176
15 Amp	D-176
16 Amp	D-176
20 Amp	D-176
25 Amp	D-176
STATIC DISCHARGE SERIES	D-178

CABLE REELS

1000 Series Cable Reels

Description

For commercial and light industrial applications, there's no better reel than the 1000 Series. Built with tough, reliable components, this cable reel is durable and made to last. High-quality construction places it above other options, while still remaining an economical and efficient choice for warehouses, maintenance shops and more.

1000 Series Cable Reels are incredibly easy to install and use, featuring separate base plates that allow the reel to be quickly repositioned and moved. Add these cable reels to your equipment and experience a safer, cleaner and more efficient worksite.

Features & Benefits

- Retracts cables up to 50 feet vertically (even with mobile end accessories attached)
- Can be quickly repositioned to bring cables where they are needed
- 20 amp, 125 volt slip ring
- Six-foot feeder cord
- Adjustable ball stop
- Ceiling, wall or bench mounting
- Rated for indoor use
- Reinforced steel frame
- Black molded nylone construction
- Robust, long-life spring
- Two-year warranty



MOBILE END OPTIONS

Quad Receptacle Box


Single Outlet


Flying Lead


Ground Continuity Monitor


Triple Tap

LEGRAND PART NUMBERING SYSTEM 1000 SERIES

CR CD 16 3 N 25 F 10

Product Group	Product Series	Cable Gauge	# Conductors	GFCI	Cord Length	Mobile End	Amperage
CR = Cord Reel PD = Pendant	CD = 1000 Series (Commercial Duty) 12 = 1200 Series 14 = 1400 Series SD = Static Discharge ED = Electric Discharge	16 12	3	N = No	25 35 50	F = Flying Lead R = Quad RB T = Tritap S = Single Outlet L = Locking Single Outlet G = Ground Continuity Monitoring	10 15 20

c UL us LISTED

made in USA

CABLE REELS

1000 Series Cable Reels

CATALOG NUMBER	MOBILE END	GFCI	LENGTH	CABLE	AMPERAGE
CRCD163N25F10	Flying Lead	No	25	16AWG 3C	10
CRCD163N35F10	Flying Lead	No	35	16AWG 3C	10
CRCD163N50F10	Flying Lead	No	50	16AWG 3C	10
CRCD123N25F20	Flying Lead	No	25	12AWG 3C	20
CRCD123N35F20	Flying Lead	No	35	12AWG 3C	20
CRCD123N50F20	Flying Lead	No	50	12AWG 3C	20
CRCD163N25R10	Quad RB	No	25	16AWG 3C	10
CRCD163N35R10	Quad RB	No	35	16AWG 3C	10
CRCD163N50R10	Quad RB	No	50	16AWG 3C	10
CRCD123N25R15	Quad RB	No	25	12AWG 3C	15
CRCD123N35R15	Quad RB	No	35	12AWG 3C	15
CRCD123N50R15	Quad RB	No	50	12AWG 3C	15
CRCD123N25R20	Quad RB	No	25	12AWG 3C	20
CRCD123N35R20	Quad RB	No	35	12AWG 3C	20
CRCD123N50R20	Quad RB	No	50	12AWG 3C	20
CRCD163N25T10	Tri-Tap	No	25	16AWG 3C	10
CRCD163N35T10	Tri-Tap	No	35	16AWG 3C	10
CRCD163N50T10	Tri-Tap	No	50	16AWG 3C	10
CRCD123N25T15	Tri-Tap	No	25	12AWG 3C	15
CRCD123N35T15	Tri-Tap	No	35	12AWG 3C	15
CRCD123N50T15	Tri-Tap	No	50	12AWG 3C	15
CRCD123G25R15	Quad RB	Yes	25	12AWG 3C	15
CRCD123G35R15	Quad RB	Yes	35	12AWG 3C	15
CRCD123G50R15	Quad RB	Yes	50	12AWG 3C	15
CRCD123G25R20	Quad RB	Yes	25	12AWG 3C	20
CRCD123G35R20	Quad RB	Yes	35	12AWG 3C	20
CRCD123G50R20	Quad RB	Yes	50	12AWG 3C	20
CRCD123G25T15	Tri-Tap	Yes	25	12AWG 3C	15
CRCD123G35T15	Tri-Tap	Yes	35	12AWG 3C	15
CRCD123G50T15	Tri-Tap	Yes	50	12AWG 3C	15
CRCD123N50S15	Single Outlet	No	50	12AWG 3C	15
CRCD123N50S20	Single Outlet	No	50	12AWG 3C	20
CRCD123N50L15	Locking Single Outlet	No	50	12AWG 3C	15
CRCD123N50L20	Locking Single Outlet	No	50	12AWG 3C	20
CRCD123N35S15	Single Outlet	No	35	12AWG 3C	15
CRCD123N35S20	Single Outlet	No	35	12AWG 3C	20
CRCD123N35L15	Locking Single Outlet	No	35	12AWG 3C	15
CRCD123N35L20	Locking Single Outlet	No	35	12AWG 3C	20
CRCD123N25S15	Single Outlet	No	25	12AWG 3C	15
CRCD123N25S20	Single Outlet	No	25	12AWG 3C	20
CRCD123N25L15	Locking Single Outlet	No	25	12AWG 3C	15
CRCD123N25L20	Locking Single Outlet	No	25	12AWG 3C	20
CRCD123N35G15	Ground Continuity Monitor	No	35	12AWG 3C	15
CRCD123N50G15	Ground Continuity Monitor	No	50	12AWG 3C	15
CRCD123N35G20	Ground ContinuityMonitor	No	35	12AWG 3C	20
CRCD123N50G20	Ground Continuity Monitor	No	50	12AWG 3C	20

CABLE REELS

1200 Series Cable Reels

Description

For industrial applications that require a small spring-driven cord reel, the 1200 Series is designed for superb reliability with rugged features for harsh environments. Long-lasting and available with different amperages and cable lengths, there's an option for you.

1200 Series Cable Reels are particularly well suited for assembly and fabrication sites, automotive work bays, truck crane control, conveyors, utility trucks and educational, entertainment and recreational centers.

Features & Benefits

- All-steel construction with fiberglass/nylon drum
- Durable yellow or black powder-coated finish
- Options include ball stop only or receptacle box
- Operating temperature range of -22°F to 194°F (-30°C to 90°C)
- Adjustable cable guide arm with 12 positions to direct cables wherever you need them
- Smooth-running 4-roller guide for minimum cable stress
- Ratchet that locks the spool to keep cable at specific extension and disengages by pulling
- Adjustable ball stop that limits cable retraction and prevents damage to cord end accessories
- Precision slip ring assembly for long life
- 6-foot feeder cord
- Safety chain hole
- Cable included
- UL and CSA Listed





made in USA

LISTED REEL 67N6

CABLE REELS

1200 Series Cable Reels

PART NUMBER	COLOR	CABLE LENGTH	APPLICATION	AWG/C	AMPERAGE	END ACCESSORY
CR12L123N50F20	Yellow	50 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N35F20	Yellow	35 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N25F20B	Black	25 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N25F20	Yellow	25 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N50R20	Yellow	50 ft.	Lift/Drag	12AWG 3C	20	20A Quad RB
CR12L123N25R20	Yellow	25 ft.	Lift/Drag	12AWG 3C	20	20A Quad RB
CR12L123N30F20	Yellow	30 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N50F20B	Black	50 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N30F20B	Black	30 ft.	Lift/Drag	12AWG 3C	20	None
CR12L124N25F16	Yellow	25 ft.	Lift/Drag	12AWG 4C	16	None
CR12L124N35F16	Yellow	35 ft.	Lift/Drag	12AWG 4C	16	None
CR12L124N35F16B	Black	35 ft.	Lift/Drag	12AWG 4C	16	None
CR12L143N50F15	Yellow	50 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N30F15	Yellow	30 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N40F15	Yellow	40 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N50F15B	Black	50 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N30F15B	Black	30 ft.	Lift/Drag	14AWG 3C	15	None
CR12L144N35F12	Yellow	35 ft.	Lift/Drag	14AWG 4C	12	None
CR12L163N50F10	Yellow	50 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N25F10	Yellow	25 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N35F10	Yellow	35 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N50F10B	Black	50 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N25F10B	Black	25 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N35F10B	Black	35 ft.	Lift/Drag	16AWG 3C	10	None
CR12L164N35F08	Yellow	35 ft.	Lift/Drag	16AWG 4C	8	None
CR12L164N50F08	Yellow	50 ft.	Lift/Drag	16AWG 4C	8	None
CR12L164N50F08B	Black	50 ft.	Lift/Drag	16AWG 4C	8	None

LEGRAND PART NUMBERING SYSTEM 1200 SERIES

CR 12 L 12 3 N 50 F 20 B

Product Group
CR = Cord Reel
PD = Pendant

Product Series
CD = 1000 Series (Commercial Duty)
12 = 1200 Series
14 = 1400 Series
SD = Static Discharge
ED = Electric Discharge

Application
L = Lift/Drag
S = Stretch
R = Retrieve

Cable Gauge
16
14
12

 # Conductors
3

GFCI
N = No

Cord Length
25
35
40
50

Mobile End
F = Flying Lead
R = Quad RB
T = Tritap
S = Single Outlet
L = Locking Single Outlet

Amperage
10
15
20

Color
Blank = Yellow
B = Black

CABLE REELS

1400 Series Cable Reels

Description

The most demanding industrial environments deserve the toughest cable reel, built to withstand harsh applications for years with little or no maintenance. Look to the 1400 Series Cable Reels for assembly and fabrication sites, extendable conveyors, class A-C overhead cranes and hoists, automotive work bays and truck cranes, utility and ladder trucks.

Features & Benefits

- Rugged, steel frame construction with safety chain hole for overhead-mounted reels
- Precision-built main spring housed in a safety-sealed canister
- Durable yellow or black powder-coated finish with black thermoplastic slip ring cover
- Operating temperature range of -22°F to 194°F (-30°C to 90°C)
- Adjustable cable guide arm with 12 positions to direct cables wherever you need them
- Ratchet that locks the spool to keep cable at specific extension and disengages by pulling
- Adjustable ball stop that limits cable retraction and prevents damage to cord end accessories
- Precision slip ring assembly enclosed in NEMA 4 weatherproof, gasketed enclosure with grounded ring
- UL & CSA Listed for indoor & outdoor use to NEMA 4
- Come with one conductor grounded to the reel
- Type SOOW-A cable is pre-installed

made in USA

LISTED REEL 67N6





LEGRAND PART NUMBERING SYSTEM 1400 SERIES

CR 12 L 12 3 N 50 F 20 B

Product Group	Product Series	Application	Cable Gauge	# Conductors	GFCI	Cord Length	Mobile End	Amperage	Color
CR = Cord Reel PD = Pendant	CD = 1000 Series (Commercial Duty) 12 = 1200 Series 14 = 1400 Series SD = Static Discharge ED = Electric Discharge	L = Lift/Drag S = Stretch R = Retrieve	16 14 12	3	N = No	25 35 40 50	F = Flying Lead R = Quad RB T = Tritap S = Single Outlet L = Locking Single Outlet	10 15 20	Blank = Yellow B = Black

CABLE REELS

1400 Series Cable Reels


PART NUMBER	COLOR	CABLE LENGTH	APPLICATION	AWG/C	AMPERAGE	END ACCESSORY
CR14L103N50F25	Yellow	50 ft.	Lift/Drag	10AWG 3C	25	None
CR14L103N60F25	Yellow	60 ft.	Lift/Drag	10AWG 3C	25	None
CR14L103N30F25	Yellow	30 ft.	Lift/Drag	10AWG 3C	25	None
CR14L103N30F25B	Black	30 ft.	Lift/Drag	10AWG 3C	25	None
CR14L104N30F20	Yellow	30 ft.	Lift/Drag	10AWG 4C	20	None
CR14L104N50F20	Yellow	50 ft.	Lift/Drag	10AWG 4C	20	None
CR14S104N40F20	Yellow	40 ft.	Stretch	10AWG 4C	20	None
CR14L104N40F20	Yellow	40 ft.	Lift/Drag	10AWG 4C	20	None
CR14R104N60F20	Yellow	60 ft.	Retrieve	10AWG 4C	20	None
CR14R104N30F20	Yellow	30 ft.	Retrieve	10AWG 4C	20	None
CR14L104N30F20B	Black	30 ft.	Lift/Drag	10AWG 4C	20	None
CR14L104N40F20B	Black	40 ft.	Lift/Drag	10AWG 4C	20	None
CR14R104N60F20B	Black	60 ft.	Retrieve	10AWG 4C	20	None
CR14S123N50F20	Yellow	50 ft.	Stretch	12AWG 3C	20	None
CR14S123N50F20	Yellow	30 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N40F20	Yellow	40 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N50F20	Yellow	50 ft.	Lift/Drag	12AWG 3C	20	None
CR14S123N50F20B	Black	50 ft.	Stretch	12AWG 3C	20	None
CR14L123N30F20B	Black	30 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N40F20B	Black	40 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N50F20B	Black	50 ft.	Lift/Drag	12AWG 3C	20	None
CR14L124N40F16	Yellow	40 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N50F16	Yellow	50 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N30F16	Yellow	30 ft.	Lift/Drag	12AWG 4C	16	None
CR14S124N40F16	Yellow	40 ft.	Stretch	12AWG 4C	16	None
CR14S124N50F16	Yellow	50 ft.	Stretch	12AWG 4C	16	None
CR14S124N30F16	Yellow	30 ft.	Stretch	12AWG 4C	16	None
CR14L124N20F16	Yellow	20 ft.	Lift/Drag	12AWG 4C	16	None
CR14R124N30F16	Yellow	30 ft.	Retrieve	12AWG 4C	16	None
CR14L124N40F16B	Black	40 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N50F16B	Black	50 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N30F16B	Black	30 ft.	Lift/Drag	12AWG 4C	16	None
CR14S124N40F16B	Black	40 ft.	Stretch	12AWG 4C	16	None
CR14L143N30F15	Yellow	30 ft.	Lift/Drag	14AWG 3C	15	None
CR14R143N100F15	Yellow	100 ft.	Retrieve	14AWG 3C	15	None
CR14L144N40F12	Yellow	40 ft.	Lift/Drag	14AWG 4C	12	None
CR14L144N30F12	Yellow	30 ft.	Lift/Drag	14AWG 4C	12	None
CR14S144N50F12	Yellow	50 ft.	Stretch	14AWG 4C	12	None
CR14S144N30F12	Yellow	30 ft.	Stretch	14AWG 4C	12	None
CR14L163N70F10	Yellow	70 ft.	Lift/Drag	16AWG 3C	10	None
CR14L163N100F10	Yellow	100 ft.	Lift/Drag	16AWG 3C	10	None
CR14L163N70F10B	Black	70 ft.	Lift/Drag	16AWG 3C	10	None

STATIC DISCHARGE REELS

Description


Static discharge reels are designed to provide maximum safety when using cables in hazardous areas. The reel clamps to the ground and dissipates static electricity that has gathered, reducing the possibility of explosions and sparks. These safe, reliable reels are perfect for static grounding of fuel tanks, airplanes and utility vehicles.

Features & Benefits

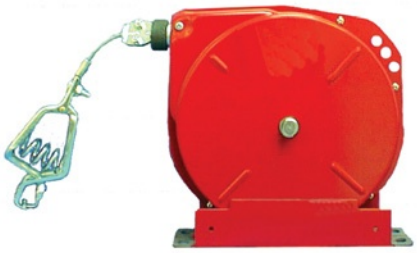

- Built to NEC® standards
- Rugged all-steel construction
- Compact design
- Mounts in any position with spool perpendicular
- Features ratchet and ball stop
- Available in a double-cable "Y" design to ground two places at once

PART NUMBER	DESCRIPTION
CDED20B1	Reel Electric Discharge 20 ft. Bare Cable
CDED20C1	Reel Electric Discharge 20 ft. Orange Coated Cable
CDED50B1	Reel Electric Discharge 50 ft. Bare Cable
CDED50C1	Reel Electric Discharge 50 ft. Orange Coated Cable
CDSD25B1	Reel Static Discharge 25 ft. Bare Cable
CDSD25C1	Reel Static Discharge 25 ft. Orange Coated Cable
CDSD50B1	Reel Static Discharge 50 ft. Bare Cable
CDSD50C1	Reel Static Discharge 50 ft. Orange Coated Cable
CDSD50Y2	Reel Static Discharge 50 ft. Y-Bridle

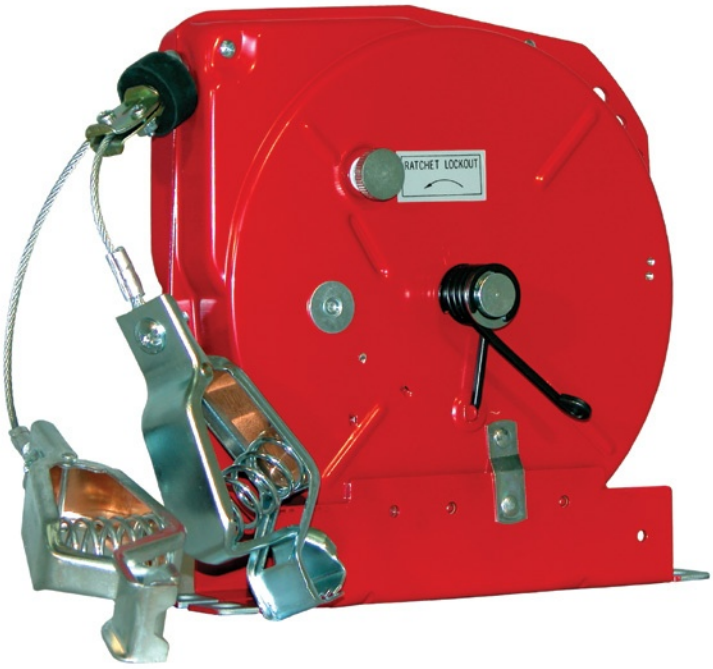


LEGRAND PART NUMBERING SYSTEM DISCHARGE REELS

CD ED 20 B 1

Product Group	Product Series	Cable Length	Steel Cable Type	Clamps
CR = Cord Reel PD = Pendant	CD = 1000 Series (Commercial Duty) 12 = 1200 Series 14 = 1400 Series SD = Static Discharge ED = Electric Discharge	20 25 50	B = Bare Cable C = Orange Coated Y = Y Bridle	1 = Single Clamp 2 = Double Clamp

SENSORS & DIMMERS

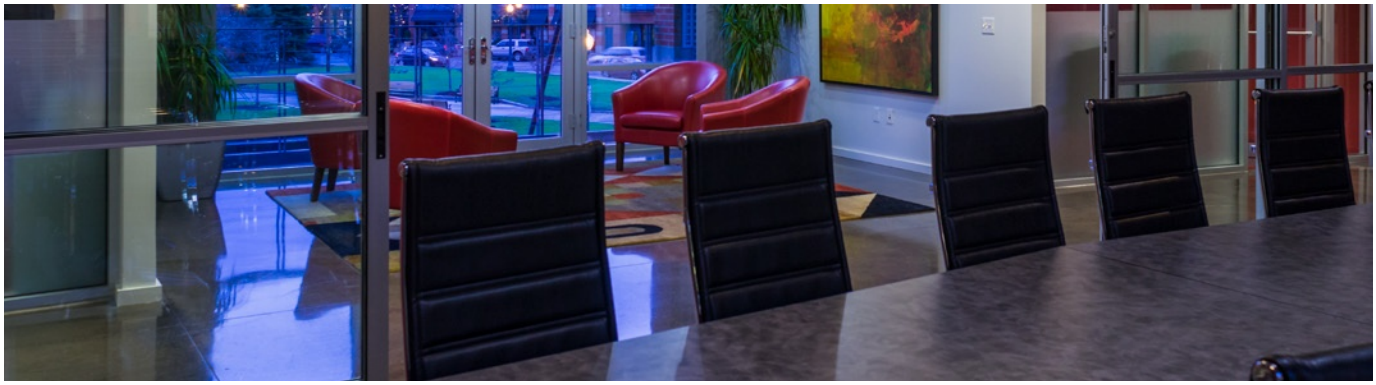



OCCUPANCY/VACANCY SENSORS & TIMERS

E-2




DIMMERS & FAN SPEED CONTROLS

E-25

TITLE 24 ENERGY SAVER

OCCUPANCY/VACANCY SENSORS & TIMERS



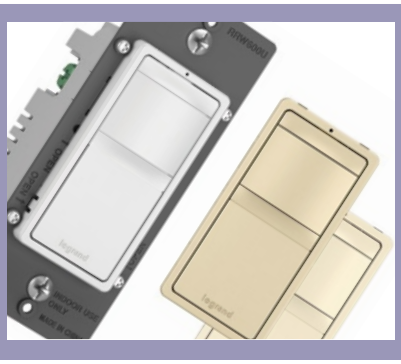

OCCUPANCY/ VACANCY SENSORS & TIMERS

OCCUPANCY/VACANCY SENSORS

120V radiant® Wall Box Vacancy Sensors E-5
120V Wall Box Occupancy Sensors E-6
120V Wall Box Occupancy/ Vacancy Sensors E-7
120/277V Wall Box Occupancy/ Vacancy Sensors E-9
Passive Infrared Occupancy/Vacancy Sensors With Neutral E-10
Dual Technology Wall Box Occupancy/Vacancy Sensors E-11
Optional Neutral Passive Infrared (PIR) E-12
Optional Neutral Dual Technology E-13
Wireless RF Passive Infrared (PIR) E-14
Wireless Self-Powered RF Remotes E-15
Wall or Ceiling Mount Passive Infrared (PIR) Occupancy/ Vacancy Sensors E-16
Ceiling Mount Passive Infrared (PIR) E-17
Ultrasonic Ceiling Mount E-18
Dual Technology Ceiling Mount E-19

SENSORS/TIMERS/POWER PACKS

High Bay Passive Infrared (PIR), Line Voltage Occupancy Sensors E-20
Power Packs & Auxiliary Relay Packs E-21
Timers E-23

RESOURCES

Sensor Technologies E-3
Sensor Applications E-4
Useful Calculations E-22

OCCUPANCY/VACANCY SENSORS & TIMERS

Sensor Technologies

Passive Infrared Sensors (PIR)

Using a patented fresnel lens which minimizes optical aberrations, each Wattstopper® PIR sensor breaks its coverage area into zones. Upon detecting an infrared energy change within a zone, one of the elements in the dual-element pyroelectric sensing device of an occupancy sensor generates a positive pulse. Within milliseconds, the other element produces a negative pulse and the lights are turned on. Vacancy sensors turn lights off when the room is vacant for a period of time, or when there is no infrared energy detected within a zone.

Passive infrared sensors are unable to detect occupancy around barriers, and are more effective when sensing movement across their field of sight rather than towards or away from it.

All Wattstopper PIR occupancy sensors feature:

- Patented fresnel lenses with multi-segment design
- Dual-element pyroelectric sensors
- Low-profile design
- Daylight filter systems
- Adjustable settings for time and sensitivity
- Custom Detection Signature Analysis for high immunity to RFI and EMI, and reliability
- Self-adaptive technology is available on some models

Ultrasonic Sensors

Ultrasonic sensors use a multi-directional transmitter/receiver system to broadcast ultrasonic sound waves generated by a quartz crystal oscillator, and then measure the amount of time it takes the waves to return. Movement within the area results in the sound waves returning to the sensor at a slower or faster rate, and thus occupancy is detected.

Ultrasonic sensors broadcast in three dimensions, and are therefore able to detect smaller movements than PIR sensors. Proper placement of the sensors is essential as sound waves can escape through open doorways, resulting in false triggering.

While Wattstopper ultrasonic sensors use special circuitry to filter out air-flow movement caused by HVAC equipment or fans, sensors should be kept away from breezy areas. Also, heavy carpeting and other sound-absorbing materials used in the construction of a room will reduce coverage.

Wattstopper Ultrasonic Occupancy Sensor features:

- Temperature- and humidity-resistant tuned receivers
- Signal Processing Circuitry
- Solid-state, crystal-controlled transmitter
- Adjustable controls for time and sensitivity

Dual Technology

Dual Technology sensors combine PIR and Ultrasonic sensing in one device. This minimizes false ONs and nuisance OFFs. Sensitivity adjustments and user selectable operational characteristics make dual technology sensors the most versatile, even in the most difficult installations.

Use dual technology sensors for the most demanding sensor applications. Odd shaped rooms, lots of partitions, and changing floor plans can be handled best by dual technology sensors.

Wireless RF Sensor

The Wireless RF PIR Occupancy Sensor works with Series RF Wall Switches to turn lights on and off based on occupancy. The sensor mounts on the ceiling and provides 360° passive infrared coverage.

Wireless RF Wall Switches

RF Wall Switches work with wireless occupancy sensors, and optional remote switches, to turn lights on and off based on occupancy. Models are available to control one or two switched legs in applications with or without neutral wires at the switch box.

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS


Sensor Applications

Wattstopper Model	Catalog Page #	Best Suited For:
120V Wall Box Occupancy Sensors		
RS250	E-6	Storage rooms, walk-in closets, pantries, garage where a neutral is available
120V Wall Box Vacancy Sensors (T24 Compliant)		
RWU600B	E-5	Bedrooms, basements bathrooms, laundry rooms, where a neutral is available
RRW600VTC	E-5	Bedrooms, basements bathrooms, laundry rooms, where no neutral is available
3-Way 120V Wall Box Occupancy/Vacancy Sensor		
RH250	E-7	Any room/hall with multiple entrances — allows manual ON/OFF control from both locations. Can be switched between occupancy and vacancy.
CH250	E-7	Any room/hall with multiple entrances — allows manual ON/OFF control from both locations. Can be switched between occupancy and vacancy.
120V Wall Box Occupancy/Vacancy Sensor with Dimmer		
CD250W	E-8	Any room where adjustable light level is desired
Commercial Passive Infrared (PIR) Wall Box Sensors		
PTWSP250	E-9	Small offices, closets, utility rooms with no partitions or obstructions
WS250	E-9	Small offices, closets, utility rooms with no partitions or obstructions
PW301	E-12	Small offices, closets, small conference rooms with no partitions or obstructions
PW302	E-12	Small rooms with two individually-controlled loads or bi-level lighting with no partitions or obstructions
PW101, PW201	E-10	Offices, conference rooms, restrooms, lunch/break rooms, classrooms, unique areas
Commercial Passive Infrared (PIR) and Ultrasonic Wall Sensors		
DSW100	E-11	Small offices, executive suites, conference rooms, break rooms
DSW200	E-11	
Commercial Passive Infrared (PIR) Ceiling Sensors		
CI2051, CI205	E-17	Open offices, lunch, utility, storage, and computer rooms with no partitions or obstructions
CI355	E-17	Larger rooms, up to 1200 sq. ft., with open floor plans, no partitions or obstructions
Commercial Passive Infrared (PIR) Wall or Ceiling Mount Sensors		
CX1051	E-16	Hallways, or aisles
CX105	E-16	Entrances, vestibules, classrooms, for wide-angle applications
Commercial Ultrasonic Ceiling Mount Sensors		
WT605	E-18	Offices, computer, meeting, copy, and restrooms
WT1105	E-18	Offices, lunch, break and classrooms, restrooms, and conference rooms
WT2205	E-18	Offices, lunch, break and classrooms, restrooms, conference rooms, halls, storage areas
Commercial Dual Technology Sensors		
DT355	E-19	Meeting, conference and classrooms, restrooms, dressing rooms, libraries, interview rooms, testing areas, lunch and break rooms
Timers		
RT50	E-23	Closets, bathroom fans, exhaust fans, heat lamps, bedrooms
RT100	E-24	Garages, basements, laundry rooms, fans, motors, landscape lights
RT200	E-24	Exterior lights, landscape lighting, security lighting, holiday lighting
High Bay Sensors		
HBP111L7	E-20	Warehouses, industrial, retail, education and institutional WL models for wet locations in these applications
HB350WL3	E-20	


All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS


120V Wall Box Vacancy Sensors Passive Infrared (PIR)



RRW600UTC



RWU600BLACC4



RRW600VTC

Features

- California Title 24 compliant.
- Replaces a standard light or fan single pole switch.
- Lighted switch for visibility in darkened rooms.
- Manual-ON operation.
- RRW600UTC has adjustable time delay of 30 seconds to 30 minutes - others have fixed 30-minute time delay, no adjustment necessary.
- Low-profile styling with uniform color-matched lens and device.
- Coverage: 180°, max. 600 ft.2 (56m2).
- cULus listed.
- 5-year warranty.

RWU600B only


- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.

RRW600VTC, RRW600UTC only

- Interchangeable face – Three colors in one box (Ivory, White, Light Almond).


CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	AUTO ON	MANUAL ON	SELECTABLE AUTO/MAN. ON	COLOR
SINGLE POLE VACANCY SENSORS							
RWU600BWCCV4	Neutral required ideal for bedrooms and baths.	120VAC 60Hz	0-600W All	No	Yes	No	White
RWU600BLACCV4				No	Yes	No	Light Almond
RRW600VTC	No neutral required, ideal for bedrooms and baths. Comes with three interchangeable face colors. Part of the radiant® collection.	120VAC 60Hz	0-600W All	No	Yes	No	Ivory White Light Almond
RRW600UTCCCV4	No neutral required, ideal for bedrooms and baths. Comes with three interchangeable face colors. Part of the radiant® collection.	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Ivory Light Almond White
RRW600UBCCCV4	No neutral required, ideal for bedrooms and baths. Comes with two interchangeable face plates. Part of the radiant collection.	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Dark Bronze, Nickel
RRW600UGCCV4	No neutral required, ideal for bedrooms and baths. Part of the radiant collection.	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Graphite

RWU600B Wiring




Wiring for RWU600B requires a neutral.

RRW600V Wiring




Wiring for RRW600V does not require a neutral.

Coverage

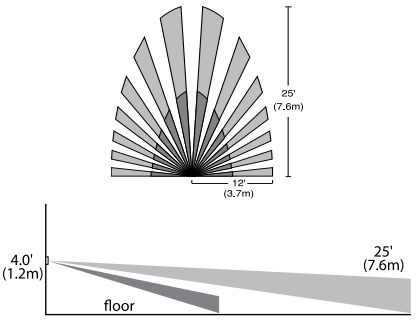

RRW600U Wiring




Wiring for RRW600U does not require a neutral.

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

120V Wall Box Occupancy Sensors Passive Infrared (PIR)



RS250

Features


- Replaces a standard light or fan single pole switch.
- Lighted switch for visibility in darkened rooms.
- Automatic-ON operation.
- Fixed five-minute time delay.
- Low-profile styling with uniform color-matched lens and device.
- Coverage: 180°, max. 600 ft.^{2} (56m^2).
- cULus listed.
- 5-year warranty.
- Works with most common residential lighting types.

RS250 only

- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.


CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	AUTO ON	MANUAL ON	SELECTABLE AUTO/MAN. ON	COLOR
SINGLE POLE OCCUPANCY SENSORS							
RS250I	Neutral required, controls most types of lighting, ideal for storage & utility rooms	120VAC 60Hz	0-600W All	Yes	No	No	Ivory
RS250W				Yes	No	No	White
RS250B				Yes	No	No	Black
RS250LA				Yes	No	No	Light Almond
RS250A				Yes	No	No	Almond

RS250 Wiring



Wiring for RS250 requires a neutral.

Coverage

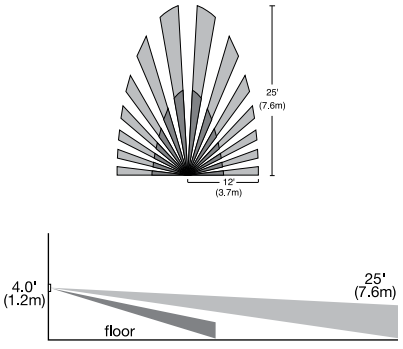

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS


120V Wall Box Occupancy/Vacancy Sensors 3-Way Passive Infrared (PIR)



RH250
CH250


Dimensions for CH250: 2.67" (L) x 1.73" (W) x 1.77" (D)

Product Controls



RH250

Coverage





Applications

The RH250 has the flexibility to work in a variety of applications including hallways, stairways, bathrooms, living and dining rooms, and other areas with multiple entries. The RH250 vacancy sensor allows true multi-way operation with automatic ON/OFF control.

Features

- Occupancy-based control plus multi-way operation.
- Two or more RH250s connected together will allow enhanced coverage of the controlled space.
- Works with most common residential lighting types.
- Adjustable time delay of 15 seconds to 30 minutes.
- Light level sensing prevents automatic ON of lights when adequate daylight exists.
- Replaces three-way or four-way switches when used with other RH250s.
- Lighted switch for visibility in darkened rooms.
- Manual- or automatic-ON operation.
- Adjustable light level setting of 10 to 150 fc (100 to 1500 lux).
- Coverage: 180°, max. 600 ft.2 (56m2).
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp.


CH250 only

- Time delay 15 seconds, 5, 15, 30 minutes.


CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	AUTO ON	MANUAL ON	SELECTABLE AUTO/MAN. ON	COLOR	LIGHT LEVEL SENSING
SINGLE POLE/3-WAY OCCUPANCY/VACANCY SENSORS								
RH250I*	Light-level sensing for optimum operation – ideal for rooms with multiple entrances.	120VAC 60Hz	0-600W All	Yes	Yes	Yes	Ivory	Yes
RH250W*				Yes	Yes	Yes	White	Yes
RH250B*				Yes	Yes	Yes	Black	Yes
RH250LA*				Yes	Yes	Yes	Light Almond	Yes
RH250A*				Yes	Yes	Yes	Almond	Yes
CH250I**	Ideal for rooms with multiple entrances.	120VAC 60Hz	0-600W All	No	Yes	No	Ivory	No
CH250W**				No	Yes	No	White	No
CH250B**				No	Yes	No	Black	No
CH250LA**				No	Yes	No	Light Almond	No
CH250A**				No	Yes	No	Almond	No

*RH250 requires an additional RH250 in multi-way circuits.
**CH250 can be used with either a momentary contact switch or an additional CH250 unit for multi-way applications.
Momentary contact switches on Page A-8.

RH250 Wiring for 3-Way Operation

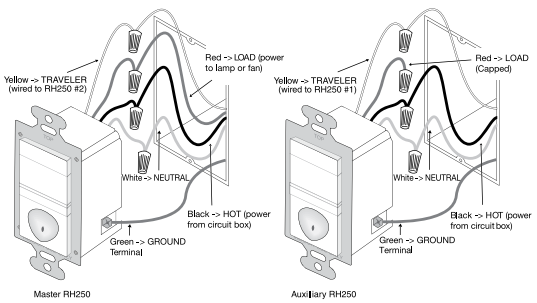

CH250 Wiring for 3-Way Operation

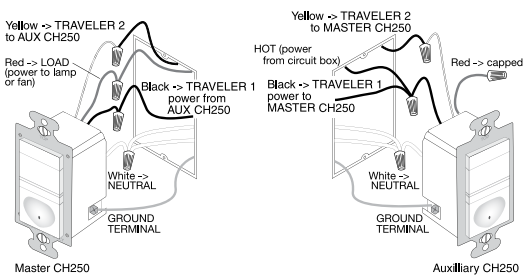

All devices listed on this page conform to NEMA WD-1 and WD-6.


OCCUPANCY/VACANCY SENSORS & TIMERS

120V Wall Box Occupancy/Vacancy Sensors Passive Infrared (PIR) with Dimmer




CD250

Product Controls



CD250

Coverage






Features

- California Title 24 compliant.
- Replaces standard single pole switch or incandescent dimmer.
- Low-profile styling with uniform color-matched lens and device.
- Lighted pushbutton for visibility in darkened rooms.
- Manual-ON or automatic-ON operation.
- Adjustable time delay from 15 seconds to 30 minutes.
- Soft start technology to prolong lamp life.
- Air gap isolation switch for safe relamping.
- If enabled, light level sensing prevents automatic-ON when adequate daylight exists.
- Adjustable light level setting from 10-150 fc (100-1500 lux) for daylight sensing.
- Operating conditions: 32°-104°F (0°-40°C), 95% RH, noncondensing.
- Coverage: 180°, max. 600 ft2 (56 m2).
- cULus listed.
- 5-year warranty.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	AUTO ON	MANUAL ON	SELECTABLE AUTO/MAN. ON	COLOR
OCCUPANCY/VACANCY SENSORS WITH PRESET DIMMERS							
CD250I	Neutral required, ideal for living, dining and family rooms, master bathrooms and bedrooms.	120VAC 60 Hz	25-500W Incandescent	Yes	Yes	Yes	Ivory
CD250W				Yes	Yes	Yes	White
CD250B				Yes	Yes	Yes	Black
CD250LA				Yes	Yes	Yes	Light Almond
CD250A				Yes	Yes	Yes	Almond

CD250 Wiring



De-rating

When more that one dimmer is installed in a multi-gang box, it is necessary to reduce the maximum load on each dimmer.

- For an CD250 in either end position of a multi-gang box, reduce the maximum load by 50W.
- For an CD250 in a central position of a multi-gang box, reduce its maximum load by 100W. Mounting in a deep electrical box is recommended.


All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

120/277V Wall Box Occupancy/Vacancy Sensors Wall Box Passive Infrared (PIR)



PTWSP250W



P&S PlugTail® Wall Switch Sensors use PTS Single Pole PlugTail® Connectors. See Page A-23.

PTS6STR3



WS250W

Features

- Detection Signature Analysis provides high immunity to RFI and EMI.
- Compact, decorator design replaces existing wall switch.
- Shallow back body (1")
- Integrated light level sensor works from 10 to 150 footcandles.
- Compatible with all electronic and magnetic ballasts, PL lamp ballasts, compact fluorescent.
- Adjustable time delay of 30 seconds to 30 minutes.
- Dual 120/277VAC operation.
- 30% to 60% energy savings.
- Positive detection indicator.
- No minimum load requirement.
- Adjustable sensitivity from 20% to 100%.
- Patented voltage drop protection.
- Patented Zero Crossing Circuitry.
- 180° coverage of up to 900 sq. ft.
- cULus listed.
- 5-year warranty.

Pass & Seymour® PlugTail® PTWSP250 Only

- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.

WS250 Only


- 6" flying leads


CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COLOR
PASS & SEYMOUR PLUGTAIL® AUTOMATIC WALL SWITCHES – 3 WIRE TECHNOLOGY				
PTWSP250I	PIR Occupancy Sensor	120/277VAC 60Hz	800W Max. at 120V 1200W Max. at 277V	Ivory
PTWSP250W				White
PTWSP250GRY				Gray
PTWSP250LA				Light Almond
AUTOMATIC WALL SWITCHES – 3 WIRE TECHNOLOGY				
WS250I	PIR Occupancy Sensor	120/277VAC 60Hz	800W Max. at 120V 1200W Max. at 277V	Ivory
WS250W				White
WS250G				Gray
WS250LA				Light Almond
WS250B				Black
PLUGTAIL CONNECTORS FOR SINGLE POLE SWITCHES				
PTS6STR3	3 Wire Stranded		6" Wire Length	Green, Black, Black

Planning a Layout


The WS250's 2-level lens provides superior coverage at desktop level by allowing the sensor to detect vertical as well as horizontal motion. Coverage shown is for walking motion. Under optimum conditions with a high level of activity and with no barriers or obstacles, coverage can reach a maximum of 900 square feet. Under a typical, desktop level of activity, when mounted at 4 feet, coverage is 300 square feet.





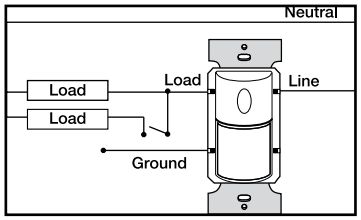



Manual Bi-level Lighting – WS250




Single Level Lighting – WS250

All devices listed on this page conform to NEMA WD-1 and WD-6.





Placement for PIR wall switch sensor




WS250

Factory settings: 30 min. time delay, maximum light level and sensitivity

OCCUPANCY/VACANCY SENSORS & TIMERS

Passive Infrared Occupancy/Vacancy Sensors with Neutral

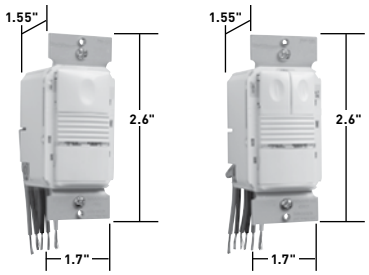

PW101 **PW201**

Features


- Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Zero-crossing for long relay life.
- Vandal-resistant lens combines precise coverage with durability.
- Choice of Auto-ON or Manual-ON operation.
- Auto adjustable time delays: automatic, fixed (5, 10, 15, 20, 25 or 30 minutes), walk-through, test-mode.
- Selectable time delay automatically adjusts for maximum savings.
- Walk-through mode turns lights off 3 minutes after the area is initially occupied – ideal for brief visits such as mail delivery.
- Selectable test mode allows quick and easy adjustments.
- Selectable audible alert for impending shutoff.
- In AUTO-ON mode, if the sensor is manually turned OFF, AUTO-ON will not enable until no motion is detected for 5 minutes. This prevents the light from turning ON when it was intended they remain OFF. Ideal for presentations.
- LED indicates occupancy detection.
- Built-in light level sensing with simple, one-step setup.
- Override mode allows sensor to operate as a service switch in the unlikely event of a failure.
- NEMA WD 7 guideline utilized for coverage testing.
- Sensitivity adjustment: PIR (high/low).
- Coverage: 180°, up to 1050 sq. ft.; major motion 35' x 30'; minor motion 20' x 15'.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

CATALOG NUMBER	DESCRIPTION	COVERAGE	VOLTAGE	LOAD RATING	COLOR
PASSIVE INFRARED OCCUPANCY/VACANCY SENSORS WITH NEUTRAL					
PW101I	PIR Occupancy/Vacancy Sensor with Neutral	Major Coverage: 35' x 30'; Minor Coverage: 20' x 15'	120/230/277 VAC, 50/60 Hz	@120VAC 0-800W tungsten or ballast, 1/6 HP; @277VAC 0-1200W ballast	Ivory
PW101W					White
PW101G					Gray
PW101LA					Light Almond
PW101B					Black
PW201I	Bi-Level PIR Occupancy/Vacancy Sensor with Neutral	Major Coverage: 35' x 30'; Minor Coverage: 20' x 15'	120/230/277 VAC, 50/60 Hz	@120VAC 0-800W tungsten or ballast, 1/6 HP; @277VAC 0-1200W ballast	Ivory
PW201W					White
PW201G					Gray
PW201LA					Light Almond
PW201B					Black


All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy/Vacancy Sensors Dual Technology Wall Box



DSW100



Features

- Adjusts time delays automatically based on actual usage patterns
- Assigns short delays (as low as 7 minutes) when the space is typically vacant, and longer delays (up to 30 minutes) for busier times
- Differentiates electrical noise from human motion
- Fixed mode – 5, 15 or 30 minutes
- Walk-through mode – turns lights off 3 minutes after the room is initially occupied if no motion is detected after 30 seconds.
- Test mode – allows quick and easy adjustments.
- Sensitivity adjustment.
- Color-matched lenses and low profile for appealing design.
- Choice of auto-ON or manual-ON operation.
- Fast, easy installation/switch-out.
- Zero-crossing for long relay life.
- High sensitivity and dense coverage for exceptional performance.
- cULus listed.
- 5-year warranty.
- DSW200 offers bi-level control of two loads independently from the same box.
  - Built-in sensor holds secondary lights off until daylight levels drop
  - Each relay can be set for automatic or manual ON
  - Dual ON/OFF buttons can control each of the loads manually as well

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
DUAL TECHNOLOGY WALL SWITCH SENSORS					
DSW100I	Dual Technology Wall Switch Sensor	120/230/277VAC, 50/60Hz	120VAC, 0-800W ballast or tungsten, 1/6HP 230/277VAC, 0-1200 ballast	1050 sq. ft	Ivory
DSW100W					White
DSW100B					Black
DSW100G					Gray
DSW100R					Red
DSW100LA					Light Almond
DSW200I	Bi-Level Dual Technology Wall Switch Sensor	120/230/277VAC, 50/60Hz	120VAC, 0-800W ballast or tungsten, 1/6HP 230/277VAC, 0-1200 ballast	1050 sq. ft	Ivory
DSW200W					White
DSW200B					Black
DSW200G					Gray
DSW200LA					Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy/Vacancy Sensors

Optional Neutral Passive Infrared (PIR) Occupancy Sensors


Compatible out of the box with existing wiring.

Optional neutral occupancy sensors turn complex retrofits into easy projects. Legrand optional neutral occupancy sensors make retrofit projects simple. You choose whether or not the neutral is connected.


Now you can decide whether or not you need a neutral. **NO configuration is required.** Just connect the flying leads as you would for any no-neutral sensor. Then, if there's a neutral in the switch box, connect it to the terminal in one easy step. The sensor does the rest – automatically.



WS301



PW301



PW302

Features

- Single relay, PIR, automatic-ON (WS301).
- Single relay, PIR factory configured for manual-ON; multi-way and light level control features (PW301).
- Dual relay, PIR, factory configured for automatic-ON to 50%; multi-way and light level control features (PW302).
- Multi-way models ensure extended coverage and full-function 3-way or 4-way control.

WS301

- 180° coverage, maximum of 900 sq. ft.
- Shallow (1") back housing and flying leads for easy installation.
- Built-in light level sensor.
- Optional neutral connection with break-off tab to expose neutral terminals.
- 120/277 VAC models.
- Button provides positive tactile feedback.

PW301/PW302

- 180° coverage, maximum of 1050 sq. ft.
- High sensitivity and dense coverage for exceptional performance.
- Color-matched lens and low profile for appealing design.
- Defaults to Manual-ON operation for maximum energy savings.
- Optional neutral connection with break-off tab to expose neutral terminals.
- 120/277 VAC and 347 VAC models.
- PW302 – Two relays for control of two separate lighting loads or circuits.
- Allows multi-way control from one of up to four control locations.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
OPTIONAL NEUTRAL PASSIVE INFRARED OCCUPANCY SENSORS					
WS301I	PIR, Single Pole, Single Relay, Optional Neutral	120 VAC; 60 Hz or 277 VAC; 60 Hz	@ 120 VAC, 0-800 W ballast or tungsten or 1/6 hp @ 277 VAC 0-1200 W ballast	900 sq ft.	Ivory
WS301W					White
WS301B					Black
WS301G					Gray
WS301LA					Light Almond
WS301R					Red
PW301I	PIR, Multi-way, Single Relay, Optional Neutral	120VAC; 50/60Hz or 277VAC; 50/60Hz	120VAC, 0-1000W ballast, LED, tungsten, 1/6 hp or @ 277VAC 0-1200W ballast, LED, 1/6 hp	1050 sq ft	Ivory
PW301IU*					Ivory
PW301W					White
PW301WU*					White
PW301B					Black
PW301G					Gray
PW301LA					Light Almond
PW301R					Red
PW302I	PIR, Multi-way, Dual Relay, Optional Neutral	120VAC; 50/60Hz or 277VAC; 50/60Hz	120VAC, 0-800W ballast, LED, tungsten, 1/6 hp or @ 277VAC 0-1000W ballast, LED, 1/6 hp	1050 sq ft	Ivory
PW302W					White
PW302B					Black
PW302G					Gray
PW302LA					Light Almond

*BAA compliant

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS


Occupancy/Vacancy Sensors

Optional Neutral Dual Technology Occupancy Sensors

Compatible out of the box with existing wiring.

Optional neutral occupancy sensors turn complex retrofits into easy projects.

Now you can decide whether or not you need a neutral. **NO configuration is required.** Just connect the flying leads as you would for any no-neutral sensor. Then, if there's a neutral in the switch box, connect it to the terminal in one easy step. The sensor does the rest – automatically.



DSW301

Features

- Single relay, dual technology factory configured for manual-ON; multi-way and light level control features (DSW301).
- Dual relay, dual technology factory configured for automatic-ON to 50%; multi-way and light level control features (DSW302).
- Multi-way models ensure extended coverage and full-function 3-way or 4-way control.

WDT301/WDT321

- 180° coverage, maximum of 1050 sq. ft.
- High sensitivity and dense coverage for exceptional performance.
- Color-matched lens and low profile for appealing design.
- Optional neutral connection with break-off tab to expose neutral terminals.
- DSW302 Two relays for control of two separate lighting loads or circuits.
- Defaults to Auto-ON at 50% operation for maximum energy savings.
- 120/277 VAC and 347 VAC models.
- Allows multi-way control from one of up to four control locations.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
OPTIONAL NEUTRAL PASSIVE INFRARED OCCUPANCY SENSORS					
DSW301I	Dual Tech, Multi-way, Single Relay, Optional Neutral	120VAC; 50/60Hz or 277VAC; 50/60Hz	120VAC, 0-1000W ballast, LED, tungsten, 1/6 hp or @ 277VAC 0-1200W ballast, LED, 1/6 hp	1050 sq ft.	Ivory
DSW301IU*					Ivory
DSW301W					White
DSW301WU*					White
DSW301B					Black
DSW301G					Gray
DSW301LA					Light Almond
DSW301R					Red
DSW302I	Dual Tech, Multi-way, Dual Relay, Optional Neutral	120VAC; 50/60Hz or 277VAC; 50/60Hz	@ 120 VAC, 0-800 W ballast or tungsten or 1/6 hp @ 277 VAC 0-1200 W ballast	1050 sq ft	Ivory
DSW302W					White
DSW302B					Black
DSW302G					Gray
DSW302LA					Light Almond
DSW302R					Red

*BAA compliant

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy/Vacancy Sensors Wireless RF Passive Infrared (PIR) Sensors and Remotes

Wireless Sensors for challenging installs

Sometimes you can't just put a wired occupancy solution in place. That's where the Legrand RF wireless solutions come into play. Built on mature, reliable and sustainable technology, wireless sensors and switches make it easy and cost effective to manage energy, especially in existing buildings. Typical applications perfect for wireless RF solutions are historic buildings where wiring is not permissible; wood, plaster, or drywall ceilings; and asbestos or other materials in the plenum with no conduit to support 3-way switching.

The solution consists of a Wireless RF Passive Infrared (PIR) Occupancy Sensor (batteries not required), RF Wall Switches, and in-wall and handheld self-powered RF remotes.

Wireless RF Sensor – EOPC100

The Wireless RF Passive Infrared (PIR) Occupancy Sensor works with Series RF Wall Switches to turn lights on and off based on occupancy. The sensor mounts on the ceiling and provides 360° passive infrared coverage.

Features

- Self-powered extended range ceiling mount sensor.
- Photovoltaic panels power sensor; no batteries required.
- Ladder-free installation options.
- Transmitter for wireless communication with RF wall switches.
- Works with 1- and 2-relay RF wall switches.
- Adds energy code compliance without the need for rewiring.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
WIRELESS RF PIR OCCUPANCY SENSOR					
EOPC100	Wireless RF PIR Occupancy Sensor	N/A - Power Supplied by built in Photovoltaic Cells or Optional CR2032 Battery	N/A	1900 sq ft	White



EOPC100
Dimensions (inches)
4.92 x 3.43 x 1.26 (LWD)

Wireless RF Switches – EOSW101/EOSW111 & EOSW102/EOSW112

EOSW101 Series RF Wall Switches work with EOPC100 wireless occupancy sensors, and optional EORS101 and EOHR101 remote switches, to turn lights on and off based on occupancy. Models are available to control one or two switched legs in applications with or without neutral wires at the switch box.

Features

- Single and dual relay 120/277 VAC RF-enabled switches.
- Replace standard wall switches for energy code compliance without the need for rewiring.
- Receiver for wireless communication with RF occupancy sensors and remote switches.
- Default settings for most energy-efficient operating mode out of the box.
- Loads can be assigned to either button (dual relay switches).

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
RF WALL SWITCHES					
EOSW101I **EWS100W** **EOSW101B** **EOSW101G** **EOSW101LA**	Single Relay RF Wall Switch, no neutral	120/277 VAC 60Hz	Load 1: @ 120VAC, 15-800W or 1/6hp @ 277VAC, 30-1200W Load 2: @ 120VAC, 0-800W or 1/6hp @ 277VAC, 0-1200W	N/A	Ivory White Black Gray Light Almond
EOSW111I **EOSW111W** **EOSW111B** **EOSW111G** **EOSW111LA**	Dual Relay RF Wall Switch, no neutral	120/277 VAC 60Hz	Load 1: @ 120VAC, 15-800W or 1/6hp @ 277VAC, 30-1200W Load 2: @ 120VAC, 0-800W or 1/6hp @ 277VAC, 0-1200W	N/A	Ivory White Black Gray Light Almond
EOSW102I **EOSW102W** **EOSW102B** **EOSW102G** **EOSW102LA**	Single Relay RF Wall Switch, with neutral	120/277 VAC 60Hz	Loads 1 & 2: @ 120VAC, 0-800W or 1/6hp @ 277VAC, 0-1200W	N/A	Ivory White Black Gray Light Almond
EOSW112I **EOSW112W** **EOSW112B** **EOSW112G** **EOSW112LA**	Dual Relay RF Wall Switch, with neutral	120/277 VAC 60Hz	Loads 1 & 2: @ 120VAC, 0-800W or 1/6hp @ 277VAC, 0-1200W	N/A	Ivory White Black Gray Light Almond



EOSW101 EOSW102
Dimensions (inches)
4.15 x 1.75 x 1.31 (LWD)

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy/Vacancy Sensors Wireless Self-Powered RF Remotes

Wireless Sensors for challenging installs

Sometimes you can't just put a wired occupancy solution in place. That's where the Legrand RF wireless solutions come into play. Built on mature, reliable and sustainable technology, wireless sensors and switches make it easy and cost effective to manage energy, especially in existing buildings. Typical applications perfect for wireless RF solutions are historic buildings where wiring is not permissible; wood, plaster or drywall ceilings; and asbestos or other materials in the plenum with no conduit to support 3-way switching.

The solution consists of a Wireless RF Passive Infrared (PIR) Occupancy Sensor (batteries not required), RF Wall Switches, and in-wall and handheld self-powered RF remotes.

Wireless Wallbox Remotes EORS101/EORS102

EORS101 Series remote switches provide wireless remote control of lighting loads wired to EOSW101 Series RF Wall Switches. They do not require any electrical connections or batteries for operation. Models are available with one or two control buttons in a single-gang device.

Features

- Wireless 1- and 2-button wall switches.
- Mount in standard J-box.
- Provide multi-way control with no wiring or batteries.
- Transmitter for wireless communication with RF wall switches.
- Work with 1- and 2-relay RF wall switches.
- Radio transmission range up to 150°.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
RF SELF-POWERED RF REMOTE SWITCHES					
EORS101I	1-Button RF remote wall switch	Self-powered when switch is pressed	N/A	N/A	Ivory
EORS101W					White
EORS101B					Black
EORS101G					Gray
EORS101LA					Light Almond
EORS102I	2-Button RF Remote wall switch	Self-powered when switch is pressed	N/A	N/A	Ivory
EORS102W					White
EORS102B					Black
EORS102G					Gray
EORS102LA					Light Almond



EORS101 EORS102

Dimensions (inches)
4.14 x 1.69 x .75 (LWD)

Wireless Handheld Remotes EOHR101/EOHR102

EOHR101 Series handheld remotes provide wireless remote control of lighting loads wired to EOSW101 Series RF Wall Switches. They do not require any electrical connections or batteries for operation. Models are available with one or two control buttons.

Features

- Wireless 1- and 2-button handheld or wall mount switches.
- Provide multi-way control with no wiring or batteries.
- Transmitter for wireless communication with RF wall switches.
- Work with 1- and 2-relay RF wall switches.
- Radio transmission range up to 150°.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE	COLOR
RF SELF-POWERED RF HANDHELD REMOTE					
EOHR101I	1-Button RF remote wall switch	Self-powered when switch is pressed	N/A	N/A	Ivory
EOHR101W					White
EOHR101B					Black
EOHR101G					Gray
EOHR101LA					Light Almond
EOHR102I	2-Button RF Remote wall switch	Self-powered when switch is pressed	N/A	N/A	Ivory
EOHR102W					White
EOHR102B					Black
EOHR102G					Gray
EOHR102LA					Light Almond




EOHR101 EOHR102

Dimensions (inches)
4.72 x 1.97 x .87 (LWD)

All devices listed on this page conform to NEMA WD-1 and WD-6.


OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy Sensors Wall or Ceiling Mount Passive Infrared (PIR)




CX1051
CX105

Wide Angle
CX105




Dense Wide Angle Lens (Standard)

Hallway
CX1051



Long Range Lens (-1)



For best results, the bracket should be used in every installation to allow for greatest flexibility of adjustment. Brackets are included with each unit.

For best results, the bracket should be used in every installation to allow for greatest flexibility of adjustment. Brackets are included with each unit.


Features

- Detection Signature Analysis provides high immunity to RFI and EMI.
- 2 coverage patterns to choose from.
- Wall mount or ceiling mount.
- Adjustable sensitivity settings.
- Digital time delay from 15 seconds to 30 minutes.
- Dual-element, temperature-compensated pyroelectric sensor.
- LED occupancy detection indicator.
- Compatible with 120VAC or 277VAC, 60 Hz lighting systems.
- Class 2 low-voltage device.
- Positive detection indicator.
- cULus listed.
- 5-year warranty.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	CURRENT DRAW	COVERAGE	COLOR
WALL/CEILING MOUNT SENSORS					
CX105	Wide Angle PIR Occupancy Sensor	24VDC	8mA	Up to 2000 sq. ft.	White
CX1051	Long Range PIR Occupancy Sensor	24VDC	8mA	Up to 90 linear ft.	White
CX1053	Long Range PIR Occupancy Sensor	24VDC	8mA	Up to 120 linear ft.	White
CX1054	Long Range PIR Occupancy Sensor	24VDC	8mA	Up to 50 linear ft.	White


Reference Page E-21 for Power Packs.

CX1051




The key areas to cover well in hallways are entrances and corners.

CX105

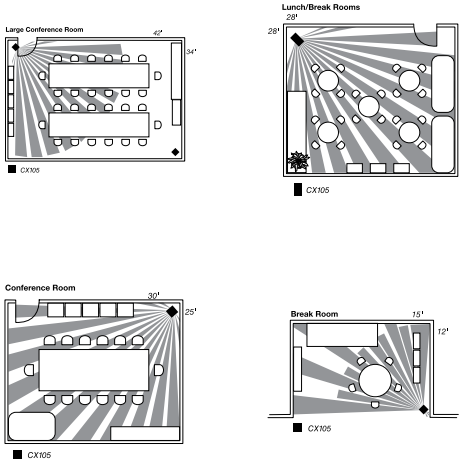

Wiring Diagram

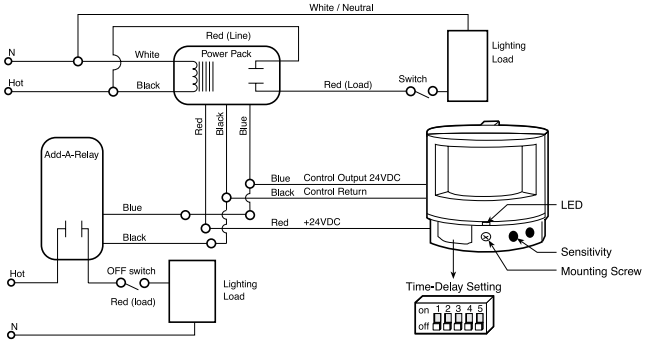

All devices listed on this page conform to NEMA WD-1 and WD-6.


OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy Sensors Ceiling Mount Passive Infrared (PIR)




CI2051
CI205


CI2051/CI205 Wiring



Mounting – CI205



CI355 Wiring




Features

- ASIC technology reduces components and enhances reliability.
- Pulse count processing eliminates false offs without reducing sensitivity.
- Detection signature analysis eliminates false triggers and provides immunity to RFI and EMI.
- Low-profile design ensures a clean and uncluttered ceiling appearance.
- User-adjustable time delay from 15 seconds to 30 minutes by two minute increments.
- Sensitivity is programmed through a DIP switch and has four settings from minimum to maximum.
- Dual-element, temperature compensated pyro-electric sensor.
- Mounting options: ceiling tile or 3.0 inch round mudring.
- Units per power pack: up to 13.
- cULus listed.
- 5-year warranty.


CATALOG NUMBER	DESCRIPTION	RATING	COVERAGE	OVERRIDE AND OUTPUT DISABLE	COLOR
LOW-PROFILE CEILING MOUNT SENSORS					
CI205	PIR Occupancy Sensor	24VDC Input, requires Power Pack 11mA	360°, 1200 sq. ft.	No	White
CI2051	PIR Occupancy Sensor		360°, 500 sq. ft.	No	White
CI355	PIR Occupancy Sensor	0-800W Ballast/Tungsten @ 120V 0-1200W Ballast @ 277V 0-1500W Ballast @ 347V	360°, 1200 sq. ft.	No	White
CI3551			360°, 500 sq. ft.	No	White
CI300	PIR Occupancy Sensor	24VDC, 20mA	360°, 1200 sq. ft.	No	White
CI3001	PIR Occupancy Sensor	24VDC, 20mA	360°, 500 sq. ft.	No	White
CI305	PIR Occupancy Sensor	24VDC, 9mA	360°, 1200 sq. ft.	No	White
CI3051	PIR Occupancy Sensor	24VDC, 9mA	360°, 500 sq. ft.	No	White

Reference Page E-21 for Power Packs.

Coverage

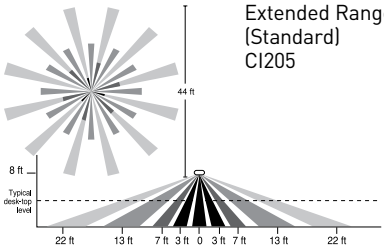

Extended Range Lens (Standard)
CI205



High Density Lens
CI2051

DIP Switch Settings

DIP Switch #	1	2	3	4	5	6
Time Delays						
15 seconds	●	●	●	●	●	●
2 minutes	-	-	●	●	●	●
4 minutes	-	●	-	●	●	●
6 minutes	-	-	-	●	●	●
8 minutes	-	●	●	-	●	●
10 minutes	-	-	●	-	●	●
12 minutes	-	●	-	-	●	●
14 minutes	-	-	-	-	●	●
16 minutes	-	●	●	●	-	●
18 minutes	-	-	●	●	-	●
► 20 minutes	-	●	-	●	-	●
22 minutes	-	-	-	●	-	●
24 minutes	-	●	●	-	-	●
26 minutes	-	-	●	-	-	●
28 minutes	-	●	-	-	-	●
30 minutes	-	-	-	-		●


DIP Switch #	7	8
Sensitivity		
Minimum	-	-
Medium Low	-	●
Medium High	●	-
► Maximum	●	●

●= ON - = OFF
►= Factory Presets


All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy Sensors Ultrasonic Ceiling Mount




WT605



WT1105
WT2205

WT605/WT1105/WT2205 Wiring

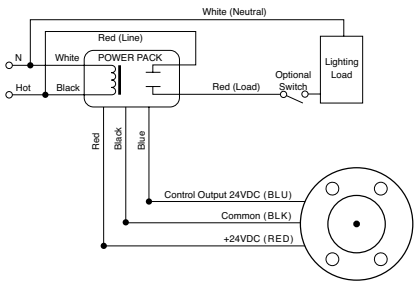


Features

- Advanced signal processing circuitry helps to eliminate false ONs.
- Utilizes advanced, omni-directional (360°), Doppler technology for reliable occupancy detection.
- Angled transmitter and receiver pairs help optimize sensitivity while eliminating unwanted detection from ceiling air movement.
- Digital DIP switch time delay (15 seconds to 30 minutes).
- LED indicates occupancy detection.
- Reliable solid-state construction.
- Temperature and humidity resistant 32 kHz receivers.
- Mounts to ceiling tiles or box.
- Units per power pack: up to 4.
- cULus listed.
- 5-year warranty.

CATALOG NUMBER	DESCRIPTION	RATING	COVERAGE	OVERRIDE AND OUTPUT DISABLE	COLOR
ULTRASONIC CEILING MOUNT SENSORS					
WT600	Ultrasonic Occupancy Sensor	24VDC input, requires a Power Pack, 37mA	180°, 600 sq. ft., One-sided	Yes	White
WT605	Ultrasonic Occupancy Sensor	24VDC input, requires Power Pack 27mA	360°, 500 sq. ft. One-sided	Yes	White
WT1100	Ultrasonic Occupancy Sensor	24VDC input, requires a Power Pack, 40mA	360°, 1100 sq. ft., Two-sided	Yes	White
WT1105	Ultrasonic Occupancy Sensor	24VDC input, requires Power Pack 30mA	360°, 1100 sq. ft. Two-sided	Yes	White
WT2200	Ultrasonic Occupancy Sensor	24VDC input, requires a Power Pack, 40mA	360°, 2200 sq. ft., Two-sided	Yes	White
WT2205	Ultrasonic Occupancy Sensor	24VDC input, requires Power Pack 30mA	360°, 2200 sq. ft. Two-sided	Yes	White
WT2250	Ultrasonic Occupancy Sensor	24VDC input, requires a Power Pack, 40mA	360°, 90 linear ft., Two-sided	Yes	White
WT2255	Ultrasonic Occupancy Sensor	24VDC input, requires a Power Pack, 30mA	360°, 90 linear ft., Two-sided	Yes	White


Reference Page E-21 for Power Packs.

Mounting

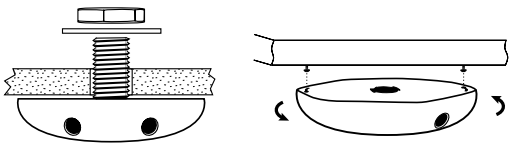

Attached to a vibration-free surface. Mount the sensors with the receivers facing the area of coverage. Note: Place 4' away from supply ducts, 6' from horizontal discharge ducts, and 6" from power packs.

Coverage

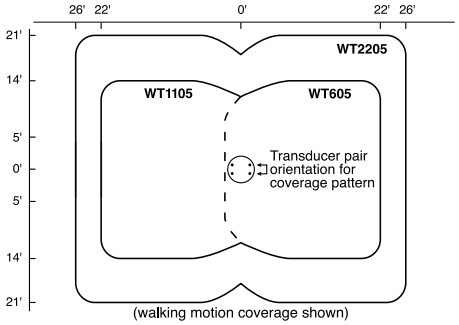

(walking motion coverage shown)

DIP Switch Settings


● =ON – =OFF	DIP Switch #					
Time Delay	**1**	**2**	**3**	**4**	**5**	**6**
15 seconds	●	–	–	–	–	–
2 minutes	–	●	–	–	–	–
4 minutes	–	–	●	–	–	–
6 minutes	–	●	●	–	–	–
8 minutes	–	–	–	●	–	–
10 minutes	–	●	–	●	–	–
12 minutes	–	–	●	●	–	–
14 minutes	–	●	●	●	–	–
*16 minutes	–	–	–	–	●	–
18 minutes	–	●	–	–	●	–
20 minutes	–	–	●	–	●	–
22 minutes	–	●	●	–	●	–
24 minutes	–	–	–	●	●	–
26 minutes	–	●	–	●	●	–
28 minutes	–	–	●	●	●	–
30 minutes	–	●	●	●	●	–
Output Disable	–	–	–	–	–	–
Override						●

* = factory preset

All devices listed on this page conform to NEMA WD-1 and WD-6.


OCCUPANCY/VACANCY SENSORS & TIMERS

Occupancy Sensors Dual Technology Ceiling Mount

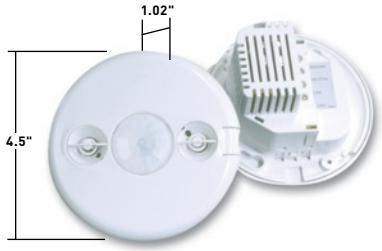


DT355

DT300 Wiring

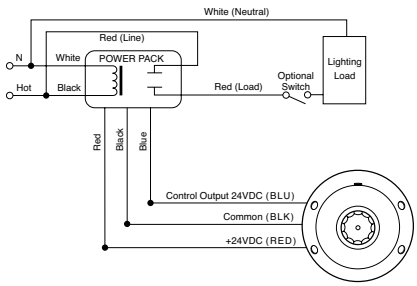

DT355 Wiring




Features

- Advanced control logic based on RISC microcontroller provides:
  - Detection signature processing eliminates false triggers and provides immunity to RFI and EMI.
- Walk-through mode turns lights off three minutes after the area is initially occupied – ideal for brief visits such as mail delivery.
- Simple, one-step setup.
- Ultrasonic diffusion technology spreads coverage to a wider area (patented).
- LEDs indicate occupancy detection.
- Four occupancy logic options give users the ability to customize control to meet application needs.
- Ultrasonic frequency of 40 kHz.
- Time delays: automatic, fixed (5, 10, 15, 20, or 30 minutes), walk-through, test-mode.
- Sensitivity adjustment: reduce sensitivity (for PIR sensitivity); ultrasonic sensitivity is variable with trimpot.
- Multi-level, 360° Fresnel lens for superior occupancy detection.
- Mounting options: ceiling tile; 4 square junction box with double gang mudring.
- Units per power pack: up to 4.
- cULus listed.
- 5-year warranty.


CATALOG NUMBER	DESCRIPTION	RATING	COVERAGE	OVERRIDE AND OUTPUT DISABLE	COLOR
LOW-PROFILE CEILING MOUNT SENSORS					
DT300	Dual Technology Occupancy Sensor	24VDC input, requires Power Pack 43mA	360°, 1000 sq. ft. Two-sided	Yes	White
DT300U*	Dual Technology Occupancy Sensor	24VDC input, requires Power Pack, 43mA	360°, 1000 sq. ft.	Yes	White
DT305	Dual Technology Occupancy Sensor	24VDC input, requires Power Pack, 35mA	360°, 1000 sq. ft.	Yes	White
DT305U*	Dual Technology Occupancy Sensor	24VDC input, requires Power Pack, 35mA	360°, 1000 sq. ft.	Yes	White
DT355	Dual Technology Occupancy Sensor	0-800W Ballast/Tungsten @ 120V 0-1200W Ballast @ 277V, 0-1500W Ballast @ 347V	360°, 1000 sq. ft.	Yes	White
DT355U*	Dual Technology Occupancy Sensor	0-800W Ballast/Tungsten @ 120V 0-1200W Ballast @ 277V, 0-1500W Ballast @ 347V	360°, 1000 sq. ft.	Yes	White


Reference Page E-21 for Power Packs. *BAA compliant.

Coverage



Mounting





DIP Switch Settings

PIR Sensitivity	Switch # 1
Minimum 30%	▬
Maximum 100%	● ◀

◀ = Factory Setting
● = ON
▬ = OFF

Occupancy Logic	Trigger	Initial Occupancy	Maintain Occupancy	Re-trigger	Switch # 2	3
	Standard	Both	Either	Either	▬	▬ ◀
	Option 1	Either	Either	Either	▬	●
	Option 2	PIR	Either	Either	●	▬
	Option 3	Both	Both	Both	●	●

Time Delay	Switch # 4	5	6	7
15 sec	●	●	●	●
2 min	▬	●	●	●
4 min	●	▬	●	●
6 min	▬	▬	●	●
8 min	●	●	▬	●
10 min	▬	●	▬	●
12 min	●	▬	▬	●
14 min	▬	▬	▬	●
16 min	●	●	●	▬
18 min ◀	▬	●	●	▬
20 min	●	▬	●	▬
22 min	▬	▬	●	▬
24 min	●	●	▬	▬
26 min	▬	●	▬	▬
28 min	●	▬	▬	▬
30 min	▬	▬	▬	▬

Override	Switch # 8
On	●
Off ◀	▬

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

High Bay Passive Infrared (PIR), Line Voltage Occupancy Sensors



HBP112L7



HB350WL3

Features


- Integrated occupancy sensor and lens device.
- Multiple mounting options for easy installation.
- Line voltage for directconnection to load.
- Lens choices for mounting between 20-40 feet.
- cULus listed.
- 5-year warranty.

HB350WL* Only


- IP65 rated for wet locations.

CATALOG NUMBER	DESCRIPTION	VOLTAGE	LOAD	COVERAGE
DRY LOCATION HIGH BAY SENSORS				
HBP112L7	High/Low Bay PIR Sensor 120/230/277/347 VAC with lens LOADS: Tungsten, Electronic and Magnetic Ballasts, Fluorescent and LED	120 VAC 50/60 Hz 230 VAC 50/60 Hz 277 VAC 50/60 Hz 347 VAC 50/60 Hz	0-1000VA, 1/4hp 0-1000VA 0-1200VA, 1/4hp 0-1500VA, 1/4hp	Can be mounted 15 ft. to 40 ft. high. 100-foot diameter at 40 ft. Aisleway masking lens included.
HBP111L7	High/Low Bay PIR Sensor 120/230/277/347 VAC with lens LOADS: Tungsten, Electronic and Magnetic Ballasts, Fluorescent and LED IR Remote Capability	120 VAC 50/60 Hz 230 VAC 50/60 Hz 277 VAC 50/60 Hz 347 VAC 50/60 Hz	0-1000VA, 1/4hp 0-1000VA 0-1200VA, 1/4hp 0-1500VA, 1/4hp	Can be mounted 15 ft. to 40 ft. high. 100-foot diameter at 40 ft. Aisleway masking lens included.
WET LOCATION HIGH BAY SENSORS				
HB350WL3	For 20' mounting heights	120/277 VAC, 60 Hz	0-800W Ballast/Tungsten 1/6 HP @ 120V	40 ft. diameter @ 20 ft. mounting height

HBP111L7/HBP112L7 Lens Coverage

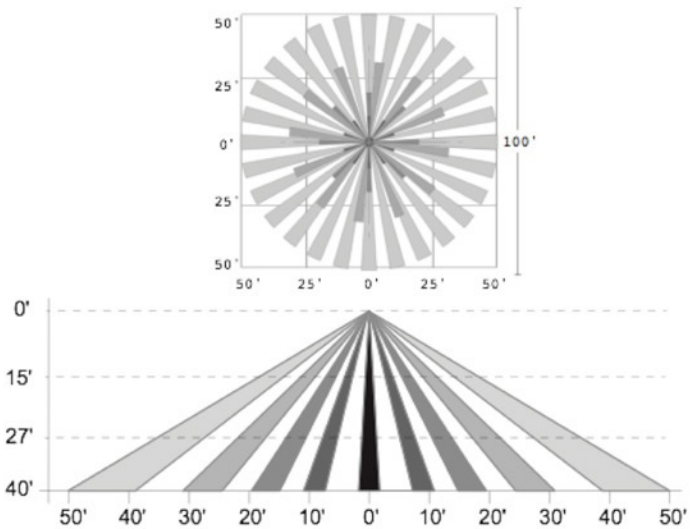

Standard Coverage

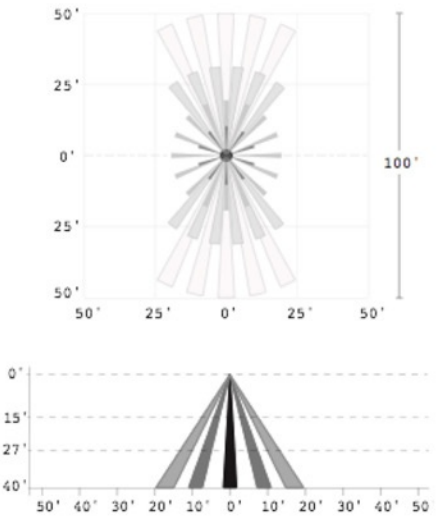


Side View with Masking Lens

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Power Packs & Auxiliary Relay Packs



BZ50

A cost-effective way to power Wattstopper® occupancy sensors.

Wattstopper universal voltage power packs consist of a transformer and high-current relay in one small unit. In addition to a primary high input, power packs have a secondary output of 24VDC, 114mA which provides operating power to sensors. Upon sensing motion or insufficient light, sensors electrically close an internal circuit and send 24VDC back to the power packs or auxiliary relay packs that control lighting systems.

Features

- Efficient switching power supply provides optimized current output based on number of sensors.
- Essential to ceiling mount sensor systems.
- Self-contained power supply relay system.
- UL 2043 plenum rated for cost-effective installation.
- UL-rated 94 V0 plastic enclosure.
- 1/2" snap-in nipple attaches to standard electrical enclosures through 1/2" knockouts.
- LED indicates status of relay or low-voltage overcurrent.
- Secondary voltage: 24VDC; Secondary output: 225mA.
- Easy-to-install.
- cULus listed.
- 5-year warranty.

CATALOG NUMBER	DESCRIPTION	INPUT VOLTAGE	LOAD RATINGS			OUTPUT
			BALLAST (A)	INCAN. (A)	MOTOR (HP)	
BZ50 **BZ50U***	Universal Voltage Power Pack Automatic On/Off	120/277 VAC	20	20	1 (120/250VAC rated)	24 VDC; 225mA with relay connected
BZ50RC	Universal Voltage Power Pack Hold-On, Hold-Off	120/277 VAC	20	20	1 (120/250VAC rated)	24 VDC; 225mA with relay connected
BZ150 **BZ150U***	Universal Voltage Power Pack, Automatic or Manual On/Off, Hold-On, Hold-Off	120/277 VAC	20	20	1 (120/250VAC rated)	24 VDC; 225mA with relay connected
S120277347EP	Auxiliary Relay Pack	120/277/347 VAC	20/20/15	13/-/-	1/-/-	–


CATALOG NUMBER	DESCRIPTION	INPUT VOLTAGE	LOAD RATINGS			PLUG LOAD	INPUT
			BALLAST / ELV/ MLV/INC/LED	E-BALLAST CFL	MOTOR (HP)		
BZ200	Universal Voltage Power Pack, Auto On/Off; rated for lighting or plug loads; load On/Off button	120/277 VAC	20	16	1 (120/250VAC rated)	20A	24 VDC; 225mA with relay connected
BZ250	Universal Voltage Power Pack, Auto or Manual On/Off, Hold-On, Hold-Off; rated for lighting or plug loads; load On/Off button	120/277 VAC	20	16		20A	24 VDC; 225mA with relay connected

Constructed with environmentally friendly materials and is RoHS-compliant.
*BAA compliant.


Installation

Power packs should be installed in accordance with state, local, and national electrical codes. They are designed to attach to electrical enclosures with 1/2 inch knockouts. In plenum ceilings, power packs should be installed in approved electrical enclosures. Most applications require UL listed, 18-22 AWG, 3-conductor, class 2 cable for low-voltage wiring. For plenum rated ceilings use UL listed plenum-approved cables.


J-Box Installation

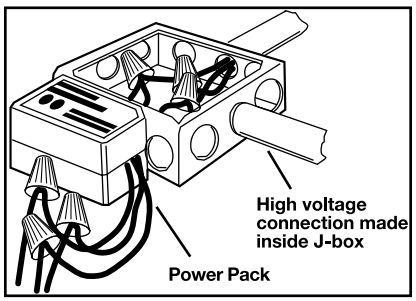


Power Pack Schematics

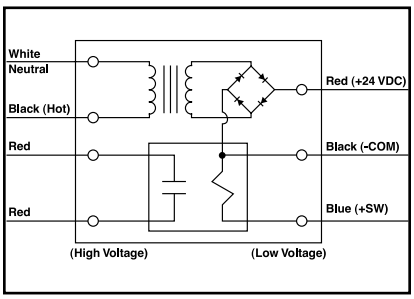

Ceiling Sensor with Power Pack

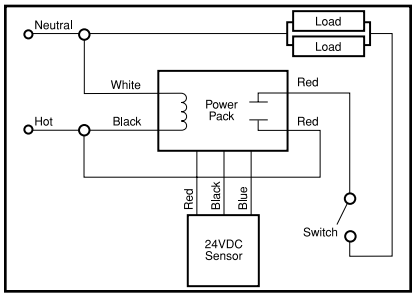

Sensor Schematic with Auxiliary Relay Pack

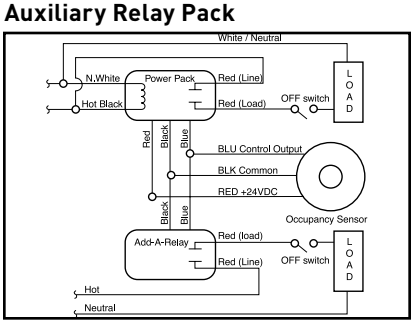

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Useful Calculations

Examples of savings and payback

EXAMPLE 1

Large office using a CX100 Passive Infrared Sensor

Six 88-watt, 3-lamp fixtures = 0.528 kW x $0.086/kWh* = $0.04541/hr
Savings = 35 hours per week
Total hours saved = 1,820 hrs/yr
Annual Savings = $82.65; 5 Year Savings = $413.23
Total estimated cost including power pack: (Product and Labor) = $140.00
Payback = 20.33 months
ROI = $82.65 ÷ $140.00 = 59.03%

EXAMPLE 2

Individual office using a CI2051 PIR Ceiling Sensor

Three 88-watt, 3-lamp fixtures = 0.264 kW x $0.086/kWh* = $0.02270/hr
Savings = 50 hours per week
Total hours saved = 2,600 hrs/yr
Annual Savings = $59.02; 5 Year Savings = $295.10
Total estimated cost: (Product and Labor) = $54.00
Payback = 10.98 months
ROI = $59.02 ÷ $54.00 = 109.30%

Restroom using a WT1105 Ultrasonic Occupancy Sensor

Four 88-watt, 3-lamp fixtures = 0.352 kW x $0.086/kWh* = $0.03027/hr
Savings = 75 hours per week
Total hours saved = 3,900 hrs/yr
Annual Savings = $118.05; 5 Year Savings = $590.27
Total estimated cost: (Product and Labor) = $160.00
Payback = 16.26 months
ROI = $118.05 ÷ $160.00 = 73.78%

*Based on 2004 US Government National average cost.

Multi-Sensor Installation

For applications requiring more than one sensor, **the load per power pack should not exceed 225mA.** Use the following table to calculate the maximum number of sensors per power pack.

CX1051	CI2051/205	CX100	WT605	WT1105/2205	S120/277/347EP	DT300
8mA	11mA	8mA	27mA	30mA	36mA	35mA

Examples:

2 x WT1105 (30mA) = 60mA ✔
This is an acceptable load because it is less than 150mA.


4 x WT1105 (30mA) + 1 x S120/277/347EP(36mA) = 156mA ✗
This is **not** an acceptable load because it is greater than 150mA.

All devices listed on this page conform to NEMA WD-1 and WD-6.

OCCUPANCY/VACANCY SENSORS & TIMERS

Timers

the radiant® collection



RT50




RT2

Features


- Five- or seven-button preset time switch.
- Manual ON/OFF.
- Adjustable time delay: 1, 5, 10, 20, 30, 60 minutes for RT50; 10, 20, 40, 60 minutes for RT2.
- Lighted switch for visibility in darkened rooms.
- Controls most types of lighting.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

CATALOG NUMBER	DESCRIPTION	RATING	LOAD	TIME-RUNNING-OUT WARNING	COLOR
DIGITAL TIMERS					
RT50I **RT50W** **RT50B** **RT50LA**	7-Button Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	No	Ivory White Black Light Almond
RT2I **RT2W** **RT2BK** **RT2LA**	radiant® 5-Button Timer	0-600W, 1/6 hp @120VAC, 60 Hz	All	Visual Countdown	Ivory White Black Light Almond

RT50 Wiring

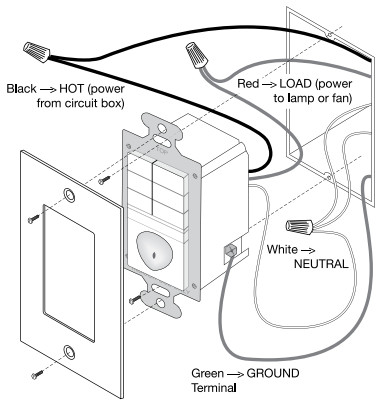

Product Controls



Six time selection buttons with activation indicator lights


ON/OFF Button

RT50

All devices listed on this page conform to NEMA WD-1 and WD-6.


OCCUPANCY/VACANCY SENSORS & TIMERS

Timers




RT100LA

RT100 Wiring

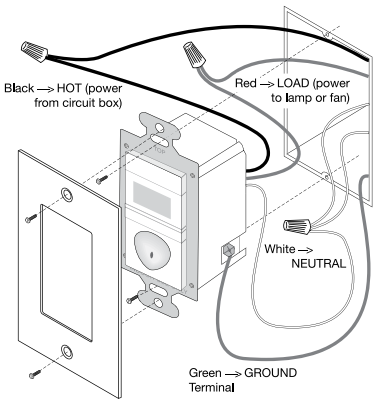

Product Controls



RT100

Features

- Programmable countdown time switch.
- Manual ON/OFF.
- Digital countdown display.
- Adjustable time delay from 5-55 minutes (five-minute increments) to 1-12 hours (15-minute increments).
- Audible beep and visible light flash warnings before automatic-OFF.
- Lighted switch for visibility in darkened rooms.
- Works with most common lighting types.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp

CATALOG NUMBER	DESCRIPTION	RATING	LOAD	TIME-RUNNING-OUT WARNING	COLOR
DIGITAL TIMERS					
RT100I	12-Button Digital Timer, Neutral required	0-600W, 1/6 hp @ 120VAC 60 Hz	All	Yes	Ivory
RT100W				Yes	White
RT100B				Yes	Black
RT100LA				Yes	Light Almond

Features

- Manual or programmed ON/OFF switching.
- Real time clock with day/date calendar.
- Easy to read LED display.
- Programming buttons accessible without removing wall plate.
- Eight programs can be assigned to any day or combination of days of the week.
- Automatically calculates sunrise and sunset times based on latitude and longitude.
- Audible or visual occupant warning before OFF.
- Power failure memory.
- Zero crossing circuitry.
- cULus listed.
- 5-year warranty.
- Load: Incandescent, fluorescent, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage (ELV), 1/6 hp



RT200W shown with Optional Plate

CATALOG NUMBER	DESCRIPTION	RATING	LOAD	TIME-RUNNING-OUT WARNING	COLOR
ASTRONOMIC PROGRAMMABLE TIMERS					
RT200I	24-Hour Programmable Timer	0-800W @ 120V 0-1200W @ 277V 1/6 hp @ 120/277V	All	Yes	Ivory
RT200W				Yes	White
RT200B				Yes	Black
RT200LA				Yes	Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

DIMMERS & FAN SPEED CONTROLS





DIMMERS & FAN SPEED CONTROLS

RESIDENTIAL/COMMERCIAL

radiant® Multi-Location Dimmers & Fan Speed Controls E-28

radiant® Incandescent & Low Voltage Dimmers E-29

radiant® Tru-Universal & CFL/LED Dimmers E-30

radiant® Fluorescent Dimmers & Fan Speed Controls E-31

DR Series Dimmers & Fan Speed Controls E-32

TradeMaster® Toggle Slide Dimmers & Fan Speed Controls E-33

TradeMaster Toggle Dimmers & Fan Speed Controls E-39

Rotary R Series Dimmers E-40

LS Series Dimmers E-41

LS Series CFL/LED/ Incandescent Dimmers E-42

LS Series Fan Speed Controls E-43

LS Series Dimmers & Accessories E-44

Wide Slide Dimmers & Fan Speed Controls E-45

Wide Slide Series CFL/LED/ Incandescent Dimmers E-46

COMMERCIAL

Titan Series Dimmers & Fan Speed Controls E-47

Titan Series Incandescent Dimmers E-48

Titan Series Magnetic Low-Voltage Dimmers & Adaptor Kit E-49

Titan Series Fluorescent 2 Wire Dimmers E-50

Titan Series Fluorescent 3 Wire Dimmers E-52

Titan Series Fluorescent/LED 4 Wire Dimmers E-53

Titan Series Fan Speed Controls E-54

REFERENCE TABLES

Product Selection Guide E-26

Catalog Numbering System E-27

TITLE 24 ENERGY SAVER

U.S. GREEN BUILDING COUNCIL MEMBER

DIMMERS & FAN SPEED CONTROLS

Product Selection Guide

Energy concerns have created directives in some states for lighting controls in new residential construction and major renovations. In an effort to reduce electrical power consumption, California has mandated one of the most stringent energy codes in the country. California Title 24 requires high efficacy luminaires, vacancy sensors, or dimmers to be placed in certain areas of the home. Other states are considering adopting similar mandates to answer their own energy concerns. Legrand has an extensive selection of vacancy sensor and dimmer solutions to address this growing industry trend.



radiant® Dimmers

- Part of the radiant collection.
- Combines ON/OFF paddle switch with separate slider for dimming control.
- No lost settings during power outages.

PAGES E-28 – E-31



radiant® Multi-Location Dimmers

- Part of the radiant collection.
- Multi-location dimming and fan speed control in up to 10 locations.
- Light levels fade elegantly up/down.
- Dim from multiple locations.

PAGE E-28



Wide Slide Dimmers

- Convenient operation — combines ON/OFF paddle switch with separate slider for dimming control.
- Sleek, ergonomic decorator-style matches other decorator-style devices.
- Interchangeable face plates allow homeowners to match or accent their decor.

PAGES E-45 – E-46



DR Series Rotary Dimmers

- Illuminated knob shows light level.
- Snap-in LED light modules make dimmers easy to find at night.
- Available for LED, Incandescent and low voltage lighting.

PAGE E-32



LS Series Slide Dimmers

- Smooth, ergonomic operation.
- Snap-in LED light modules make dimmers easy to find at night.
- Available in both preset and non-preset models.

PAGES E-41 – E-44



Rotary Dimmers

- Models for incandescent and low-voltage lights; preset and illuminated features available.
- Simple to operate.
- Available in both preset and non-preset models.

PAGE E-40



Toggle Slide Dimmers

- Convenient preset dimming control.
- Combines ON/OFF toggle with separate slider preset for dimming control.
- Matches appearance of toggle switches.

PAGES E-33 – E-38



Toggle Dimmers

- Match appearance of toggle switches.
- No loss of settings during power outages.
- Illuminated versions available.

PAGE E-39



Titan® Dimmers

- Included screwless wall plate components make it easy to assemble a custom multi-gang wall plate in any configuration, saving money and time.
- Preset models feature large ON/OFF button and single pole/three-way functionality.
- Exclusive adjustable limit control in incandescent dimmers saves energy and extends bulb life — reduces maximum output by up to 10 percent.
- Widest choice of amperage ratings with minimal or no de-rating for faster job planning.

PAGE E-47 – E-54

All devices listed on this page conform to NEMA WD-1 and WD-6.

DIMMERS & FAN SPEED CONTROLS

Catalog Numbering System



All Dimmers and Fan Speed Controls use an easy-to-understand catalog numbering system:

RH CL 453 P TC*

Control Type
- LS = Long Slide
- T = Toggle
- R = Rotary
- DR = Decorator Rotary
- RH = radiant
- WS = Wide Slide
- TSD = Toggle Slide
- CD = Titan

Load Type
- Blank = Incandescent
- FB = Fluorescent Ballast
- IR = Infrared Remote
- LV = Magnetic Low-Voltage
- ELV = Electronic Low-Voltage
- MC = Master Controller
- DC = Dual Dimmer/ De-Hummer Speed Control
- DV = Dimmer/Variable Speed Control
- DH = De-Hummer Fan Speed Control
- SC = Fan Speed Control
- CL = LED/CFL/Inc

Load Size
- 300 = 300 Watt
- 600 = 600 Watt/VA
- 603 = 600 Watt/VA, 3-Way
- 700 = 700 Watt
- 703 = 700 Watt 3-Way
- 1000 = 1000 Watt/VA
- 1003 = 1000 Watt/VA, 3-Way
- 1100 = 1100 Watt
- 1103 = 1100 Watt 3-Way
- 1600 = 1600 Watt
- 1603 = 1600 Watt 3-Way
- 2000 = 2000 Watt
- 2003 = 2000 Watt 3-Way
- 3 = 3 Amps
- 5 = 5 Amps
- 7 = 7 Amps
- 8 = 8 Amps
- 10 = 10 Amps
- 15 = 1.5 Amps
- 16 = 1.6 Amps or 16 Amps
- 25 = 2.5 Amps
- 450 = 450W LED/700W Inc
- 453 = 450W LED/700W Inc 3-Way

Options
- E = Electronic Preset
- L = Lighted
- M = Multi-Location
- P = Preset
- TU = Tru-Universal

Color
- BK = Black
- (Blank) = Brown
- CL = Clear
- GRY = Gray
- I = Ivory
- LA = Light Almond
- LC = Lighted Clear
- W = White
- TC = Tri-color

Package
- Blank = Box
- V = VisionPak™
- TK = Triple Knob

WS703PW = Wide Slide, Incandescent, 700W 3-Way, Preset in White
LS600LA = Decorator-style Long Slide Dimmer, Incandescent, 600W, Light Almond, in a Box
WSSC53PWV = Wide Slide, Fan Speed Control, 5 Amp, White, in a VisionPak

Many Dimmers & Fan Speed Controls are available boxed or VisionPak™ clam-shell packaging for high-impact merchandising.

Please see the Catalog Numbering System above or specific charts for ordering information.

All devices listed on this page conform to NEMA WD-1 and WD-6.


RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

radiant® Multi-Location Dimmers

the radiant® collection



HCL453PMM



HDH163PMMW

Features

- Part of the radiant® collection.
- Multi-location dimming compatible with 3-way wiring for simple installation
- Can be paired with up to nine remote dimmers (HMRTC/HMRW) for multi-way dimming.

Interchangeable Face Versions

- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White-only option also available.
- Interchangeable faces available in nine colors (sold separately, see below).

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
CFL/LED MULTI-LOCATION MASTER DIMMER			
HCL453PMMTC	Single Pole/3-Way with Preset, 3 Interchangeable Face Plates	120V, 60Hz, 25-450W, 700W Incandescent	Ivory, Light Almond, White
HCL453PMMW	Single Pole/3-Way with Preset		White
SINGLE POLE/3-WAY MULTI-LOCATION REMOTE DIMMER, SINGLE POLE/3-WAY, DEHUMMER, PRESET			
HMRTC	Single Pole/3-Way, 3 Interchangeable Face Plates	120V	Ivory, Light Almond, White
HMRW	Single Pole/3-Way		White
RADIANT® SINGLE POLE/3-WAY DE-HUMMER MULTI-LOCATION MASTER FAN SPEED CONTROL WITH PRESET			
HDH163PMMTC	3 Interchangeable Face Plates	120V, 1.6A	Ivory, Light Almond, White
HDH163PMMW			White
MULTI-LOCATION DIMMER INTERCHANGEABLE FACE PLATE, SINGLE POLE/3-WAY			
HMKITAB	Interchangeable Face Plates for Multi-Location Master Dimmers		Antique Brass
HMKITBK			Black
HMKIT			Brown
HMKITDB			Dark Bronze
HMKITGRY			Gray
HMKITI			Ivory
HMKITLA			Light Almond
HMKITNI			Nickel
HMKITW			White
MULTI-LOCATION DE-HUMMER FAN SPEED CONTROL INTERCHANGEABLE FACE PLATE			
HDHKITAB	Interchangeable Face Plates for Multi-Location Master Fan Speed Controls		Antique Brass
HDHKITBK			Black
HDHKIT			Brown
HDHKITDB			Dark Bronze
HDHKITGRY			Gray
HDHKITI			Ivory
HDHKITLA			Light Almond
HDHKITNI			Nickel
HDHKITW			White
MULTI-LOCATION REMOTE DIMMER INTERCHANGEABLE FACE PLATE			
HMRKITAB	Interchangeable Face Plates for Multi-Location Remote Dimmers		Antique Brass
HMRKITBK			Black
HMRKIT			Brown
HMRKITDB			Dark Bronze
HMRKITGRY			Gray
HMRKITI			Ivory
HMRKITLA			Light Almond
HMRKITNI			Nickel
HMRKITW			White


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

radiant® Incandescent and Low Voltage Dimmers




RH703P




RH1103P



RHLV703P



RHLV1103P



RHDH163PW

Features

- Part of the radiant® collection.
- Convenient operation – combines ON/OFF paddle switch with separate slider for dimming control.
- White LED glows when OFF to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Higher ratings.
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate back wire terminals save time, space and money.

RH703P, RHLV703P

- No de-rating.
- No fins to break.

Interchangeable Face Versions

- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White-only option also available.
- Interchangeable faces available in nine colors (sold separately, see below).

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
INCANDESCENT SINGLE POLE/3-WAY DIMMERS*			
RH703PW	Incandescent Preset, Single Pole and 3-Way	120V, 700W	White
RH1103PW	Incandescent Preset, Single Pole and 3-Way	120V, 1100W	White
INTERCHANGEABLE FACE INCANDESCENT SINGLE POLE/3-WAY DIMMERS			
RH703PTC	Incandescent Preset, Single Pole and 3-Way Three Interchangeable Face Colors	120V, 700W	Ivory/White/Light Almond
RH1103PTC	Incandescent Preset, Single Pole and 3-Way Three Interchangeable Face Colors	120V, 1100W	Ivory/White/Light Almond
MAGNETIC LOW VOLTAGE PRESET, SINGLE POLE/3-WAY			
RHLV703PTC	Preset, Single Pole/3-Way Three Interchangeable Face Colors	120V, 700VA	Ivory/White/Light Almond
RHLV703PW	Preset, Single Pole/3-Way		White
RHLV1103PTC	Preset, Single Pole/3-Way Three Interchangeable Face Colors	120V, 1100VA	Ivory/White/Light Almond
RHLV1103PW	Preset, Single Pole/3-Way		White
RADIANT® FAN SPEED CONTROLS, DE-HUMMER, SINGLE POLE/3-WAY**			
RHDH163PTC*	Preset, Single Pole/3-Way Three Interchangeable Face Colors	120V, 1.6A	Ivory/White/Light Almond
RHDH163PW	Preset, Single Pole/3-Way		White
INTERCHANGEABLE FACE COVERS†			
RHKITI	Interchangeable Face		Ivory
RHKITW			White
RHKIT			Brown
RHKITGRY			Gray
RHKITBK			Black
RHKITLA			Light Almond
RHKITDB			Dark Bronze
RHKITNI			Nickel
RHKITRED			Red

*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: RH1103PWCCV6.
**Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."
†Available in VisionPak™ packaging, add "BPCCV6" to Catalog Number. Example: RHKITIBPCCV6.

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

radiant® Tru-Universal and CFL/LED Dimmers


the radiant® collection



RH703PTU



RHCL453P



RH4FBL3P

The radiant® collection is a step up from the standard with simple, classic options in wiring devices, home automation controls, and screwless wall plates that complement today's homes and hospitality settings.

Features

radiant® Tru-Universal (RH703PTU)

- Part of the radiant collection.
- Self-Calibration feature allows users to select lamp type, which then automatically sets the minimum voltage for that lamp, eliminating flickering and poor performance.
- Works with every lamp and load.
- Preset, single pole and 3-way operation.
- Wider slide controller for easier dimming operation.
- Larger paddle switch that's easier to see and use.
- White LED glows when off to make dimmer easy to find in the dark.
- Sleek, modern design that matches today's styles.
- Interchangeable faces — Package comes with three colors: Ivory, White, Light Almond. Other face color kits available separately, see page E-29.

radiant CFL/LED Dimmer (RHCL453P)

- CFL/LED dimmable-bulb compatible (with the exception of 0-10V LED drivers).
- Adjustment dial allows users to adjust the bottom of the dimming range for a wide range of CFL and LED bulbs.
- No derating required in multi-gang applications.

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
TRU-UNIVERSAL DIMMER			
RH703PTUTC*	Tru-Universal, Preset, Single-Pole/3-Way Three Interchangeable Face Colors	120 VAC, 60 Hz Incandescent, Halogen & ELV: 700W MLV: 500VA LED/CFL: 450W EFL: 5.5A	Ivory/White/Light Almond
RH703PTUW	Tru-Universal, Preset, Single Pole/3-Way		White
CFL/LED DIMMERS			
RHCL453PTC	CFL/LED Single Pole and 3-Way, Preset Three Interchangeable Face Colors	120 VAC, 60 Hz, 450W CFL/LED; 700W Incandescent	Ivory/White/Light Almond
RHCL453PW	CFL/LED Single Pole and 3-Way, Preset		White
LED/FLUORESCENT PRESET, SINGLE POLE/3-WAY DIMMERS, 0-10V			
RH4FBL3PTC	Fluorescent Single Pole/3-Way Dimmer with Preset, 3 Interchangeable Face Colors	0-10V	Ivory/White/Light Almond
RH4FBL3PW	Fluorescent Single Pole/3-Way Dimmer with Preset	0-10V	White


*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: RH703PTUTCCCV6.

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

radiant® Fluorescent Dimmers & Fan Speed Controls

the radiant® collection



RHFB83P



RHDH163P

The radiant® collection is a step up from the standard with simple, classic options in wiring devices, home automation controls, and screwless wall plates that complement today's homes and hospitality settings.

Features

- Part of the radiant® collection.
- Convenient operation – combines ON/OFF paddle switch with separate slider for dimming control.
- White LED glows when OFF to make dimmer easy to find in the dark.
- Constant memory returns lights to previous level after a power failure.
- Higher ratings
- Single pole and 3-way operation.
- Works with standard 3-way switches and wiring.
- Screw-pressure-plate backwire terminals save time, space and money.

RHDH163P

- No de-rating.
- No fins to break.

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
FLUORESCENT PRESET, SINGLE POLE/3-WAY DIMMERS*			
RHFB83PTC	Preset, Single Pole/3-Way Three Interchangeable Face Colors	120V, 8A	Ivory/White/Light Almond
RHFB83PW	Preset, Single Pole/3-Way		White
FLUORESCENT PRESET, SINGLE POLE/3-WAY DIMMERS, 0-10V			
RH4FBL3PTC	Fluorescent Single Pole/3-Way Dimmer with Preset, 3 Interchangeable Face Colors	0-10V	Ivory/White/Light Almond
RH4FBL3PW	Fluorescent Single Pole/3-Way Dimmer with Preset	0-10V	White
FAN SPEED CONTROLS, DE-HUMMER, SINGLE POLE/3-WAY**			
RHDH163PTC†	Preset, Single Pole/3-Way Three Interchangeable Face Colors	120V, 1.6A	Ivory/White/Light Almond
RHDH163PW†	Preset, Single Pole/3-Way		White
CFL/LED SSL 7A PRESET DIMMERS, SINGLE POLE/3-WAY			
RHL743PTC	Preset, Single Pole/3-Way, Three Interchangeable Face Plates	450W CFL/LED, 120VAC, 60Hz	Ivory, Light Almond, White
RHL743PW	Preset, Single Pole/3-Way	450W CFL/LED, 120VAC, 60Hz	White
RHL373PTC	Preset, Single Pole/3-Way, Three Interchangeable Face Plates	450W CFL/LED, 120VAC, 60Hz	Ivory, Light Almond, White
RHL373PW	Preset, Single Pole/3-Way	450W CFL/LED, 120VAC, 60Hz	White


*For use with Advance MK10 dimming ballasts. See instruction sheet for complete list of compatible ballasts.
**Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."
†Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: RHDH163PTCCCV6.

DE-RATING CHART FOR RADIANT DIMMERS			
CATALOG NUMBER	MAXIMUM LOAD	MULTI-GANG DE-RATING	
		2 GANG	3 GANG
RH703P	700W	700W	700W
RH1103P	1100W	1100W	800W
RHLV703P	700VA	700VA	650VA
RHLV1103P	1100VA	950VA	700VA
RHFB83P	8A	8A	6.5A
RHDH163P	1.6A	1.6A	1.6A


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS


DR Series Dimmers & Fan Speed Controls



DR703PLAV



DR1103P



DRSC53PWV



Illuminated knob indicates light level.

Features

- Matches P&S Deco Combo devices.
- Accepts Snap-In Light Module (sold separately) to convert devices into illuminated-type in moments; makes devices easy to find in the dark. See Page E-44.
- Screw-pressure-plate backwiring speeds installation and ensures solid, high-quality electrical connections. Also supports traditional, wire-loop side wiring.
- Heavy-gauge black anodized aluminum strap provides superior heat management and structural strength for mounting against wall surfaces.
- Slim design leaves more room in the box and makes installation faster and easier.
- Higher ratings of 700 and 1100 watts.
- No de-rating of 700 watt devices.
- Single pole and 3-way in same device.

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
INCANDESCENT PRESET DIMMERS			
DR703PIV	Single Pole/3-Way Dimmer with Pilot Light	120V, 700W	Ivory
DR703PWV			White
DR703PV			Brown
DR703PBKV			Black
DR703PLAV			Light Almond
DR1103PIV	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100W	Ivory
DR1103PWV			White
DR1103PV			Brown
DR1103PBKV			Black
DR1103PLAV			Light Almond
CFL/LED 3-WAY PRESET DIMMERS			
DRCL453PBK	3-Way, Preset	120VAC, 60Hz, 450W	Black
DRCL453P			Brown
DRCL453PI			Ivory
DRCL453PLA			Light Almond
DRCL453PW			White
MAGNETIC LOW-VOLTAGE DIMMERS			
DRLV703PI	Single Pole/3-Way Dimmer with Pilot Light	120V, 700VA	Ivory
DRLV703PW			White
DRLV703P			Brown
DRLV703PBK			Black
DRLV703PLA			Light Almond
DRLV1103PI	Single Pole/3-Way Dimmer with Pilot Light	120V, 1100VA	Ivory
DRLV1103PW			White
DRLV1103P			Brown
DRLV1103PBK			Black
DRLV1103PLA			Light Almond

Available in VisionPak™ only.

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
CONTINUOUSLY VARIABLE PRESET FAN SPEED CONTROLS			
DRSC53PIV	Single Pole/3-Way Fan Speed Control	120V, 5A	Ivory
DRSC53PWV			White
DRSC53PV			Brown
DRSC53PBKV			Black
DRSC53PLAV			Light Almond
3-SPEED DE-HUMMER* PRESET FAN SPEED CONTROLS			
DRDH163PIV	Single Pole/3-Way Fan Speed Control with back-lit speed indication	120V, 1.6A	Ivory
DRDH163PWV			White
DRDH163PV			Brown
DRDH163PBKV			Black
DRDH163PLAV			Light Almond

* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

CATALOG NUMBER	MAXIMUM LOAD	MULTI-GANG DE-RATING	
		2 GANG	3 GANG
DE-RATING CHART FOR DR SERIES			
DR703	No De-Rating Required		
DR1103	1100W	900W	750W

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Slide Dimmers

TSDCL303PW
TradeMaster® Toggle Slide Dimmers

Matches appearance of standard P&S toggle switch.

All models Single Pole/3-Way capable.

Interchangeable face covers available in seven different colors.

Highest wattage rating.


Lifetime warranty.



TSDCL303PW

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
INCANDESCENT SINGLE POLE/3-WAY DIMMERS			
TSD703PI*	Preset, Single Pole/3-Way	120V, 700W	Ivory
TSD703PW*			White
TSD703P			Brown
TSD703PBK			Black
TSD703PLA*			Light Almond
TSD703PGRY			Gray
TSD703PRED			Red
TSD1103PI*	Preset, Single Pole/3-Way	120V, 1100W	Ivory
TSD1103PW*			White
TSD1103P			Brown
TSD1103PBK			Black
TSD1103PLA*			Light Almond
TSD1103PGRY			Gray
TSD1103PRED			Red
CFL/LED 3-WAY, PRESET DIMMERS			
TSDCL303PBK	3-Way, Preset	120VAC, 60Hz, 450W	Black
TSDCL303P			Brown
TSDCL303PI			Ivory
TSDCL303PLA			Light Almond
TSDCL303PW			White
TSDCL303PGRY			Gray
TSDCL303PRED			Red

*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: TSD703PICCV6.



TSD1103PW
700W versions are 1.75" W


MAX. LOAD RATING	FINS REMOVED	
	ONE SIDE	TWO SIDE
DE-RATING CHART		
1000W	800W	700W

Note: Each side removed reduces plate size by 3/8".


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Slide Dimmers & Fan Speed Controls



TSDLV1103PW




TSDLV703PW


CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
MAGNETIC LOW-VOLTAGE SINGLE POLE/3-WAY DIMMERS			
TSDLV703PI	Preset, Single Pole/3-Way	120V, 700VA	Ivory
TSDLV703PW			White
TSDLV703P			Brown
TSDLV703PBK			Black
TSDLV703PLA			Light Almond
TSDLV703PGRY			Gray
TSDLV703PRED			Red
TSDLV1103PI	Preset, Single Pole/3-Way	120V, 1100VA	Ivory
TSDLV1103PW			White
TSDLV1103P			Brown
TSDLV1103PBK			Black
TSDLV1103PLA			Light Almond
TSDLV1103PGRY			Gray
TSDLV1103PRED			Red
FLUORESCENT SINGLE POLE/3-WAY DIMMERS*			
TSDFB83PI	Two Wire Fluorescent Single Pole/3-Way	120V, 8A	Ivory
TSDFB83PW			White
TSDFB83P			Brown
TSDFB83PBK			Black
TSDFB83PLA			Light Almond
TSDFB83PGRY			Gray
TSDFB83PRED			Red
DE-HUMMER FAN SPEED CONTROLS**			
TSDDH163PI	De-Hummer Fan Speed Control	120V, 1.6A	Ivory
TSDDH163PW			White
TSDDH163P			Brown
TSDDH163PBK			Black
TSDDH163PLA			Light Almond
TSDDH163PGRY			Gray
TSDDH163PRED			Red

* For use with Advance MK10 dimming ballasts. See instruction sheet for complete list of compatible ballasts.

**Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

Wiring Diagrams

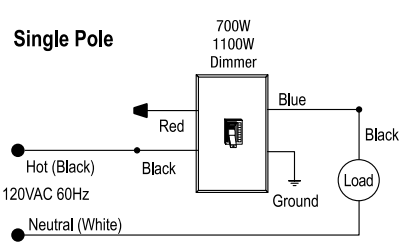


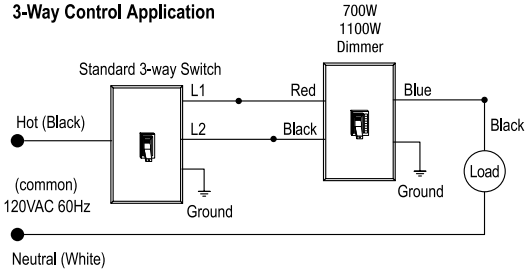

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Slide Tru-Universal Dimmers




TSD703PTUTC

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
MAGNETIC LOW-VOLTAGE SINGLE POLE/3-WAY, PRESET DIMMERS			
TSD703PTUTC	Tru-Universal® Single Pole/ 3-Way, Preset	700W Incandescent, Halogen & ELV; 500VA MLV; 450W CFL/LED; 5.5A EFL	Three interchangeable face colors: Ivory, Light Almond, White
TSD703PTU	Tru-Universal® Single Pole/ 3-Way, Preset	700W Incandescent, Halogen & ELV; 500VA MLV; 450W CFL/LED; 5.5A EFL	Brown
TSD703PTUBK			Black
TSD703PTUGRY			Gray
TSD703PTUI			Ivory
TSD703PTULA			Light Almond
TSD703PTURED			Red
TSD703PTUW			White

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Fluorescent Dimmers




TSD4FBL3PTC

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
MAGNETIC LOW-VOLTAGE FLUORESCENT SINGLE POLE/3-WAY, PRESET			
TSD4FBL3PTC	Fluorescent Single Pole/ 3-Way, Preset	120V 10A / 277V 5A LED (0-10V, 4-wire, fluorescent dimming of drivers and ballasts)	Three interchangeable face colors: Ivory, Light Almond, White
TSD4FBL3P	Fluorescent Single Pole/ 3-Way, Preset	120V 10A / 277V 5A LED (0-10V, 4-wire, fluorescent dimming of drivers and ballasts)	Brown
TSD4FBL3PBK			Black
TSD4FBL3PGRY			Gray
TSD4FBL3PI			Ivory
TSD4FBL3PLA			Light Almond
TSD4FBL3PRED			Red
TSD4FBL3PW			White

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Slide SSL7A Compliant Dimmers



TSDSSL7APTC

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
MAGNETIC LOW-VOLTAGE SSL7A COMPLIANT SINGLE POLE/3-WAY, PRESET			
TSDSSL7APTC	SSL7A Compliant Single Pole/3-Way, Preset	300W CFL/LED; 700W Incandescent & Halogen	Three interchangeable face colors: Ivory, Light Almond, White
TSDSSL7PA	SSL7A Compliant Single Pole/3-Way, Preset	300W CFL/LED; 700W Incandescent & Halogen	Brown
TSDSSL7APBK			Black
TSDSSL7APGRY			Gray
TSDSSL7API			Ivory
TSDSSL7APLA			Light Almond
TSDSSL7APRED			Red
TSDSSL7APW			White

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Slide Dimmer Interchangeable Face Plates




TSDKITW

CATALOG NUMBER	DESCRIPTION	COLOR
TOGGLE SLIDE DIMMER INTERCHANGEABLE FACE PLATES		
TSDKIT	Interchangeable Face Plate	Brown
TSDKITBK		Black
TSDKITGRY		Gray
TSDKITI		Ivory
TSDKITLA		Light Almond
TSDKITRED		Red
TSDKITW		White

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

TradeMaster® Toggle Dimmers & Fan Speed Controls



T600I
TSC5I

Features

- Tough impact-resistant thermoplastic housing.
- Power-failure memory.
- Superior heat management: no time wasting break off tabs.
- Exclusive, screw-pressure-plate back wire terminals eliminates wire nuts.

CATALOG NUMBER		DESCRIPTION	RATINGS	COLOR
SINGLE POLE	THREE-WAY			
600W INCANDESCENT TOGGLE DIMMERS				
T600I*	T603I**	Non-Preset	120V 600W	Ivory
T600W*	T603W**			White
T600*	T603**			Brown
T600LA*	T603LA**			Light Almond
600W INCANDESCENT – LIGHTED TOGGLE DIMMERS*				
T600LI	T603LI	Non-Preset	120V 600W	Ivory
T600LW	T603LW			White
T600LLA	T603LLA			Light Almond
1000W INCANDESCENT TOGGLE DIMMERS				
T1000I*	T1003I**	Non-Preset	120V 1000W	Ivory
T1000W*	T1003W**			White
T1000*	T1003**			Brown
T1000LA*	T1003LA**			Light Almond
1000W INCANDESCENT – LIGHTED TOGGLE DIMMERS**				
T1000LI	T1003LI	Non-Preset	120V 1000W	Ivory
T1000LW	T1003LW			White
T1000LLA	T1003LLA			Light Almond
600VA LOW-VOLTAGE MAGNETIC TOGGLE DIMMERS*				
TLV600I	TLV603I	Non-Preset	120V 600VA	Ivory
TLV600W	TLV603W			White
TLV600LA	TLV603LA			Light Almond
1000VA LOW-VOLTAGE MAGNETIC TOGGLE DIMMERS**				
TLV1000I	TLV1003I	Non-Preset	120V 1000VA	Ivory
TLV1000W	TLV1003W			White
TLV1000LA	TLV1003LA			Light Almond
TOGGLE FAN SPEED CONTROLS*				
TSC5I	—	Non-Preset, Adjustable Trim	120V 5A	Ivory
TSC5W				White
TSC5LA				Light Almond

* Available in VisionPak™ packaging, add "V" to Catalog Number. Example: T600LAV.
**Available in boxed packaging only.

MAX. LOAD RATING	GANG REDUCTION 2 CONTROLS	GANG REDUCTION 3+ CONTROLS
DE-RATING CHART		
5A	4A	3A

MAX. LOAD RATING	GANG REDUCTION 2 DIMMERS	GANG REDUCTION 3+ DIMMERS
DE-RATING CHART		
600W	500W	400W
1000W	700W	650W

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL DIMMERS & FAN SPEED CONTROLS

Rotary R Series Dimmers



R600PWV



R1000WV


Features

- Slimmer design – the trimmest rotary dimmers, 1/4" less depth than the leading competitor's models.
- Easy-to-grip knob with soft, contemporary curves goes with any décor. Interchangeable with older-style knobs.
- Excellent RFI/EMI filtering performance – won't impact sensitive electronic devices.
- Pre-stripped leads speed termination.
- No de-rating of 600 watt models in multi-gang applications.
- Leaves more room in the box for faster, easier installation.
- Makes small adjustments in lighting levels easier.
- Illuminated models are easy to find in the dark.

CATALOG NUMBER		DESCRIPTION	RATINGS	COLOR
SINGLE POLE	THREE-WAY			
600W INCANDESCENT RFI ROTARY DIMMERS				
R600IV R600WV R600LAV		Non-Preset	120V 600W	Ivory White Light Almond
R600PIV R600PWV R600PLAV	R603PIV R603PWV R603PLAV	Preset	120V 600W	Ivory White Light Almond
1000W INCANDESCENT RFI ROTARY DIMMERS				
R1000IV R1000WV R1000LAV		Non-Preset	120V 1000W	Ivory White Light Almond
R1000PIV R1000PWV R1000PLAV	R1003PIV R1003PWV R1003PLAV	Preset	120V 1000W	Ivory White Light Almond

Available in VisionPak™ only.

Rotary Dimmer 3-Way Wiring Diagram

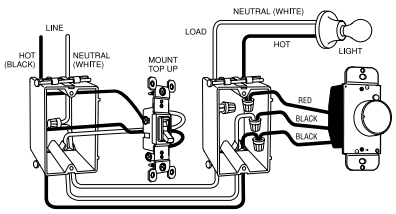

CATALOG NUMBER	DESCRIPTION	COLOR
ROTARY REPLACEMENT KNOBS		
RRKIV RRKWV RRKLAV	Plain Replacement Knob	Ivory White Light Almond
RRKCLGV RRKIGV RRKWGV RRKLAGV	Deluxe Replacement Knob	Clear Ivory White Light Almond

CATALOG NUMBER	MAXIMUM LOAD	MULTI-GANG DE-RATING	
		2 GANG	3 GANG
DE-RATING CHART FOR R SERIES			
R600, R600P	600W	No De-Rating Required	
R1000	1000W	750W	700W
R1000P	1000W	900W	800W
R1003P	1000W	900W	800W


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS


LS Series Dimmers



LS600



LS600P



LS1000P

CATALOG NUMBER		DESCRIPTION	RATINGS	COLOR
SINGLE POLE	THREE-WAY			
600W INCANDESCENT SLIDE DIMMERS*				
LS600I		Non-Preset	120V, 600W max.	Ivory
LS600W				White
LS600				Brown
LS600BK				Black
LS600LA				Light Almond
LS600PI	LS603PI	Preset	120V, 600W max.	Ivory
LS600PW	LS603PW			White
LS600P	LS603P			Brown
LS600PBK	LS603PBK			Black
LS600PLA	LS603PLA			Light Almond
1000W INCANDESCENT SLIDE DIMMERS*				
LS1000I		Non-Preset	120V, 1000W max.	Ivory
LS1000W				White
LS1000				Brown
LS1000BK				Black
LS1000LA				Light Almond
LS1000PI	LS1003PI	Preset	120V, 1000W max.	Ivory
LS1000PW	LS1003PW			White
LS1000P	LS1003P			Brown
LS1000PBK	LS1003PBK			Black
LS1000PLA	LS1003PLA			Light Almond
600VA MAGNETIC LOW-VOLTAGE SLIDE DIMMERS**				
LSLV600I		Non-Preset	120V, 600VA max.	Ivory
LSLV600W				White
LSLV600				Brown
LSLV600BK				Black
LSLV600LA				Light Almond
LSLV600PI	LSLV603PI	Preset	120V, 600VA max.	Ivory
LSLV600PW	LSLV603PW			White
LSLV600P	LSLV603P			Brown
LSLV600PBK	LSLV603PBK			Black
LSLV600PLA	LSLV603PLA			Light Almond

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LS600IV.
**Available in boxed packaging only.

Features


- Ergonomic design and solid, quality feel combine for smooth, easy operation and precise control.
- Electromagnetic and radio-frequency interference protection built in.
- Sleek, sculpted contemporary design. No dirt-catching crevices.
- Tough, impact-resistant thermoplastic housing makes it a perfect choice for new home construction. Matching, unbreakable TradeMaster® wall plate available for all models.
- Preset ON/OFF switch automatically returns controlled lights to preset level without readjusting dimmer setting.
- Exclusive, screw-pressure-plate back wire terminals save time, space and money. Designed for 12 and 14 gauge wire, stranded or solid. No-wire-lead design eliminates wire nuts.
- Superior heat management.
- No de-rating on 600W units.
- Patented Snap-In Light Module (sold separately) transforms the dimmer into an illuminated dimmer. See Page E-44 for information.

	FINS REMOVED	
MAX. LOAD RATING	ONE SIDE	TWO SIDE
DE-RATING CHART		
LS600, LS603	No De-Rating Required	
LS1000P, LS1003P	900W	750W
LS1000	850W	700W


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS


LS Series CFL/LED/Incandescent Dimmers



LSCL450



LSCL453P



LSCLDC163P

Features


- CFL/LED dimmable bulb compatible (except for 0-10V LED drivers).
- Single pole/3-way versions.
- Unique integrated single pole/3-way dimmer with fan speed control.
- 450W CFL/LED rated.

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
CFL/LED SINGLE POLE, NON-PRESET DIMMERS			
LSCL450BK	Single Pole, Non-Preset	120VAC, 60Hz, 450W	Black
LSCL450			Brown
LSCL450I			Ivory
LSCL450LA			Light Almond
LSCL450W			White
CFL/LED 3-WAY, PRESET DIMMERS			
LSCL453PBK	3-Way, Preset	120VAC, 60Hz, 450W	Black
LSCL453P			Brown
LSCL453PI			Ivory
LSCL453PLA			Light Almond
LSCL453PW			White
SINGLE POLE /3-WAY PRESET DIMMER WITH SINGLE POLE/3-WAY 3-SPEED DE-HUMMER FAN CONTROL			
LSCLDC163PBK	Single Pole/3-Way Preset Dimmer With Single Pole/3-Way 3-Speed De-Hummer Fan Control	1.6A, 300W (Fan Control); 120VAC, 60Hz, 450W (Dimmer)	Black
LSCLDC163P			Brown
LSCLDC163PI			Ivory
LSCLDC163PLA			Light Almond
LSCLDC163PW			White


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

LS Series Fan Speed Controls



LSDC16*V



LSDC163P*V

Features

- Tough impact-resistant thermoplastic housing.
- Power-failure memory.
- Superior heat management: no time wasting break off tabs.
- Exclusive, screw-pressure-plate back wire terminals eliminates wire nuts.
- Can be used with patented Snap-In Light Module (sold separately).

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
SLIDE FAN SPEED CONTROLS*			
LSSC5I	Non-Preset, Single Pole, Adjustable Trim	5A	Ivory
LSSC5W			White
LSSC5			Brown
LSSC5BK			Black
LSSC5LA			Light Almond
LSSC5PI	Preset, Single Pole, Adjustable Trim	5A	Ivory
LSSC5PW			White
LSSC5P			Brown
LSSC5PBK			Black
LSSC5PLA			Light Almond
SLIDE DE-HUMMER CONTROLS**			
LSDH16IV	Non-Preset, 4-Speed Fan Control	1.6A	Ivory
LSDH16WV			White
LSDH16V			Brown
LSDH16BKV			Black
LSDH16LAV			Light Almond
DUAL CONTROL SLIDES**			
LSDC16IV	Non-Preset, 3-Speed De-Hummer Fan Control With Single Pole Dimmer	1.6A/300W	Ivory
LSDC16WV			White
LSDC16V			Brown
LSDC16BKV			Black
LSDC16LAV			Light Almond
LSDC163PIV	Preset, Single Pole/3-Way 3-Speed De-Hummer Fan Control with Single Pole/3 Way Dimmer	1.6A/300W	Ivory
LSDC163PWV			White
LSDC163PV			Brown
LSDC163PBKV			Black
LSDC163PLAV			Light Almond
LSDV25IV	Non-Preset, Variable Speed Fan Control With Single Pole Dimmer	2.5A/300W	Ivory
LSDV25WV			White
LSDV25V			Brown
LSDV25BKV			Black
LSDV25LAV			Light Almond
SINGLE POLE /3-WAY PRESET DIMMER WITH SINGLE POLE/3-WAY 3-SPEED DE-HUMMER FAN CONTROL			
LSCLDC163PBK	Single Pole/3-Way Preset Dimmer With Single Pole/3-Way 3-Speed De-Hummer Fan Control	1.6A, 300W (Fan Control); 120VAC, 60Hz, 450W (Dimmer)	Black
LSCLDC163P			Brown
LSCLDC163PI			Ivory
LSCLDC163PLA			Light Almond
LSCLDC163PW			White

*Available in VisionPak™ packaging, add "V" to Catalog Number. Example: LSSC5IV.
**Available in VisionPak™ only.
Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

LS Series Dimmers



LSDS300PV



LSDD300



TM8LMCC8

CATALOG NUMBER	DESCRIPTION	RATINGS		COLOR
		DIMMER	SWITCH	
SINGLE POLE/3-WAY PRESET DIMMERS & SWITCHES				
LSDS300PIV	Single Pole/3-Way Preset Dimmer and Independent Single Pole/3-Way Switch	120V 300W	7A general purpose resistive and ballast, 1/4 hp 900W tungsten	Ivory
LSDS300PWV				White
LSDS300PV				Brown
LSDS300PBKV				Black
LSDS300PLAV				Light Almond
DUAL SLIDE TO OFF SINGLE POLE DIMMERS				
LSDD300I	Dual Slide to OFF Single Pole Dimmers	120V 300W	—	Ivory
LSDD300W				White
LSDD300				Brown
LSDD300BK				Black
LSDD300LA				Light Almond

CATALOG NUMBER	MAXIMUM LOAD	MULTI-GANG DE-RATING	
		2 GANG	3 GANG
DE-RATING CHART			
LSDS300	300W	300W	300W
LSDD300	300W	300W	300W

Features

- No tool needed, module snaps-in.
- Lights when OFF.
- Uses energy-efficient 1/4 watt LED light.
- LED light will not generate heat and will last on average 47 years.


CATALOG NUMBER	RATING		COLOR
	A.	VAC	
SNAP-IN LIGHT MODULE			
TM8LMCC8	15	120/125	Clear

CATALOG NUMBER	DESCRIPTION	COLOR
ACCESSORIES FOR		
LRKIV	Replacement Knobs for LS Series Dual Slides	Ivory
LRKWV		White
LRKV		Brown
LRKBKV		Black
LRKLAV		Light Almond
LLRKIV	Large Replacement Knobs for LS Series Single Slides	Ivory
LLRKWV		White
LLRKV		Brown
LLRKBKV		Black
LLRKLAV		Light Almond


All devices listed on this page conform to NEMA WD-1 and WD-6.

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Wide Slide Series



WS700TC
WSLV700TC



Preset Models

Shown with the Three Interchangeable Faces
All 1100W versions are 2.50" W

Features

- Convenient operation – combines ON/OFF paddle switch with separate slider for dimming control.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic decorator-style matches other decorator-style devices.
- Higher ratings.
- Single pole and 3-way operation.
- Screw-pressure-plate back wire terminals save time, space and money.
- 700W maximum rated dimmers can be ganged without de-rating.
- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (W).
- Interchangeable faces available in four colors (sold separately, see below).

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
INTERCHANGEABLE FACE INCANDESCENT DIMMERS			
WS700TC*	Single Pole, Slide to OFF, 3 Face Colors	120V, 700W	Ivory/White/Lt. Almond
WS700W	White Face Only	120V, 700W	White
WS703PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 700W	Ivory/White/Lt. Almond
WS703PW	White Face Only	120V, 700W	White
WS1100TC*	Single Pole, Slide to OFF, 3 Face Colors	120V, 1100W	Ivory/White/Lt. Almond
WS1100W	White Face Only	120V, 1100W	White
WS1103PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 1100W	Ivory/White/Lt. Almond
WS1103PW	White Face Only	120V, 1100W	White
INTERCHANGEABLE FACE MAGNETIC LOW-VOLTAGE DIMMERS			
WSLV700TC*	Single Pole, Slide to OFF, 3 Face Colors	120V, 700VA	Ivory/White/Lt. Almond
WSLV700W	White Face Only	120V, 700VA	White
WSLV703PTC*	Preset, Single Pole/3-Way, 3 Face Colors	120V, 700VA	Ivory/White/Lt. Almond
WSLV703PW	White Face Only	120V, 700VA	White
INTERCHANGEABLE FACE FAN SPEED CONTROLS			
WSSC53PTC*	Preset, Variable Speed, 3 Face Colors	120V, 5A	Ivory/White/Lt. Almond
WSSC53PW	White Face Only	120V, 5A	White
WIDE SLIDE DE-HUMMER† FAN SPEED CONTROLS			
WSDH16TC	De-Hummer Fan Speed Control	120V, 1.6A	Ivory/White/Lt. Almond
WSDH16W			White
INTERCHANGEABLE FACE COVERS**			
WSKITI	Wide Slide Interchangeable Face		Ivory
WSKIT			Brown
WSKITBK			Black
WSKITLA			Light Almond
WSKITPI	Preset Wide Slide Interchangeable Face		Ivory
WSKITP			Brown
WSKITPBK			Black
WSKITPLA			Light Almond
WSKITPRED			Red
WSKITPGRY			Gray

*Available in VisionPak™ packaging, add "CCV6" to Catalog Number. Example: WS700TCCCV6.
**Available in VisionPak™ packaging, add "BPCC6" to Catalog Number. Example: WSKITIBPCC6.
†Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."


All devices listed on this page conform to NEMA WD-1 and WD-6.

MAX. LOAD RATING	FINS REMOVED	
	ONE SIDE	TWO SIDE
DE-RATING CHART		
1000W	800W	700W
1000VA	800VA	700VA

Note: Each side removed reduces plate size by 3/8".

RESIDENTIAL & LIGHT COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Wide Slide Series CFL/LED/Incandescent Dimmers

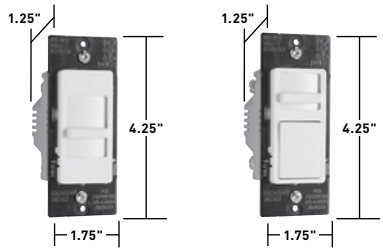

WSCL450 **WSCL453P**

Features

- Convenient operation – combines ON/OFF paddle switch with separate slider for dimming control.
- Constant memory returns lights to previous level after a power failure.
- Sleek, ergonomic decorator-style matches other decorator-style devices.
- Higher ratings.
- Single pole and 3-way operation.
- Screw-pressure-plate back wire terminals save time, space and money.
- 450W maximum rated dimmers can be ganged without de-rating.
- Designed for CFL/LED and incandescent dimmers.
- Package comes with three face colors – Ivory, White, Light Almond (TC).
- White only option also available (W).
- Interchangeable faces available in four colors (sold separately, see below).

CATALOG NUMBER	DESCRIPTION	RATINGS	COLOR
SINGLE POLE, NON-PRESET CFL/LED SLIDE DIMMERS			
WSCL450TC	Single Pole, Non-Preset, 3 Interchangeable Face Plates	120VAC, 60Hz, 450W	Ivory, Light Almond, White
WSCL450W	Single Pole, Non-Preset		White
SINGLE POLE/3-WAY, PRESET CFL/LED SLIDE DIMMERS			
WSCL453PTC	Single Pole/3-Way, Preset, 3 Interchangeable Face Plates	120VAC, 60Hz, 450W	Ivory, Light Almond, White
WSCL453PW	Single Pole/3-Way, Preset		White
SINGLE POLE/3-WAY, NON-PRESET CFL/LED SLIDE DIMMERS			
WSCL453TC	Single Pole/3-Way, Non-Preset, 3 Interchangeable Face Plates	120VAC, 60Hz, 450W	Ivory, Light Almond, White
WSCL453W	Single Pole/3-Way, Non-Preset		White
FLUORESCENT SINGLE POLE/3-WAY DIMMER WITH PRESET			
WS4FBL3PTC	Fluorescent Single Pole/3-Way Dimmer with Preset, 3 Interchangeable Face Plates	0-10V	Ivory, Light Almond, White
WS4FBL3PW	Fluorescent Single Pole/3-Way Dimmer with Preset		White

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Dimmers & Fan Speed Controls



CD703PW
Titan Commercial Dimmers

A. **Exclusive labeling system has a built-in label holder** enabling instant circuit identification; looks clean and professional.

B. **Included end-caps and spacers** screw directly to heat sinks; center plate snaps easily on and off.

C. **Enclosed slider** helps prevent dust and dirt contamination.

D. **Exclusive adjustable limit control in incandescent dimmers saves energy** and extends bulb life — reduces maximum output by up to 10 percent.

E. **Air-gap switch**

F. **Improved heat management** enables superior load ratings.

Included screwless wall plate components make it easy to assemble a custom multi-gang wall plate in any configuration — saving money and time.

Preset models feature large ON/OFF button and single pole/three-way functionality.


High-reliability design with built-in surge and static protection plus oversize output devices to stand up to abuse.

Power-failure memory retains presets through power outages.


Widest choice of amperage ratings with minimal or no de-rating for faster job planning.

A complete solution for easy, economical multi-gang installations.

The Wattstopper Titan® Series dimmers have key features designed to increase installer productivity. Each comes with all the screwless wall plate components necessary for single gang or multi-gang installations. No need to order any additional components such as long-lead time custom wall plates to finish the job. Complete the installation with everything right out of the box, increasing productivity by finishing up in one visit instead of several.

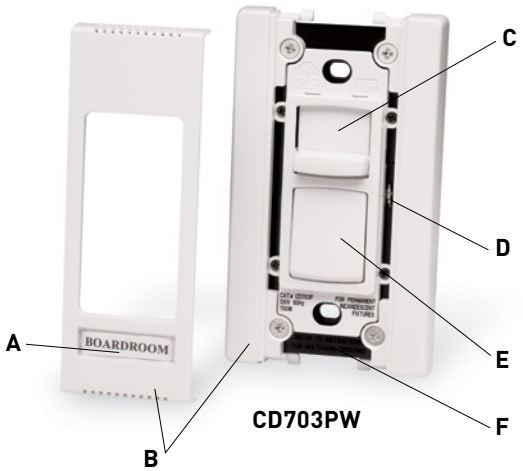

CD703PW



CDADAPTORKITW




Adaptor kit enables matching installation of standard P&S Decorator-Style Devices – outlets, switches, GFCIs and more. See page E-49 for ordering information.


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Incandescent Dimmers




CD703PW - Narrow



CD1100W - Narrow



CD1603PW - Wide



CD2003PW - Wide

CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
INCANDESCENT				
CD700I **CD700W** **CD700** **CD700GRY** **CD700BK** **CD700LA**	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD703PI **CD703PW** **CD703P** **CD703PGRY** **CD703PBK** **CD703PLA**	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CD1100I **CD1100W** **CD1100** **CD1100GRY** **CD1100BK** **CD1100LA**	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1103PI **CD1103PW** **CD1103P** **CD1103PGRY** **CD1103PBK** **CD1103PLA**	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CD1600I **CD1600W** **CD1600** **CD1600GRY** **CD1600BK** **CD1600LA**	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD1603PI **CD1603PW** **CD1603P** **CD1603PGRY** **CD1603PBK** **CD1603PLA**	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CD2000I **CD2000W** **CD2000** **CD2000GRY** **CD2000BK** **CD2000LA**	Single Pole, Slide-to-OFF	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond
CD2003PI **CD2003PW** **CD2003P** **CD2003PGRY** **CD2003PBK** **CD2003PLA**	Single Pole/3-Way, Preset	120V, 2000W	Wide	Ivory White Brown Gray Black Light Almond


Features

- Field configurable wall plate system.
- Labeling system.
- Adjustable top end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system. (See Page E-49.)
- Blank center plate included.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Magnetic Low-Voltage Dimmers & Adaptor Kit



CDLV700W - Narrow




CDLV1103PW - Wide

CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
MAGNETIC LOW-VOLTAGE				
CDLV700I CDLV700W CDLV700 CDLV700GRY CDLV700BK CDLV700LA	Single Pole, Slide-to-OFF	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV703PI CDLV703PW CDLV703P CDLV703PGRY CDLV703PBK CDLV703PLA	Single Pole/3-Way, Preset	120V, 700W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1100I CDLV1100W CDLV1100 CDLV1100GRY CDLV1100BK CDLV1100LA	Single Pole, Slide-to-OFF	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1103PI CDLV1103PW CDLV1103P CDLV1103PGRY CDLV1103PBK CDLV1103PLA	Single Pole/3-Way, Preset	120V, 1100W	Narrow	Ivory White Brown Gray Black Light Almond
CDLV1600I CDLV1600W CDLV1600 CDLV1600GRY CDLV1600BK CDLV1600LA	Single Pole, Slide-to-OFF	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
CDLV1603PI CDLV1603PW CDLV1603P CDLV1603PGRY CDLV1603PBK CDLV1603PLA	Single Pole/3-Way, Preset	120V, 1600W	Wide	Ivory White Brown Gray Black Light Almond
ADAPTOR KIT				
CDADAPTORKITI CDADAPTORKITW CDADAPTORKIT CDADAPTORKITGRY CDADAPTORKITBK CDADAPTORKITLA	Decorator-Style Device Adaptor Kit		Narrow	Ivory White Brown Gray Black Light Almond

Features

- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system.
- Blank center plate included.




CDADAPTORKITW

Adaptor kit enables matching installation of standard P&S decorator-style Devices – outlets, switches, GFCIs and more.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Fluorescent 2-Wire Dimmers



CDFB5W - Narrow

Features


- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system. (See Page E-49.)
- Blank center plate included.

CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
FLUORESCENT				
CDFB5I **CDFB5W** **CDFB5** **CDFB5GRY** **CDFB5BK** **CDFB5LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB8I **CDFB8W** **CDFB8** **CDFB8GRY** **CDFB8BK** **CDFB8LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB10I **CDFB10W** **CDFB10** **CDFB10GRY** **CDFB10BK** **CDFB10LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB16I **CDFB16W** **CDFB16** **CDFB16GRY** **CDFB16BK** **CDFB16LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB7277I **CDFB7277W** **CDFB7277** **CDFB7277GRY** **CDFB7277BK** **CDFB7277LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB10277I **CDFB10277W** **CDFB10277** **CDFB10277GRY** **CDFB10277BK** **CDFB10277LA**	2 Wire, Electronic, Single Pole, Slide-to-OFF	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Fluorescent 2-Wire Dimmers



CDFB53PW - Narrow



CDFB103PW - Wide

Features


- For use with 2 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system. (See Page E-49.)
- Blank center plate included.

CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
FLUORESCENT				
CDFB53PI CDFB53PW CDFB53P CDFB53PGRY CDFB53PBK CDFB53PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	5A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB83PI CDFB83PW CDFB83P CDFB83PGRY CDFB83PBK CDFB83PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	8A, 120V	Narrow	Ivory White Brown Gray Black Light Almond
CDFB103PI CDFB103PW CDFB103P CDFB103PGRY CDFB103PBK CDFB103PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB163PI CDFB163PW CDFB163P CDFB163PGRY CDFB163PBK CDFB163PLA	2 Wire, Electronic, Single Pole/3-Way, Preset	16A, 120V	Wide	Ivory White Brown Gray Black Light Almond
CDFB73P277I CDFB73P277W CDFB73P277 CDFB73P277GRY CDFB73P277BK CDFB73P277LA	2 Wire, Electronic, Single Pole/3-Way, Preset	7A, 277V	Wide	Ivory White Brown Gray Black Light Almond
CDFB103P277I CDFB103P277W CDFB103P277 CDFB103P277GRY CDFB103P277BK CDFB103P277LA	2 Wire, Electronic, Single Pole/3-Way, Preset	10A, 277V	Wide	Ivory White Brown Gray Black Light Almond

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Fluorescent 3-Wire Dimmers



CD3FB163PW - Narrow

Features


- For use with 3 wire 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system. (See Page E-49.)
- Blank center plate included.

CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
FLUORESCENT				
CD3FB16I	3 Wire Electronic, Single Pole, Slide-to-OFF	120V, 16A	Narrow	Ivory
CD3FB16W				White
CD3FB16				Brown
CD3FB16GRY				Gray
CD3FB16BK				Black
CD3FB16LA				Light Almond
CD3FB163PI	3 Wire Electronic, Single Pole/3-Way, Preset	120V, 16A	Narrow	Ivory
CD3FB163PW				White
CD3FB163P				Brown
CD3FB163PGRY				Gray
CD3FB163PBK				Black
CD3FB163PLA				Light Almond
CD3FB10277I	3 Wire Electronic, Single Pole, Slide-to-OFF	277V, 10A	Narrow	Ivory
CD3FB10277W				White
CD3FB10277				Brown
CD3FB10277GRY				Gray
CD3FB10277BK				Black
CD3FB10277LA				Light Almond
CD3FB103P277I	3 Wire Electronic, Single Pole/3-Way, Preset	277V, 10A	Narrow	Ivory
CD3FB103P277W				White
CD3FB103P277				Brown
CD3FB103P277GRY				Gray
CD3FB103P277BK				Black
CD3FB103P277LA				Light Almond


All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL DIMMERS & FAN SPEED CONTROLS

Titan® Series Fluorescent/LED 4-Wire Dimmers



CD4FB3PW - Narrow



CD4FBLW

Features

- For use with 0-10V, 4 wire or 120V and 277V fluorescent dimming ballasts.
- Field configurable wall plate system.
- Labeling system.
- Adjustable low end output voltage.
- Shipped with protective film.
- Rugged construction.
- Superior ratings with a minimum of de-rating when ganged.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF and single pole/3-way preset models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system. (See Page E-49.)
- Blank center plate included.


CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
FLUORESCENT				
CD4FBI	Single Pole, Slide-to-OFF	24VDC	Narrow	Ivory
CD4FBW				White
CD4FB				Brown
CD4FBGRY				Gray
CD4FBBK				Black
CD4FBLA				Light Almond
CD4FB3PI	Single Pole/3-Way, Preset	24VDC	Narrow	Ivory
CD4FB3PW				White
CD4FB3P				Brown
CD4FB3PGRY				Gray
CD4FB3PBK				Black
CD4FB3PLA				Light Almond
BZ50	Power pack for switching load	24VDC	—	
LED 4-WIRE				
CD4FBLI	Single Pole, Slide-to-OFF	0-10V	Narrow	Ivory
CD4FBLW				White
CD4FBL				Brown
CD4FBLGRY				Gray
CD4FBLBK				Black
CD4FBLLA				Light Almond
CD4FBL3PI	Single Pole/3-Way Preset	0-10V	Narrow	Ivory
CD4FBL3PW				White
CD4FBL3P				Brown
CD4FBL3PGRY				Gray
CD4FBL3PBK				Black
CD4FBL3PLA				Light Almond

Red available made to order.

All devices listed on this page conform to NEMA WD-1 and WD-6.

COMMERCIAL FAN SPEED CONTROLS

Titan® Series Fan Speed Controls



CDSC6W
Narrow

Features

- Field configurable wall plate system.
- Labeling system.
- Shipped with protective film.
- Rugged construction.
- Simple to plan the rough-in.
- Available in single pole slide-to-OFF models.
- Attractive European styling.
- Eye-catching packaging.
- Exclusive adaptor kit to install other decorator-style opening devices under the Titan® wall plate system. (See Page E-49.)
- Available in both continuously variable and de-hummer styles.
- Blank center plate included.

CATALOG NUMBER	DESCRIPTION	RATINGS	NARROW OR WIDE	COLOR
FAN SPEED CONTROLS				
CDSC6I	Continuously Variable Speed Fan Speed Control	120V, 6A	Narrow	Ivory
CDSC6W				White
CDSC6				Brown
CDSC6GRY				Gray
CDSC6BK				Black
CDSC6LA				Light Almond
CDSC12I	Continuously Variable Speed Fan Speed Control	120V, 12A	Wide	Ivory
CDSC12W				White
CDSC12				Brown
CDSC12GRY				Gray
CDSC12BK				Black
CDSC12LA				Light Almond
CDDH16I	De-Hummer*, 4 Speed Low/Low-Mid/High-Mid/High Fan Speed Control	120V, 1.6A	Narrow	Ivory
CDDH16W				White
CDDH16				Brown
CDDH16GRY				Gray
CDDH16BK				Black
CDDH16LA				Light Almond

* Feature specially designed capacitive circuitry to virtually eliminate fan motor "hum."

SMART LIGHTING



As the world leader in electrical switches and outlets, Legrand Smart Lighting solutions fit every lifestyle, application or project.

With advanced capabilities including voice and app control, scheduling, and compatibility with leading smart products, Legrand smart lighting solutions deliver the safety, comfort, and convenience your family requires.



SMART LIGHTING

Smart Switch	F-2
Smart Tru-Universal Dimmer	F-2
Smart Plug-In Switch	F-2
Smart Plug-In Tru-Universal Dimmer	F-2
Smart Plug-In Outdoor GFCI	F-2
Smart Lighting Ordering Information	F-3

SMART LIGHTING

the radiant® collection



Control lights and power from anywhere

The easy-to-install connected home is here. Put the power of a smarter home technology to work for your clients with simple, scalable solutions that provide control of lights from any smart device, anywhere.

Features & Benefits

- Control lights from smart phones and tablets with the Smart Lights app
- Schedule lights on/off automatically, group lights, and create scenes
- Know your home is secure, even when you're away
- Just ask Amazon Alexa or the Google Assistant to turn lights on
- Out-of-the-box connectivity with OCF certification
- Easy installation
- Works with existing home Wi-Fi

A SMART SWITCH | WWRL10*CCV2
Easily replace standard switches with the Smart Switch to allow convenient control of lights – from anywhere.
Bonus: works with any 3-way switch

B SMART TRU-UNIVERSAL DIMMER | WWRL50*CCV2
The Smart Tru-Universal Dimmer works with any 120V dimmable bulb for perfect dimming – every time.
Bonus: works with HMR Multi-location dimmer

C SMART PLUG-IN SWITCH | WWP10CCV2
Simply plug in to allow wireless on/off control with no installation required.

D SMART PLUG-IN TRU-UNIVERSAL DIMMER | WWP20CCV2
Simply plug in to allow wireless dimming with patented Tru-Universal technology that works with all 120V dimmable bulbs.

E SMART PLUG-IN OUTDOOR GFCI | WWP30CCV2**
Wirelessly control outdoor outlets by simply plugging in, with GFCI protection for safety outdoors.

**Estimated availability 2H 2019




Estimated availability 2H 2019




WORKS WITH alexa
works with the Google Assistant
Download on the App Store
GET IT ON Google Play
Wi Fi CERTIFIED

SMART LIGHTING


the radiant® collection

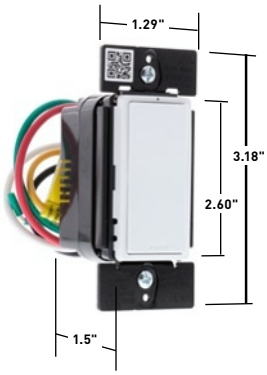


WWRL10WHCCV2

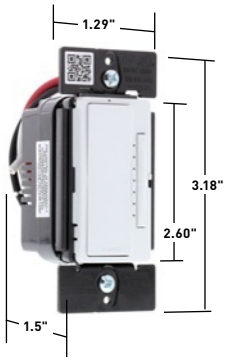

WWRL50WHCCV2



HMRW



WWP10CCV2 & WWP20CCV2

- Works with iOS and Android smart phones for control while at home or halfway around the world
- Schedule lights on/off automatically, group lights, and create scenes
- White locator light glows when device is off for easy location in the dark
- Works with Alexa and Google voice assistants

CATALOG NUMBER		DESCRIPTION	RATINGS	COLOR
WI-FI TRU UNIVERSAL IN-WALL DIMMER				
WWRL50WHCCV2 **WWRL50LACCV2** **WWRL50NICCV2**	3-Way, Preset	FWD: 700W Inc/ELV 4.5A EFL/CFL/LED 500VA MLV REV: 450W Inc/ELV 2.1A EFL/CFL/LED	120VAC, 60Hz	White Light Almond Nickel
MULTI-LOCATION DIMMER FOR USE WITH WWRL50				
HMRTC **HMRW**	Multi-Location Remote	Up to 50' from WWRL50 smart dimmer	120VAC, 60Hz	White, Light Almond, Ivory White
MULTI-LOCATION DIMMER COLOR KITS				
HMRKITWH **HMRKITLA** **HMRKITNI**		Multi-Location Remote Interchangeable Face Plate		White Light Almond Nickel
WI-FI IN-WALL SWITCH				
WWRL10WHCCV2 **WWRL10LACCV2** **WWRL10NICCV2**	3-Way, Preset (works with any 3-Way switch)	Incandescent / Halogen 1800W, Ballast 15A Standard / Electronic, LED 5A, 1/2 HP motor	120VAC, 60Hz	White Light Almond Nickel
WI-FI PLUG-IN TRU UNIVERSAL DIMMER				
WWP20CCV2	Indoor Plug-In Module	FWD – 1A LED/CFL, 300 VA MLV FWD – 300W Inc/Halogen/ELV FWD REV – 300W Inc/Halogen/ELV	120VAC, 60Hz	White
WI-FI PLUG-IN SWITCH				
WWP10CCV2	Indoor Plug-In Module	Incandescent / Halogen 1800W, Ballast 15A Standard/Electronic, LED 5A, 1/2 HP motor	120VAC, 60Hz	White
WI-FI PLUG-IN OUTDOOR GFCI				
WWP30CCV2	Indoor/Outdoor Plug-In Module	Incandescent / Halogen 1800W, Ballast 15A Standard/Electronic, LED 5A, 1/2 HP motor	120VAC, 60Hz	Black


MAX. LOAD RATINGS	Gang Reduction	
	2 Dimmers	3+ Dimmers
DE-RATING CHART		
Reverse Phase	No De-rating	No De-rating
Forward Phase	600W	600W on outer units, 500W inner unit(s)
Incandescent/Halogen/ELV		

De-rating of the dimmer is not required for reverse phase applications. For forward phase applications in two-gang installations, de-rate incandescent, halogen, or electronic low voltage (ELV) loads to 600 Watts; in three-gang or greater installations, de-rate incandescent, halogen, or electronic low voltage (ELV) loads to 600 Watts on the outer units and 500 Watts on the center units.

REQUIREMENTS:
Android 5.0 and higher with camera
IOS 10.0 and higher with camera
Requires Home Wi-Fi network

GET IT ON Google Play

Download on the App Store

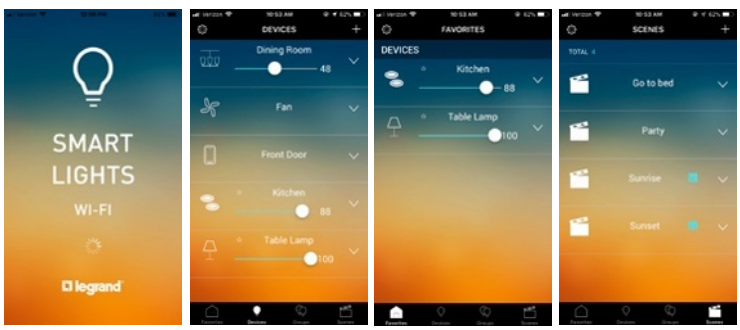

WEATHERPROOF BOXES & COVERS





WEATHERPROOF BOXES & COVERS

Extra-Duty While-In-Use Covers	G-3
Extra-Duty Rating While-In-Use Covers	G-4
Cast Weatherproof Covers	G-5
Thermoplastic Covers	G-9
Thermoplastic/Heavy Cast Aluminum Covers	G-12
Heavy Cast Aluminum Covers	G-13
Weatherproof Stainless Steel Covers	G-14
Dustproof Stainless Steel Covers	G-15
Cast Weatherproof Boxes & Covers	G-16
Weatherproof Boxes	G-17
Weatherproof Round Boxes & Weatherproof Kits	G-20
Cluster & Blank Covers	G-21
Outdoor Lighting Accessories & Swimming Pool Junction Box	G-22
Gaskets & Accessories	G-23
NEC® Compliance	G-24

WEATHERPROOF BOXES & COVERS

WPG1 and WPG2
Thermoplastic/Heavy Cast Aluminum Covers

Two sizes: 1.96" and 2.32" diameters to cover 15A/20A Straight Blade and 15A/20A/30A Turnlok® devices. Covers fit all competitive flanged inlets and outlets.

Stainless steel mounting screws resist corrosion.


A. **Pre-attached gaskets** for easy installation and tight seal to panel or weatherproof box — with no misaligned or collapsed gaskets.

B. **Tamper-proof hinge** features permanent, locked-in pins for added security.

C. **Unbreakable glass-filled polycarbonate construction** withstands years of job site abuse and harsh environmental exposure. Stainless steel mounting screws resist corrosion.

D. **Molded-in label area** for pre-printed or handwritten labels identifying circuits, ratings, and other data.

E. **Lockable "bullnose"** for OSHA Lockout/Tagout compliance.

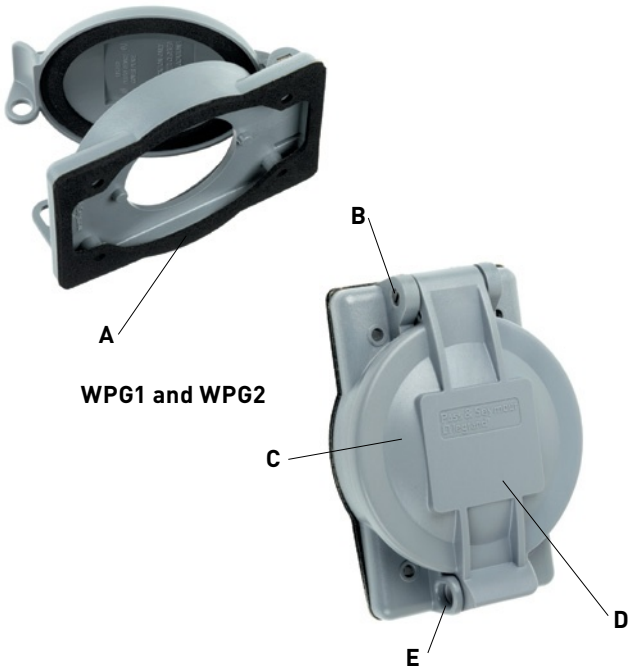

WPG1 and WPG2

WIUCED10SC
Extra-Duty While-In-Use Cover

The NEC® Section 406.9(B)(1) requires that an outlet box load installed for this purpose shall be listed and shall be identified as "extra duty".

A. **Exclusive cord flap gasket** inhibits water splash from driving rain or sprinklers.

B. **Sturdy polycarbonate construction** resists impacts and harsh weather.

C. **Patented corner hinge and cord opening** allow vertical or horizontal installation.

D. **Exclusive WaterShed™ Channel** keeps water moving outside while cord flap keeps the inside dry.

E. **Preapplied gasket** easier to install, saves time, won't get lost or damaged.

F. **Paintable, textured finish** hides scratches.


G. **Patented trigger latch** opens easily with one finger, yet is lockable to prevent tampering.

H. **Sturdy, molded-in hinge** withstands hard use.

I. **Installs without removing electrical device**, thanks to patented, keyed mounting holes.

J. **Roomy interior** provides space for plugs and cord bends.

Shallow profile models have 1" shorter top lid than prior models.

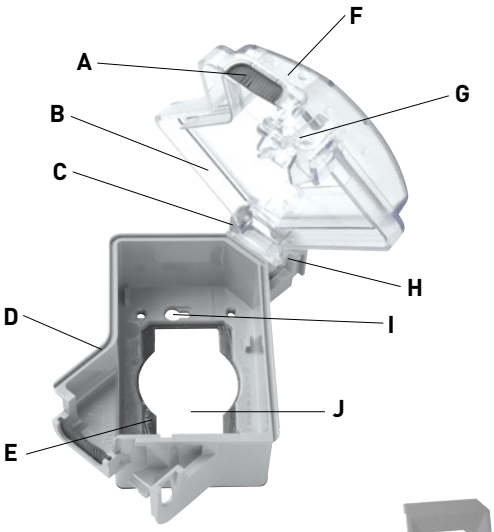


WIUCED10SC



Snap-in device plates require no tools to install and won't fall out. See chart for plates provided with each catalog number.

WEATHERPROOF BOXES & COVERS


Extra-Duty While-In-Use Covers




SINGLE GANG COVERS




SINGLE GANG



SINGLE GANG SHALLOW



SINGLE GANG DEEP

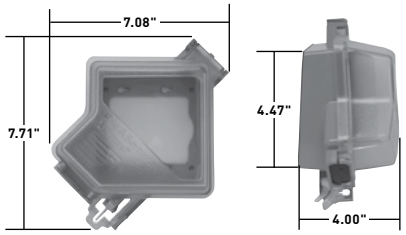

TWO GANG COVER


Features

- Comply with NEC® Section 406.9 (B)(1) for wet location covers, and conform to NEMA 3R.
- Covers are self-closing as required by UL514C42.3.
- Covers mount vertically or horizontally.
- Body, cover, and plates made of polycarbonate.
- Gasket made of closed cell foam, neoprene blend regular density, UL Rated HBF.
- Mounting screws made of 302 stainless steel.
- Single receptacle plate available in 1.405" and 1.595" openings.
- Deep model available for 20A locking plugs.
- Shallow covers accommodate up to 14/3 AWG extension cords.
- New trigger latch opens easily with one finger.

CATALOG NUMBER	BOTTOM COLOR	TOP COLOR	DEVICE PLATES PROVIDED	PLATE WIDTH	PACKAGE QUANTITY	3RD PARTY COMPLIANCE
SINGLE GANG						
WIUCED10GL	Gray	Gray		2 3/8"	12	•
WIUCED10CL	Gray	Clear				
WIUCED10WL	White	White				
SINGLE GANG SHALLOW						
WIUCED10SG	Gray	Gray		2 3/8"	14	•
WIUCED10SC	Gray	Clear				
WIUCED10SW	White	White				
WIUCED10SB	White	Clear				
SINGLE GANG DEEP						
WIUCED10DGL	Gray	Gray		2 3/8"	9	•
WIUCED10DCL	Gray	Clear				
WIUCED10DWL	White	White				
TWO GANG						
WIUCED20GL	Gray	Gray		2"	8	•
WIUCED20CL	Gray	Clear				
WIUCED20WL	White	White				
EXTRA PLATE KITS						
WIUED10PK	Gray		Single Gang Plate Kit	2 3/8"		•
WIUED10PKW	White					
WIUED20PK	Gray		Two Gang Plate Kit	2"		•
WIUED20PKW	White					

WEATHERPROOF BOXES & COVERS

Extra-Duty Rating While-In-Use Covers



WIUC10FRED



WIUC20FRED



WIUC1FRHSL





WIUC1GVSL

Features

- Trigger latch opens easily with one finger, yet lockable to prevent tampering.
- Pre-assembled with gasket for easier installation, saving time and preventing incorrect gasket placement.
- Frosted polycarbonate construction resists impacts and harsh weather while hiding dirt.
- Corner hinge and cord opening allows for vertical or horizontal installation (single gang only).
- Roomy interior provides space for plugs and cord bends.
- Snap-in device plates require no tools to install and won't fall out of cover, cutting installation time.

NOTE: This product complies with the 2014 NEC® section 406.9(B)(1) which requires that an outlet box load installed for this purpose shall be listed and shall be identified as "extra-duty".

CATALOG NUMBER	DESCRIPTION	COLOR	DEVICE PLATES PROVIDED
SINGLE GANG			
WIUC10FRED	In-Use Weatherproof Cover, One Gang, Extra-Duty	Frosted	GFCI, Duplex, Round
TWO GANG			
WIUC20FRED	In-Use Weatherproof Cover, Two Gang, Extra-Duty	Frosted	2 Duplex, 2 GFCI
WIUC21FRED	In-Use Weatherproof Cover, Two Gang, Extra-Duty, Single Opening in Center	Frosted	

CATALOG NUMBER	DEVICE PLATES PROVIDED	PLATE WIDTH	PACKAGE QUANTITY	3RD PARTY COMPLIANCE c UL us
EXTRA PLATE KITS				
WIUCFR10PK	1 Toggle, 1 Power, 1 Power (1.6) 	2 3/8"	10	•
WIUCFR20PK	2 Toggle, 2 Power (1.4), 2 Power (1.6) 	2"	20	•

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE c UL us
WIUC1FRHSL	Slimline Non-Metallic While-In-Use Cover, Horizontal, Single Gang	Frosted	•
WIUC1FRVSL	Slimline Non-Metallic While-In-Use Cover, Vertical, Single Gang	Frosted	•
WIUC1GHSL	Slimline Non-Metallic While-In-Use Cover, Horizontal, Single Gang	Gray	•
WIUC1GVSL	Slimline Non-Metallic While-In-Use Cover, Vertical, Single Gang	Gray	•
WIUC1WHSL	Slimline Non-Metallic While-In-Use Cover, Horizontal, Single Gang	White	•
WIUC1WVSL	Slimline Non-Metallic While-In-Use Cover, Vertical, Single Gang	White	•

WEATHERPROOF BOXES & COVERS

Cast Weatherproof Covers

WIUCAST1
Cast Weatherproof Cover

A. Self-closing lids as required by UL514C42.3.

B. Heavy-duty die-cast aluminum.

C. Exclusive cord flap gasket inhibits water splash from driving rain or sprinklers.


D. Lockable cover accepts a standard sized padlock.

E. Patented corner hinge and cord opening allow vertical or horizontal installation.

F. Preapplied gasket easier to install, saves time, won't get lost or damaged.


Meets NEC® Section 406.9(B)(1) suitable for Extra Duty wet locations.

All components baked-on electrostatic, polyester, powder paint coated prior to assembly for superior corrosion resistance.

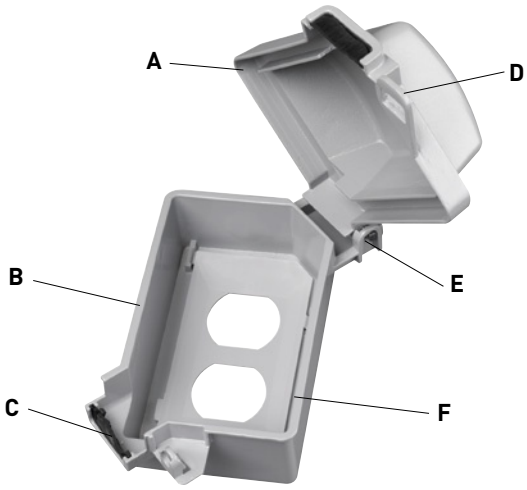


WIUCAST1

Zinc-plated screws, and three metal mounting plates are supplied.



CATALOG NUMBER	COLOR	DEVICE PLATES PROVIDED	PACKAGE QUANTITY	3RD PARTY COMPLIANCE c UL us
SINGLE GANG				
WIUCAST1*	Gray		12	•
TWO GANG				
WIUCAST2	Gray		10	•


*WIUCAST1 accepts WIU10PK inserts.

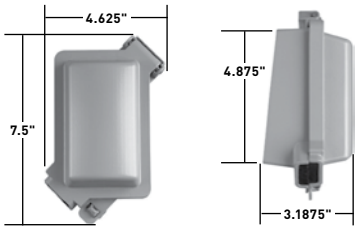


WIUCAST1

WEATHERPROOF BOXES & COVERS


Cast Weatherproof Covers




CA1U2681G
Horizontal



CA1U2681G
Vertical






CA2U2681G



Horizontal
2 Self-Closing Lids





Vertical
1 Self-Closing Lid


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE c UL us
ONE GANG			
CA7GV 	Single Receptacle Vertical – 1 Self-Closing Lid	Gray	
CA8GH **CA8WH** 	Duplex Receptacle Horizontal – 2 Self-Closing Lids	Gray White	•
CA8GJ 	Oversized Duplex Receptacle Horizontal – 2 Self-Closing Lids Dimensions: H - 4.52", L - 4.58"	Gray	•
CA8GVFS **CA8WV** 	Duplex Receptacle Vertical – 1 Self-Closing Lid 5 Screw Mounting	Gray White	
CA721G 	Power Outlet – 1.625 Diameter Vertical – 1 Self-Closing Lid	Gray	•
CA723G 	Power Outlet – 2.125 Diameter Vertical – 1 Self-Closing Lid	Gray	

Features

- Featuring one and two gang universal covers.
- Broad line of one gang covers for receptacles and power outlets.
- Heavy-duty die-cast zinc. Stainless steel springs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Covers comply with NEC® Section 406.9(A).


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE c UL us
UNIVERSAL CAST WEATHERPROOF COVERS			
CA1U2681G 	One Gang Cover with Metal Device Plates for #26, #8 and #1 Openings (One Each)	Gray	•
CA2U2681G 	Two Gang Cover with Metal Device Plates for #26, #8 and #1 Openings (Two Each)	Gray	•

Universal Cast Weatherproof Covers can serve six applications with a combination of inserts and one gang horizontal or vertical mounting.

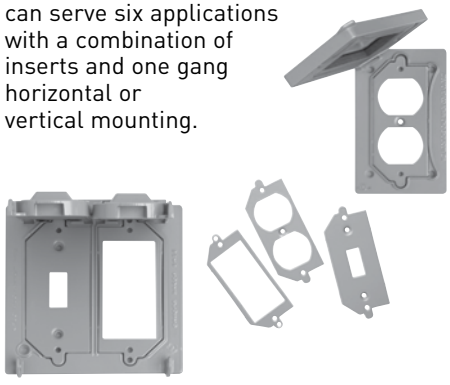

WEATHERPROOF BOXES & COVERS


Cast Weatherproof Covers




Horizontal
1 Self-Closing Lid



Vertical
1 Self-Closing Lid



CA1GL



3778

Features


- Broad line of single gang covers for switches and GFCIs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Heavy-duty die-cast zinc.
- Stainless steel springs.
- Covers comply with NEC® Section 406.9(A).

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE c UL us
ONE GANG			
CA26GH **CA26WH**	Decorator or GFCI Horizontal – 1 Self-Closing Lid	Gray White	• •
CA26GV **CA26WV**	Decorator or GFCI Vertical – 1 Self-Closing Lid	Gray White	• •
CA1G	Vertical – 1 Self-Closing Lid with Inserts Accommodates Toggle Switch +1.750 Power Outlet	Gray	•
CA1GS	Toggle with 15A 120VAC Single Pole Toggle Switch (Cat. # 660) Included Vertical – 1 Self-Closing Lid	Gray	•
CA1GL	Toggle Switch Cover – with Actuating Lever – Mounts Directly Over Switch	Gray	•


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE c UL us
SELF-CLOSING COVER – MOTOR BASE – HORIZONTAL			
3778	Single with 15A 125V Recessed Flanged Inlet.	Gray	•

WEATHERPROOF BOXES & COVERS

Cast Weatherproof Covers



Two Gang Cover



Two Gang Cover
4 Screw Mounting

Features

- Broad line of two gang covers for switches, receptacles, GFCIs, and power outlets.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Heavy-duty die-cast zinc.
- Stainless steel springs.
- All covers have 2 self-closing lids.
- Covers comply with NEC® Section 406.9(B)(1).

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE c UL us
TWO GANG			
CA82G 	2 Duplex Receptacles	Gray	•
CA72G 	2 Single Receptacles	Gray	•
CA262G 	2 Decorator 4 Screw Mounting	Gray	•
CA268G 	1 Decorator/1 Duplex 4 Screw Mounting	Gray	•
CA18G 	1 Toggle/1 Duplex 4 Screw Mounting	Gray	•
CA126GRY 	1 Toggle/1 Decorator 4 Screw Mounting	Gray	•
CA2G **CA2W** 	2 Toggles 4 Screw Mounting	Gray White	•
CA2GS 	2 Toggles with 2 15A 120VAC Single Pole Toggle Switches (Cat. # 660) Included 4 Screw Mounting	Gray	•

WEATHERPROOF BOXES & COVERS


Thermoplastic Covers



3723FS





3710



3703


Features

- Broad line of single gang covers for switches, receptacles, GFCIs and power outlets.
- Clear polycarbonate lid with reinforced thermoplastic base.
- Covers comply with NEC® Section 406.9(A).

CATALOG NUMBER	DESCRIPTION	GASKET THICKNESS	3RD PARTY COMPLIANCE	
			UL	CSA
SELF-CLOSING COVERS – CLEAR POLYCARBONATE LID VERTICAL TWO SCREW MOUNTING – PADLOCKABLE				
3710 	Duplex RV use Gray Base/Clear Cover	3/8"	•	•
3720 	Single Receptacle 1.40" Diameter or Toggle Switch (Toggle Switch Insert Included), Gray Base/Clear Cover	3/8"	•	•
3723 	Decorator RV use Gray Base/Clear Cover	3/8"	•	•
SELF-CLOSING COVERS – CLEAR POLYCARBONATE LID VERTICAL FOUR SCREW MOUNTING – PADLOCKABLE				
3723FS 	Decorator or GFCI Gray Base	3/32"	•	•
3795 	Power Outlet, 2.13" Diameter Gray Base	3/8"	•	•
SELF-CLOSING COVERS – CLEAR POLYCARBONATE LID HORIZONTAL TWO SCREW MOUNTING				
3703 	Decorator Gray Base	3/32"	•	•
3703TCW 	Decorator RV Use Colonial White Base	3/8"	•	•

WEATHERPROOF BOXES & COVERS

Thermoplastic Covers






3780 Series



FBOX1

Features


- Broadest line in the industry.
- All covers are self-closing with two flip lids.
- Covers comply with NEC® Section 406.9(A).

CATALOG NUMBER	DESCRIPTION	GASKET THICKNESS	3RD PARTY COMPLIANCE	
			UL	CSA
OUTDOOR ASSEMBLIES AND SPECIAL COVERS FOR MOBILE HOMES, MANUFACTURED AND MODULAR HOUSING, AND RV USE – HORIZONTAL INSTALLATION WITH TWO SELF-CLOSING FLIP LIDS				
3780SCFBXWH 	3232 Duplex Receptacle, Gasket and Flanged Box, White with Black Gasket	1/8"	•	
3780SCMH 	3232 Duplex Receptacle & Gasket, Gray with Black Gasket	3/8"	•	
3780SCMHWH 	3232 Duplex Receptacle & Gasket, White with Black Gasket	3/8"	•	


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
FLANGED BOXES FOR HORIZONTAL OR VERTICAL INSTALLATION				
FBOX1 	Flanged Box – 18.5 Cubic Inch Minimum Opening Size 2.5" x 4.1" Depth 3.0"	Gray	•	
FBOX1WH 	Flanged Box – 18.5 Cubic Inch Minimum Opening Size 2.5" x 4.1" Depth 3.0"	White	•	

WEATHERPROOF BOXES & COVERS

Thermoplastic Covers



3780 Series



3726 Series



3760


Features

- Broadest line in the industry.
- Covers comply with NEC® Section 406.9(A).
- 3780 series have two flip lids.
- 3726 series have a single flip lid.


CATALOG NUMBER	DESCRIPTION	GASKET THICKNESS	3RD PARTY COMPLIANCE	
			UL	CSA
HORIZONTAL SELF-CLOSING FLIP LIDS				
3780SC	Duplex, Gray with Black Gasket	1/8"	•	•
3780SCWH	Duplex, White with Black Gasket	1/8"	•	•
3726SC	Decorator or GFCI, Gray with Black Gasket	3/32"	•	•
3726SCBG	Decorator or GFCI, Beige with Black Gasket	3/32"	•	•
3726SCCW	Decorator or GFCI, Colonial White Black Gasket	3/32"	•	•
3726SCWH	Decorator or GFCI, White Black Gasket	3/32"	•	•
HORIZONTAL SINGLE COVER SELF-CLOSING FLIP-LID				
3770SC	Single Receptacle 1.405" Diameter, Gray	3/32"	•	•
VERTICAL SINGLE COVER THREE POSITION FLIP-LID (CLOSED, OPENED 90° OR OPENED 180°)				
3760	Single Receptacle 1.563" Diameter, Gray	3/32"	•	•
HORIZONTAL REINFORCED THERMOPLASTIC TWO POSITION FLIP-LIDS, (CLOSED OR OPENED 90°)				
3780	Duplex, Gray with Black Gasket, 2 Flip Lids	1/8"	•	•

WEATHERPROOF BOXES & COVERS


Thermoplastic/Heavy Cast Aluminum Covers Specification Grade



WPG1



7770



4600*


INDUSTRIAL GRADE WEATHERPROOF COVERS

- Unbreakable glass-filled polycarbonate construction to withstand years of job site abuse and harsh environmental exposure. Stainless steel mounting screws also resist corrosion.
- Covers comply with NEC® Section 406.9(A).
- Molded-in label area (2.8 sq. in.) for pre-printed or handwritten labels for identification of circuits, ratings, and other application data.
- WPG1 and WPG2 have lockable "bullnose" for OSHA locktag/tagout compliance.
- Covers fit all competitive inlets and outlets.
- Pre-attached gaskets for easy installation and tight seal to panel or weatherproof box – with no misaligned or collapsed gaskets.
- Tamper-proof hinge features permanent, locked-in pins for added security.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
THERMOPLASTIC WEATHERPROOF COVERS FOR FLANGED INLET/OUTLET				
WPG1	1.96" Diameter Opening to Accommodate 15/20A Straight Blade, 15A Turnlok, 20403 Power Interrupter	Gray	•	•
WPG2	2.32" Diameter Opening to Accommodate 20A Turnlok, 30A Turnlok	Gray	•	•
THERMOPLASTIC WEATHERPROOF COVER FOR SINGLE RECEPTACLES				
7425Y	Corrosion-Resistant Flip Lid Receptacle Cover for 20/30A Turnlok®	Yellow		
7770	2.38" Diameter Opening to Accommodate 50A Turnlok (non-lockout)	Yellow	•	
7770GRY	2.38" Diameter Opening to Accommodate 50A Turnlok (non-lockout)	Gray	•	

HEAVY CAST ALUMINUM COVERS – FLUSH ENCLOSURES


- Adapter, frame, and cover are heavy cast aluminum.
- No. 8-32 screws hold assembly firmly in place.
- Covers comply with NEC® Section 406.9(A).
- Mortar keys provide positive holding means within wall.
- Neoprene gasket seals cover to frame. Moisture and dust cannot enter enclosure.
- Two keys provided for lock.
- Purchase enclosure and mounting plate separately
- Mounts on 4" or 4-11/16" box.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
MORTARED-IN APPLICATIONS				
4600* 	Enclosure Only, without Mounting Plate	Gray	•	•
46001P 	Mounting Plate for Toggle Switch	Gray	•	•
46007P 	Mounting Plate for Single Receptacle Diameter: 2.156"	Gray	•	•
46008P 	Mounting Plate for Duplex Receptacle	Gray	•	•
460026P 	Mounting Plate for Decorator/GFCI	Gray	•	•
4609 	Replacement Key for Enclosure		•	•


*Note: All locks keyed the same.

WEATHERPROOF BOXES & COVERS


Heavy Cast Aluminum Covers Specification Grade




4512, 7420



4510



4511



3796, 3797

Features

- Extremely durable for hard-use institutional applications.
- Spring-loaded covers close automatically when plugs are removed.
- Die-cast copper-free aluminum construction.
- Stainless steel springs.
- Screws and spring covers are chrome-plated brass.
- Baked-on lacquer finish.
- Heavy rubber gaskets provide positive seal.
- All covers below are for 4 screw mounting only.
- Covers comply with NEC® Section 406.9(A).

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
HEAVY CAST ALUMINUM COVERS – ONE GANG				
4510 	Duplex Receptacle, 2 Doors, Horizontal	Gray	•	•
4511 	Decorator/GFCI, Horizontal	Gray	•	•
4512 	Decorator/GFCI, Vertical	Gray	•	•
7420 	1 Gang Power Outlet, 1.593" max. Diameter, Vertical	Gray	•	•


Features

- Heavy-duty die cast aluminum covers and plate.
- 3/32" gasket included.
- Stainless steel mounting screws.


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
MULTIGANG COVERS – OUTDOOR				
3796 	2 Gang Power Outlet (2.156" Diameter Opening)	Gray	•	•
3797 	2 Gang Power Outlet (2.656" Diameter Opening)	Gray	•	•

WEATHERPROOF BOXES & COVERS


Weatherproof Stainless Steel Covers Specification Grade




WP13



4515




4515FS



4516

Features

- Covers comply with NEC® Section 406.9(A).
- Plate is Type 302/304 Stainless Steel for corrosion resistance.
- Ideal for hard-use and corrosive applications.
- Aesthetically pleasing.

CATALOG NUMBER	DESCRIPTION	3RD PARTY COMPLIANCE	
		UL	CSA
STAINLESS STEEL COVERS			
WP13 	1 Gang Blank (Box Mounted) Gasketed	•	•
WP23 	2 Gang Blank (Box Mounted) Gasketed	•	•

Features


- Covers comply with NEC® Section 406.9(A).
- Plate is Type 302/304 Stainless Steel for corrosion resistance.
- Transparent silicone rubber mat seals plate and opening from contamination.
- Switch easily actuated through flexible silicone bubble.
- Silicone mat maintains pliability from -100° F to +250° F.
- Mat is resistant to grease, water, steam, detergents, aging, and ozone.

CATALOG NUMBER	MAT CATALOG NUMBER	DESCRIPTION	3RD PARTY COMPLIANCE	
			UL	CSA
STAINLESS STEEL COVERS				
4515	**4515GAS**	Round mat, mounts to Standard Switch Box	•	•
4515FS	**4515FSGAS**	Round mat, 4 Screw Box mounting	•	•
4516	**4516GAS**	Rectangular mat, mounts to Standard Switch Box (includes #348 strap for Despard switches)	•	•


For Dustproof Stainless Steel Covers, see Page G-15

WEATHERPROOF BOXES & COVERS


Dustproof Stainless Steel Covers Specification Grade




WP1, WP7




WP2




WP8, WP26



WP26L



WPH1L, WPH7L



WPH8, WPH26

Stainless Steel Covers are dustproof only and do not meet NEC® 406.8(A) or (B).

Features

- Exclusive – Spec-grade stainless steel dust covers.
- Ideal for hard-use and corrosive applications.
- Aesthetically pleasing.

CATALOG NUMBER	DESCRIPTION	3rd PARTY COMPLIANCE	
		UL	CSA
DUSTPROOF STAINLESS STEEL COVERS			
WP1	1 Toggle Switch,1 Small Cover, Vertical 1 Gang Plate. Available for Four Screw Mount – add suffix -FS	•	•
WP2	2 Toggle Switches 2 Small Covers, Vertical 2 Gang Plate	•	•
WP7	1 Single Receptacle 1 Small Cover, Vertical 1 Gang Plate Available for Four Screw Mount – add suffix -FS	•	•
WP8	1 Duplex Receptacle 1 Long Cover, Vertical 1 Gang Plate	•	•
WPH8	1 Duplex Receptacle 1 Long Cover, Horizontal 1 Gang Plate	•	•
WPD8	1 Duplex Receptacle 2 Small Covers, Horizontal 1 Gang Plate	•	•
WP26	1 Decorator-Style/GFCI 1 Long Cover, Vertical 1 Gang Plate	•	•
WPH26	1 Decorator-Style/GFCI 1 Long Cover, Horizontal 1 Gang Plate	•	•
DUSTPROOF LOCKING STAINLESS STEEL COVERS*			
WPH1L	Toggle Opening, Horizontal	•	•
WPH7L	Single Receptacle Opening, Horizontal	•	•
WPH8L	Duplex Receptacle Opening, Horizontal	•	•
WP26L	Decorator-Style/GFCI, Vertical	•	•

***Catalog Number WP255K –** replacement key for all Dustproof Locking Covers. (Two keys furnished with each unit.)


Note: All locks keyed the same.

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WEATHERPROOF BOXES & COVERS

Cast Weatherproof Boxes & Covers

CA8GH and WPB23
Cast Weatherproof Boxes and Covers

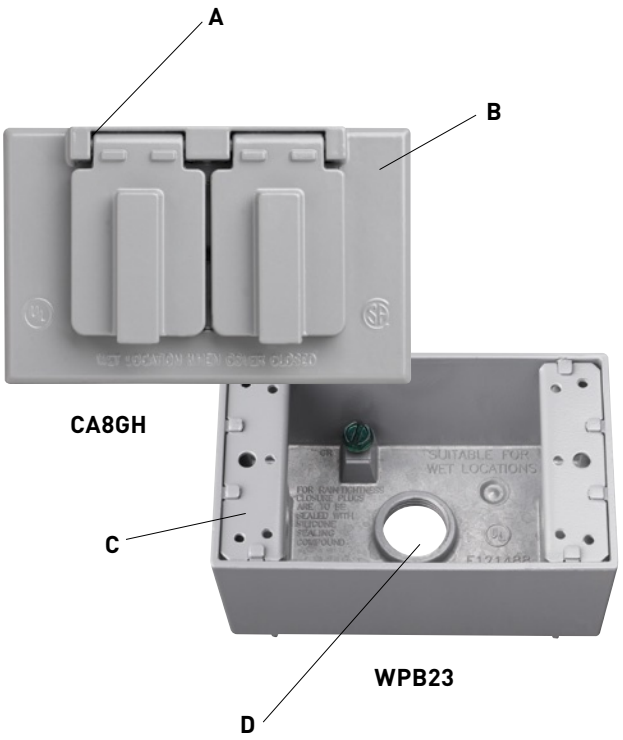

A. Stainless steel springs.

B. Baked-on electrostatic, polyester, powder paint, for superior scratch- and corrosion-resistant finish.

C. Heavy die-cast aluminum.

D. Available in 1/2" and 3/4" hub sizes, from 3 to 6 hole configurations.

Product assembled after painting for complete corrosion resistance.

Covers available in 1 & 2 gang in a variety of configurations.

No rough edges.

Available in gray, white and bronze.


Available in standard and deep configurations.

UL Listed, for wet and/or damp locations with appropriate cover.

Boxes available in 1, 2 & 3 gang.

WEATHERPROOF BOXES & COVERS






Weatherproof Boxes



Single Gang Box

Features


- Wide range of sizes, depths, and gangs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 2 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Will accept standard 4 screw mounting covers and single gang weatherproof covers.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
SINGLE GANG BOXES				
WPB23 **WPB23W** 	3 Hole 1/2", 18.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray White	•	•
WPB33 	3 Hole 3/4", 18.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray	•	•
WPB24 	4 Hole 1/2", 18.0 Cu. In. (2 Holes One End, 1 Hole Other End, 1 Hole in Back)	Gray	•	•
WPB34 	4 Hole 3/4", 18.0 Cu. In. (2 Holes One End, 1 Hole Other End, 1 Hole in Back)	Gray	•	•
WPB25 	5 Hole 1/2", 17.0 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPB35 	5 Hole 3/4", 17.0 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPB26 **WPB26W** 	5 Hole 1/2", 17.0 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray White	•	•
WPB36 	5 Hole 3/4", 16.8 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•

CATALOG NUMBER	DESCRIPTION
WEATHERPROOF LOCKING INLET KIT FOR GENERATOR APPLICATIONS	
L1430FIKIT	Kit includes 30A Locking Gray Flanged Inlet L1430FI, Weatherproof Cover WPG2, and Weatherproof Box WPB23 with 1/2" knockout holes.

WEATHERPROOF BOXES & COVERS

Weatherproof Boxes



Two Gang Box


Features

- Wide range of sizes, depths, and gangs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 2 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Will accept standard two gang weatherproof covers.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
TWO GANG BOXES				
WPB232	2 Gang – 3 Hole 1/2", 30.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray	•	•
WPB332	2 Gang – 3 Hole 3/4", 30.5 Cu. In. (1 Hole Each End, 1 Hole in Back)	Gray	•	•
WPB242	2 Gang – 4 Hole 1/2", 30.5 Cu. In. (2 Holes One End, 1 Hole Other End, 1 Hole in Back)	Gray	•	•
WPB342	2 Gang – 4 Hole 3/4", 30.5 Cu. In. (2 Holes One End, 1 Hole Other End,	Gray	•	•
WPB252	2 Gang – 5 Hole 1/2", 30.5 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPB352	2 Gang – 5 Hole 3/4", 30.5 Cu. In. (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPB262	2 Gang – 5 Hole 1/2", 30.5 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB362	2 Gang – 5 Hole 3/4", 30.5 Cu. In. (1 Hole Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB272	2 Gang – 6 Hole 1/2", 30.5 Cu. In. (2 Holes One End, 1 Hole Other End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB276	2 Gang – 6 Hole 1/2", 30.5 Cu. In. (3 Holes One Side, 2 Holes Other Side, 1 Hole in Back)	Gray	•	•
WPB282	2 Gang – 7 Hole 1/2", 30.5 Cu. In. (2 Holes Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB382	2 Gang – 7 Hole 3/4", 30.5 Cu. In. (2 Holes Each End, 1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPB287	2 Gang – 7 Hole 1/2", 30.5 Cu. In. (3 Holes Each Side, 1 Hole in Back)	Gray	•	•
WPB387	2 Gang – 7 Hole 3/4", 30.5 Cu. In. (3 Holes in Each Side, 1 Hole in Back)	Gray	•	•

WEATHERPROOF BOXES & COVERS


Weatherproof Boxes



Three Gang Box




1 Gang Deep Box



2 Gang Deep Box

Features

- Wide range of sizes, depths, and gangs.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 2 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
THREE GANG BOX				
WPB373 	3 Gang – 7 Hole 3/4", 59.8 Cu. In. (3 Holes Each Side, 1 Hole in Back)	Gray	•	•

Features

- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 4 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Will accept standard three-gang weatherproof covers.
- Simply strike desired knockout studs with a sharp hammer blow for clean mounting holes.
- Heavy die-cast aluminum.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
1 GANG DEEP BOXES				
WPBD23 **WPBD23W**	1 Gang Deep – 3 Hole 1/2", 23 Cu. In. with Threaded Holes (1 Hole Each Side, 1 Hole in Back)	Gray White	•	•
WPBD33	1 Gang Deep – 3 Hole 3/4", 23 Cu. In. with Threaded Holes (1 Hole Each Side, 1 Hole in Back)	Gray	•	•
WPBD43	1 Gang Deep – 3 Hole 1", 23 Cu. In. with Threaded Holes (1 Hole Each Side, 1 Hole in Back)	Gray	•	•
2 GANG DEEP BOXES				
WPBD252	2 Gang Deep – 5 Hole 1/2", 37 Cu. In. with Threaded Holes (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPBD352	2 Gang Deep – 5 Hole 3/4", 37 Cu. In. with Threaded Holes (2 Holes Each End, 1 Hole in Back)	Gray	•	•
WPBD452	2 Gang Deep – 5 Hole 1", 37 Cu. In. with Threaded Holes (2 Holes Each End, 1 Hole in Back)	Gray	•	•

WEATHERPROOF BOXES & COVERS

Weatherproof Round Boxes & Weatherproof Kits


WPRB25




WPGFIKIT


WPOUTKIT


WPFLDKIT

Features – 4" Round Die-Cast Aluminum Boxes

- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- 4 closure plugs and mounting lugs furnished with all boxes.
- UL Listed for wet and/or damp locations with appropriate cover.
- Designed for both interior and exterior applications.
- Heavy die-cast aluminum.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
4" ROUND DIE-CAST ALUMINUM BOXES				
WPRB25 	Round Cast Box – 5 Hole 1/2", 16.1 Cu. In., 4 Plugs Furnished	Gray	•	•
WPRB35 **WPRB35W** 	Round Cast Box – 5 Hole 3/4", 16.1 Cu. In., 4 Plugs Furnished	Gray White	•	•

Features

- Easy-to-install, self-contained kits include everything needed for installation – gaskets, plugs, and hardware.
- Clam-shell packaging designed for hanging displays.

CATALOG NUMBER	COLOR	DESCRIPTION	COMPONENTS	3RD PARTY COMPLIANCE
				c UL us
WEATHERPROOF KITS				
WPGFIKIT	Gray	Weatherproof Safety Outlet (GFCI) Kit includes GFCI, box and cover	1597GRY, WPB23, CA26GH	•
WPOUTKIT	Gray	Weatherproof Outlet Kit includes outlet, box and cover	3232I, WPB23, CA8GH	•
WPOUTKITBR	Bronze		3232I, WPB23, CA8GH	•
WPOUTKITW	White		3232W, WPB23W, CA8WH	•
WPFLDKITW	White	Weatherproof Dual Floodlight Kit includes box, cover, and lampholders	WPRB25W, (2) PAR1W, WPRB12W	•
WPFLDKITBR	Bronze		WPRB25, (2) PAR1, WPRB12	•

WEATHERPROOF BOXES & COVERS


Cluster & Blank Covers



WPB11



WPRB1







WPRB13



WPB1


Features

- Wide range of rectangular and round covers.
- Baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.
- Kits available combining fixtures, lamp covers, and accessories.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			c UL us	CSA
OUTDOOR LAMP CLUSTER COVERS FOR SINGLE GANG BOXES				
WPB11 **WPB11W** **WPB11BK** 	Rectangular Single Gang Cover 1 Hole 1/2"	Gray White Black	•	•
WPB12 	Rectangular Single Gang Cover 2 Hole 1/2", 1 Plug Furnished	Gray	•	•
WPB13 **WPB13W** **WPB13BR** 	Rectangular Single Gang Cover 3 Hole 1/2", 2 Plugs Furnished	Gray White Bronze	•	•
4" ROUND OUTDOOR CLUSTER COVERS				
WPRB1 	Round Blank Cover with Gasket and Screws	Gray	•	
WPRB11 **WPRB11W** **WPRB11BR** 	Round Cover – 1 Hole 1/2" with Gasket and Screws	Gray White Bronze	•	•
WPRB12 **WPRB12W** **WPRB12BR** 	Round Cover – 2 Hole 1/2" with Gasket and Screws 1 Plug Furnished	Gray White Bronze	•	•
WPRB13 **WPRB13W** **WPRB13BR** 	Round Cover – 3 Hole 1/2" with Gasket and Screws 2 Plugs Furnished	Gray White Bronze	•	•

Features

- Designed for both interior and exterior applications.
- Universal aluminum mounting plates.
- Gray, bronze and white models have baked-on electrostatic, polyester, powder paint for superior scratch and corrosion resistance.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	CSA
BLANK COVERS				
WPB1 **WPB1G** **WPB1W** 	1 Gang Blank Aluminum Cover with Gasket and Screws	Brushed Aluminum Gray White	•	•
WPB2 **WPB2G** **WPB2BR** 	2 Gang Blank Aluminum Cover with Gasket and Screws	Brushed Aluminum Gray Bronze	•	•
WPB3 	3 Gang Blank Aluminum Cover with Gasket and Screws	Brushed Aluminum	•	•

WEATHERPROOF BOXES & COVERS


Outdoor Lighting Accessories & Swimming Pool Junction Box



PAR1



WPLKIT2



WPBJ22

Features

- Now rated for CFL/LED.
- Medium base heat resistant.
- Fits 1/2" threaded outlet.
- Seal gasket included.
- Adjustable through 180°.
- Complete range of lamp covers in gray and white.
- Corrosion-resistant finish.

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			c RU us	
DIE-CAST OUTDOOR LAMPHOLDER				
PAR1	Outdoor Lampholder	Gray	•	
PAR1W	Outdoor Lampholder	White	•	
PAR1BR	Outdoor Lampholder	Bronze	•	


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			c RU us	
OUTDOOR LAMPHOLDER KITS				
WPLKIT1	Kit includes (1) WPRB13 and (2) PAR1 Lampholders	Gray	•	
WPLKIT2	Kit includes (1) WPRB13W and (2) PAR1W Lampholders	White	•	


CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			c UL us	
LED OUTDOOR LAMPHOLDERS				
WPLEDBR	Weatherproof LED Lamp, 10W, 800 Lumens	Bronze	•	•
WPLEDG	Weatherproof LED Lamp, 10W, 800 Lumens	Gray	•	•
WPLEDW	Weatherproof LED Lamp, 10W, 800 Lumens	White	•	•
WPLEDKITBR	Weatherproof LED Lamp Kit with 2 Lamps, Round Box, and Cover	Bronze	•	•
WPLEDKITG	Weatherproof LED Lamp Kit with 2 Lamps, Round Box, and Cover	Gray	•	•
WPLEDKITW	Weatherproof LED Lamp Kit with 2 Lamps, Round Box, and Cover	White	•	•

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE	
			UL	
SWIMMING POOL JUNCTION BOX				
WPBJ22	22 cu. in. Thermoplastic Base, Brass Cover. Meets NEC® Article 680.Two 3/4" Hubs, one 1" Hub. Four Ground Posts, Gasket, and Mounting Screws Included.	Gray	•	•

WEATHERPROOF BOXES & COVERS


Gaskets & Accessories



GASKET38


GASKET3726


GASKET3780


WPGAS100


WPGAS101






WPGASR101

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE (UL)
GASKETS			
GASKET2	1/8" Thick, 1 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	•
GASKET38	3/8" Thick, Weatherproof, 1 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	
GASKET3726	3/32" Thick, Weatherproof, 1 Gang, Decorator Multiuse Gasket, Closed Cell Polyethylene	Gray	•
GASKET3780	3/32" Thick, Weatherproof, 1 Gang, Duplex Multiuse Gasket, Closed Cell Polyethylene	Gray	•
WPGAS100	1/8" Thick, Weatherproof, 1 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	
WPGAS101	1/8" Thick, Weatherproof, 2 Gang, Multiuse Gasket, Closed Cell Polyethylene	Black	
WPGASR101	1/8" Thick, Weatherproof, Round, Multiuse Gasket, Closed Cell Polyethylene	Black	


WPEX1


WPEX2


WPEX3

CATALOG NUMBER	DESCRIPTION	COLOR	3RD PARTY COMPLIANCE (UL)	3RD PARTY COMPLIANCE (CSA)
ACCESSORIES				
WPEX1 	1 Gang Extension Ring, 9.5 Cu. In., 2.75" x 4.5" x 1"	Gray		•
WPEX2 	2 Gang Extension Ring, 16.3 Cu. In., 4.5" x 4.5" x 1"	Gray		•
WPEX3 	Round Device Box Extension, 4-1/2" Hubs	Gray		•
WPEX4 	1 Gang Extension Ring with 4-1/2" Hubs, 2-1/2" Plugs Supplied, 9.5 Cu. In.	Gray		•
WPEX5 	1 Gang Flanged Extension Ring with 4-1/2" Hubs, 2-1/2" Plugs Supplied, 9.5 Cu. In.	Gray		•
WPEX6 	1 Gang Extension Ring, with 4-3/4" Hubs, 2-3/4" Plugs Supplied, 9.5 Cu. In.	Gray		•
WPBP50 WPBP50CC WPBP50WCC 	Closure Plug – 1/2"	Metallic, Qty. 100 Gray, Qty. 3 White, Qty. 3	• • •	• • •
WPBP75 WPBP75CC WPBP75WCC 	Closure Plug – 3/4"	Metallic, Qty. 100 Gray, Qty. 3 White, Qty. 3	• • •	• • •
WPBP100 	Closure Plug – 1"	Metallic, Qty. 100	•	•
WPBL100 	Aluminum Lugs (2), and Self-Tapping Screws	Gray		

WEATHERPROOF BOXES & COVERS

NEC® Compliance

Choose the cover according to the location in which it is to be used.

Outdoor Wet Locations NEC 406.9(B)(1)

Wet locations are defined as those subjected to saturation with water or other liquids, such as vehicle washing areas, unprotected locations exposed to weather, or in installations under ground or in concrete slabs or masonry in direct contact with the earth.

NEC Article 406.8(B)(1) requires that all 15 and 20 amp, 125 & 250 volt receptacles installed in wet locations must have an enclosure that is weatherproof, whether or not a plug is inserted. These receptacles must use a while-in-use cover, such as those shown below:

WIUCED10GL
WIUCED10CL
WIUCED10WL
WIUCED10SG
WIUCED10SC
WIUCED10SW
WIUCED10SB
WIUCED10DGL
WIUCED10DCL
WIUCED10DWL
WIUCED20GL
WIUCED20CL
WIUCED20WL
WIUC10FRED
WIUC20FRED
WIUC1FRHSL
WIUC1FRVSL
WIUC1GHSL
WIUC1GVSL
WIUC1WHSL
WIUC1WVSL
WIUCAST1
WIUCAST2

Other Wet Locations NEC 406.8(B)(1)

(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug cap inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g., portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

CA1G
CA1GL
CA1GS
CA126GRY
CA18G
CA2G
CA2W
CA26GH
CA26GV
CA26WH
CA26WV
CA262G
CA268G
CA7GV
CA72G
CA721G
CA723G
CA8GH
CA8GJ
CA8GVFS
CA8WH
CA8WV
CA82G
WP13
WP23
WPBJ22
WPFLDKIT
WPFLDKITW
WPGFIKIT
WPG1
WPG2
WPOUTKIT
WPOUTKITW
3703
3703TCW
3710
3720
3722FS
3723
3723FS
3723WH
3726SC
3726SCBG
3726SCCW
3726SCWH
3770SC
3778
3780SC
3780SCFBXWH
3780SCMH
3780SCMHWH
3780SCWH
3795
3796
3797
4510
4511
4512
4515
4515FS
4516
4600
7420
7770

Damp Locations NEC 406.9(A)

Damp locations are defined as those protected from weather and not subject to saturation with water or other liquids, but subject to moderate degrees of moisture. Examples of such locations include partially protected locations under canopies, marquees, and roofed open porches not subjected to a beating rain or water runoff, as well as interior locations such as some basements, barns, and cold-storage warehouses.

NEC Article 406.9(A) requires that receptacles installed in damp locations must have an enclosure that is weatherproof when the receptacle is covered (attachment plug is not inserted and receptacle cover is closed).

An installation suitable for wet locations shall also be considered suitable for damp locations. Therefore, all catalog numbers shown above are also suitable for use in damp locations. The covers below are suitable for damp locations only, because the lid can be propped in the full open position.

3760 **3780**

Weather-Resistant Receptacles in Damp and Wet Locations NEC 406.9(A) and 406.9(B)(1)

An additional requirement has been added which states that a listed weather-resistant receptacle must be used where 15- and 20-amp, 125- and 250-volt straight blade receptacle configurations are installed in damp or wet locations. The goal of the change is to ensure that receptacles of sufficiently robust design are employed under these conditions. Listed weather-resistant receptacles have improved resistance to sunlight exposure, corrosion and impact.

Switches in Damp or Wet Locations NEC 404.4

Surface-mounted switches and circuit breakers in damp or wet locations are required to be enclosed in a weatherproof enclosure and flush-mounted switches and circuit breakers in damp or wet locations to be provided with weather-proof covers. This change recognizes that exposure to adverse weather conditions requires comparable protection for switches and receptacles used in damp or wet locations.


BOXES





SLATER PLASTIC BOXES

Switch & Outlet Boxes	H-2
Wall Box Extension Rings	H-2
Old Work Boxes & Shallow Boxes	H-4
Low Voltage Brackets	H-5
Wood & Steel Stud Bracket Boxes	H-6
Screw Mount Steel Stud Boxes	H-7
4" Square Boxes & Covers	H-8
4" Round Ceiling Boxes	H-9
Round Ceiling Boxes	H-12
Tamper-Resistant Floor Box Assemblies	H-13
Tamper-Resistant Round Floor Box Assemblies	H-16
Tamper-Resistant Round Floor Box Assemblies & Covers	H-17
Recessed TV Boxes	H-18
Applications & Product Features	H-19

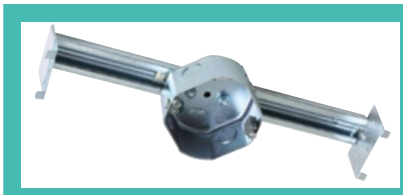

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

Retrofit Braces	H-22
New Construction Slides	H-23
Side, Direct & Shallow Boxes	H-24
Specialty Boxes, Concrete Fan Support Boxes & Contractor Packs	H-25
Specifications	H-26

SLATER® PLASTIC BOXES


Switch & Outlet Boxes With Captive Mounting Nails on Each End with Quick/Click®




S118R



S122R




S235RAC



S235RACMH

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS L	W	D	WIRE FILL (AWG)	QTY. PER CARTON
SWITCH & OUTLET BOXES WITH QUICK/CLICK®							
S118R	18.0	Single gang. 2 Quick/Entries® each end.	3¾	2¼	$2^{23}/_{32}$	9 No. 14 8 No. 12 7 No. 10	100
S235RAC	35.0	Two gang. 4 Auto/Clamps® each end.	$3^{31}/_{32}$	$3^{31}/_{32}$	$3^{3}/_{8}$	17 No. 14 15 No. 12 14 No. 10	50
S235RACMH	35.0	Two gang. 4 Auto/Clamps® each end. 3" depth for manufactured housing walls.	3¾	$4^{1}/_{16}$	3	17 No. 14 15 No. 12 14 No. 10	100
S354RAC	54.0	Three gang. 6 Auto/Clamps® each end.	$3^{31}/_{32}$	$5^{25}/_{32}$	3	27 No. 14 24 No. 12 21 No. 10	50
S468RAC	68.0	Four gang. Rear stabilizing bar virtually eliminates inward movement. 6 Auto/Clamps® each end.	$3^{13}/_{16}$	$7^{13}/_{16}$	3	34 No. 14 30 No. 12 27 No. 10	25
DEEP SWITCH & OUTLET BOXES WITH QUICK/CLICK®							
S122R	22.5	Single gang deep. 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	$3^{3}/_{8}$	11 No. 14 10 No. 12 9 No. 10	100



S354RAC



S468RAC

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468RAC.)



EXT1



EXT2

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	QTY. PER CARTON
WALL BOX EXTENSION RINGS			
EXT1	1.0	Single gang. ¼" thick. Stackable.	10
EXT2	2.0	Two gang. ¼" thick. Stackable.	10

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Switch & Outlet Boxes with Captive Mounting Nails on Each End



P118R



P118RN




P122R




P122RN




P122N



PH122R



P122C



P235RAC



P235RACMH



P354RACMH

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS L	W	D	WIRE FILL (AWG)	QTY. PER CARTON
SWITCH & OUTLET BOXES WITH THREADED MOUNTING HOLES							
P118R	18.0	Single gang. 2 Quick/Entries® each end.	3¾	2¼	$2^{23}/_{32}$	9 No. 14 8 No. 12 7 No. 10	100
P118RN	18.0	Single gang. Reverse angled captive mounting nail. 2 Quick/Entries® each end. Used for manufactured housing.	3¾	2¼	$2^{23}/_{32}$	9 No. 14 8 No. 12 7 No. 10	100
P122C	22.0	Single gang. With EZ Grip – a temporary hold feature.	3¾	2¼	4	11 No. 14 10 No. 12 9 No. 10	100
PH122R	22.0	Single gang. Horizontal. Captive mounting nail each side.	3¾	2¼	$3^{7}/_{8}$	11 No. 14 10 No. 12 9 No. 10	100
P235RAC	35.0	Two gang. 4 Auto/Clamps® each end.	$3^{31}/_{32}$	$3^{31}/_{32}$	$3^{3}/_{8}$	17 No. 14 15 No. 12 14 No. 10	100
P235RACMH	35.0	Two gang. 4 Auto/Clamps® each end. 3" depth for manufactured housing walls.	$3^{31}/_{32}$	$3^{31}/_{32}$	3	17 No. 14 15 No. 12 14 No. 10	100
P354RACMH	54.0	Three gang. 6 Auto/Clamps® each end. $3^{1}/_{16}$" depth for manufactured housing walls.	$3^{13}/_{16}$	$5^{15}/_{16}$	$3^{1}/_{16}$	27 No. 14 24 No. 12 21 No. 10	50
DEEP SWITCH & OUTLET BOXES WITH THREADED MOUNTING HOLES							
P122R	22.5	Single gang deep. 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	$3^{3}/_{8}$	11 No. 14 10 No. 12 9 No. 10	100
P122RN	22.5	Single gang deep. Reverse angled captive mounting nail. 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	$3^{3}/_{8}$	11 No. 14 10 No. 12 9 No. 10	100
P122N	22.5	Single gang deep. Vertical bracket mount.	3¾	2¼	$3^{3}/_{8}$	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance (Does not apply to P122N.)

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Old Work Boxes & Shallow Boxes

S352W
Old Work Switch & Outlet Box with Quick/Click®

A. Quick/Click feature secures devices quickly and easily. Does not strip when over-torqued. See Page H-19 for details.

B. 4 Auto/Clamps® on each end eliminate the need for separate cable clamps. See Page H-19 for details.


C. Metal swing bracket for quick mounting in existing walls.

D. Divider plate (LVDIV1, sold separately) used when installing line and low-voltage devices or multiple 277 volt devices in same box. See Page H-5 for details.

E. Swing bracket adjusts from 1-1/4" to 1/8".

Big 52 cubic inch capacity.

Easy installation, rectangular cutout.

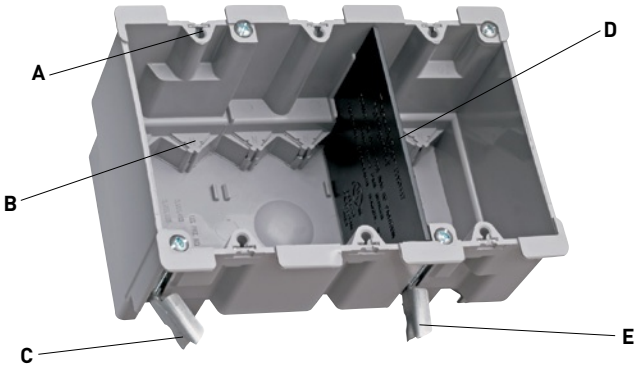

3 Gang Old Work Box shown with Divider Plate, LVDIV1


S118W


S122W


S232W


M118W


P108N



P108W

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS L	W	D	WIRE FILL (AWG)	QTY. PER CARTON
OLD WORK SWITCH & OUTLET BOXES WITH QUICK/CLICK							
S116W	16.0	Single gang. Swing-bracket for mounting adjusts from 1¼" down to 1/8". 2 Auto/Clamps® each end.	3¾	2¼	2¾	8 No. 14 7 No. 12 6 No. 10	100
S118W	18.0	Single gang. Swing-bracket for mounting adjusts from 1¼" down to 1/8". 2 Auto/Clamps® each end.	3¾	2¼	3 1/32	9 No. 14 8 No. 12 7 No. 10	100
S232W	32.0	Two gang. Swing-bracket for mounting adjusts from 1¼" down to 1/8". 4 Auto/Clamps® each end.	3¾	4 1/16	3 1/32	16 No. 14 14 No. 12 12 No. 10	50
S352W	52.0	Three gang. Swing-bracket for mounting adjusts from 1¼" down to 1/8". 6 Auto/Clamps® each end.	3¾	5 7/8	3 1/32	26 No. 14 23 No. 12 20 No. 10	10
M118W	18.0	Single gang metal box. Swing bracket for mounting adjusts 1¼" down to ¼". Four ¾"/1¼" KOs plus integral Romex clamp.	3¼	2¼	3	8 No. 14 7 No. 12 6 No. 10	50
DEEP OLD WORK SWITCH & OUTLET BOXES WITH QUICK/CLICK							
S122W	22.0	Single gang deep. Swing-bracket for mounting adjusts from 1¼" down to 1/8". 2 Auto/Clamps® each end.	3¾	2 5/16	3½	–	50
OLD WORK SWITCH & OUTLET BOXES WITH THREADED MOUNTING HOLES							
P116W	16.0	Single gang. Swing-bracket for mounting adjusts from 1¼" down to 1/8". 2 Auto/Clamps® each end.	3¾	2¼	2¾	8 No. 14 7 No. 12 6 No. 10	100
SHALLOW SWITCH & OUTLET BOXES for use in limited depth application							
P108W	8.0	Single gang. Old work flange box for retrofit applications.	3¾	2 5/16	1 1/8	–	20
P108N	8.0	Single gang. With vertical side bracket for new construction applications.	3¾	2 5/16	1 1/8	–	20

All boxes are UL listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S232W, S352W, P108W, and P108N.)

SLATER® PLASTIC BOXES

Low-Voltage Brackets



SLV2B



SLV3W



PLV1W



PLVIR



LVDIV1

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
LOW-VOLTAGE BRACKETS WITH QUICK/CLICK® for class 2 low-voltage applications							
SDV2B	22.5	Two gang. For dual-voltage. Face mount box and bracket for new construction.	3¾	4	3¾	11 No. 14 10 No. 12 9 No. 10	12
SLV1R	–	Single gang. Nail on for new construction.	3¾	2¼	–	–	12
SLV1S	–	Single gang. Nail on for new construction.	3¾	2¼	–	–	12
SLV1B	–	Single gang. Face mount bracket for new construction.	3¾	2¼	–	–	12
SLV2B	–	Two gang. Face mount bracket for new construction.	3¾	4	–	–	12
SLV1W	–	Single gang. Swing bracket mount for old work.	3¾	2¼	–	–	12
SLV2W	–	Two gang. Swing bracket mount for old work.	3¾	4	–	–	12
SLV3W	–	Three gang. Swing bracket mount for old work.	3¾	6	–	–	12
LOW-VOLTAGE BRACKETS for class 2 low-voltage applications							
P100WD	8.0	Single Gang. Gangable. Swing bracket for mounting, adjusts from 11/4" down to 1/8", for old work, stand alone applications.	3¾	2	–	–	15
P100ND	8.0	Single gang. With vertical side bracket for new construction, with wire retaining fingers.	3¾	2⅜	1¼	–	15
PDV2B	22.5	Two gang. For dual-voltage. Face mount box and bracket for new construction.	3¾	4	3¾	11 No. 14 10 No. 12 9 No. 10	12
PLV1R	–	Single gang. Nail on for new construction.	3¾	2¼	–	–	12
PLV1S	–	Single gang. Screw on for new construction.	3¾	2¼	–	–	12
PLV1B	–	Single gang. Face mount bracket for new construction.	3¾	2¼	–	–	12
PLV2B	–	Two gang. Face mount bracket for new construction.	3¾	4	–	–	12
PLV1W	–	Single gang. Swing bracket mount for old work.	3¾	2¼	–	–	12
PLV2W	–	Two gang. Swing bracket mount for old work.	3¾	4	–	–	12
PLV3W	–	Three gang. Swing bracket mount for old work.	3¾	6	–	–	12
DIVIDER PLATE							
LVDIV1	-.5	Suitable for low-voltage or multiple 277V devices. For use with S235RAC, S235RACS, P235RAC, S235S50AC, S354RAC and S352W.	–	–	–	–	12

All boxes are UL listed.


All devices listed on this page conform to NEMA OS2.


SLATER® PLASTIC BOXES

Wood & Steel Stud Bracket Boxes With Offset Bracket for Wood and/or Steel Mounting


S118S50


S118B50


S122S50



S235S50AC



S354S50AC


S468S50AC

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS L	W	D	WIRE FILL (AWG)	QTY. PER CARTON
WOOD & STEEL STUD BRACKET BOXES WITH QUICK/CLICK®							
S118S50	18.0	Single gang. 3/8" offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with 3/8" to 5/8" wallboard.	3¾	2¼	2 23/32	9 No. 14 8 No. 12 7 No. 10	100
S118B50	18.0	Single gang. ½" offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 2 Quick/ Entries® each end. For use with 3/8" to 5/8" wallboard.	3¾	2¼	2¾	9 No. 14 8 No. 12 7 No. 10	100
S235S50AC	35.0	Two gang. 3/8" offset for wood and steel stud mounting. 4 Auto/ Clamps® each end. For use with 3/8" to 5/8" wallboard.	3 31/32	3 31/32	3 3/8	17 No. 14 15 No. 12 14 No. 10	50
S354S50AC	54.0	Three gang. 3/8" offset for wood and steel stud mounting. 6 Auto/Clamps® each end. For use with 3/8" to 5/8" wallboard.	3¾	5 25/32	3	27 No. 14 24 No. 12 21 No. 10	25
S468S50AC	68.0	Four gang. 3/8" offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 6 Auto/ Clamps® each end. For use with 3/8" to 5/8" wallboard.	3¾	7 13/16	3	34 No. 14 30 No. 12 27 No. 10	25
DEEP WOOD & STEEL STUD BRACKET BOXES WITH QUICK/CLICK®							
S122S50	22.5	Single gang deep. 3/8" offset for wood and steel stud mounting. 2 Quick/ Entries® each end. For use with 3/8" to 5/8" wallboard.	3¾	2¼	3 3/8	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468S50AC.)


P122B


PH122B

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS L	W	D	WIRE FILL (AWG)	QTY. PER CARTON
STEEL STUD BRACKET BOXES WITH QUICK/CLICK®							
S122B	22.0	Single gang. 1/2" offset for steel stud mount only. 2 stabilizer legs.	3¾	2¼	4¼	11 No. 14 10 No. 12 9 No. 10	100
SH122B	22.0	Single gang. Horizontal. 1/2" offset for wood or steel stud mount. 2 stabilizer legs.	3¾	2¼	3 7/8	11 No. 14 10 No. 12 9 No. 10	100
STEEL STUD BRACKET BOXES							
P122B	22.0	Single gang. 1/2" offset for steel stud mount only. 2 stabilizer legs.	3¾	2¼	4¼	11 No. 14 10 No. 12 9 No. 10	100
PH122B	22.0	Single gang. Horizontal. 1/2" offset for wood or steel stud mount. 2 stabilizer legs.	3¾	2¼	3 7/8	11 No. 14 10 No. 12 9 No. 10	100
S50BRACKET	N/A	Steel stud bracket only for use with P235RAC, P354RAC, S235RAC, S354RAC, S468RAC	N/A	N/A	N/A	N/A	50

All boxes are UL Listed. UL Classified for 2 Hour Fire Resistance.

SLATER® PLASTIC BOXES


Screw Mount Steel Stud Boxes With Captive Combo Head Self Tapping Mounting Screws on Each End



S118RS




S122RS



S235RACS



S235RACSMH



S354RACS



S468RACS

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS L	DIMENSIONS W	DIMENSIONS D	WIRE FILL (AWG)	QTY. PER CARTON
SCREW MOUNT, STEEL STUD BOXES WITH QUICK/CLICK®							
S118RS	18.0	Single gang. 2 Quick/Entries® each end.	3¾	2¼	$2^{23}/_{32}$	9 No. 14 8 No. 12 7 No. 10	100
S235RACS	35.0	Two gang. 4 Auto/Clamps® each end.	$3^{31}/_{32}$	$3^{31}/_{32}$	$3^{3}/_{8}$	17 No. 14 15 No. 12 14 No. 10	50
S235RACSMH	35.0	Two gang. 4 Auto/Clamps® each end. H-3" depth for manufactured housing walls.	3¾	$4^{1}/_{16}$	3	17 No. 14 15 No. 12 14 No. 10	100
S354RACS	54.0	Three gang. 6 Auto/Clamps® each end.	$3^{31}/_{32}$	$5^{25}/_{32}$	3	27 No. 14 24 No. 12 21 No. 10	50
S468RACS	68.0	Four gang. 6 Auto/Clamps® each end. Rear stabilizing bar virtually eliminates inward movement.	$3^{13}/_{16}$	$7^{13}/_{16}$	3	34 No. 14 30 No. 12 27 No. 10	25
DEEP SCREW MOUNT, STEEL STUD BOXES WITH QUICK/CLICK®							
S122RS	22.5	Single gang deep. 2 Quick/Entries® each end. Extra deep for dimmers, GFCIs and thermostats, yet suitable for 2 x 4 construction.	3¾	2¼	$3^{3}/_{8}$	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed. UL Classified for 2 Hour Fire Resistance. (Does not apply to S468RACS.)
Note: 3¼" self-tapping, drill-point screws. Nails are 3¼".



CT1

CATALOG NUMBER	DESCRIPTION	QTY. PER CARTON
CRIMPING TOOL FOR ATTACHING STEEL STUD BOXES		
CT1	Crimping tool for attaching boxes to steel studs. Comes equipped with long and short anvils to meet most installation requirements.	1

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

4" Square Boxes & Covers



4SBC



RC1



RC2



S4418BAC



S4421RAC



S4421SAC

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
COVERS FOR 4" SQUARE BOXES							
4SBC	–	4" square flat blank cover – gray	4¼	4¼	N/A	–	50
4SBCW	–	4" square flat blank cover – white	4¼	4¼	N/A	–	50
RC1	3.2	Single gang device cover, raised ⅜"	4¼	4¼	⅜	–	100
RC2	5.3	Two gang device cover, raised ⅜"	4¼	4¼	⅜	–	100
4" SQUARE BOXES WITH THREADED MOUNTING HOLES							
S4418BAC	17.0	Shallow 4" square. Captive mounting nail each end. 2 Auto/Clamps® each end. 2 #8 mounting screws factory installed.	4¼	4¼	1¼	9 No. 14 8 No. 12 7 No. 10	50
S4421RAC	21.0	4" square. Captive mounting nail each end. 3 Auto/Clamps® each end, 2 on side opposite to nails. 2 #8 mounting screws factory installed.	4¼	4¼	1½	10 No. 14 9 No. 12 8 No. 10	100
S4421SAC	21.0	4" square. For wood and steel stud mounting. 3 Auto/Clamps each end, 2 on side opposite bracket. 2 #8 mounting screws factory installed.	4¼	4¼	1½	10 No. 14 9 No. 12 8 No. 10	50
S4435RAC	35.0	4" square. Captive mounting nail each end. 3 Auto/Clamps® each end, 2 on side adjacent to nails. 2 #8 mounting screws factory installed.	4¼	4¼	2⅜	17 No. 14 15 No. 12 14 No. 10	50
S4435SAC	35.0	4" square. For wood and steel stud mounting. 3 Auto/Clamps® each end, 2 on side opposite bracket. 2 #8 mounting screws factory installed.	4¼	4¼	2⅜	17 No. 14 15 No. 12 14 No. 10	50



S4435RAC




S4435SAC

All boxes are UL Listed. UL Classified for 2 Hour Fire Resistance. (Does not apply to 4SBC and 4SBCW.)



P242SRD



P242RRD

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
RANGE & DRYER BOXES							
P242SRD	42.0	½" offset for wood or steel stud mount with metal cable clamp. Captive mounting screw each end.	3¾	4	4	16 No. 10 14 No. 8 8 No. 6	12
P242RRD	42.0	½" offset for wood or steel stud mount with metal cable clamp. Captive mounting nail each end.	3¾	4	4	16 No. 10 14 No. 8 8 No. 6	12


All boxes are UL Listed. UL Classified for 2 Hour Fire Resistance (pending).

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

4" Round Ceiling Boxes

S120JFAN
Fan Box

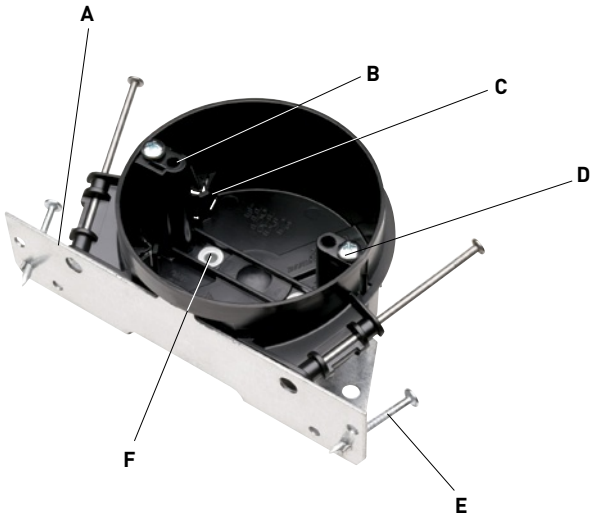

A. Angled, rugged, metal mounting bracket safely and securely fastens fans or fixtures to the building structure.

B. Dual mounting accepts fans or fixtures with 2.75" or 3.5" straps.

C. Auto Clamp® cable clamps molded in — hold wire securely in box.

D. Phillips-head screws (#10-32 x 3") mount the fan or fixture directly to the metal bracket.

E. Ringed nails for tighter grip.

F. Depth-mounting gauge at bottom of bracket helps you align the box at the proper depth relative to the ceiling.

Fan mounts directly to bracket through box with #10-32 screws (provided).

Large, 20.25 cubic inch capacity for extra wiring space.

Constructed of impact-resistant Noryl® thermoplastic, making it virtually unbreakable and non-conductive.

UL Listed for fan and fixture support.

S116FAN
4" Round Direct Mount Ceiling Fan Box



A. Impact-resistant Noryl® means no ground wiring as with metal boxes.

B. Screw lock holds screws in box until needed. No lost hardware and no broken spiral saw bits.

C. Mounts directly under a joist or on a joist cross member.

Easy installation. One #10 x 1¼" screw holds the box at rough in. Two factory-supplied #10 x 2" screws secure the fan or fixture through the box, directly to the joist.

UL Listed for fan and fixture support.

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

4" Round Ceiling Boxes With Dual Threaded Mounting Holes


S120JFAN


S120BFAN


S120RFAN


S109FAN


S116FAN

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS (IN.)		WIRES (AWG)	QTY. PER CARTON	UL LISTED MAX. WEIGHT RATING	
			DIA.	DEPTH			FAN	FIXTURE
FAN BOXES – FAN & FIXTURE RATED								
S120JFAN	20.25	Ceiling Fan Box – Premium Grade with integral fan mounting bracket and 4 Auto/Clamps®.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	12	70 lbs.	150 lbs.
S120BFAN	20.25	Ceiling Fan Box – Construction Grade with 4 Auto/Clamps®.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	30	70 lbs.	70 lbs.
S120RFAN	20.25	Ceiling Fan Box – Standard Grade 4 Auto/Clamps® with 2 captive mounting nails.	4	2 3/16	10 No. 14	30	35 lbs.	50 lbs.
4" ROUND DIRECT MOUNT CEILING FAN BOXES – FAN & FIXTURE RATED								
S116FAN	16	Ceiling Fan Box – with Direct Mount.	4	2 3/4	8 No. 14 7 No. 12 6 No. 10	24	70 lbs.	210 lbs.
S109FAN	9	Ceiling Fan Box – with Direct Mount. Suitable for single or double joist.	4	2 3/4	4 No. 14 4 No. 12 3 No. 10	24	70 lbs.	210 lbs.

All boxes are UL listed.
UL Classified for 2 Hour Fire Resistance.Dual mounting accommodates both 2.75" and 3.5" fixtures.

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

4" Round Ceiling Boxes With Dual Threaded Mounting Holes



S120RAC




S120RGAC




S120JAC



S120JGAC

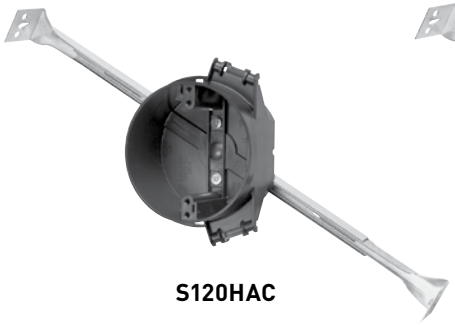

S120HAC

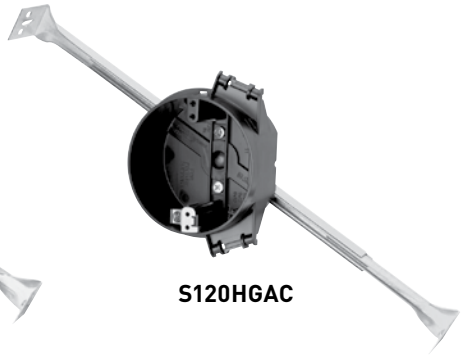

S120HGAC



S120RACS

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS (IN.) DIA.	DIMENSIONS (IN.) DEPTH	WIRES (AWG)	QTY. PER CARTON	UL LISTED MAX. WEIGHT RATING FIXTURE
CEILING BOXES							
S120RAC	20.25	4" round. 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120RGAC	20.25	4" round with ground lug. 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120JAC	20.25	4" round. J-bracket with 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120JGAC	20.25	4" round with ground lug. J-bracket with 2 captive mounting nails. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120HAC	20.25	4" round. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120HGAC	20.25	4" round with ground lug. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.
S120RACS	20.25	4" round. 2 captive mounting screws. 4 Auto/Clamps.	4	2 3/16	10 No. 14 9 No. 12 8 No. 10	50	50 lbs.

All boxes are UL listed. UL Classified for 2 Hour Fire Resistance. Dual mounting accommodates both 2.75" and 3.5" fixtures.

CATALOG NUMBER	DESCRIPTION	QTY. PER CARTON
COVERS FOR 4" ROUND BOXES		
4RBC	4" round flat blank cover – gray	50
4RBCW	4" round flat blank cover – white	50




4RBC


All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Round Ceiling Boxes



C118WAC




C118WGAC




C118RAC



C118RGAC

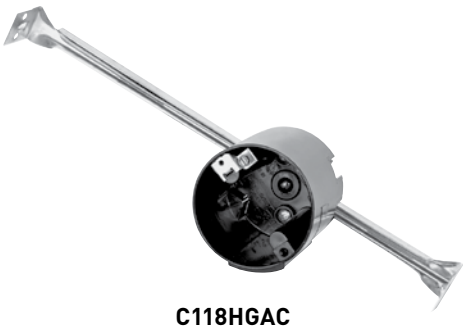

C118HGAC

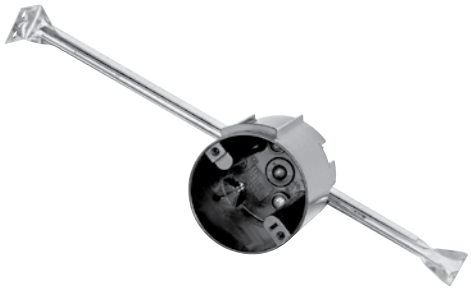

C118HAC

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS (IN.) DIA.	DIMENSIONS (IN.) DEPTH	WIRES (AWG)	QTY. PER CARTON	UL LISTED MAX. WEIGHT RATING FIXTURE
3¾" ROUND OLD WORK CEILING BOXES							
C118WAC	18.0	3¾" round. Swing brackets for mounting adjust from 1¼" down to ⅛". 4 Auto/Clamps®. Includes device mounting holes.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	20 lbs.
C118WGAC	18.0	3¾" round. With grounding lug. Swing brackets for mounting adjust from 1¼" down to ⅛". 4 Auto/Clamps®. Includes device mounting holes.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	20 lbs.
3¾" ROUND OLD WORK CEILING BOXES							
C118WACX	18.0	3¾" round. Same as C118WAC, except without swing brackets, for screw mounting into OSB or plywood. 4 Auto/Clamps®.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	8 lbs.
C118WGACX	18.0	3¾" round. Same as C118WGAC, except without swing brackets, for screw mounting into OSB or plywood. 4 Auto/Clamps®.	3¾	2 11/16	9 No. 14 8 No. 12 7 No. 10	50	8 lbs.
3¼" ROUND CEILING BOXES*							
C118RAC	18.0	3¼" round. 2 captive mounting nails. 4 Auto/Clamps.	3¼	3 5/32	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.
C118RGAC	18.0	3¼" round with ground lug. 2 captive mounting nails. 4 Auto/Clamps®.	3¼	3 5/32	9 No. 14 8 No. 12 7 No.10	50	50 lbs.
C118HAC	18.0	3¼" round. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps®.	3¼	3 5/32	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.
C118HGAC	18.0	3¼" round with ground lug. Bar-hanger adjusts to 16" or 24" joist spacing. 4 Auto/Clamps®.	3¼	3 5/32	9 No. 14 8 No. 12 7 No. 10	50	50 lbs.

*UL Classified for 2 Hour Fire Resistance.

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Tamper-Resistant Floor Box Assemblies For Wood Sub-Floors



FB1TRSRB



FB1TRDRB

Features – FB Series

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Rugged diecast cover plates.
- Meets UL514(c) and NEC 314.27(c).
- Scrub water compliant.
- With durable nickel or brass cover plates.
- Swing brackets mounting option eliminates drilling tile flooring for mounting screws.
- Wood sub-floors only.
- Wire Fill (AWG): 10 No. 14, 9 No. 12, 8 No. 10.

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	COVER PLATE FINISH	DIMENSIONS (IN.)			QTY. PER CARTON
				L	W	D	
FLOOR BOX ASSEMBLIES — ONE GANG FOR WOOD SUB-FLOORS							
FB1TRSRB FB1TRSRN	20.5	Single threaded screw plug. Includes 15A, 125V single tamper-resistant receptacle.	Brass Nickel	4¾	3¼	4	1
FB1TRDRB FB1TRDRN	20.5	#8 duplex opening, 2 threaded screw plugs. Includes 3232 tamper-resistant 15A, 125V duplex receptacle.	Brass Nickel	4¾	3¼	4	1

National Electrical Code® Section 406.11 Tamper-Resistant Receptacles in Dwelling Units.
In all areas specified in 210.52 all 125-volt, 15- and 20-amp receptacles shall be listed tamper-resistant receptacles.

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Tamper-Resistant Floor Box Assemblies For Wood Sub-Floors

FB2TRDRKS4N
Floor Box Assemblies

A. Rugged, die-cast cover plate with durable nickel or brass finish.

B. Large box flange rests on finished floor — no adjustments needed.

C. Swing-bracket mounting, great for tile floors — eliminates drilling for mounting screws.


D. Dual-voltage models available. Includes 15 Amp, 125 Volt tamper-resistant duplex receptacle, lo w-voltage divider, Cat 5e jack, F-connector, and blanks.

E. Extra-deep design leaves plenty of wiring room.

Scrub water compliant without caulking, supplied with foam gasket and O-ring-equipped plugs.

Meets NEC Section 406.11 Tamper-Resistant requirements.

Meet UL514C and NEC314.27c requirements including scrub water for tile floors.

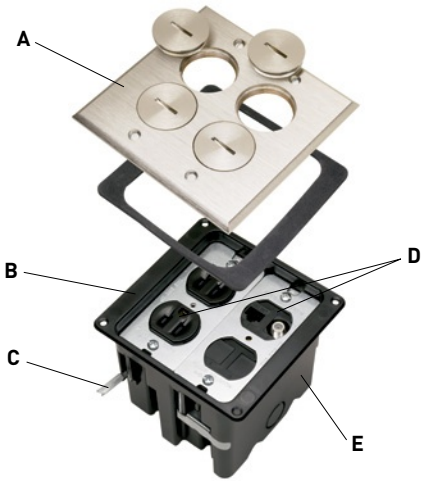


CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	COVER PLATE FINISH	DIMENSIONS (IN.) L	W	D	QTY. PER CARTON
FLOOR BOX ASSEMBLIES — TWO GANG FOR WOOD SUB-FLOORS							
FB2TRDR2B FB2TRDR2N	42.5	Two #8 duplex openings, 4 threaded screw plugs. Includes two 3232 tamper-resistant 15A, 125V duplex receptacles.	Brass Nickel	4¾	6½	4	1
FB2TRDRKS4B FB2TRDRKS4N	42.5	Dual-voltage. Two #8 duplex openings, 4 threaded screw plugs. Includes 3232 tamper-resistant 15A, 125V duplex receptacle, Cat 5e jack, F-connector, 10 blanks & low-voltage divider.	Brass Nickel	4¾	6½	4	1

Wire File (AWG): 21 No. 14, 18 No. 12, 17 No. 10.


All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Tamper-Resistant Floor Box Assemblies 2 Pole, 3 Wire Grounding 15A, 125V




TM1542BOX




TM1542TRLA

See available colors below.



TM1542TRFM




TM1542TRCF

Features


- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Hinged door is removable and easily replaceable.
- Durable construction, impact and scratch resistant PVC construction.
- Standard Decorator opening that accepts GFCI, TVSS, DataCom or other Decorator devices.
- Auto/Clamps® and knockouts on both sides of box.
- Meets UL514(c) scrub water exclusion test.
- Threaded device mounting holes.
- Simple mounting box, fits into a 4-3/4" hole and mounts with 3 screws included.
- Ready for low-voltage wiring, drill guides on underside of cover.
- UL and cUL Listed.
- Captive screws on TM1542 series – screws will not be lost – new.
- Made in USA.

CATALOG NUMBER	DESCRIPTION	COLOR	NEMA CONFIG. NO.
FLOOR BOX			
TM1542BOX	38 cu. in., with knockouts and Auto/Clamps®, 3 screws for mounting to floor.	Gray	5-15R
THERMOPLASTIC COVERS			
TM1542TRW	Includes 15A, 125V tamper-resistant Decorator receptacle, matching detachable and replaceable hinged door; threaded device-mounting holes; drill guides for low-voltage poke-through holes; accepts any Decorator device; mounts on carpeting, hardwood, linoleum, tile floors; 4 mounting/leveling screws.	White	5-15R
TM1542TRBR		Brown	5-15R
TM1542TRGRY		Paintable Gray	5-15R
TM1542TRLA		Light Almond	5-15R
BRASS COVERS			
1542TRFM	Low-profile cover requires minimum 3/8" hardwood floor thickness.	Brass	5-15R
TM1542TRCF	High-profile cover fits any floor finish – including carpeting, linoleum, tile, etc. Both covers include an 885 tamper-resistant 15A, 125V Decorator duplex receptacle and will accept any Decorator device. Covers include captive screws to prevent loss.	Brass	5-15R

UL listed in accordance with 314.27(e).



1542TRFBA



1542TRDR

Features

- Solid brass covered plate with matching flush fitting brass cap.
- 15A, 125V single receptacle made of durable thermoplastic.
- UL and FSUL listed.

CATALOG NUMBER	RATING A.	RATING V.	DESCRIPTION	COLOR	NEMA CONFIG. NO.
FLOOR BOX ASSEMBLY**					
1542TRFBA	15	125	Tamper-resistant receptacle, brass plate, 1.01" recessed plug, gasket, O-ring, and metal 18 cu. in. box	Brown	5-15R
DISPLAY RECEPTACLE*					
1542TRDR	15	125	Tamper-resistant receptacle, brass plate and 1.01" recessed plug	Brown	5-15R

*UL listed in accordance with 314.27(e).
**Conforms to NEMA OS2.

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Tamper-Resistant Round Floor Box Assemblies For Wood or Concrete Sub-Floors



PS862TRT




PS862TRGFICAL

Features

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Rugged diecast cover plates.
- Brass or aluminum.
- Smooth, nearly flush installation.
- PS862 Series wood or concrete sub-floors only.
- Wire Fill (AWG): 11 No. 14, 9 No. 12, 8 No. 10.

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	COVER PLATE FINISH	DIMENSIONS (IN.) DIA.	DIMENSIONS (IN.) DEPTH	QTY. PER CARTON
ROUND FLOOR BOX ASSEMBLIES FOR HARDWOOD OR TILE FINISHED FLOORS						
PS862TRT **PS862TRTAL**	22.0	#8 duplex opening, 2 flip lids. Includes 3232 tamper-resistant 15A, 125V duplex receptacle.	Brass Aluminum	4¼	3¼	1
PS862TRTGFI **PS862TRTGFIAL**	22.0	#26 opening, flip lid. Includes 1595 tamper-resistant 15A, 125V duplex GFCI receptacle.	Brass Aluminum	4¼	3¼	1
ROUND FLOOR BOX ASSEMBLIES FOR CARPETED FINISHED FLOORS						
PS862TRC **PS862TRCAL**	22.0	#8 duplex opening, 2 flip lids. Includes 3232 tamper-resistant 15A, 125V duplex receptacle.	Brass Aluminum	5½	3¼	1
PS862TRGFIC **PS862TRGFICAL**	22.0	#26 opening, flip lid. Includes 1595 tamper-resistant 15A, 125V duplex GFCI receptacle.	Brass Aluminum	5½	3¼	1



PS862KIT

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS (IN.) DIA.	DIMENSIONS (IN.) DEPTH	WIRE FILL (AWG)	QTY. PER CARTON
ROUND FLOOR BOX FOR HARDWOOD, TILE OR CARPETED FINISH FLOORS						
PS862	22.0	Box only.	3¾	$2^{11}/_{16}$	11 No. 14 9 No. 12 8 No. 10	1
CONCRETE KIT						
PS862KIT	–	Mud Cap, Gasket. Two 3/4" male PVC conduit fittings.	–	–	–	5

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Tamper-Resistant Round Floor Box Assemblies & Covers For Wood Sub-Floors



PS863TRC




PS863TRGFIC

Features

- Tamper-resistant receptacles feature dual mechanical shutter system to help prevent insertion of foreign objects.
- Meets NEC 406.11 requirements.
- Rugged diecast cover plates.
- Brass or aluminum.
- Dual-voltage.
- Smooth, nearly flush installation.
- PS863 series wood sub-floors only.
- Includes Cat 5e & F-Connector.
- Wire Fill (AWG): 11 No. 14, 10 No. 12, 9 No. 10.

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	COVER PLATE FINISH	DIMENSIONS (IN.)		QTY. PER CARTON
				DIA.	DEPTH	
ROUND FLOOR BOX ASSEMBLIES						
PS863TRC **PS863TRCAL**	23.5	Dual-voltage. #8 duplex opening, 2 flip lids and 2 low-voltage openings. Includes 3232 tamper-resistant 15A, 125V duplex receptacle, Cat 5e jack and F-connector.	Brass Aluminum	5¾	3½	1
PS863TRGFIC **PS863TRGFICAL**	23.5	Dual-voltage. #26 opening, flip lid and 2 low-voltage openings. Includes 1595 tamper-resistant 15A, 125V duplex GFCI receptacle, Cat 5e jack and F-connector.	Brass Aluminum	5¾	3½	1

Round Floor Box Covers For Wood or Concrete Sub-Floors



PS895GFIC

CATALOG NUMBER	DESCRIPTION	COVER PLATE FINISH	DIAMETER	QTY. PER CARTON
ROUND FLOOR BOX COVERS FOR HARDWOOD OR TILE FINISHED FLOORS				
PS895T **PS895TAL**	#8 duplex opening, 2 flip lids. Cover only.	Brass Aluminum	4¼	8
PS895TGFI **PS895TGFIAL**	#26 Decorator opening, flip lid. Cover only.	Brass Aluminum	4¼	8
ROUND FLOOR BOX COVERS FOR CARPETED FINISHED FLOORS				
PS895C **PS895CAL**	#8 duplex opening, 2 flip lids. Cover only.	Brass Aluminum	5½	8
PS895GFIC **PS895GFICAL**	#26 Decorator opening, flip lid. Cover only.	Brass Aluminum	5½	8

All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Recessed TV Boxes



TV3WTVSSLA

Ideal for flat-screen TVs, home office, kitchen counter tops, and behind furniture to allow snug-to-wall placement.

Today's homeowners have more multimedia choices than ever — including flat panel, wall-mounted televisions. P&S Recessed TV Boxes offer a clean installation with the versatility to handle up to 12 multimedia connections, while providing surge protected power.

Their recessed design saves space and simplifies connections to cable or satellite boxes, DVRs, DVD players, surround-sound systems and more.

And they're available with or without surge protective receptacles to protect costly electronics from potentially damaging surges.



TV1WW



TV1WTVSSBK



TV2MBK



TV1M

Features

- Clean, flush-mount appearance — snap-on end caps hide mounting screws.
- Flexible — position either line voltage or low-voltage in all three openings.
- Low-voltage connectors offer both terminated and pull-through capability.
- Plugs and multimedia connections stay recessed behind the wall surface.
- Molded-in template and rectangular cut-out.
- Accepts standard TP wall plates.
- Metal swing brackets ensure a solid mounting.
- Uses old-work-style boxes for line voltage.
- Accepts all P&S keystone low-voltage connectors, including Cat 5e and F-connectors (both supplied with Surge Protective kit), as well as RCA and audio binding posts.
- Metal boxes feature all-steel construction and are ideal for commercial applications.

CATALOG NUMBER	DESCRIPTION	COLOR
RECESSED TV BOXES		
TV1WW TV1WBK TV1WLA	Single Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV1WTVSSW TV1WTVSSBK TV1WTVSSLA	Single Gang Recessed TV Box with Surge Protective and Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, and Wall Plates.	White Black Light Almond
TV3WW TV3WBK TV3WLA	Three Gang Recessed TV Box — Frame Only.	White Black Light Almond
TV3WTVSSW TV3WTVSSBK TV3WTVSSLA	Three Gang Recessed TV Box with Surge Protective & Low-Voltage Kit. Includes Surge Protective Duplex Receptacle, Cat 5e Jack, F-Connector, Blanks, and Wall Plates.	White Black Light Almond

Single gang dimensions: 7.25" L x 4.875" W x 2.25" D
Three gang dimensions: 8.5" L x 4.875" W x 2.25" D

CATALOG NUMBER	CUBIC INCH VOLUME	DESCRIPTION	L	W	D	WIRE FILL (AWG)
METAL RECESSED TV BOXES						
TV1WMTVSSWCC2	18	Single Gang Recessed TV Box with metal electrical box, White	8	5	3.5	17 #14; 15 #12; 14 #10
TV1WMLVKIT	18	Single Gang Recessed TV Box with metal electrical box and low-voltage brush, White	8	5	3.5	17 #14; 15 #12; 14 #10
TV2MBK	37.5	Two Gang Commercial Metal Recessed TV Box, Black	6.9	7.6	3.5	9 #14; 8 #12; 7 #10
TV3WMTTVSSW	18	Three Gang Recessed TV Box with metal electrical box, White	8	5	3.5	17 #14; 15 #12; 14 #10


All devices listed on this page conform to NEMA OS2.

SLATER® PLASTIC BOXES

Applications & Product Features

Application

Slater Plastic Boxes, the Contractor's Choice designed with unique labor-saving features, include a complete range of wall, ceiling, and old work boxes for commercial and residential construction applications.

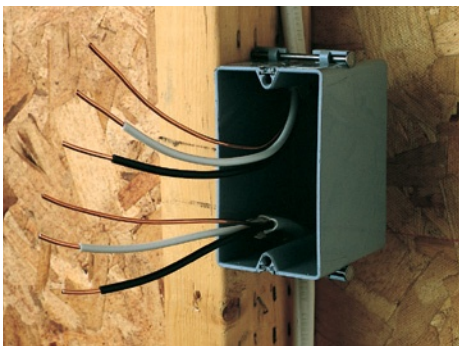

UL Classified


All Slater Plastic Boxes are Underwriters Laboratories Listed. Slater Plastic Boxes shown that are UL Classified for Fire Resistance meet the requirements of UL263 and have a two hour fire resistance rating. These boxes may be used in fire resistant walls and ceilings. Installation information for Slater Plastic Boxes Classified for Fire Resistance may be found in the UL Fire Resistance Directory under category CEYY for Legrand.

Product Features – Exclusive Auto/Clamp®

Eliminates the need for separate cable clamps as well as the tools usually needed for installation.

Auto/Clamp® is available on all multigang boxes, old work boxes, 4" square boxes, and 3-1/4" and 4" round ceiling boxes. A major installation advantage with Auto/Clamp® is that the clamp is molded as an integral part of the box (there are no separate clamps and screws to install, adjust or tighten). Each cable opening contains an Auto/Clamp®, therefore, the non-metallic sheathed cable may be inserted where needed or where most convenient. Auto/Clamp® does not take up as much room as conventional clamps, allowing more room for wire and devices – another important feature.


To install the cable, insert stripped or unstripped non-metallic wire into the Auto/Clamp® opening and pull through to the desired length. The cable is automatically secured and the installation is complete. There are no other operations for the electrician to perform. Contractors can look forward to saving time and money with every Auto/Clamp® plastic box installation.



Note: no additional cubic inch volume deduction required.

Location Ribs


Location Ribs enable the installer to quickly and accurately maintain a 1/2" offset. Dual ribs also make it easy to keep the face of the box parallel to the stud. The ribs are .450" long to reduce the chance of the box protruding beyond the 1/2" sheetrock.They project .080" to span the rounded edges of wood studs but will not cause excessive canting of the box when used with thinner wallboard.



Quick/Entry®

Speeds installation by eliminating need for tools

Another time-saving idea is Quick/Entry®, a method that allows you to push stripped or unstripped non-metallic cable into a single gang plastic box without removing knock-outs. Jagged edges usually formed in other boxes are eliminated. Staple wire to stud within 8" of the box (per NEC 314.17(c)] to complete installation.




Quick/Click®


Fast, easy, and secure installations.

The unique, labor-saving Quick/Click® design secures the wiring device quickly and easily. Simply push in the mounting screws with a screwdriver and turn the screw one turn.

With Quick/Click® you cannot cross-thread or strip a device mounting screw.

Wall boxes are tested for a minimum 100 lb. total device pull-out resistance.






How Quick/Click® Works

The **spring steel** insert for quick mounting of switches and receptacles is a unique patented feature. (Refer to illustration.) Note how the spring acts as a locking ratchet and allows the screw to be pushed in and then tightened. The screw can only be released by unscrewing it in the conventional fashion.

SLATER® PLASTIC BOXES


Applications & Product Features

Wood & Steel Stud Bracket Boxes – Application

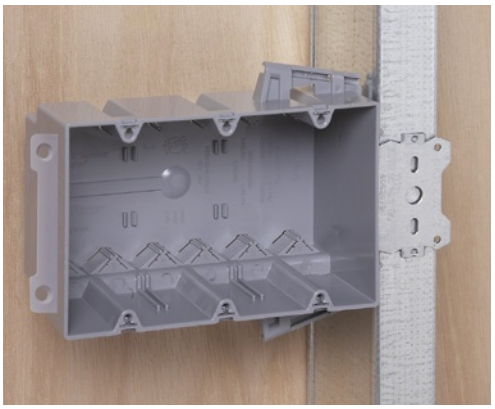

Single, two, three, four gang and 4" square wood and steel stud boxes feature Quick/Click®, the labor-saving device that assures quick and dependable installation of switches and receptacles. These high-impact thermoplastic boxes can be mounted quickly to steel or aluminum studs using the CT-1 Crimping Tool. They can also be mounted to wooden studs with common nails or screws.


On the single, two, three and four gang steel stud boxes, a steel mounting bracket is provided for mounting to the structural stud. The non-mounting side of the two and four gang box has provisions for attachment to a short section of stud (phantom stud), as shown in the illustration below, to give additional rigidity to the installation. This assembly may also be used without the phantom stud as a positioning tab to automatically realign the box to the wallboard surface. The brackets are 3/8" offset to accommodate 3/8" to 5/8" thick wallboard.

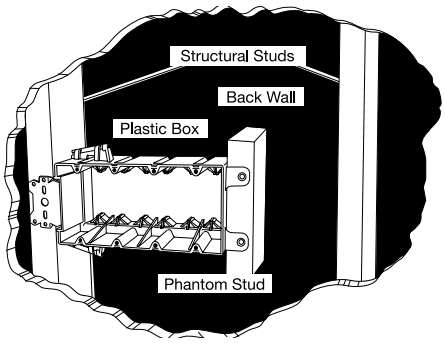


Features

- Available in single, two, three, four gang and 4" square boxes. Two, three and four gang boxes and 4" square include exclusive Auto/Clamp® feature.
- Single gang include Quick/Entry® feature.
- Quick/Click® feature offers fast and dependable installation of devices (single, two, three and four gang).
- Unique offset tab assures proper alignment to wall face. Available with 3/8" offsets.
- Can be used for steel, aluminum, or wooden studs. Can be installed on steel studs with most standard crimping tools in addition to CT-1 Crimping Tool.
- Molded of high-impact thermoplastic.

Screw Mount: Steel Stud Boxes – Application

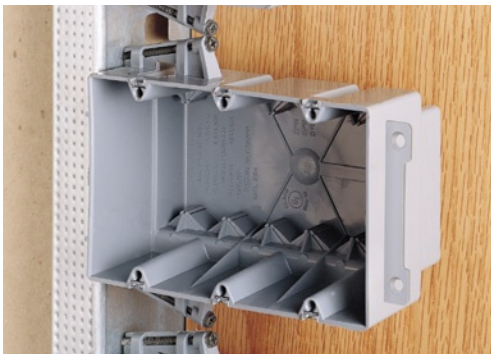

Single, deep single, two, three, four gang, and 4" round ceiling boxes come with combination Hex/Phillips washer head screws. They are designed to save labor and speed installation in steel stud construction. These innovative boxes are an alternative to bracket boxes, and can also be used on wood studs. The specially designed drill point on the screw rapidly penetrates medium gauge steel studs to securely fasten the box. Locator ribs 0.450" long help align the box on the stud and insure correct mounting depth.

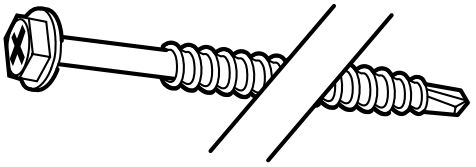

Features


- Available in single, single deep, two, three and four gang, and 4" round ceiling boxes.
- All multi-gang and ceiling boxes include exclusive Auto/Clamp® feature.
- Single gang include Quick/Entry® feature.
- Specially designed drill point rapidly penetrates medium gauge steel studs.
- Screws have combination Hex/Phillips washer heads.
- Quick/Click® feature on wall boxes offers fast and dependable installation of devices.
- Can be used for steel, aluminum, or wood studs.
- Molded of high-impact thermoplastic.
- Locator ribs ensure proper alignment on stud and proper offset depth.

SLATER® PLASTIC BOXES

Applications & Product Features

Old Work Boxes
Application

Old Work Boxes provide fast, easy installation of an electrical device in a finished (dry walled) area where no box existed before. Old Work Boxes include the Auto/Clamp® and Quick/Click® features for convenient, labor-saving installations.



Features


- Box designed so mounting strap of the device, with plaster ears removed, fits flush, allowing use of standard depth wall plate without unsightly gap between plate and wall surface.
- Swing out wing brackets permit installation of box in wall with 1-1/4" thick wallboard down to 1/8" thick paneling.
- New longer swing brackets have greater reach to clamp onto oversized cutouts.
- Made of high impact thermoplastic.
- Combination slotted/Phillips head swing bracket screws.
- Include exclusive Auto/Clamp® feature.
- Wall boxes include exclusive Quick/Click® feature.
- Available in ceiling box versions.

Box Volume Required


TOTAL CONDUCTOR FILL COUNT	CUBIC INCHES REQUIRED FOR		
	#14 WIRE	#12 WIRE	#10 WIRE
1	2.0	2.25	2.50
2	4.0	4.50	5.00
3	6.0	6.75	7.50
4	8.0	9.00	10.00
5	10.0	11.25	12.50
6	12.0	13.50	15.00
7	14.0	15.75	17.50
8	16.0	18.00	20.00
9	18.0	20.25	22.50
10	20.0	22.50	25.00
11	22.0	24.75	27.50
12	24.0	27.00	30.00
13	26.0	29.25	32.50
14	28.0	31.50	35.00
15	30.0	33.75	37.50
16	32.0	36.00	40.00
17	34.0	38.25	42.50
18	36.0	40.50	45.00
19	38.0	42.75	47.50
20	40.0	45.00	50.00

In addition to counting 1 conductor fill allowance for each conductor, 1 additional allowance must be counted for all cable clamps, and 1 additional allowance for all ground conductors. 2 additional fill allowances must be counted for each device strap. See NEC Section 314.16(b). The table above defines box volume required for resulting total conductor fill count, depending on AWG used.

Standard Mounting Dimensions for Boxes

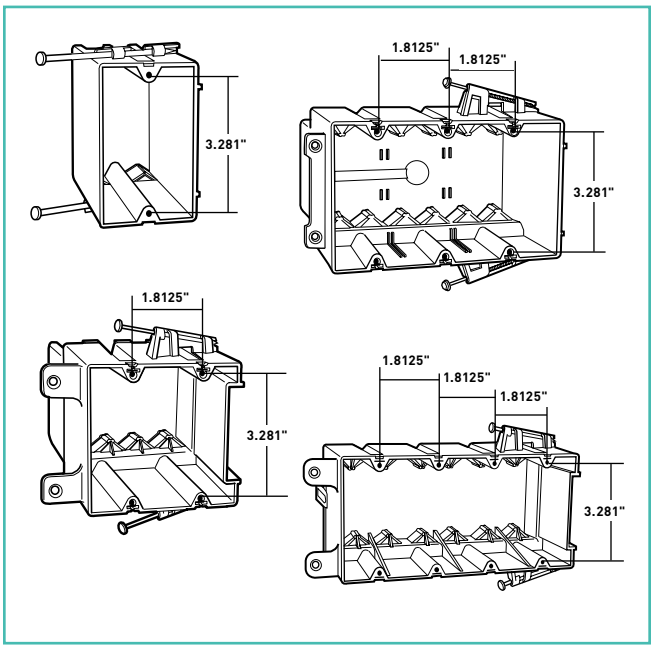

Standard Mounting Dimensions Round Boxes

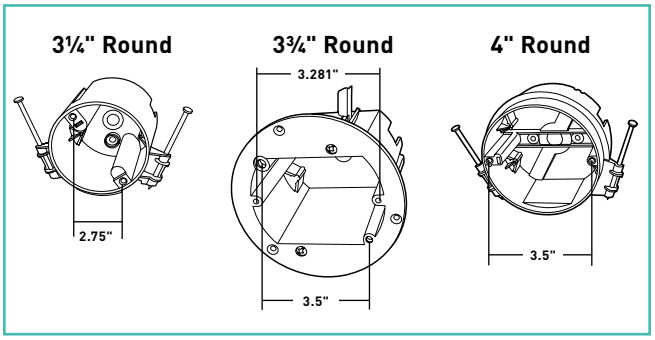

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

Retrofit Braces

22200
Retrofit Braces


A. Cast zinc self-leveling feet ease installation.

B. 25 cu. in. metal box included.


C. Heavy-duty hexagon brace expands from 16"-24", perfect for existing ceiling applications.

D. Rotating dual supports accept both fan (#10-32 screws) and fixture (#8-32 screws) mounting.

Supports fans up to 70 lbs. and fixtures up to 150 lbs.

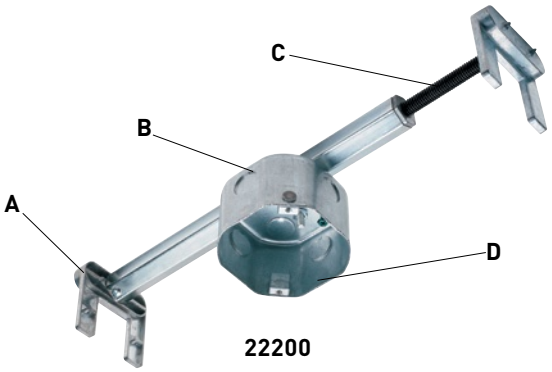

22200

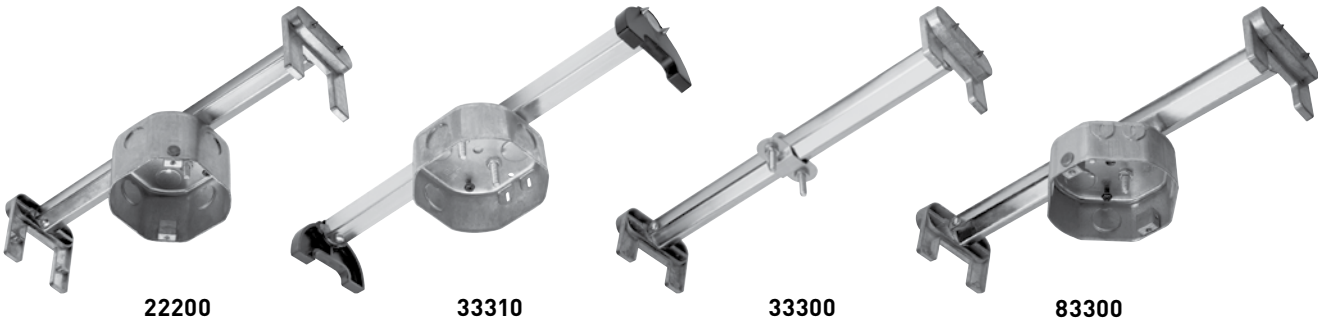
22200 33310 33300 83300

Features


- For spans from 16 to 24 inches.
- UL listed for fan and fixture support.
- Self-leveling feet.
- Maximum weight rating shown for 16" spans.
- Ground screw pre-installed.
- Boxes include top knockouts.

CATALOG NUMBER	DESCRIPTION	VOLUME CU. IN.	BOX DEPTH	QUANTITY PER CARTON	UL LISTED MAX. WEIGHT RATING AT 16" SPAN	
					FAN	FIXTURE
RETROFIT BRACES						
22200	Fan Brace – premium grade with deep box, rotating dual support for 16-24" spans	25 cu. in.	2.5"	12	70 lbs.	150 lbs.
33310	Fan Brace – standard grade with standard box, single #10 support for 16-24" spans	16 cu. in.	1.5"	12	70 lbs.	150 lbs.
33300	Fan Brace Only – use with standard octagon electrical box (33303), single #10 support for 16-24" spans	N/A	N/A	12	70 lbs.	150 lbs.
83300	Fan Brace — premium grade with standard box, rotating dual support for 16-24" spans	16 cu. in.	1.5"	12	70 lbs.	150 lbs.

All devices listed on this page conform to NEMA OS2.

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

New Construction Slides

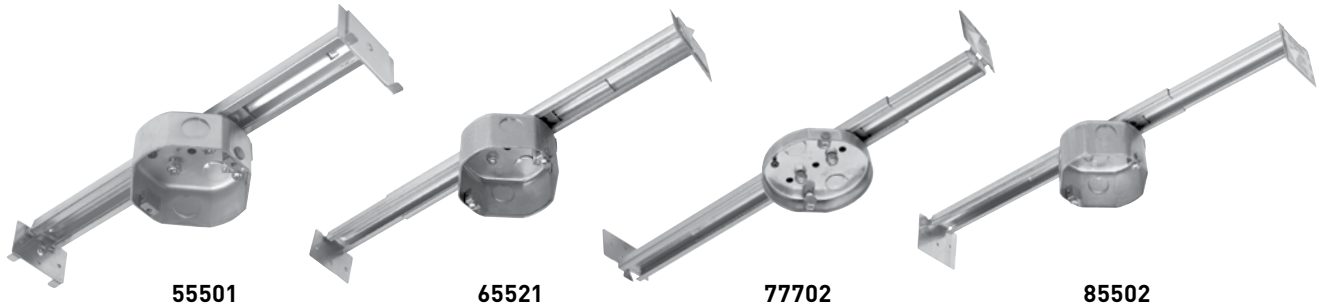

55501 65521 77702 85502

Features

- For spans from 16 to 24 inches.
- UL listed for fan and fixture support.
- Peel-off tape for "hands-free" installation.
- Maximum weight rating shown for 16" spans.
- Broadest line available, from shallow to deep boxes.
- Pre-assembled with ground screw installed.
- Boxes include top knockouts.


CATALOG NUMBER	DESCRIPTION	VOLUME CU. IN.	BOX DEPTH	QUANTITY PER CARTON	UL LISTED MAX. WEIGHT RATING AT 16" SPAN	
					FAN	FIXTURE
NEW CONSTRUCTION						
55501*	Slide Fan Support – heavy-duty slide with standard box, rotating dual support for 16-24" spans	16 cu. in.	1.5"	24	70 lbs.	110 lbs.
65521	Slide Fan Support – same heavy-duty slide as 55501, but with 2.0" deep box, to accommodate up to 1" firewall or soundproofed ceilings, with rotating dual support for 16-24" spans, bulk packed	21 cu. in.	2.0"	25	70 lbs.	110 lbs.
85502	Slide Fan Support – heavy-duty slide with deep box, rotating dual support for 16-24" spans	21 cu. in.	2.0"	24	70 lbs.	110 lbs.
77702	Slide Fan Support – heavy-duty slide with shallow box, rotating dual support for 16-24" spans	8 cu. in.	5/8"	24	70 lbs.	110 lbs.

*Available in 12 Pack. Use Catalog Number 5550112.

All devices listed on this page conform to NEMA OS2.

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

Side, Direct & Shallow Boxes



55025



77705

Features

- Direct mount to joist.
- UL listed for fan and fixture support.
- Peel-off tape for "hands-free" installation.
- Broadest line available, from shallow to deep boxes .
- Ground screw pre-installed.
- Supplied with hardware.
- Boxes include top knockouts.

CATALOG NUMBER	DESCRIPTION	VOLUME CU. IN.	BOX DEPTH	QUANTITY PER CARTON	UL LISTED MAX. WEIGHT RATING AT 16" SPAN	
					FAN	FIXTURE
SIDE MOUNT BOXES						
55015	Side Mount Box – with rotating dual support	16 cu. in.	1.5"	24	70 lbs.	150 lbs.
55020*	Side Mount Deep Box – with rotating dual support	21 cu. in.	2.0"	24	70 lbs.	150 lbs.
55025	Side Mount Deep Box – same as 55020 with 5 top knockouts and rotating dual support	21 cu. in.	2.0"	24	70 lbs.	150 lbs.
DIRECT MOUNT BOXES						
33303	Standard Electrical Box – for use with 33300 Brace	16 cu. in.	1.5"	36	N/A	N/A
44400	Direct Mount Deep Box — with rotating dual support	25 cu. in.	2.5"	24	70 lbs.	150 lbs.
55528	Direct Mount Deep Box – with rotating dual support	21 cu. in.	2.0"	24	70 lbs.	150 lbs.
SHALLOW BOXES						
77700	Direct Mount Shallow Box — with rotating dual support	8 cu. in.	5/8"	24	70 lbs.	150 lbs.
77705	Direct Mount Shallow Box — with rotating dual support	6.5 cu. in.	1/2"	24	70 lbs.	150 lbs.

*Available in 12 Packs. Use Catalog Numbers 55020012.

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS


Specialty Boxes, Concrete Fan Support Box & Contractor Packs



77706



15010



15040

Features

- Direct mount to joist.
- UL listed for fan and fixture support.
- Peel-off tape for "hands-free" installation.
- Maximum weight rating (slides and braces) shown for 16" spans.
- Broadest line available, from shallow to deep boxes.
- Ground screw pre-installed.
- Supplied with hardware.
- Boxes include top knockouts.

CATALOG NUMBER	DESCRIPTION	VOLUME CU. IN.	BOX DEPTH	QUANTITY PER CARTON	UL LISTED MAX. WEIGHT RATING AT 16" SPAN	
					FAN	FIXTURE
SPECIALTY BOXES						
77706	Shallow Box – with wings for thick/ firewall ceilings, rotating dual support	8 cu. in.	5/8"	24	70 lbs.	150 lbs.
15010*	Drop Ceiling Support – single #10 support for 24-36" spans, 38" drop	16 cu. in.	1.5"	6	70 lbs.	150 lbs.
CONCRETE FAN SUPPORT BOX						
15040	Concrete Box – single #10 support	47.5 cu. in.	4.0"	12	35 lbs.	50 lbs.


*UL Listed Fan/Fixture at 24" Span.

CATALOG NUMBER	DESCRIPTION	VOLUME CU. IN.	BOX DEPTH	QUANTITY PER CARTON	BASE ITEM	UL LISTED MAX. WEIGHT RATING AT 16" SPAN	
						FAN	FIXTURE
BULK – CONTRACTOR PACK							
65501	Slide Fan Support – heavy-duty slide with standard box, rotating dual support for 16-24" spans	16 cu. in.	1.5"	25	55501	70 lbs.	110 lbs.
77708	Slide Fan Support – heavy-duty slide with shallow box, rotating dual support for 16-24" spans	8 cu. in.	5/8"	24	77702	70 lbs.	110 lbs.
55500	Direct Mount Box	16 cu. in.	1.5"	24	33303	70 lbs.	150 lbs.
65505	Direct Mount Box – with rotating dual support	16 cu. in.	1.5"	50		70 lbs.	150 lbs.
67705	Direct Mount Shallow Box – with rotating dual support	6.5 cu. in.	1/2"	50	77705	70 lbs.	150 lbs.

All devices listed on this page conform to NEMA OS2.

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

Specifications

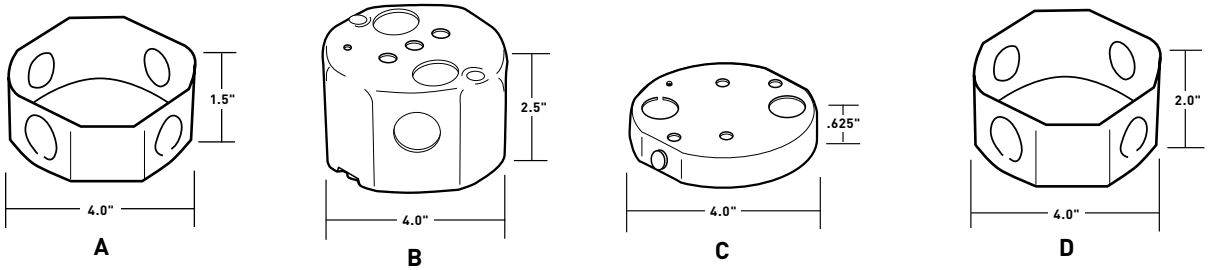

Retrofit Braces

MATERIALS OF CONSTRUCTION	
Hex Tube	16 Gauge Extruded Steel with Chrome Plating
Square Tube	16 Gauge Extruded Steel with Chrome Plating
Die Cast Feet	Die Cast Zinc
Plastic Feet	Injection Molded Plastic

COMPLIANCES
Compliant with UL514A
Compliant with NEC Section 422.18 and Section 314.27
Extension rating from 16 to 24 inches
Compliant with NEMA Standard OS1

CATALOG NUMBER	DESCRIPTION	BOX INCLUDED			WEIGHT RATING (LBS.)			
					16" SPANS		>16-24" SPANS	
		TYPE	DEPTH	CU. IN.	FAN	FIXTURE	FAN	FIXTURE
22200	Premium Brace with deep box	B	2.5	25	70	150	35	50
33300	Premium Brace only		None		70	150	35	50
33310	Standard Brace with standard box	A	1.5	16	70	150	35	50
83300	Premium Brace with standard box	A	1.5	16	70	150	35	50

New Construction Slides

MATERIALS OF CONSTRUCTION	
Slide Parts	16 Gauge Stamped Steel
Inner Slide	14 Gauge Stamped Steel


COMPLIANCES
Compliant with UL514A
Compliant with NEC Section 422.18 and Section 314.27
Extension rating from 16 to 24 inches
Compliant with NEMA Standard OS1

CATALOG NUMBER	DESCRIPTION	BOX INCLUDED			WEIGHT RATING (LBS.)			
					16" SPANS		>16-24" SPANS	
		TYPE	DEPTH	CU. IN.	FAN	FIXTURE	FAN	FIXTURE
55501	Heavy-Duty Slide with standard box	A	1.5	16	70	110	35	50
65501	Heavy-Duty Slide with standard box	A	1.5	16	70	110	35	50
65521	Heavy-Duty Slide with deep box	D	2.0	21	70	110	35	50
77702	Heavy-Duty Slide with shallow box	C	0.625	8	70	110	35	50
77708	Heavy-Duty Slide with shallow box	C	0.625	8	70	110	35	50
85502	Heavy-Duty Slide with deep box	D	2.0	21	70	110	35	50


All devices listed on this page conform to NEMA OS2.

REIKER CEILING FAN & FIXTURE SUPPORT PRODUCTS

Specifications



Single #10 Support



Rotating Dual Support

Side, Direct, Shallow & Specialty Boxes

MATERIALS OF CONSTRUCTION	
Box Steel	16 Gauge Stamped Steel

COMPLIANCES
Compliant with UL514A
Compliant with NEC Sections 422.18 and 314.27
Compliant with NEMA Standard OS1

CATALOG NUMBER	DESCRIPTION	BOX CAPACITY	WEIGHT RATING
33303	Electrical box only	16 cu. in.	N/A
44400	Direct Mount with rotating dual support	25 cu. in.	Up to 70# Fan/150# Fixture
55015	Side Mount with rotating dual support	16 cu. in.	Up to 70# Fan/150# Fixture
55020 55025	Side Mount with rotating dual support	21 cu. in.	Up to 70# Fan/150# Fixture
55528	Direct Mount with rotating dual support	21 cu. in.	Up to 70# Fan/150# Fixture
77700	Direct Mount shallow box with rotating dual support	8 cu. in.	Up to 70# Fan/150# Fixture
77705	Direct Mount shallow box with rotating dual support	6.5 cu. in.	Up to 70# Fan/150# Fixture
77706	Direct Mount with u-bracket for firewalls with rotating dual support	8 cu. in.	Up to 70# Fan/150# Fixture

CATALOG NUMBER	WIRE CLAMP TYPE
15010	Metal
15040	Plastic
22200	Plastic
33303	Metal
33310	Plastic
44400	Plastic
55015	Metal
55020	Plastic
55025	Plastic
55501	Metal
55528	Plastic
65501	Metal
65521	Metal
77700	Plastic
77702	Plastic
77705	Plastic
77706	Plastic
83300	Plastic

All devices listed on this page conform to NEMA OS2.

WALL PLATES & SPECIALTIES






WALL PLATES

RADIANT SCREWLESS WALL PLATES	I-2
STANDARD SIZE WALL PLATES	
Toggle Switch Openings	I-5
Duplex Receptacle Openings	I-6
Decorator-Style Openings	I-7
Blank Plates-Box Mounted	I-8
Blank Plates-Strap Mounted	I-9
Single Receptacles & One Gang Power Outlet Openings	I-10
Two Gang Power Outlet Openings	I-11
Combination Openings	I-12
Despard Openings	I-16
Two Gang With Center Openings	I-17
Louver & KL Series Locking Switch Plates	I-18
JUNIOR JUMBO & JUMBO WALL PLATES	
Toggle Switch, Duplex & Single Receptacle Openings	I-19
Decorator-Style Openings	I-20
Combination Openings	I-21
Sectional Wall Plates	I-22



SPECIALTIES

CUSTOM & ENGRAVED WALL PLATES	
Engraved & Pad Printed	I-23
Custom Plates	I-25
MISCELLANEOUS	
Communication Plates	I-31
Mounting Straps & Yokes	I-37
Incandescent Lampholders & Neon Pilot Lights	I-38
Screws & Screwdrivers	I-39

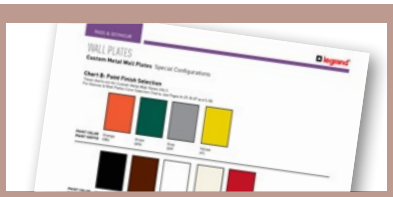

REFERENCE MATERIALS

Specifications	I-40
Style Selector Guide	I-43
Color Selection Guide	I-56

WALL PLATES

RWP26LA
radiant® Screwless Polycarbonate Wall Plates

A. Redesigned screwless wall plates feature a lower, more modern profile in keeping with today's design trends.


B. Molded of rugged .065" thick polycarbonate.

C. One-piece subplate mounts over the device for easy retrofit and lower profile.

D. Subplate screws align devices to ensure proper positioning of wall plates.

E. Opening accommodates all NEMA decorator-opening devices.

F. An extra 3/8" width and height than standard size wall plates for more tolerance in covering ragged sheet rock openings.

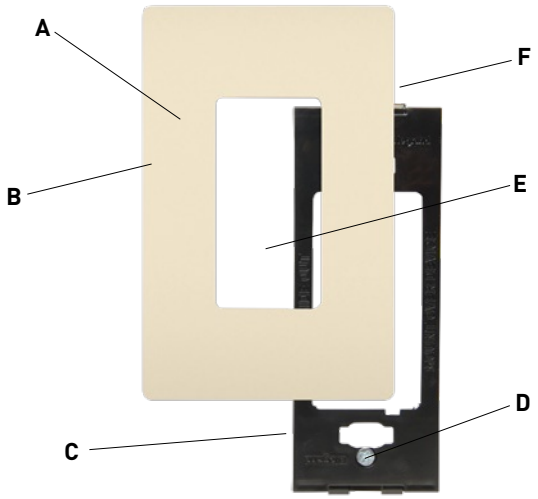

RWP26LA

The radiant® collection is a step up from the standard with simple, classic options in wiring devices, home automation controls, and screwless wall plates that complement today's homes and hospitality settings.

WALL PLATES

radiant® Metallic Finish Screwless Wall Plates Polycarbonate









One Gang
Nickel



Two Gang
Dark Bronze



Three Gang
Graphite


DESCRIPTION	COLOR	26 OPENINGS
SCREWLESS DECORATOR-STYLE OPENINGS PLASTIC SUBPLATE INCLUDED		
One Gang 	Nickel Dark Bronze Graphite	RWP26NI RWP26DBCC6 RWP26GCC6
Two Gang 	Nickel Dark Bronze Graphite	RWP262NI RWP262DBCC6 RWP262GCC6
Three Gang 	Nickel Dark Bronze Graphite	RWP263NI RWP263DBCC6 RWP263GCC6
Four Gang 	Nickel Dark Bronze	RWP264NI RWP264DB
Five Gang 	Nickel Dark Bronze	RWP265NI RWP265DB
Six Gang 	Nickel Dark Bronze	RWP266NI RWP266DB

For Screwless Wall Plate and Plastic Subplate dimensions, see next page.


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES


radiant® Screwless Wall Plates Polycarbonate



One Gang



Two Gang




Three Gang



Four Gang

DESCRIPTION	COLOR	26 OPENINGS
SCREWLESS WALL PLATES PLASTIC SUBPLATE INCLUDED		
One Gang	Ivory	RWP26I
	White	RWP26W
	Brown	RWP26
	Gray	RWP26GRY
	Black	RWP26BK
	Light Almond	RWP26LA
Two Gang	Ivory	RWP262I
	White	RWP262W
	Brown	RWP262
	Gray	RWP262GRY
	Black	RWP262BK
	Light Almond	RWP262LA
Three Gang	Ivory	RWP263I
	White	RWP263W
	Brown	RWP263
	Gray	RWP263GRY
	Black	RWP263BK
	Light Almond	RWP263LA
Four Gang	Ivory	RWP264I
	White	RWP264W
	Brown	RWP264
	Gray	RWP264GRY
	Black	RWP264BK
	Light Almond	RWP264LA
Five Gang	Ivory	RWP265I
	White	RWP265W
	Brown	RWP265
	Gray	RWP265GRY
	Black	RWP265BK
	Light Almond	RWP265LA
Six Gang	Ivory	RWP266I
	White	RWP266W
	Brown	RWP266
	Gray	RWP266GRY
	Black	RWP266BK
	Light Almond	RWP266LA



One Gang Plastic Subplate

Two Gang Plastic Subplate









DESCRIPTION	HEIGHT	WIDTH
SCREWLESS DECORATOR-STYLE OPENINGS PLASTIC SUBPLATE INCLUDED		
One Gang	4.94"	3.15"
Two Gang	4.94"	4.96"
Three Gang	4.94"	6.77"
Four Gang	4.94"	8.59"
Five Gang	4.94"	10.40"
Six Gang	4.94"	12.21"

DESCRIPTION	HEIGHT	WIDTH
SCREWLESS PLASTIC SUBPLATE DIMENSIONS		
One Gang	4.78"	1.81"
Two Gang	4.78"	3.62"
Three Gang	4.78"	5.44"
Four Gang	4.78"	7.25"
Five Gang	4.78"	9.06"
Six Gang	4.78"	10.87"

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES







Toggle Switch Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
TOGGLE SWITCH OPENINGS					
One Gang 	Ivory	TP1I	SP1I	Aluminum	SA1
	White	TP1W	SP1W		
	Brown	TP1	SP1	Polished Brass	SB1PB
	Gray	TP1GRY	SP1GRY	430S/S	SL1
	Black	TP1BK		302/304 S/S	SS1
	Red	TP1RED		Brushed Bronze	SB1BZ
	Light Almond	TP1LA	SP1LA	Chrome	SB1CH
Two Gang 	Ivory	TP2I	SP2I	Aluminum	SA2
	White	TP2W	SP2W		
	Brown	TP2	SP2	Polished Brass	SB2PB
	Gray	TP2GRY	SP2GRY	430S/S	SL2
	Black	TP2BK		302/304 S/S	SS2
	Red	TP2RED		Brushed Bronze	SB2BZ
	Light Almond	TP2LA	SP2LA	Chrome	SB2CH
Three Gang 	Ivory	TP3I	SP3I	Aluminum	SA3
	White	TP3W	SP3W		
	Brown	TP3	SP3	Polished Brass	SB3PB
	Gray	TP3GRY	SP3GRY	430S/S	SL3
	Black	TP3BK		302/304 S/S	SS3
	Red	TP3RED		Brushed Bronze	SB3BZ
	Light Almond	TP3LA	SP3LA	Chrome	SB3CH
Four Gang 	Ivory	TP4I	SP4I	Aluminum	SA4
	White	TP4W	SP4W		
	Brown	TP4	SP4	Polished Brass	SB4PB
	Gray	TP4GRY	SP4GRY	430S/S	SL4
	Black	TP4BK		302/304 S/S	SS4
	Red	TP4RED			
	Light Almond	TP4LA	SP4LA		
Five Gang 	Ivory	TP5I	SP5I		
	White	TP5W	SP5W		
	Brown	TP5	SP5	Polished Brass	SB5PB
	Gray	TP5GRY	SP5GRY		
	Black	TP5BK		302/304 S/S	SS5
	Light Almond	TP5LA	SP5LA		
Six Gang 	Ivory	TP6I	SP6I		
	White	TP6W	SP6W	Polished Brass	SB6PB
	Brown	TP6			
	Gray	TP6GRY	SP6GRY	302/304 S/S	SS6
	Black	TP6BK			
	Light Almond	TP6LA	SP6LA		
Seven Gang 				302/304 S/S	SS601
				302/304 S/S Painted Ivory	SS601I
				302/304 S/S Painted White	SS601W
Eight Gang 				302/304 S/S	SS602
				302/304 S/S Painted Ivory	SS602I
				302/304 S/S Painted White	SS602W

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES









Duplex Receptacle Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
DUPLEX RECEPTACLE OPENINGS					
One Gang 	Ivory	TP8I	SP8I		
	White	TP8W	SP8W	Aluminum	SA8
	Brown	TP8	SP8		
	Gray	TP8GRY	SP8GRY	Polished Brass	SB8PB
	Black	TP8BK		430S/S	SL8
	Red	TP8RED		302/304 S/S	SS8
	Light Almond	TP8LA	SP8LA	Brushed Bronze	SB8BZ
	Blue	TP8BL		Chrome	SB8CH
	Orange	TP8OR			
Two Gang 	Ivory	TP82I	SP82I		
	White	TP82W	SP82W	Aluminum	SA82
	Brown	TP82	SP82		
	Gray	TP82GRY	SP82GRY	Polished Brass	SB82PB
	Black	TP82BK		430S/S	SL82
	Red	TP82RED		302/304 S/S	SS82
	Light Almond	TP82LA	SP82LA	Brushed Bronze	SB82BZ
	Orange	TP82OR		Chrome	SB82CH
Three Gang 	Ivory		SP83I		
	White		SP83W		
	Brown		SP83	Polished Brass	SB83PB
	Gray		SP83GRY		
	Light Almond		SP83LA	302/304 S/S	SS83
Four Gang 	Ivory		SP84I		
	White		SP84W	Polished Brass	SB84PB
	Brown		SP84		
	Gray		SP84GRY	302/304 S/S	SS84
Five Gang 				302/304 S/S	SS85
Six Gang 				302/304 S/S	SS86

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES








Decorator-Style Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
DECORATOR-STYLE OPENINGS					
One Gang 	Ivory	TP26I	SP26I		
	White	TP26W	SP26W	Aluminum	SA26
	Brown	TP26	SP26		
	Gray	TP26GRY	SP26GRY	Polished Brass	SB26PB
	Black	TP26BK	SP26BK	430S/S	SL26
	Red	TP26RED		302/304 S/S	SS26
	Light Almond	TP26LA	SP26LA	Brushed Bronze	SB26BZ
	Blue	TP26BL		Chrome	SB26CH
	Orange	TP26OR			
	White	TP262W	SP262W	Aluminum	SA262
	Brown	TP262	SP262		
	Gray	TP262GRY	SP262GRY	Polished Brass	SB262PB
	Black	TP262BK	SP262BK	430S/S	SL262
	Red	TP262RED		302/304 S/S	SS262
	Light Almond	TP262LA	SP262LA		
	Blue	TP262BL			
	Orange	TP262OR			
Three Gang 	Ivory	TP263I	SP263I		
	White	TP263W	SP263W		
	Brown	TP263		Polished Brass	SB263PB
	Gray	TP263GRY	SP263GRY		
	Black	TP263BK	SP263BK	302/304 S/S	SS263
	Red	TP263RED			
	Light Almond	TP263LA	SP263LA		
Four Gang 	Ivory	TP264I	SP264I		
	White	TP264W	SP264W		
	Brown	TP264	SP264	Polished Brass	
	Gray	TP264GRY	SP264GRY		
	Black	TP264BK	SP264BK	302/304 S/S	SS264
	Red	TP264RED			
	Light Almond	TP264LA	SP264LA		
Five Gang 	Ivory	TP265I	SP265I		
	White	TP265W	SP265W		
	Brown	TP265		302/304 S/S	SS265
	Gray	TP265GRY	SP265GRY		
	Black	TP265BK	SP265BK		
	Red		SP265RED		
	Light Almond	TP265LA	SP265LA		
Six Gang 	Ivory	TP266I	SP266I		
	White	TP266W	SP266W		
	Brown	TP266	SP266	302/304 S/S	SS266
	Gray	TP266GRY	SP266GRY		
	Black	TP266BK	SP266BK		
	Light Almond	TP266LA	SP266LA		
Seven Gang 				302/304 S/S	SS267
				302/304 S/S Painted Ivory	SS267I
				302/304 S/S Painted White	SS267W
Eight Gang 				302/304 S/S	SS268
				302/304 S/S Painted Ivory	SS268I
				302/304 S/S Painted White	SS268W

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES





Blank Plates – Box Mounted Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
BLANK PLATES – BOX MOUNTED					
One Gang Blank – Box Mtd. 	Ivory	TP13I	SP13I	Aluminum	SA13
	White	TP13W	SP13W		
	Brown	TP13	SP13	Polished Brass	SB13PB
	Gray	TP13GRY	SP13GRY	430S/S	SL13
	Black	TP13BK		302/304 S/S	SS13
	Red	TP13RED		302/304 S/S (1/2" Screws)	SS13.5
	Light Almond	TP13LA	SP13LA	Brushed Bronze	SB13BZ
				Chrome	SB13CH
Two Gang Blank – Box Mtd. 	Ivory	TP23I	SP23I	Aluminum	SA23
	White	TP23W	SP23W		
	Brown	TP23	SP23	Polished Brass	SB23PB
	Gray	TP23GRY	SP23GRY	430S/S	SL23
	Black	TP23BK		302/304 S/S	SS23
	Light Almond	TP23LA	SP23LA	302/304 S/S (1/2" Screws)	SS23.5
				Brushed Bronze	SB23BZ
				Chrome	SB23CH
Three Gang Blank – Box Mtd. 	Ivory		SP33I	Polished Brass	SB33PB
	White		SP33W		
	Brown		SP33	302/304 S/S	SS33
	Gray		SP33GRY	302/304 S/S (1/2" Screws)	SS33.5
	Light Almond		SP33LA		
Four Gang Blank – Box Mtd. 	Ivory		SP43I		
	White		SP43W		
	Brown		SP43	302/304 S/S	SS43
	Gray		SP43GRY		
Five Gang Blank – Box Mtd. 				302/304 S/S	SS53
Six Gang Blank – Box Mtd. 				302/304 S/S	SS63
Seven Gang Blank – Box Mtd. 				302/304 S/S	SS6013
Eight Gang Blank – Box Mtd. 				302/304 S/S	SS6023

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES





Blank Plates – Strap Mounted Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
BLANK PLATES – STRAP MOUNTED WITH ADJUSTMENT YOKE					
One Gang Blank – Strap Mtd. 	Ivory	TP14I	SP14I		
	White	TP14W	SP14W	Aluminum	SA14
	Brown	TP14	SP14		
	Gray	TP14GRY	SP14GRY	430S/S	SL14
	Black	TP14BK	SP14BK	302/304 S/S	SS14
	Red		SP14RED	302/304 S/S (1/2" Screws)	SS14.5
	Light Almond	TP14LA	SP14LA		
Two Gang Blank – Strap Mtd. 	Ivory	TP24I	SP24I		
	White	TP24W	SP24W	Aluminum	SA24
	Brown	TP24	SP24		
	Gray	TP24GRY	SP24GRY	430S/S	SL24
	Black	TP24BK	SP24BK	302/304 S/S	SS24
	Red		SP24RED	302/304 S/S (1/2" Screws)	
	Light Almond	TP24LA	SP24LA		
Three Gang Blank – Strap Mtd. 	Ivory		SP34I		
	White		SP34W		
	Brown		SS34	302/304 S/S	SS34
	Gray		SP34GRY		
Four Gang Blank – Strap Mtd. 	Ivory		SP44I		
	White		SP44W		
	Brown		SP44	302/304 S/S	SS44
	Gray		SP44GRY		

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES




Single Receptacle & Power Outlet Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
SINGLE RECEPTACLE OPENINGS					
One Gang 	Ivory	TP7I	SP7I		
	White	TP7W	SP7W	Aluminum	SA7
	Brown	TP7	SP7		
	Gray	TP7GRY	SP7GRY	Polished Brass	SB7PB
	Black	TP7BK		430S/S	SL7
	Red	TP7RED		302/304 S/S	SS7
	Light Almond	TP7LA	SP7LA		
Two Gang 	Ivory		SP72I		
	White		SP72W		
	Brown		SP72	302/304 S/S	SS72
Three Gang 				302/304 S/S	SS73
POWER OUTLET RECEPTACLE OPENINGS – ONE GANG					
 1.5938" hole for 1.5625" dia. device – 2 mtg. holes	Ivory	TP720I	SP720I		
	White	TP720W	SP720W		
	Brown	TP720	SP720	302/304 S/S	SS720
	Gray	TP720GRY	SP720GRY		
	Light Almond	TP720LA	SP720LA		
 1.625" hole for 1.5938" dia. device – 2 mtg. holes				302/304 S/S	SS721
 1.75" hole for 1.7186" dia. device-2 mtg. holes				302/304 S/S	SS725
 2.125" hole for 2.094" dia. device – 2 mtg. holes				302/304 S/S	SS723
 2.156" hole for 2.125" dia. device – 2 mtg. holes	Ivory	TP724I	384I		
	White	TP724W			
	Brown	TP724	384	Chrome	S384C
	Gray	TP724GRY		302/304 S/S	SS724
	Black	TP724BK			
	Light Almond	TP724LA			

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES





Power Outlet Receptacle Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
POWER OUTLET RECEPTACLE OPENINGS – TWO GANG					
 2.4688" hole for 2.375" dia. device – 4 mtg. holes				Chrome 302/304 S/S	S3863C SS701
 2.1563" hole for 2.125" dia. device – 2 mtg. holes				302/304 S/S	SS702
 2.1563" hole for 2.125" dia. device – 4 mtg. holes	Ivory Ivory White Brown Brown Gray Black Light Almond	TP703I TP703W TP703 TP703GRY TP703BK TP703LA	SP703I 3862I SP703 3862	 Chrome 302/304 S/S	 S3862C SS703
 2.2813" hole for 2.125" dia. device – 4 mtg. holes				Aluminum 302/304 S/S	SA716 SS716
 2.1563" hole for 2.125" dia. device – 4 mtg. holes				302/304 S/S	SS705
 1.5938" hole for 1.5625" dia. device – 2 mtg. holes				302/304 S/S	SS710

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES


Combination Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
TOGGLE SWITCH & DUPLEX RECEPTACLE OPENINGS					
Two Gang 1 Toggle, 1 Duplex 	Ivory	TP18I	SP18I		
	White	TP18W	SP18W		
	Brown	TP18	SP18	Polished Brass	SB18PB
	Gray	TP18GRY	SP18GRY		
	Black	TP18BK		302/304 S/S	SS18
	Red	TP18RED			
	Light Almond	TP18LA	SP18LA		
Three Gang 2 Toggles, 1 Duplex 	Ivory	TP28I	SP28I		
	White	TP28W	SP28W		
	Brown	TP28	SP28	Polished Brass	SB28PB
	Gray	TP28GRY	SP28GRY		
	Black	TP28BK		302/304 S/S	SS28
	Red	TP28RED			
	Light Almond	TP28LA	SP28LA		
Four Gang 3 Toggles, 1 Duplex 	Ivory		SP38I	Polished Brass	SS38PB
	White		SP38W		
	Brown		SP38	302/304 S/S	SS38
	Gray		SP38GRY		SS38.5
	Light Almond		SP38LA		
Five Gang 4 Toggles, 1 Duplex 				302/304 S/S	SS48
				302/304 S/S Painted Ivory	SS48I
				302/304 S/S Painted White	SS48W
TOGGLE SWITCH & DECORATOR-STYLE OPENINGS					
Two Gang 1 Toggle, 1 Decorator-Style 	Ivory	TP126I	SP126I		
	White	TP126W	SP126W	Aluminum	SA126
	Brown	TP126	SP126		
	Gray	TP126GRY	SP126GRY	Polished Brass	SB126PB
	Black	TP126BK	SP126BK		
	Light Almond	TP126LA	SP126LA	302/304 S/S	SS126
Three Gang 2 Toggles, 1 Decorator-Style 	Ivory	TP226I	SP226I		
	White	TP226W	SP226W		
	Brown	TP226	SP226	302/304 S/S	SS226
	Gray	TP226GRY	SP226GRY		
	Light Almond	TP226LA	SP226LA		
	Black	TP226BK			
Three Gang 1 Toggle, 2 Decorator-Style 	Ivory		SP1262I		
	White		SP1262W		
	Brown		SP1262	302/304 S/S	SS1262
	Gray		SP1262GRY		
	Black		SP1262BK		
	Light Almond		SP1262LA		
Four Gang 3 Toggles, 1 Decorator-Style 	Ivory		SP326I		
	White		SP326W		
	Brown		SP326	302/304 S/S	SS326
	Gray		SP326GRY		
	Light Almond		SP326LA		

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES






Combination Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
TOGGLE SWITCH & DECORATOR-STYLE OPENINGS (CONT.)					
Four Gang 2 Toggles, 2 Decorator-Style 	Ivory White Brown Light Almond		SP2262I SP2262W SP2262 SP2262LA		
TOGGLE SWITCH & BLANK STRAP MOUNTED OPENINGS					
Two Gang 1 Toggle, 1 Blank 				302/304 S/S	SS114
Three Gang 2 Toggles, 1 Blank 				302/304 S/S	SS214
Four Gang 3 Toggles, 1 Blank 				302/304 S/S	SS314

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES




Combination Openings Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
TWO GANG COMBINATION OPENINGS					
Two Gang 1 Toggle, 1 Single 	Ivory White Brown Gray		SP17I SP17W SP17 SP17GRY	302/304 S/S	SS17
Two Gang Single/Duplex 	Ivory White Brown Gray		SP78I SP78W SP78 SP78GRY	Aluminum 302/304 S/S	SA78 SS78
Two Gang Duplex/Decorator-Style 	Ivory White Brown Gray Black Red Light Almond	TP826I TP826W TP826 TP826GRY TP826BK TP826RED TP826LA	SP826I SP826W SP826 SP826GRY SP826LA	Polished Brass 302/304 S/S	SB826PB SS826
Two Gang Telephone/Toggle 	Ivory White Brown		SP112I SP112W SP112		
Two Gang Telephone/Duplex 	Ivory White Brown Gray		SP128I SP128W SP128 SP128GRY	302/304 S/S	SS128
Two Gang Telephone/Blank (Strap Mtd) 	Ivory White		SP1214I SP1214W	302/304 S/S	SS1214
Three Gang Telephone/Decorator-Style 	White Brown		SP1226W SP1226	302/304 S/S	SS1226
Four Gang Blank (Box Mtd)/Duplex 	Ivory White Brown Gray Black Red Light Almond	TP138I TP138W TP138 TP138GRY TP138BK TP138RED TP138LA	SP138I SP138W SP138 SP138GRY	302/304 S/S	SS138
Four Gang Toggle/Blank (Box Mtd) 	Ivory White Brown Gray Black Light Almond	TP113I TP113W TP113 TP113GRY TP113BK TP113LA		302/304 S/S	SS113

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES

Combination Openings Standard Size Plastic & Metal




DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
TWO GANG COMBINATION OPENINGS (CONT.)					
Two Gang Blank (Strap Mtd) Duplex 	Ivory White Brown Gray		SP148I SP148W SP148 SP148GRY	302/304 S/S	SS148
Two Gang Blank (Strap Mtd)/Single 	Ivory White		SP147I SP147W	302/304 S/S	SS147
Two Gang Blank (Strap Mtd)/Decorator-Style 	Ivory White Brown Gray Light Almond		SP1426I SP1426W SP1426 SP1426GRY SP1426LA	302/304 S/S	SS1426
THREE & FOUR GANG COMBINATION OPENINGS					
Three Gang Toggle/Duplex/Duplex 	Ivory White Brown Gray Light Almond		SP182I SP182W SP182 SP182GRY SP182LA	Polished Brass 302/304 S/S	SB182PB SS182
Three Gang Blank (Strap Mtd)/Toggle/ Blank (Strap Mtd) 				302/304 S/S	SS8148
Two Gang Blank (Strap Mtd)/Toggle/ Blank (Strap Mtd) 				302/304 S/S	SS14114
Three Gang Telephone/Decorator-Style 				302/304 S/S	SS14814
Four Gang Blank (Box Mtd)/Duplex 				302/304 S/S	SS282

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES

Despard® Openings

Standard Size Plastic & Metal Despard Interchangeable Plate Supplied with Mounting Straps



DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
ONE HORIZONTAL OPENING PER GANG					
One Gang 	Ivory White Brown		K1I K1W K1	302/304 S/S	SSK1
Two Gang 				302/304 S/S	SSK12
Three Gang 				302/304 S/S	SSK13
TWO HORIZONTAL OPENINGS PER GANG					
One Gang 	Ivory White Brown		K2I K2W K2	302/304 S/S	SSK2
Two Gang 				302/304 S/S	SSK22
THREE HORIZONTAL OPENINGS PER GANG					
One Gang 	Ivory White Brown		K3I K3W K3	302/304 S/S	SSK3
Two Gang 				302/304 S/S	SSK32
Three Gang 				302/304 S/S	SSK33
ONE VERTICAL OPENING PER GANG					
One Gang 	Ivory White Brown		K4I K4W K4		

See Page J-11 for Devices.

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES





Two Gang with Center Opening Standard Size Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
ONE HORIZONTAL OPENING PER GANG					
Toggle Switch 				302/304 S/S	SS740
Blank-Box Mount 				302/304 S/S	SS743
Decorator-Style 				302/304 S/S	SS746
Single Receptacle 				302/304 S/S	SS747
Duplex Receptacle 				302/304 S/S	SS748

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES









Louver & Biplex/Triplex Openings Standard Size Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® PLATES	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
LOUVER PLATES					
One Gang Horizontal 				302/304 S/S 302/304 S/S Painted Ivory 302/304 S/S Painted White 302/304 S/S Painted Light Almond	SS760 SS760I SS760W SS760LA
One Gang Vertical 				302/304 S/S 302/304 S/S Painted Ivory 302/304 S/S Painted White 302/304 S/S Painted Brown 302/304 S/S Painted Gray 302/304 S/S Painted Light Almond	SS771 SS771I SS771W SS771X SS771GRY SS771LA
Two Gang Vertical 				302/304 S/S	SS772
KL SERIES LOCKING SWITCH PLATES					
One Gang  .906 diameter Reference Page A-20 for device				302/304 S/S	SS717
Two Gang  .906 diameter Reference Page A-20 for device				302/304 S/S	SS727

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES









Toggle Switch, Duplex & Single Receptacle Openings Junior-Jumbo & Jumbo Plastic & Metal

		NYLON	THERMOSET		METAL		
		TRADEMASTER®	JUNIOR-JUMBO	JUMBO		JUNIOR-JUMBO	JUMBO
DESCRIPTION	COLOR	JUMBO	SMOOTH	SMOOTH	MATERIAL	SMOOTH	SMOOTH
TOGGLE SWITCH OPENINGS							
One Gang 	Ivory	TPJ1I	SPJ1I	SPO1I	302/304 S/S	SSJ1	SSO1
	White	TPJ1W	SPJ1W	SPO1W			
	Brown	TPJ1	SPJ1	SPO1			
	Gray	TPJ1GRY					
	Light Almond	TPJ1LA	SPJ1LA				
Two Gang 	Ivory	TPJ2I	SPJ2I	SPO2I	302/304 S/S	SSJ2	SSO2
	White	TPJ2W	SPJ2W	SPO2W			
	Brown	TPJ2	SPJ2	SPO2			
	Gray	TPJ2GRY					
	Light Almond	TPJ2LA	SPJ2LA				
Three Gang 	Ivory	TPJ3I	SPJ3I		302/304 S/S	SSJ3	SSO3
	White	TPJ3W	SPJ3W				
	Brown	TPJ3	SPJ3				
	Gray	TPJ3GRY					
	Light Almond	TPJ3LA	SPJ3LA				
Four Gang 	Ivory	TPJ4I	SPJ4I		302/304 S/S		SSO4
	White	TPJ4W	SPJ4W				
	Brown	TPJ4	SPJ4				
	Gray	TPJ4GRY					
	Light Almond	TPJ4LA	SPJ4LA				
DUPLEX RECEPTACLE OPENINGS							
One Gang 	Ivory	TPJ8I	SPJ8I	SPO8I	302/304 S/S	SSJ8	SSO8
	White	TPJ8W	SPJ8W	SPO8W			
	Brown	TPJ8	SPJ8	SPO8			
	Gray	TPJ8GRY					
	Light Almond	TPJ8LA	SPJ8LA	SPO8LA			
Two Gang 	Ivory	TPJ82I	SPJ82I	SPO82I	302/304 S/S	SSJ82	SSO82
	White	TPJ82W	SPJ82W	SPO82W			
	Brown	TPJ82	SPJ82	SPO82			
	Gray	TPJ82GRY	SPJ82GRY				
	Light Almond	TPJ82LA	SPJ82LA				
Three Gang 					302/304 S/S		SSO83
SINGLE RECEPTACLE OPENINGS							
One Gang 	Ivory	TPJ7I	SPJ7I		302/304 S/S	SSJ7	SSO7
	White	TPJ7W	SPJ7W				
	Brown	TPJ7	SPJ7				
	Gray	TPJ7GRY					
	Light Almond	TPJ7LA	SPJ7LA				

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES









Decorator-Style Openings & Blank Plates Junior-Jumbo & Jumbo Plastic & Metal

		NYLON	THERMOSET		METAL		
		TRADEMASTER®	JUNIOR-JUMBO	JUMBO		JUNIOR-JUMBO	JUMBO
DESCRIPTION	COLOR	JUMBO	SMOOTH	SMOOTH	MATERIAL	SMOOTH	SMOOTH
DECORATOR-STYLE OPENINGS							
One Gang 	Ivory	TPJ26I	SPJ26I	SPO26I	302/304 S/S	SSJ26	SSO26
	White	TPJ26W	SPJ26W	SPO26W			
	Brown	TPJ26	SPJ26	SPO26			
	Gray	TPJ26GRY					
	Red	TPJ26RED					
	Light Almond	TPJ26LA	SPJ26LA	SPO26LA			
Two Gang 	Ivory	TPJ262I	SPJ262I	SPO262I	302/304 S/S	SSJ262	SSO262
	White	TPJ262W	SPJ262W	SPO262W			
	Brown	TPJ262	SPJ262	SPO262			
	Gray	TPJ262GRY					
	Light Almond	TPJ262LA	SPJ262LA				
Three Gang 	Ivory	TPJ263I	SPJ263		302/304 S/S	SSJ263	
	White	TPJ263W	SPJ263W				
	Brown	TPJ263	SPJ263				
	Gray	TPJ263GRY					
	Light Almond	TPJ263LA	SPJ263LA				
Four Gang 	Ivory	TPJ264I	SPJ264I				
	White	TPJ264W	SPJ264W				
	Brown	TPJ264	SPJ264				
	Gray	TPJ264GRY					
	Light Almond	TPJ264LA	SPJ264LA				
BLANK PLATES – BOX & STRAP MOUNTED							
One Gang Blank Box Mtd. 	Ivory	TPJ13I	SPJ13I	SPO13I	302/304 S/S	SSJ13	SSO13
	White	TPJ13W	SPJ13W	SPO13W			
	Brown	TPJ13	SPJ13	SPO13			
	Gray	TPJ13GRY					
	Light Almond	TPJ13LA	SPJ13LA				
Two Gang Blank Box Mtd. 	Ivory			SPO23I	302/304 S/S		SSO23
	White			SPO23W			
	Brown			SPO23			
Three Gang Blank Box Mtd. 					302/304 S/S		SSO33
One Gang Strap Mtd. 					302/304 S/S		SSO14
Two Gang Blank Strap Mtd. 					302/304 S/S		SSO24

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES

Combination Openings Junior-Jumbo & Jumbo Plastic & Metal

DESCRIPTION	COLOR	NYLON TRADEMASTER® JUMBO	THERMOSET JUNIOR-JUMBO SMOOTH	THERMOSET JUMBO SMOOTH	METAL MATERIAL	METAL JUNIOR-JUMBO SMOOTH	METAL JUMBO SMOOTH
TWO GANG COMBINATION OPENINGS							
Two Gang Toggle/Duplex 	Ivory	TPJ18I	SPJ18I	SPO18I	302/304 S/S	SSJ18	SSO18
	White	TPJ18W	SPJ18W	SPO18W			
	Brown	TPJ18	SPJ18	SPO18			
	Gray	TPJ18GRY					
	Light Almond	TPJ18LA	SPJ18LA				
Two Gang Toggle/Decorator-Style 	Ivory	TPJ126I	SPJ126I		302/304 S/S	SSJ126	SSO126
	White	TPJ126W	SPJ126W				
	Brown	TPJ126	SPJ126				
	Gray	TPJ126GRY					
	Light Almond	TPJ126LA	SPJ126LA				
Two Gang Toggle/Blank (Strap Mtd) Supplied with 340 Yoke 					302/304 S/S		SSO114
Two Gang Toggle/Blank (Box Mtd.) 	Ivory	TPJ113I	SPJ113I	SPO113I			
	White	TPJ113W	SPJ113W				
	Brown	TPJ113	SPJ113	SPO113			
	Gray	TPJ113GRY					
	Light Almond	TPJ113LA					
Two Gang Blank (Box Mtd)/Duplex 	Ivory		SPJ138I	SPO138I	302/304 S/S		SSO138
	White		SPJ138W				
	Brown		SPJ138	SPO138			
Two Gang Duplex/Decorator-Style 	Ivory	TPJ826I	SPJ826I				
	White	TPJ826W	SPJ826W				
	Brown	TPJ826					
	Gray	TPJ826GRY					
	Light Almond	TPJ826LA	SPJ826LA				
Two Gang Blank/Decorator-Style 	Ivory		SPJ1426I**	SPO1326I*			
	White		SPJ1426W**	SPO1326W*			
	Brown		SPJ1426**	SPO1326*			
Three Gang 2 Toggles/Duplex 					302/304 S/S		SSO28






*Box mounted
**Strap mounted

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.






WALL PLATES

Sectional

Thermoplastic

DESCRIPTION	SEMI-JUMBO COLOR	SEMI-JUMBO SMOOTH NYLON
SECTIONAL WALL PLATES – END SECTIONS		
Toggle Switch 	Ivory White Light Almond	PJSE1I PJSE1W PJSE1LA
Duplex Receptacle 	Ivory White Light Almond	PJSE8I PJSE8W PJSE8LA
Single Receptacle 	White	PJSE7W
Blank, Strap Mounted  supplied with #340 Yoke	Ivory White Light Almond	PJSE14I PJSE14W PJSE14LA
Decorator-Style 	Ivory White Light Almond	PJSE26I PJSE26W PJSE26LA


Thermoplastic









DESCRIPTION	SEMI-JUMBO COLOR	SEMI-JUMBO SMOOTH NYLON
SECTIONAL WALL PLATES – CENTER SECTIONS		
Toggle Switch 	Ivory White Light Almond	PJSC1I PJSC1W PJSC1LA
Duplex Receptacle 	Ivory White Light Almond	PJSC8I PJSC8W PJSC8LA
Single Receptacle 	White	PJSC7W
Blank, Strap Mounted  supplied with #340 Yoke	Ivory White Light Almond	PJSC14I PJSC14W PJSC14LA
Decorator-Style 	Ivory White Light Almond	PJSC26I PJSC26W PJSC26LA

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES









Engraved & Pad Printed

ENGRAVED (1/8" CHARACTERS)					
	DESCRIPTION	PLATE COLOR	FILL COLOR	NYLON TRADEMASTER®	METAL SMOOTH
EMERGENCY					
	1 Gang Duplex 1 Gang Duplex	302/304 S/S 302/304 S/S Painted Red	Black Black		SS8EE SS8ERED

PAD PRINTED (1/8" CHARACTERS)					
	DESCRIPTION	PLATE COLOR	FILL COLOR	NYLON TRADEMASTER®	METAL SMOOTH
ISOLATED GROUND					
	1 Gang Duplex 1 Gang Duplex	Orange 302/304 S/S	Black Black	TP8IG	 SS8IG
	2 Gang Duplex	302/304 S/S	Black		SS82IG
	1 Gang Single	Orange	Black	TP7IG	
	1 Gang Decorator-Style 1 Gang Decorator-Style	Orange 302/304 S/S	Black Black	TP26IG	 SS26IG
EMERGENCY					
	1 Gang Duplex 1 Gang Duplex 1 Gang Duplex 1 Gang Duplex	Ivory White Red 302/304 S/S	Red Red Black Black	TP8EI TP8EW TP8ERED	 SS8ES
	2 Gang Duplex	Red	Black	TP82ERED	
	1 Gang Toggle	Red	Black	TP1ERED	
	2 Gang Toggle	Red	Black	TP2ERED	

WALL PLATES

Engraved & Pad Printed

PAD PRINTED (1/8" CHARACTERS)					
	DESCRIPTION	PLATE COLOR	FILL COLOR	NYLON TRADEMASTER®	METAL SMOOTH
EMERGENCY					
	1 Gang Decorator-Style	Red	Black	TP26ERED	
	1 Gang Duplex	Red	Black	TP8EMPOWER	
GAS BURNER ON/OFF EMERGENCY SWITCH					
	1 Gang Toggle	302/304 S/S Painted Red	Black		SS1GBRED
OIL BURNER ON/OFF EMERGENCY SWITCH					
	1 Gang Toggle	302/304 S/S Painted Red	Black		SS1OBRED
GFCI PROTECTED					
	1 Gang Duplex 1 Gang Duplex	Ivory White	Black Black	TP8GFI TP8GFW	
COMPUTER ONLY					
	1 Gang Duplex 1 Gang Duplex	Ivory Orange	Black Black	TP8CI TP8CO	
	Single Receptacle Single Receptacle	Ivory Orange	Black Black	TP7CI TP7CO	
	1 Gang Decorator-Style 1 Gang Decorator-Style 1 Gang Decorator-Style	Ivory Blue Orange	Black Black Black	TP26CI TP26CBL TP26CO	

WALL PLATES

Custom Metal Wall Plates Ordering Instructions

Ordering Instructions:

1. Using the following charts, fill in the spaces provided to select the proper material, number of gangs, desired finish and color.

Review Your Requirements:	For Example:	Write Your Selection:	Space #
Material Prefix Code (Chart A below) For Jr. Jumbo Size add "J" after prefix, if Jumbo Size, add "O" after Prefix	SSO		1
Total Number of Gangs Ordered	4		2
Paint Finish Suffix (Chart B – Page I-26)	BLU		4
Metal Finish Suffix (Chart C – Page I-26)	BC		5

MATERIAL	PREFIX CODE
CHART A: MATERIAL SELECTION	
Aluminum*	SA
302/304 Stainless Steel	SS

*Standard size only.

2. Review the Plate Opening Styles on pages I-44 – I-56. Following the sequence of your installation (left to right), label each box below with the appropriate Opening Style Number for each gang.

Gang: 1	2	3	4	5	6	7	8	9	10

3. Create the Complete Order Part Number by filling in items from previous steps in spaces below.

Space #1-Material Prefix Code (from step 1)
Space #2-Total Number of Gangs (from step 1)
Space #3-Style Numbers In Order (from step 2)
Space #4-Metal Finish Suffix (from step 1)
Space #5-Paint Finish Suffix (from step 1)

Catalog #_____ G____ Style ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____

Space # 1 2 3 3 3 3 3 3 3 3 3 3 4 5

METAL PLATE	STANDARD	JR. JUMBO	JUMBO
MAXIMUM GANGS FOR CUSTOM METAL WALL PLATES			
Stainless (302)	20	3	20
Aluminum	8	N/A	N/A

WALL PLATES


Custom Metal Wall Plates Special Configurations

Chart B: Paint Finish Selection


These charts are for Custom Metal Wall Plates ONLY.
For Devices & Wall Plates Color Selection Charts, see Pages A-29, B-87 and I-57.



PAINT COLOR	Orange	Green	Gray	Yellow
PAINT SUFFIX	ORG	GRN	GRY	YFI

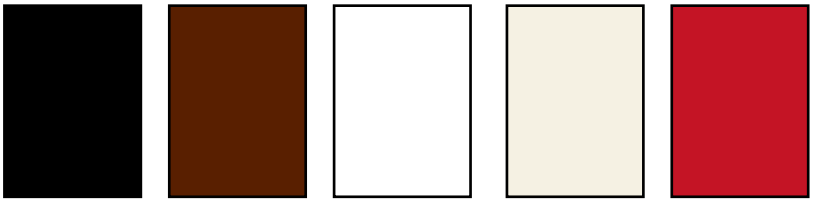

PAINT COLOR	Glossy Black	Brown	White	Primer	Red
PAINT SUFFIX	GBK	BRO	WHT	PRI	RED

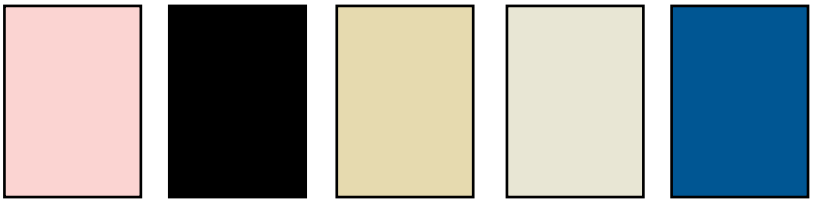

PAINT COLOR	Pink	Flat Black	Ivory	Light Almond	Blue
PAINT SUFFIX	PNK	FBK	IVY	LTA	MBL

Only available on Stainless Steel and Aluminum Plate Material. Colors may vary slightly.
All Paint Finishes are gloss, except primer and flat black.

Chart C: Metal Finish Selection



METAL FINISH	Polished Brass US #3	Bright Chromium US #26	Brushed Copper	Brushed Bronze US #10
FINISH SUFFIX	PB*	CH	BC	BZ

*Order with Brass Plate Material Prefix Only.
For additional colors consult factory.

WALL PLATES


Custom Metal Wall Plates Engraving & Pad Printing

Custom Engraving & Pad Printing

Most plates in this catalog can be engraved or pad printed. However, engraving plated finish metal plates is not recommended, since exposed edges could oxidize over time. Refer to current price sheet to select the better process that suits your needs.

Position


Marking may appear anywhere on the flat surface of smooth plates.
On decorator-style plates, markings are restricted to the top and bottom flat panels.
If space permits, up to three lines can be pad printed on a plate provided the lettering fits within a 50mm circle.



Letter Height

Unless specified otherwise, designers will select size and position of letters or markings for maximum legibility. Characters per inch:

3/8" - 2-1/2 1/4" - 4 3/16" - 6 1/8" - 9 1/16" - 14




Letter Font

Pad printing is available in any True Type font in colors listed below, on 1 gang and 2 gang plates. Bitmap images can also be printed.
Laser engraving is available in any True Type font only in black (not color-filled) including bitmap images.
Engraving with color fill is available only in block letter font. While mixing of laser and color-filled engraving is allowed, it is not recommended since the font types will not match.

Color

Color-filled engraving can be filled with red, orange, black, blue, or white paint.
Standard colors for pad printing are red, black, blue, green, orange or white, as shown below.

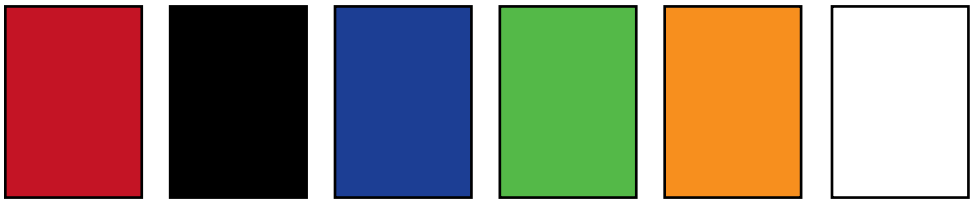


Red Black Blue Green Orange White

Ordering Instructions

Specify clearly the following information when you order.

1. Catalog number of plate(s).
2. To be engraved or pad printed.
3. Letters, numbers, characters required.
4. Position and size.
5. Color of filler, or pad printing.
6. Special layout information, if applicable.



Position
Height of Mark
Color of Filler
Plate Style
by Catalog Number
Including
Color/Finish

WALL PLATES

Custom Panel Plates Ordering Instructions

Blank panel plates (PP-series) up to 5-gangs high and 10-gangs wide are made from Type 302/304 Stainless Steel. Up to 50 openings from the style selector guide can be custom punched to your specifications. For uniformity of design throughout the building, panel plates have the same distinctive styling as all other plates, plastic and metal.

Ordering Instructions

For this example, use the 4 gang high by 2 gang wide panel plate illustrated in Figure 2.

1. Start the catalog number with the material prefix: "SS" for Type 302/304 Stainless. This is a 302/304 Stainless plate, so the first letters of its catalog number will be "SS."
2. Determine the catalog number for a panel plate 4 gangs high and 2 gangs wide from the table on page S-44. It is PP-4-2. Your 302/304 Stainless Steel catalog number is SSPP-4-2.
3. Construct a chart upon which you can indicate the opening style number for each of the 8 gangs, starting from the top left. Leave space to show any words or symbols that will be engraved. Write the catalog number SSPP-4-2 at the top of the chart. See Figure 1.
4. Refer to the Style Selector Guide and find the style numbers for each of the desired openings. Write these numbers in their appropriate position on your chart.
5. Indicate what, if any, engraving is required for each gang. Show in parentheses if engraving is to be above or below the opening.
6. Send the chart with your order to the factory. You have provided all required information. Refer to current price sheet for pricing details.

Additional Information


- Where no opening or mounting holes are required, specify Style #149.
- Louvered openings can be placed only on the top row of a panel plate.
- For painted or special metal finishes, refer to price sheet for price adds per gang.
- For special openings not in Selector Guide, provide detailed drawing.

Example

SSPP-4-2

ROW #1:		
Style Nos.	1	1
Engraving:	ALTAR (Above)	CHOIR (Above)
ROW #2:		
Style Nos.	9	9
Engraving:	(None)	(None)
ROW #3:		
Style Nos.	12	12
Engraving:	(None)	TEL (Above)
ROW #4:		
Style Nos.	16	16
Engraving:	(None)	120V. (Above)

Figure 1

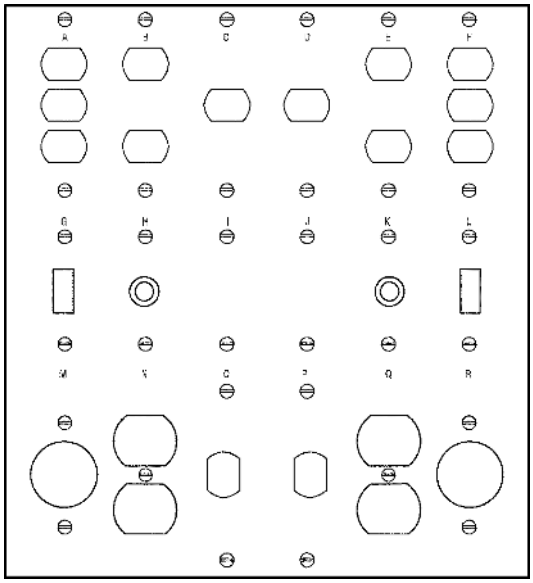

Custom Panel Plate

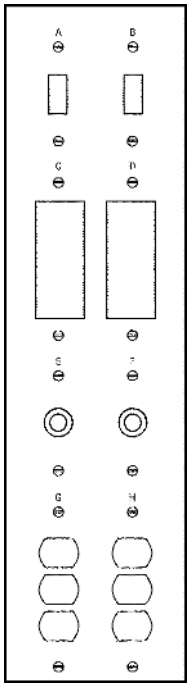


Figure 2

WALL PLATES


Custom Panel Plates Ordering Instructions

Wall Box Dimensions

Panel Plates are limited to fit the box configuration shown.

Caution: Not all boxes are identical in overall dimensions, but are built to exact standards on device mounting holes. When boxes are connected together, they should be shimmed to ensure that the bottom hole to bottom hole dimension between two vertically adjacent boxes is 4-1/8" as errors are cumulative. Critical dimensions circled.

If additional mounting holes are required in the corners, indicate location and spacing.

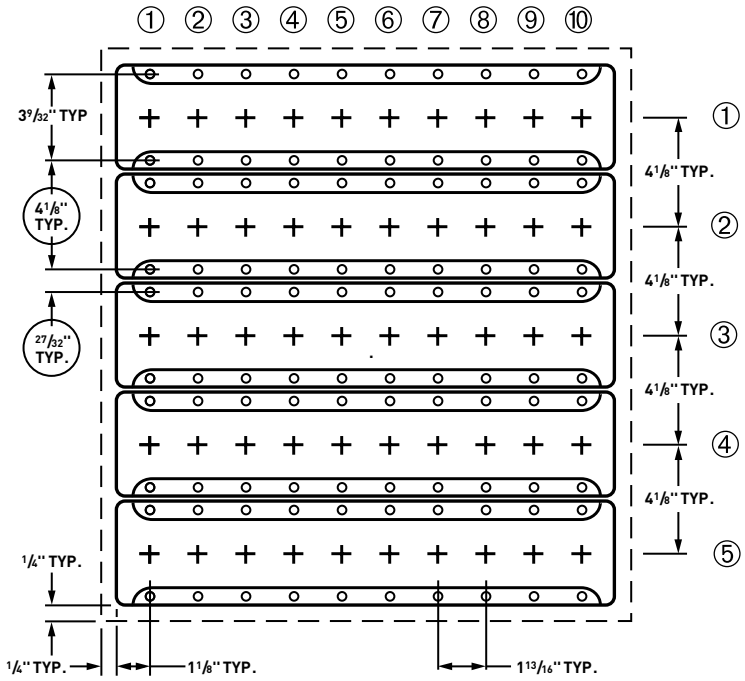


302/304 Stainless Steel

PLATE HEIGHT	CATALOG NUMBER	GANGS WIDE	PLATE WIDTH
Two Gangs High 8-3/4"	PP21	One	2-3/4"
	PP22	Two	4-9/16"
	PP23	Three	6-3/8"
	PP24	Four	8-3/16"
	PP25	Five	10"
	PP26	Six	11-13/16"
	PP27	Seven	13-5/8"
	PP28	Eight	15-7/16"
	PP29	Nine	17-1/4"
	PP210	Ten	19-1/16"
Three Gangs High 12-7/8"	PP31	One	2-3/4"
	PP32	Two	4-9/16"
	PP33	Three	6-3/8"
	PP34	Four	8-3/16"
	PP35	Five	10"
	PP36	Six	11-13/16"
	PP37	Seven	13-5/8"
	PP38	Eight	15-7/16"
	PP39	Nine	17-1/4"
	PP310	Ten	19-1/16"

PLATE HEIGHT	CATALOG NUMBER	GANGS WIDE	PLATE WIDTH
Four Gangs High 17"	PP41	One	2-3/4"
	PP42	Two	4-9/16"
	PP43	Three	6-3/8"
	PP44	Four	8-3/16"
	PP45	Five	10"
	PP46	Six	11-13/16"
	PP47	Seven	13-5/8"
	PP48	Eight	15-7/16"
	PP49	Nine	17-1/4"
	PP410	Ten	19-1/16"
Five Gangs High 21-1/8"	PP51	One	2-3/4"
	PP52	Two	4-9/16"
	PP53	Three	6-3/8"
	PP54	Four	8-3/16"
	PP55	Five	10"
	PP56	Six	11-13/16"
	PP57	Seven	13-5/8"
	PP58	Eight	15-7/16"
	PP59	Nine	17-1/4"
	PP510	Ten	19-1/16"

WALL PLATES

Narrow Metal Made-To-Order Wall Plates


CATALOG NUMBER	WIDTH	MATERIAL	
MADE-TO-ORDER NARROW METAL WALL PLATES			
SSN14	1-3/4"	302/304 S/S	
SSN15	2"	302/304 S/S	
SSN85	2"	302/304 S/S	

Note: All narrow plates are 4-1/2" high.


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES


Communication Devices Telephone Wiring Devices



TPTE1



TPTE2



26TE14
26TE16

Features

- RJ11 modular jack.
- Mar-resistant wall plate.
- Wall plate dimension is Standard size.
- Fits standard size single gang electrical box.
- Meets FCC Part 68 requirements.

CATALOG NUMBER	DESCRIPTION	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
SINGLE GANG OPENING MODULAR TELEPHONE JACK WITH WALL PLATE			
TPTE1I	Ivory	4 Conductor	
TPTE1W	White	4 Conductor	
TPTE1	Brown	4 Conductor	
TPTE1GRY	Gray	4 Conductor	
TPTE1BK	Black	4 Conductor	
TPTE1LA	Light Almond	4 Conductor	
SINGLE GANG, TWO MODULAR RJ11 TELEPHONE JACKS WITH WALL PLATE			
TPTE2I	Ivory	4 Conductor	
TPTE2W	White	4 Conductor	
TPTE2	Brown	4 Conductor	
TPTE2BK	Black	4 Conductor	
TPTE2LA	Light Almond	4 Conductor	

Features


- Decorator-style rectangular design.
- RJ11 modular jack.
- Fits standard single gang electrical box.
- May be used in multigang applications.
- Face constructed of high-impact thermoplastic.
- Brass terminals with nickel-plated steel screws and washers.
- Meets FCC Part 68 requirements.

CATALOG NUMBER	DESCRIPTION	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
DECORATOR-STYLE MODULAR JACK SINGLE GANG, 1 OPENING MODULAR JACK			
26TE14I	Ivory	4 Conductor	•
26TE14W	White	4 Conductor	•
26TE14LA	Light Almond	4 Conductor	•
26TE16I	Ivory	6 Conductor	•
26TE16W	White	6 Conductor	•


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES


Communication Devices Telephone Wiring Devices



26TE24



WMTE14



SMTE14

Features

- One piece molded plate decorator-style outline.
- Two RJ11 modular jacks.
- Fits standard single gang electrical box.
- Face constructed of high-impact thermoplastic.
- Brass terminals with nickel-plated steel screws and washers.
- Wall plate dimension is standard size.
- Meets FCC Part 68 requirements.

CATALOG NUMBER	COLOR	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
DECORATOR-STYLE DUPLEX MODULAR JACK WITH SMOOTH PLATE SINGLE GANG, 2 OPENINGS			
26TE24I	Ivory	4 Conductor	•
26TE24W	White	4 Conductor	•
26TE24LA	Light Almond	4 Conductor	•
26TE26I	Ivory	6 Conductor	•
26TE26W	White	6 Conductor	•

Features

- RJ-11 modular jack.
- High-impact thermoplastic face plate and back body.
- Nickel-plated steel screw terminals.
- Zinc-plated mounting lugs.

CATALOG NUMBER	COLOR	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
MODULAR WALL MOUNT TELEPHONE JACK FOR HANGING PHONES			
WMTE14I	Ivory	4 Conductor	•
WMTE14W	White	4 Conductor	•
WMTE14LA	Light Almond	4 Conductor	•

Features


- Nickel-plated steel screws and washers.
- Brass terminals.
- Comes with mounting screws and adhesive pad.
- Snap-on cover and base constructed of high-impact thermoplastic.

CATALOG NUMBER	COLOR	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
SURFACE MOUNT MODULAR RJ-11 TELEPHONE JACK			
SMTE14I	Ivory	4 Conductor	•


These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES


Communication Devices Telephone & CATV Wiring Devices

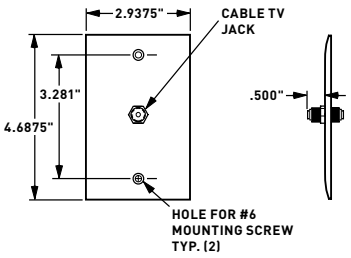

TPCATV

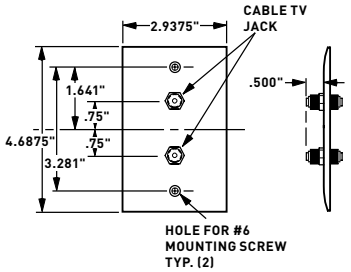

TPCATV2




26CATV


Features

- Mar-resistant wall plate.
- Fits standard size single gang electrical box.
- Wall plate dimension is Standard size.
- Nickel-plated steel.
- Connector is threaded at each end.

CATALOG NUMBER	COLOR	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
"F" TYPE WITH ONE COAXIAL CONNECTOR & WALL PLATE, SINGLE GANG			
TPCATVI	Ivory	F-type COAX Connector	•
TPCATVW	White	F-type COAX Connector	•
TPCATV	Brown	F-type COAX Connector	•
TPCATVBK	Black	F-type COAX Connector	•
TPCATVLA	Light Almond	F-type COAX Connector	•
"F" TYPE WITH TWO COAXIAL CONNECTORS & WALL PLATE, SINGLE GANG			
TPCATV2I	Ivory	2 F-type COAX Connectors	•
TPCATV2W	White	2 F-type COAX Connectors	•
TPCATV2	Brown	2 F-type COAX Connectors	•
TPCATV2BK	Black	2 F-type COAX Connectors	•
TPCATV2LA	Light Almond	2 F-type COAX Connectors	•



TPTELTV



26TELTVCC10

Features

- Decorator-style outline.
- Face constructed of high-impact thermoplastic.
- Zinc-plated steel strap.
- Nickel-plated "F" type connector.
- Threaded on each end.

CATALOG NUMBER	COLOR	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
DECORATOR-STYLE "F" TYPE COAXIAL CONNECTOR SINGLE GANG WITH 1 COAX CONNECTOR			
26CATVI	Ivory	F-type COAX Connector	•
26CATVW	White	F-type COAX Connector	•
26CATVLA	Light Almond	F-type COAX Connector	•

Features






- Decorator-style outline.
- RJ11 modular jack.
- Face constructed of high-impact thermoplastic.
- Zinc-plated steel strap.
- Nickel-plated "F" type connector.
- Threaded on each end.

CATALOG NUMBER	COLOR	CONFIGURATION	3rd PARTY COMPLIANCE UL1863
COMBINATION COAXIAL CONNECTOR & TELEPHONE JACK			
TPTELTVI	Ivory		•
TPTELTVW	White	F-type COAX Connector with	•
TPTELTV	Brown	4 Conductor RJ-11 jack	•
TPTELTVBK	Black		•
TPTELTVLA	Light Almond		•
26TELTVICC10	Ivory	Same as TPTELTV with	•
26TELTVWCC10	White	one-piece molded plate	•
26TELTVLACC10	Light Almond	decorator-style outline.	•

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES







Communication Plates Standard Size Plastic & Metal

DESCRIPTION	COLOR	NYLON	THERMOSET	METAL	
		TRADEMASTER® PLATES	SMOOTH	MATERIAL	SMOOTH
TELEPHONE OR CABLE OUTLET 13/32" HOLE, BOX MOUNTED					
 **One Gang** 1 Outlet (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)	Ivory	TP11I	SP11I		
	White	TP11W	SP11W	302/304 S/S	SS11
	Brown	TP11	SP11		
	Gray	TP11GRY			
	Black	TP11BK			
	Red	TP11RED			
	Light Almond	TP11LA			
 **Two Gang** 2 Outlets	Ivory		SP21I		
	White		SP21W		
	Gray		SP21GRY	302/304 S/S	SS21
TELEPHONE OR CABLE OUTLET 13/32" HOLE, STRAP MOUNTED, WITH ADJUSTMENT YOKE					
 **One Gang** 1 Outlet, 1 #340 Yoke (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)	Ivory	TP12I	SP12I		
	White	TP12W	SP12W		
	Brown	TP12	SP12	430S/S	SL12
	Gray	TP12GRY		302/304 S/S	SS12
	Black	TP12BK	SP12BK		
	Red		SP12RED		
	Light Almond	TP12LA	SP12LA		
TELEPHONE OR CABLE OUTLET 5/8" HOLE, STRAP MOUNTED					
 **One Gang** 1 Outlet 1 #340 Yoke (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)				302/304 S/S	SS730
TELEPHONE OR CABLE OUTLET 13/32" HOLE WITH KNOCKOUT, STRAP MOUNTED					
 **One Gang** 1 Outlet 1 #340 Yoke	Ivory		SP732I		
	Brown		SP732		
	Gray		SP732GRY		
TELEPHONE OR CABLE OUTLET 5/8" ID, BOX MOUNTED					
 **One Gang** 1 Outlet	Ivory	TP60I	SP60I		
	White	TP60W	SP60W		
	Light Almond	TP60LA	SP60LA		
TELEPHONE OR CABLE OUTLET 1 1/4" HOLE, STRAP MOUNTED					
 **One Gang** 1 Outlet Supplied With #340 Yoke				302/304 S/S	SS736

These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES

Communication Plates







DESCRIPTION	MATERIAL	CATALOG
HORIZONTAL-SPLIT WALL PLATES FOR TELEVISION OR CABLE LEAD-IN*		
 **One Gang** 1 Outlet Box Mounted. Removable 13/32" I.D. grommet in 1/2" hole.	302/304 S/S	SS751
 **One Gang** 1 Outlet Strap Mounted. Removable 13/32" I.D. grommet in 17/32" hole.	302/304 S/S	SS752
 **One Gang** 1 Outlet Box Mounted. Removable 5/8" I.D. grommet in 7/8" hole.	302/304 S/S	SS753
 **One Gang** 1 Outlet Strap Mounted. Removable 5/8" I.D. grommet in 7/8" hole.	302/304 S/S	SS754
 **One Gang** 1 Outlet (Also Furnished for Strap Mounting Cat. **#SS786** with 2 #340 Yokes. Box Mounted. Removable 13/32" I.D. grommet in 17/32" hole.	302/304 S/S**	SS785
 **Two Gang** 1 Centered Outlet (Also Furnished for Strap Mounting Cat. **#SS788** with 2 #340 Yokes. Box Mounted. Removable 5/8" I.D. grommet in 7/8" hole.)	302/304 S/S**	SS787

*For telephone, security systems, FM and cable TV antennas or wherever cable interconnections are required.
**Strap Mounted with 2 #340 Yokes.



These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

WALL PLATES

Communication Plates

DESCRIPTION	COLOR	THERMOSET SMOOTH	METAL MATERIAL	METAL SMOOTH
TWO GANG WITH CENTERED OPENINGS**				
 **1 Centered Outlet** Box Mounted			302/304 S/S	SS741
 **1 Centered Outlet** Strap Mounted Supplied with #340 Yoke			302/304 S/S	SS742
COMPUTER JACK PLATES FOR RS-232 CONNECTORS**				
 **One Gang** One Jack Opening			302/304 S/S	SS791
 **One Gang** Two Jack Opening			302/304 S/S	SS792
STANDARD COMBINATION TWO GANG*				
 **Two Gang** Telephone/Duplex	Ivory White Brown Gray	SP128I SP128W SP128 SP128GRY	302/304 S/S	SS128
 **Two Gang** Telephone/Blank (Strap Mtd)	Ivory White	SP1214I SP1214W	302/304 S/S	SS1214
 **Two Gang** Telephone/ Decorator-Style	White Brown	SP1226W SP1226	302/304 S/S	SS1226
 **Two Gang** Telephone/Toggle	Ivory White Brown	SP112I SP112W SP112		

*Has 13/32" and 5/8" double knockout.


DESCRIPTION	COLOR	THERMOSET JUNIOR-JUMBO SMOOTH	METAL JUMBO MATERIAL	METAL JUMBO SMOOTH
TELEPHONE/CABLE OUTLET**				
 **One Gang** 1 Outlet (Metal plates have removable 13/32" I.D. grommet in 17/32" hole.)	Ivory White Light Almond	SPJ11I SPJ11W SPJ11LA	302/304 S/S	SSO11
 **One Gang** 1 Outlet Supplied with #340 Yoke			302/304 S/S	SSO12

**These products listed to UL514, Cover Plates for Flush-Mounted Wiring Devices, CSA Certified.

SPECIALTIES

Mounting Straps and Yokes

DESCRIPTION	FINISH	COLOR	CATALOG NUMBER	DIMENSIONS
GALVANIZED STEEL HANDY BOX PLATES				
Mounting strap for dimmer insert. Box mounted. Change from decorator-style to toggle opening.	Painted Steel	Ivory	327I	
		White	327W	
		Brown	327	
		Light Almond	327LA	
Mounting strap for blank insert. Box mounted. Change decorator-style opening to blank.	Painted Steel	Ivory	326I	
		White	326W	
		Brown	326	
		Light Almond	326LA	
Tandem mounting strap with two vertical openings. Plate screw hole spacing 4-3/8".	Bright Zinc		342	
Mounting strap with three horizontal openings. Plate screw hole spacing 3-13/16". Box mounted.	Bright Zinc		348	
Mounting strap with single vertical opening. Plate screw hole spacing 3-13/16". Box mounted.	Bright Zinc		347	
Adjustment yoke for strap mounted telephone and blank wall plates. Slots 3-9/32" C to C. Plate screw holes 2-3/8" C to C. Box mounted.	Bright Zinc		340	
Mounting strap for blank insert. Changes toggle opening to blank, box mounted.	Thermoset	Ivory	80700I	
		White	80700W	
		Light Almond	80700LA	

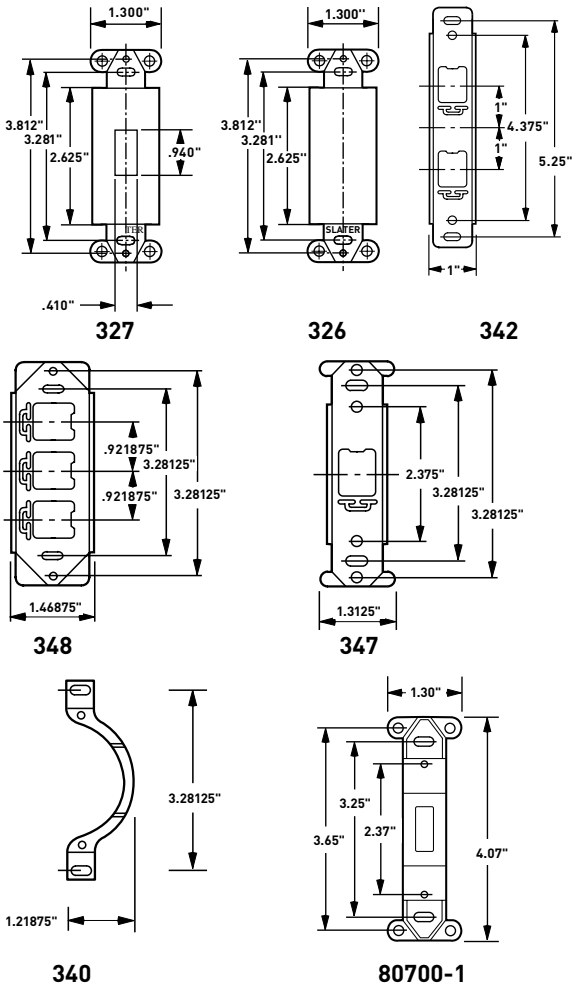

SPECIALTIES

Incandescent Lampholders, Neon Pilot Lights

Incandescent Lampholders




Designed to give adequate light when installed behind a louvre plate or indicator jewel. Mounts in standard wall box. Plate mounting is 2-3/8" and 3-13/16". UL listed for 120 VAC circuits. Plate not included.

Description	Catalog Number
Standard lampholder, 4 Watt	**2152**

Extra long life: Integral series resistor in base reduces light output by about 40%, but increases lamp life more than ten times. Plate not included.

Extra long life, 4 Watt	**2156**




Application

Lampholders and louver plates are an ideal combination for providing bright, shielded light in hallways and pathways. They increase safety in corridors, theater aisles, porches, stairways, etc. A wide choice of plates gives unlimited possibilities for designing the perfect night light installation. Available in custom-painted stainless steel and stainless steel.

For the complete listing of Louver Plates, see Page I-18 .

Energy Efficient Gasket



Description	Catalog Number
Gangable gasket, use for toggle, duplex, GFCI or blank.	**GASKET1**

Neon Pilot Lights







Long life neon bulb emits indicating light through transparent lens to show power is on. May be installed at the load, at switching posts or at remote locations. We suggest the wall plate be engraved to explain indication. Fits standard wall box and takes standard toggle switch plate opening. Plate mounting is 2-3/8". UL listed 120/277 VAC.


Description	Catalog Number
With green lens	**2151GN**
With red lens	**2151RED**
With white lens	**2151W**


All devices listed on this page conform to NEMA WD-1 and WD-6.


SPECIALTIES

Screws & Screwdrivers

DESCRIPTION	COLOR OR FINISH	CATALOG NUMBER
STANDARD & INTERCHANGEABLE WALL PLATE SCREWS		
Oval Head Milled Slot 5/16" long, 6 x 32 Thread  Standard size for Decorator-Style Wall Plates.	Ivory White Brown Gray Light Almond Stainless	509I 509W 509 509GRY 509LA 509S
Oval Head Milled Slot 1/2" long, 6 x 32 Thread  Standard size for Duplex Receptacles and Toggle Switch Wall Plates.	Ivory White Brown Brass Stainless	510I 510W 510 510BR 510S
Oval Head Milled Slot 3/4" long, 6 x 32 Thread 	Ivory White Brown Light Almond Stainless	511I 511W 511 511LA 511S
Oval Head Milled Slot 1" long, 6 x 32 Thread  Standard size for Blank Box Mounted Wall Plates.	Ivory White Brown Light Almond Stainless	512I 512W 512 512LA 512S
Oval Head Milled Slot 1-1/2" long, 6 x 32 Thread 	Ivory White Brown Light Almond Stainless	513I 513W 513 513LA 513S

DESCRIPTION	FINISH	CATALOG NUMBER
TAMPER-PROOF SPANNER HEAD SCREWS		
Spanner Oval Head 1/2" long, 6 x 32 Thread 	430S/S	531S
Spanner Oval Head 1" long, 6 x 32 Thread 	430S/S	532S

DESCRIPTION	CATALOG NUMBER
SCREWDRIVER FOR SPANNER HEAD OR KEY SLOT SCREWS	
Screwdriver for Spanner Head Screw 	533D

DESCRIPTION	FINISH	CATALOG NUMBER
NYLON SCREWS FOR STANDARD AND INTERCHANGEABLE WALL PLATES		
Oval Head Standard Slot 1/2" long, 6 x 32 Thread 	Ivory	528I

Notes:


- Specify screws by catalog number to designate type of screw, thread, length, color or finish required.
- Screws are available by the box only.
- Order by number of boxes...not by the quantity of screws.
- Each box contains 100 screws.
- Metal screws are available with special finishes and can be painted.

WALL PLATES


Specifications

radiant® Screwless Polycarbonate RWP Series


Thermoset SP Series


Nylon TP Series


302/304 Stainless Steel


Polished Brass


Aluminum

Application

Legrand's broad line of Pass & Seymour® Standard Size Plastic and Metal Wall Plates features the most complete range of types, sizes, colors, and finishes available. Choose from more than 1,900 standard plates in non-combustible thermoset plastic material, self-extinguishing nylon material, screwless polycarbonate material, or attractively finished metal, for residential, commercial, institutional, and industrial applications. All plastic wall plates color match to Pass & Seymour devices.

Screwless Polycarbonate Wall Plates

- Part of the radiant® collection.
- Molded of .065" thick polycarbonate, matte finish.
- One-piece subplate mounts over the device for easy retrofit and lower profile.
- Extra 3/8" width and height than Standard size plates.
- Available in Ivory, White, Brown, Gray, Black and Light Almond; and three metallic finishes – Dark Bronze, Nickel, and Graphite.

Thermoset Plastic Wall Plates

- Molded of non-combustible mar-proof material.
- Available in "SP" series in Standard, Junior-Jumbo, and Jumbo sizes.
- Seven standard colors available – Ivory, White, Brown, Gray, Black, Red, and Light Almond.
- Individually wrapped with color-matching screws.
- Resistant to discoloration, grease, oil, solvent and moisture.
- Nominal thickness, .070"

TradeMaster® Thermoplastic Wall Plates

- Molded of rugged, practically indestructible self-extinguishing nylon. ("TP" series only)
- Available in "TP" series, extra 3/16" width and height than Standard size plates; and "TPJ" series, extra 3/16" width and height than Junior-Jumbo size plates.
- Available in Ivory, White, Brown, Gray, Black, Blue, Orange, Red, and Light Almond.
- Preferred for hospital, industrial, institutional, and other high-abuse applications.
- Nominal thickness, .070"

Metal Wall Plates


- Constructed of corrosion-resistant stainless steel, brass, aluminum, chrome, brushed bronze or galvanized steel.
- Standard, Jumbo and Tandem size plates available, as well as special Panel size plates up to 5-gangs high and 10-gangs wide.
- Packaged in protective film, with finish-matching screws.
- Variety of special plated finishes. Paintable to match plastic plates.
- Can be silk-screened or engraved, and custom punched with over 300 opening styles.

Materials

- Type 302/304 Stainless Steel, non-magnetic, .032" nominal thickness, brushed finish. This alloy contains 18% chromium and 8% nickel for superior resistance to corrosion. Recommended for use in food processing plants, dairies, chemical plants, and other industrial, institutional, and commercial applications where corrosive atmospheres exist.
- Type 430 Stainless Steel, magnetic, .032" nominal thickness, brushed finish. Less corrosion-resistant than Type 302/304, but ideal for general service in high abuse applications in industrial plants, commercial, and institutional buildings.
- Chrome and Polished Brass, .040" thick. 70% copper, 30% zinc alloy gives warm, appealing finish to modern decor as well as retrofit applications. Lacquered to prevent corrosion.
- Aluminum, .040" thick. Lustrous satin finish. Lacquered to prevent corrosion.
- Galvanized Steel. Used only for Handy Box Plates.
- Brushed Bronze, .040" thick. 90% copper, 10% zinc. Lacquered to prevent corrosion.

WALL PLATES

Dimensions

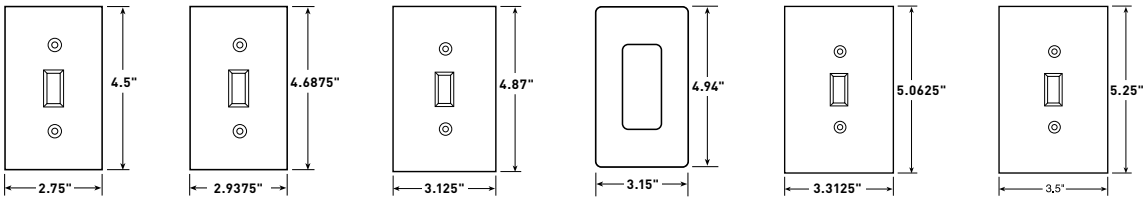

Standard | **Trademaster Standard** | **Junior-Jumbo** | **radiant® Screwless** | **Trademaster Jumbo** | **Jumbo**

Standard Size Wall Plates

- Standard size wall plates for all applications.
- Best fit for surface mount boxes.
- Available in plastic and metal only.

Dimensions

1 gang	2.75" x 4.5"
2 gang	4.56" x 4.5"
3 gang	6.375" x 4.5"
4 gang	8.125" x 4.5"
5 gang	10" x 4.5"
6 gang	11.812" x 4.5"
7 gang	13.62" x 4.5"
8 gang	15.44" x 4.5"

TradeMaster® Wall Plates

- Extra 3/16" width and height than Standard size wall plates.
- Provide better sheet rock coverage with standard size appearance.
- Available in unbreakable nylon 6 construction only.
- Screws pre-installed in the duplex, toggle and decorator-style single gang plates.

Dimensions

1 gang	2.9375" x 4.6875"
2 gang	4.75" x 4.6875"
3 gang	6.563" x 4.6875"
4 gang	8.375" x 4.6875"
5 gang	10.188" x 4.6875"
6 gang	12" x 4.6875"

radiant® Screwless Polycarbonate Wall Plates

- Available in decorator-style openings.
- Extra 3/8" width and height than Standard size wall plates.
- Provide better sheet rock coverage with standard size appearance.
- Molded of .065" thick polycarbonate.
- 1-piece plastic subplate.
- Available in 3 metallic finishes and 6 standard colors.

Wall Plate Dimensions

1 gang	3.15" x 4.94"
2 gang	4.96" x 4.94"
3 gang	6.77" x 4.94"
4 gang	8.59" x 4.94"
5 gang	10.40" x 4.94"
6 gang	12.21" x 4.94"

Subplate Dimensions

1 gang	1.81" x 4.78" x .15"
2 gang	3.62" x 4.78" x .15"
3 gang	5.44" x 4.78" x .15"
4 gang	7.25" x 4.78" x .15"
5 gang	9.06" x 4.78" x .15"
6 gang	10.87" x 4.78" x .15"

Junior-Jumbo Wall Plates

- Extra 3/8" width and height than Standard size wall plates.
- Additional coverage for sheet rock gaps.
- Available in plastic and metal only.

Dimensions

1 gang	3.125" x 4.87"
2 gang	4.93" x 4.87"
3 gang	6.75" x 4.87"
4 gang	8.56" x 4.87"

TradeMaster® Jumbo Wall Plates

- Extra 3/16" width and height than Junior-Jumbo size wall plates.
- Provide additional coverage for sheet rock gaps, matching the appearance of the TradeMaster Plates.
- Available in unbreakable nylon 6 construction only.
- Screws pre-installed in the duplex, toggle and decorator-style single gang plates.

Dimensions

1 gang	3.3125" x 5.0625"
2 gang	5.125" x 5.0625"
3 gang	6.9375" x 5.0625"
4 gang	8.75" x 5.0625"

Jumbo Wall Plates


- Extra 3/4" width and height than Standard size wall plates.
- Largest size wall plates to cover larger wall damage.
- Available in plastic and metal only.

Dimensions

1 gang	3.5" x 5.25"
2 gang	5.31" x 5.25"
3 gang	7.12" x 5.25"
4 gang	8.93" x 5.25"

WALL PLATES

Dimensions

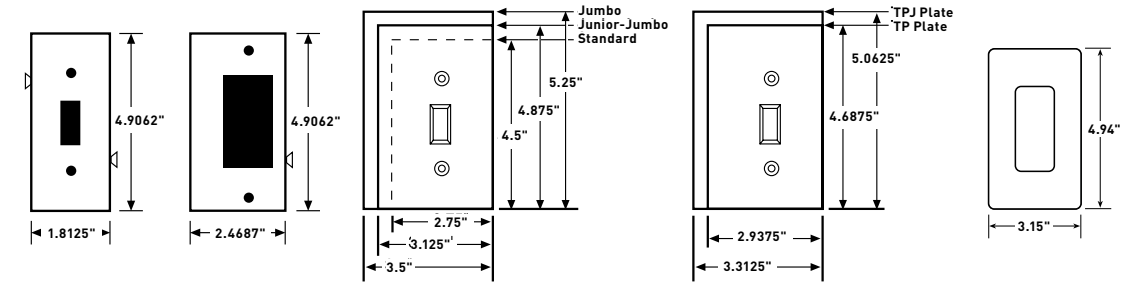


Center Panel **End Panel** **SP Plates** **TP Plates** **RWP Plates**

Sectional Wall Plates

End and center panels with each of five most-used configurations make it possible to improvise custom wall plates on the job. Panels lock securely together on installation. Blank sections furnished with mounting strap.

Wall Plate Mountings

Illustrated are the five standard methods of plate mounting. There are many other non-standard methods which depend upon the special device used. Exact mounting hole specifications for every device appear in the Selector Guide.

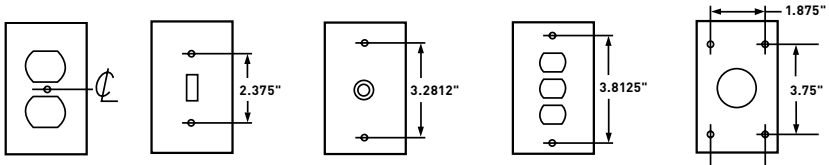


Center Strap **Strap** **Box** **Interchangeable** **FS (4 Screw)**


Wall Plate Sizes

Standard Size


Available in plastic and metal




Junior-Jumbo



Jumbo




radiant® Screwless Wall Plate Plastic Subplate



For radiant Screwless (RWP) Wall Plate dimensions refer to Page I-4.


TradeMaster® Size

Available in nylon only



TradeMaster Jumbo


Available in nylon only



WALL PLATES


Style Selector Guide Custom Metal Wall Plates

STYLE 1




TOGGLE SWITCH
#1 Standard Plate page I-5


STYLE 2




STYLE 3




STYLE 4



STYLE 5




STYLE 7




SINGLE OUTLET
#7 Standard Plate page I-10

STYLE 8




DUPLEX OUTLET
#8 Standard Plate page I-6

STYLE 9




BIPLEX/TRIPLEX

STYLE 10




PUSH BUTTON

STYLE 11




TELEPHONE, BOX MTD.
#11 Standard Plate page I-34

STYLE 12




TELEPHONE, STRAP MTD.
with #340 Yoke
#12 Standard Plate page I-34

STYLE 13




BLANK, BOX MTD.
#13 Standard Plate page I-8

STYLE 14




BLANK, STRAP MTD.
with #340 Yoke
#14 Standard Plate page I-9

STYLE 16




SINGLE OUTLET
FOR 1600 SERIES

STYLE 17



SINGLE RECEPTACLE
FOR 1600 SERIES
CENTERED 2 GANG

STYLE 18




TOGGLE SWITCH
CENTERED 2 GANG
#740 Standard Plate page I-17

All wall plate dimensions shown above are in inches.

WALL PLATES


Style Selector Guide Custom Metal Wall Plates

STYLE 19




SINGLE OUTLET
CENTERED 2 GANG
#747 Standard Plate page I-17

STYLE 20




DUPLEX OUTLET
CENTERED 2 GANG
#748 Standard Plate page I-17

STYLE 21




BIPLEX/TRIPLEX
CENTERED 2 GANG

STYLE 22




DECORATOR-STYLE/GFCI
CENTERED 2 GANG
#746 Standard Plate page I-17

STYLE 23




BLANK, BOX MTD.
#23 Standard Plate page I-8

STYLE 24




BLANK, STRAP MTD.
with 2 #340 Yokes
#24 Standard Plate pageI-9

STYLE 25




TELEPHONE JACK OUTLET
NOTE: Special Plate Mounting

STYLE 26




DECORATOR-STYLE/GFCI
#26 Standard Plate page I-7

STYLE 27




ONE DESPARD® INTERCHANGEABLE
with #348 Strap
Standard Plate page I-16
STYLE 27A — BOX MTD.

STYLE 28




TWO DESPARD® INTERCHANGEABLE
with #348 Straps
Standard Plate page I-16
STYLE 29 — BOX MTD.

STYLE 30




THREE DESPARD® INTERCHANGEABLE
with #348 Straps
Standard Plate page I-16
STYLE 31 — BOX MTD.

STYLE 32




ONE VERTICAL DESPARD® INTERCHANGEABLE
with #347 Strap
Standard Plate page I-16


STYLE 33




STYLE 36



STYLE 37



STYLE 38




All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates


STYLE 40




STYLE 41




STYLE 42




STYLE 43




STYLE 44




STYLE 45




STYLE 46



STYLE 47




STYLE 48




NOTE: Engraving Extra at Standard Price per Character

STYLE 49




STYLE 49A — Vertical Opening
STYLE 50 — 2 Openings 1 Gang
STYLE 51— 3 Openings 1 Gang
STYLE 52 — 4 Openings 1 Gang

STYLE 55




with #340 Yoke
STYLE 56 — BOX MTD.

STYLE 57




with #340 Yoke
STYLE 58 — BOX MTD.

STYLE 59




with #340 Yoke
STYLE 60 — BOX MTD.
STYLE 61— DESP. INTCH. MTD.

STYLE 62




STYLE 63— BOX MTD.

STYLE 64



STYLE 65 — BOX MTD.

STYLE 66




STYLE 67— BOX MTD.

All wall plate dimensions shown above are in inches.

WALL PLATES


Style Selector Guide Custom Metal Wall Plates

STYLE 68




STYLE 69 — BOX MTD.
STYLE 70— DESP. INTCH. MTD.

STYLE 71




STYLE 72— BOX MTD.

STYLE 73




STYLE 74 — BOX MTD.

STYLE 75




Clearance for 11/8" Device
STYLE 76 — BOX MTD.

STYLE 77




STYLE 78 — BOX MTD.
STYLE 79 — DESP. INTCH. MTD.

STYLE 80




STYLE 81 —BOX MTD.
STYLE 82 — DESP. INTCH. MTD.

STYLE 83




STYLE 84 — BOX MTD.
STYLE 85 — DESP. INTCH. MTD.

STYLE 86




STYLE 87 — BOX MTD.
STYLE 88 — DESP. INTCH. MTD.

STYLE 89




STYLE 90 — BOX MTD.

STYLE 91




POWER OUTLET
#720 Standard Plate page I-10

STYLE 92




STYLE 93 — DESP. INTCH. MTD.

STYLE 94




STYLE 95 — BOX MTD.
STYLE 96 — DESP. INTCH. MTD.

STYLE 97




STYLE 98




POWER OUTLET
#723 Standard Plate page I-10

STYLE 99

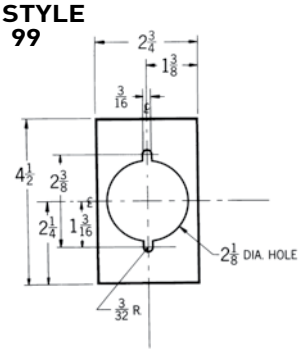

STYLE 100




with 2 # 340 Yokes
STYLE 101 — BOX MTD.

All wall plate dimensions shown above are in inches.

WALL PLATES


Style Selector Guide Custom Metal Wall Plates

STYLE 102




STYLE 103 — BOX MTD.

STYLE 104




STYLE 105 — BOX MTD.

STYLE 106




STYLE 107 — BOX MTD.

STYLE 110




STYLE 112




STYLE 113 — BOX MTD.
STYLE 114 — DESP. INTCH. MTD.

STYLE 115




STYLE 116




STYLE 117 — BOX MTD.
STYLE 118 — DESP. INTCH. MTD.


STYLE 119




STYLE 121

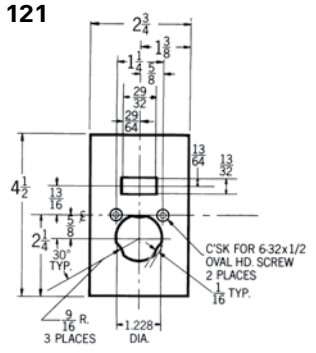

STYLE 122

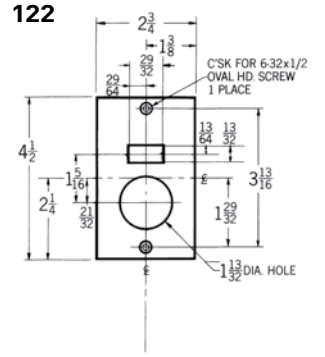


STYLE 123




with #340 Yoke

STYLE 124




STYLE 125 — 2 HOLES
STYLE 126 — 3 HOLES


STYLE 131



STYLE 132




STYLE 134



POWER OUTLET
#701 Standard Plate page I-11

STYLE 135




STYLE 135A. — DESP. INTCH. MTD.
#771 Standard Plate page I-18

All wall plate dimensions shown above are in inches.

WALL PLATES


Style Selector Guide Custom Metal Wall Plates

STYLE 136




RAZOR BLADES
with #340 Yoke

STYLE 137




RAZOR BLADES, BOX MTD.
STYLE 137B — HORIZONTAL
RAZOR BLADE, BOX MTD.

STYLE 138




STYLE 139 — BOX MTD.
STYLE 140 — DESP. INTCH. MTD.


STYLE 141




STYLE 142



STYLE 143

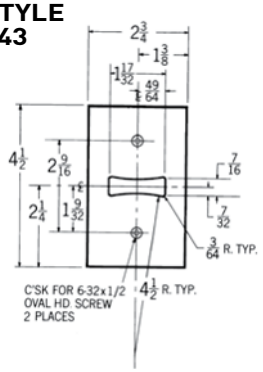


STYLE 144




STYLE 145 — 3 OPENINGS
STYLE 146 — 4 OPENINGS
STYLE 147 — MASTER CONTROL

STYLE 149




STYLE 150




DESP. INTCH. MTD.

STYLE 152




TELEPHONE OUTLET CENTERED
2 GANG, with #340 Yoke
STYLE 151 — BOX MTD.
#741, 742 Standard Plate page I-36

STYLE 155




POWER OUTLET
#702 Standard Plate page I-11

STYLE 156




POWER OUTLET
#703 Standard Plate page I-11

STYLE 160




STYLE 162




STYLE 176 — STRAP MTD.
with #340 Yoke
#743 Standard Plate page I-17

STYLE 163



POWER OUTLET
#721 Standard Plate page I-10

STYLE 165




POWER OUTLET
#724 Standard Plate page I-10

All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates

STYLE 166




STYLE 169




LOUVER
#760 Standard Plate page I-18

STYLE 171




POWER OUTLET
#710 Standard Plate page I-11

STYLE 172




3 GANG PLATE

STYLE 177




STYLE 178
Touch Plate 50-2, 2 Openings
STYLE 179
Touch Plate 50-3, 3 Openings Box Mtd.


STYLE 180




STYLE 181




STYLE 182




STYLE 183




STYLE 185




STYLE 187



STYLE 188




STYLE 189




STYLE 190 — BOX MTD.

STYLE 191




STYLE 192 — BOX MTD.
STYLE 193 — DESP. INTCH. MTD.

STYLE 194



POWER OUTLET
#725 Standard Plate page I-10
STYLE 195 — BOX MTD.
STYLE 196 — DESP. INTCH. MTD.

STYLE 199




All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates

STYLE 200




STYLE 206




with #340 Yoke
STYLE 207 — BOX MTD.

STYLE 210




STYLE 211




4-S Box Mtd. Plate available in any Standard 1 Gang Opening (Style 8 Shown)

STYLE 213




STYLE 214




with #340 Yoke

STYLE 215




STYLE 215A — 1 HOLE CENTERED


STYLE 216

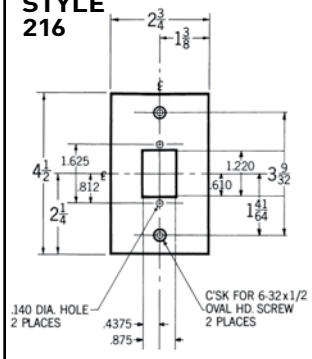


STYLE 217




STYLE 218




STYLE 219




STYLE 220




STYLE 221




STYLE 222



STYLE 223



STYLE 224




All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates


STYLE 225




STYLE 226




STYLE 227




STYLE 228




STYLE 229




STYLE 230



STYLE 232




STYLE 233




STYLE 233A — EXTRA CIRCLE OF HOLES (31 HOLES)


STYLE 235



STYLE 236




STYLE 237




with #340 Yoke
STYLE 238 — BOX MTD.


STYLE 239




STYLE 240




STYLE 241



STYLE 242



STYLE 243




All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates


STYLE 244




STYLE 245




STYLE 246




STYLE 247



STYLE 248




STYLE 252




with Hospital Cord Eyelet


STYLE 257




STYLE 258




STYLE 259




STYLE 260



STYLE 261




STYLE 262




STYLE 262A
HORIZONTAL OPENING, BOX MTD.


STYLE 267



STYLE 269




STYLE 270



F.S. BOX MTD.

STYLE 271




All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates


STYLE 272




STYLE 273




STYLE 274




STYLE 275




STYLE 276




STYLE 279

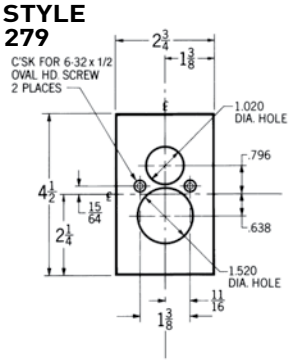


STYLE 281

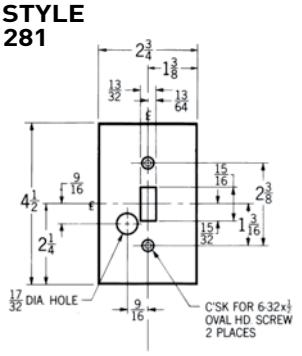


STYLE 282

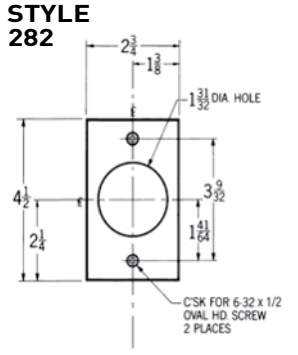


STYLE 283



STYLE 284




STYLE 285




JUMBO 2 GANG PLATE


STYLE 286




STYLE 287




STYLE 288



STYLE 289



STYLE 291




All wall plate dimensions shown above are in inches.


WALL PLATES

Style Selector Guide Custom Metal Wall Plates

STYLE 292




STYLE 293




POWER OUTLET
for 30, 50, 60A. Receptacle
#716 Standard Plate page I-11

STYLE 295




FOR RS-232 COMPUTER JACK
#791 Standard Plate page I-36

STYLE 295A




FOR RS-232 COMPUTER JACKS
#792 Standard Plate page I-36


STYLE 296




STYLE 296A




STYLE 297




STYLE 298




STYLE 299




STYLE 300



STYLE 301




STYLE 302




SS-717 for PS20AC1KL Switch


STYLE 303




STYLE 305



STYLE 306













STYLE 307



All wall plate dimensions shown above are in inches.

WALL PLATES

Style Selector Guide Custom Metal Wall Plates


STYLE 308  **TELEPHONE JACK**	**STYLE 309**  **TELEPHONE JACK**	**STYLE 310**  **AMP ELECTRONIC CONNECTOR**	**STYLE 311**  **COAXIAL ELECTRONIC CONNECTOR**
STYLE 312  **COAXIAL ELECTRONIC CONNECTOR**	**STYLE 313**  **COAXIAL ELECTRONIC CONNECTOR**	**STYLE 314**  **LAN PORT**	**STYLE 315** 
STYLE 315A  	**STYLE 315B**  		


All wall plate dimensions shown above are in inches.


DEVICES & WALL PLATES


Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory


Light Almond


White


Green


Dark Bronze



Nickel



Graphite



Black


Blue


Brown


Gray


Orange



Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

Metal Finish


Aluminum


Polished Brass



Stainless Steel



Brushed Bronze



Chrome


Custom Metal Wall Plates Paint Finish Colors


Paint Color



Orange



Green



Gray



Yellow



Glossy Black



Brown



White



Primer



Red


Pink


Flat Black


Ivory


Light Almond


Blue

To order custom metal wall plates, see Pages I-25 – I-29.
For additional colors consult factory.

ELECTRICAL ACCESSORIES



Looking for the classic porcelain lampholder? A hard-to-find household adapter? Or a wide range of replacement appliance switches? You'll find them in our accessory line — along with quality materials, durability, and time-tested designs.










ELECTRICAL ACCESSORIES

Appliance Switches	J-2
Fluorescent Lampholders	J-3
Incandescent/CFL Lampholders	J-4
Household Devices	J-7
Fluorescent Starters & Wall Plate Inserts	J-10
Special Purpose Devices-Despard	J-11
Low-Voltage Switching Components	J-13
Keystone Products, Wall Plates & Frames	J-15
Frames & Wall Plates	J-16
Patch Panels, 66 Block & Patch Cords	J-17

ELECTRICAL ACCESSORIES

Appliance Switches

APPLIANCE SWITCHES









	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA	cULus
	**423**	6A 3A	125V 250V	In-line cord switch, light-duty.	Brown	•	•	
	**5406BK** **5406BKBPCC5** **5406BKCC10** **5406WCC10**	6A	125V	Heavy-duty, feed-thru cord switch, single pole, ON-OFF sequence, markings near toggle.	Black White	•	•	
	**575**	3A 1A	250V 250V	Push button canopy switch, single pole, Bakelite plunger, ON-OFF sequence, RU Listed.	Brown	•		
	**653**	6A 3A	125VT 250V	Rotary, single pole, two circuit, four position, heavy-duty, black, blue, red leads, 1st ON, 2nd ON, both ON, OFF sequence. RU Listed.		•		
	**738**	8A	125V	Toggle, single throw, ON-OFF sequence, 2 black leads. (18 AWG) 6.5" long, RU Listed.			•	
	**168950**	3A 6A 3A 1/4 HP @ 125/120V	125V-L 125V 250V	Pull chain, two circuit, four position, 1st ON, 2nd ON, both ON, OFF sequence, RU Listed.		•	•	
	**220**	6A 3A	125V 250V	Heavy-duty single pole canopy pull switch. 2 black leads (18 AWG) 6.5" long, RU Listed.		•	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES

Fluorescent Lampholders

FLUORESCENT LAMPHOLDERS



	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA
	**3901W**	660W	600V	Medium bi-pin, screw terminals.	White	•	•
	**464**	660W	600V	Pedestal type, recessed, contact, plunger, with floor terminal screw cover (for 800 & 1500MA T-12 lamps).	White	•	•
	**465**	660W	600V	Pedestal type, recessed, fixed, quick wire terminals (for 800 & 1500MA T-12 lamps).	White	•	•
	**466**	660W	1000V	Pedestal type, recessed, plunger, quick wire terminals (for all sizes of lamps T-12, T-8, and T-6).	White	•	
	**467**	660W	600V	Pedestal type, recessed, fixed, quick wire terminals (for all sizes of lamps T-12, T-8, and T-6).	White	•	
	**2536**	660W	1000V	Slimline, for single pin lamps, shallow base, slide plunger, push in terminal.	White	•	•
	2537	660W	600V	Slimline, for single pin lamps, shallow base, slide fixed, 2 push in terminals.	White	•	•
	**13053UN**	660W	660V	Slide-on, short, for medium bi-pin lamps with captive nut, 4 quick wire terminals.	White	•	
	**13057UN**	660W	600V	Slide-on, for medium bi-pin with captive 4 quick wire terminals.	White	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


ELECTRICAL ACCESSORIES

Incandescent Lampholders





MEDIUM BASE LAMPHOLDERS

	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	cULus	UL	CSA
 276WH	**272**	660W	250V	Medium base, porcelain, one piece keyless, 2 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White		•	•
	272WH6	660W	250V	Same with 6" leads.	White		•	•
	274	660W	250V	Medium base, porcelain, one piece keyless, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes.	White		•	•
	276WH	660W	250V	Medium base, phenolic, one-piece keyless, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White		•	•
	276WH6	660W	250V	Same with 6" leads.	White		•	•
 280WH	**282**	250W	250V	Medium base, porcelain, pullchain, 2 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White		•	•
	284	250W	250V	Medium base, porcelain, pullchain, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White		•	•
	280WH	250W	250V	Medium base, phenolic, pullchain, 4 terminals with tri-drive screws, fits 3-1/4" and 4" boxes, with cage neck.	White		•	•
	280WH6	250W	250V	Same with 6" leads.	White		•	•
 288	**29816C2**	250W	250V	Medium base, porcelain, pullchain, 2 terminals with tri-drive screws, 6" leads, fits 3-1/4" and 4" boxes with cage neck.	White		•	•
	288	250W	125V	Medium base, porcelain, pullchain, 2 terminals with tri-drive screws, 15A 125V grounding receptacle, fits 3-1/4" and 4" boxes, with cage neck.	White		•	•

CFL LAMPHOLDERS

	**277FL**	13W	120V, 60Hz	Compact Fluorescent Lampholder, includes GU24 lamp, Energy Star qualified	White	•		
	278FL	13W	120V, 60Hz	Compact Fluorescent Lampholder with pull chain, includes GU24 lamp, Energy Star qualified	White	•		






METAL SHELL LAMPHOLDERS

 7070PG, 7090PG	**7070PG**	250W	250V	Medium base, metal shell, removable turn knob, electrolier, 2 lamp controls, 3 terminals, 1st ON, 2nd ON, both ON, OFF sequence.			•	•
	7090PG	250W	250V	Medium base, metal shell, removable turn knob, electrolier, 3-way LO-MED-HIGH.			•	
	7090M			Interior only for 7090-PG.			•	
	7090MH			Interior only with hickey for 7090-PG.			•	
	**6098PG**	660W	250V	Medium base, push through, metal shell, electrolier, single circuit.			•	•
	**1008316**	250W	250V	Medium base, metal shell, removable turn knob, single circuit, electrolier, 1/8" IPS tapped bushing with set screw.			•	
	**19980PG**	660W	250V	Medium base, metal shell, pull chain, electrolier, single circuit, 1/8" IPS bushing with set screw.			•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES






Incandescent Lampholders

	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA	cULus
METAL SHELL LAMPHOLDERS								
	**975ABDCC10**	660W	250V	Medium base, metal shell, keyless.	Brass	•	•	
MEDIUM BASE LAMPHOLDERS								
	**8101**	660W	250V	Medium base, porcelain, keyless, single circuit, 2 piece ring with leads. 1-3/8" to 1-1/2" hole.	White	•		
	**201**	660W	600V	Medium base, rubber, keyless, for temporary lighting, 2 wire leads 6" long.	Black	•		•
	**31528**	660W	250V	Medium base, porcelain, screw terminals, keyless, single circuit, fixture pan with 1/8" IPS hickey.	White	•	•	
	**3352F**	660W	250V	Medium base, porcelain, keyless, screw terminals, short base.	White	•	•	
	**8052CC10**	660W	250V	Medium base, porcelain, bracket mount.	White	•	•	
	**9880CC10**	660W	250V	Medium base, porcelain, surface mount type, 2-piece.	White	•	•	
	**10045**	660W	250V	Medium base, porcelain, keyless, single circuit with screw terminals, aluminum screw shell with set.	White	•	•	
	10085	660W	250V	Medium base, porcelain, keyless, single circuit with 2-18 AWG leads 6" long.	White	•	•	
	**19062**	660W	250V	Medium base, porcelain, pony cleat type, terminal screws.	White	•	•	
	**S752WCC10**	660W	250V	Medium base, cleat sockets, front wire.	White			•
	**61**	660W	125V	Medium base, outlet to lampholder, 2 Pole, 2 Wire.	Brown			

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES

Incandescent Lampholders








CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA
MEDIUM BASE LAMPHOLDERS						
 **4017CC10**	660W	250V	Medium base, single-to-twin.	Black	•	•
MOGUL BASE LAMPHOLDERS						
 **8601**	750W	250V	Mogul base, porcelain, removable turn knob, 2 circuits, hickey tapped 1/4" IPS x 7/8" high.	White	•	
 **8678**	1500W	600V	Mogul base, porcelain, keyless, single circuit, 1/4" IPS 13/16" hexagon x 9/16" high with screw set.	White	•	•
 **8694**	1500W	600V	Mogul base, porcelain, screw terminals, keyless, single pole with bushings, 4KV pulse rated.	White	•	
PONY CLEAT TYPE LAMPHOLDERS						
 **10020**	75W	125V	Pony cleat type, plastic, miniature base.	White		
10028	75W	125V	Pony cleat type, plastic, candelabra base.	White		
CANDELABRA BOX LAMPHOLDERS						
 **10027**	75W	125V	Candelabra base, keyless, screw terminals, solid hickey, overall height 1-1/2", paperboard sleeve.		•	
TEMPORARY LIGHTING DEVICES						
 **43308**	660W	250V	Medium base, phenolic, pin type hook supplied, for temporary use.	Black	•	
SOCKET EXTENSIONS/CLUSTERS						
 **2005**	660W	250V	Socket extensions, medium-to-medium, one piece porcelain, 1.25" extension.	White	•	•
2006	660W	250V	Socket extensions, medium-to-medium, one piece phenolic, 1.1875" extension.	White	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES

Household Devices





PLUGS & CONNECTORS

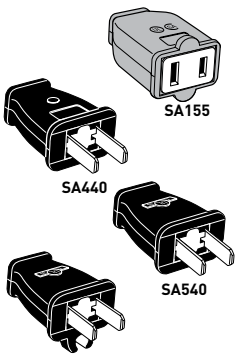	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA
	**101**	15A	125V	Clamptite plug, light-duty, 2 Pole, 2 Wire.	Black	•	
	**84BKCC20**	15A	125V	Angle plug, light-duty, 2 Pole, 2 Wire.	Black	•	•
	**111MC**	15A	125V	Rubber plug, with vinyl cord clamp, 2 Pole, 2 Wire.	Black	•	
	111GMC	15A	125V	Rubber plug, with vinyl cord clamp inner assembly, 2 Pole, 3 Wire, (mates with 114GMC).	Black	•	
	114GMC	15A	125V	Rubber connector, with vinyl cord clamp, 2 Pole, 3 Wire, (mates with 111GMC).	Black	•	
	**123P**	10A 3A	125V 125V	Easy wire plug, 10A 125V use with 18-2 SPT-1 Cord, 3A 125V use with 20-2XT Cord, non-polarized.	Brown	•	
	123PW				White	•	
	**48643**	15A	125V	Plug, vinyl, short flat, 2 Pole, 2 Wire.	Brown	•	
	**83CC4**	30A	125V	Angle travel trailer plug, 2 Pole, 3 Wire.	Black	•	•
	**SA155BKCC10**	15A	125V	Straight blade connector, polarized, 2 Pole, 2 Wire.	Black	•	•
	SA155CC10				Brown	•	•
	SA155WCC10				White	•	•
	SA440BKCC10	15A	125V	Straight blade plug, 2 Pole, 2 Wire.	Black	•	•
	SA440CC10				Brown	•	•
	SA440WCC10				White	•	•
	SA540BKCC10	15A	125V	Straight blade plug, polarized, 2 Pole, 2 Wire.	Black	•	•
	SA540CC10				Brown	•	•
	SA540WCC10				White	•	•
	SA840BKCC10	15A	125V	Straight blade plug, with cord clip, 2 Pole, 2 Wire.	Black	•	•
	SA840CC10				Brown	•	•
	SA840WCC10				White	•	•
	**SA399BKCC10**	15A	125V	Straight blade plug, 2 Pole, 3 Wire.	Black	•	•
	SA399GRYCC10				Gray	•	•
	SA399OCC10				Orange	•	•
	SA399WCC10				White	•	•
	**SA993BKCC10**	15A	125V	Straight blade connector, 2 Pole, 3 Wire.	Black	•	•
	SA993GRYCC10				Gray	•	•
	SA993OCC10				Orange	•	•
	SA993WCC10				White	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES

Household Devices



QUICK CLAMP PLUGS & CONNECTORS							
	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA
 123PQC 123C3W	123PQC	10A with 18AWG SPT-1 & 2 Cord, 13A with 16AWG SPT-1 Cord		2 wire Quick Clamp plug	Brown	•	
	123C3WBPCC10			2 wire tri-tap Quick Clamp connector	White	•	
ADAPTERS							
	125	15A 660W	125V	Lampholder to outlet, medium base.	White	•	
	1406	250W	125V	Medium base lampholder/outlet adapter, pull chain lampholder with 2 outlets, 2 Pole, 2 Wire.	Black	•	
	128	660W	250V	Single lampholder-to-twin lampholder, medium base.	Brown	•	
	8681	660W	250V	Mogul to medium socket adapter, 1 piece. 1.66" Dia. x 2.0" Deep	White	•	•
	1264	15, 20A	125V	Travel trailer adapter, 2 Pole, 3 Wire.			
	1482ICC10	15A	125V	Cube tap, single to triple outlet, 2 Pole, 3 Wire.	Ivory	•	•
	68	15A	125V	Cube tap, phenolic, single to triple, 2 Pole, 2 Wire.	Brown		
	63	15A	125V	Plug-in adapter, single to triple, polarized, 2 Pole, 2 Wire.	Brown	•	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


ELECTRICAL ACCESSORIES

Household Devices

ADAPTERS

	CATALOG NUMBER	RATING		DESCRIPTION	COLOR	UL	CSA
	**697**	15A	125V	Plug-in outlet adapter, single to triple, 2 Pole, 3 Wire.	Brown	•	
	697I				Ivory	•	
	697RI	15A	125V	Plug-in outlet adapter, single to triple, rubber, 2 Pole, 3 Wire.	Ivory	•	
	697W	15A	125V	Plug-in outlet adapter, single to triple, 2 Pole, 3 Wire.	White	•	
	**699CC25**	15A	120V	Plug-in outlet adapter, single to triple, 2 Pole, 3 Wire.	Brown	•	•
	699GRCC25				Green	•	•
	**226PAW**	15A	125V	Plug-in adapter, two to six, polarized, 2 Pole, 3 Wire.	White	•	•

MISCELLANEOUS DEVICES


	**13741**	15A	125V	Snap-in receptacle, 3 Wire grounding outlet with 6" leads, No. 14 AWG 105°C plastic.	Black	•	•
	**779CC5**	15A	120/277V	Cover-mounted switch.		•	•
	**735CC10**	10A 5A	125V 250V	Surface mount switch	Black		
	**5SC**			Outlet safety caps.	Clear	•	

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES





Fluorescent Starters & Wall Plate Inserts

FLUORESCENT STARTERS



CATALOG NUMBER	DESCRIPTION	UL	CSA
FS2	Glow switch starter without reset, 2 pins 14, 15 & 20W.	•	•
FS4	Glow switch starter without reset, 2 pins 13, 30 & 40W.	•	•
FS5	Glow switch starter without reset, 2 pins 4, 6 & 8W.	•	•


WALL PLATE INSERTS

DIMENSIONS	CATALOG NUMBER	DESCRIPTION	FINISH	COLOR
	325I 325W 325 325BK 325LA 325GRY	Mounting strap for blank insert. Box mounted. Changes decorator opening to blank.	Polycarbonate Plastic	Ivory White Brown Black Light Almond Grey
	326I 326W 326 326LA	Mounting strap for blank insert. Box mounted. Changes decorator opening to blank.	Painted Steel	Ivory White Brown Light Almond
	327I 327W 327 327LA	Mounting strap for dimmer insert. Box mounted. Change from decorator to toggle opening.	Painted Steel	Ivory White Brown Light Almond
	80700I 80700W 80700LA	Mounting strap for blank insert. Box mounted. Changes toggle opening to blank.	Thermoset Plastic	Ivory White Light Almond


All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES


Special Purpose Devices – Despard®



ACD1



1432



1475

CATALOG NUMBER		COLOR	RATING		3RD PARTY COMPLIANCE
SINGLE POLE	THREE-WAY		A.	V.	UL20
TOGGLE SWITCHES SCREW TERMINALS					
ACD1I	ACD3I	Ivory	15	120/277	•
ACD1W	ACD3W	White	15	120/277	•
ACD1	ACD3	Brown	15	120/277	•
ACD201I	ACD203I	Ivory	20	120/277	•
ACD201	ACD203	Brown	20	120/277	•

HP CONVERSION TABLE	
15 Amp	1/2 Horsepower at 120VAC; 2 Horsepower at 240VAC
20 Amp	1 Horsepower at 120VAC; 2 Horsepower at 240VAC
30 Amp	2 Horsepower at 120VAC; 2 Horsepower at 240VAC

CATALOG NUMBER	COLOR	RATING		DESCRIPTION	3RD PARTY COMPLIANCE
		A.	V.		UL498
RECEPTACLES THREE WIRE GROUNDING					
1432	Ivory	15	125	Must be installed in end opening of strap with Ground Lead	•
1532	White	15	125		•
1433	Ivory	15	125		•
1333	Brown	15	125		•

CATALOG NUMBER	COLOR	RATING		DESCRIPTION	3RD PARTY COMPLIANCE
		A.	V.		UL542
NEON PILOT LIGHTS					
1575	White	1/25	125	Flush Red Neon Pilot Light with Screw Terminals	•

All devices listed on this page conform to NEMA WD-1 and WD-6.


ELECTRICAL ACCESSORIES

Special Purpose Devices – Despard®


CATALOG NUMBER	DESCRIPTION	SCREW SPACING	FINISH
RECEPTACLES THREE WIRE GROUNDING			
342	Tandem mounting strap with two vertical openings. Plate screw hole spacing 4-3/8".	4-3/8"	Bright Zinc
347	Mounting strap with single vertical opening. Plate screw hole spacing 3-13/16". Box mounted.	3-13/16"	Bright Zinc
348	Mounting strap with three horizontal openings. Plate screw hole spacing 3-13/16". Box mounted.	3-13/16"	Bright Zinc
1354	Appliance Strap.	1-31/32"	

The correct style of mounting strap is furnished with each Despard wall plate, but straps may be ordered separately.
Consult Page I-37 for additional mounting straps.


Dimensions

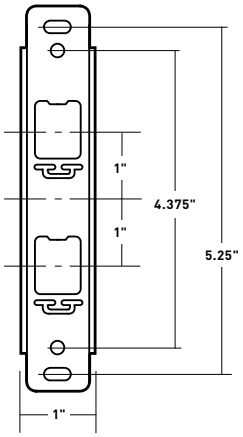

342




347




348

Installation & Removal

To assemble Despard devices in strap, insert tab on strap into the slot in the device; a twist of a screwdriver in the slots on the opposite side of the strap turns a slim strip of metal into the mounting slot on that side of the device to lock the device securely in place. To remove the device, reverse the procedure.

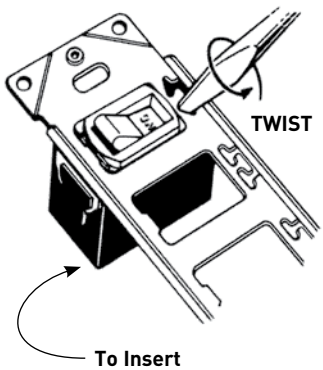

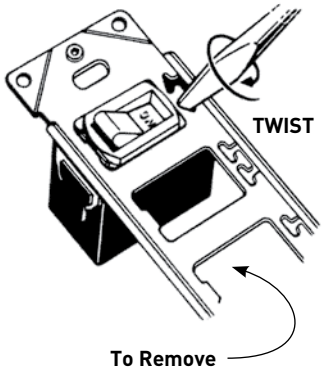

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES

Low-Voltage Switching Components

Application


Legrand's Pass & Seymour Low-Voltage Remote Control Products consist of reliable, field-tested switching circuitry that provide central or local control of lighting loads throughout a building. These are best applied in institutions, schools, commercial buildings, warehouses and other installations where the ON-OFF switching of lighting is widely dispersed throughout the structures.

Important:


Low-Voltage Switching Components are specifically designed for switching incandescent and fluorescent lighting (non-HID) loads.

Low-Voltage Switching Components are not to be used with any components supplied by other manufacturers. Misapplication or improper use may void product warranties.

Basic Wiring Diagram

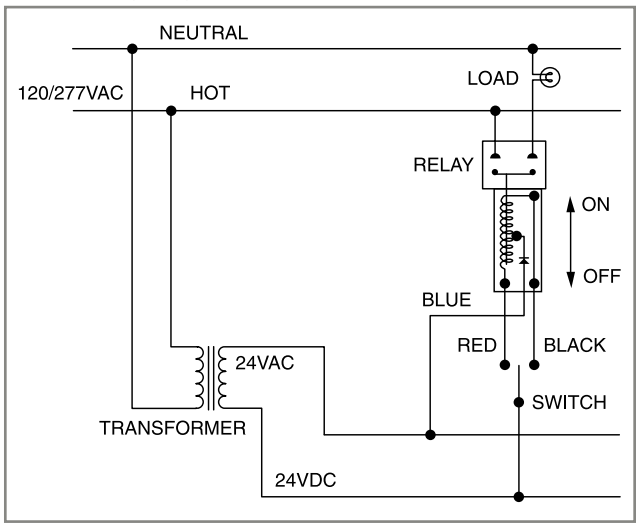

The ABCs of Low-Voltage Wiring and Components

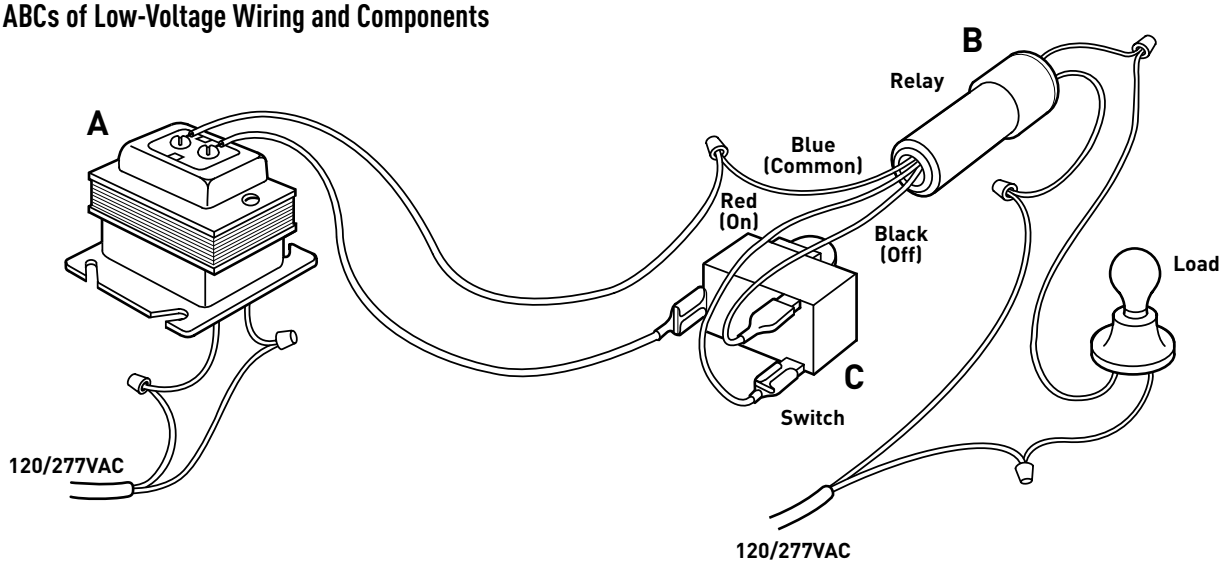

The low-voltage system differs from conventional switch wiring by actuating relays through the use of momentary contact switches. This type of switching utilizes a transformer to provide safe low-voltage current to control line voltage circuits. The wiring of lights and other electrical loads is installed in the conventional manner.

The above illustration simplifies a low-voltage circuit with its basic components:

A. Transformer – Converts line voltage to low-voltage. All low-voltage components operate using 24 volts furnished by the step-down transformer. Secondary output is 3-12A.

B. Relay – The magnetic relay switches line voltage. A momentary 24 volt pulse energizes the "ON" or "OFF" coils to make or break line voltage contacts.

C. Switches – Switches are momentary contact type used to energize either the "ON" or "OFF" coils of a relay. Momentary contact switches are normally open, single pole, double throw.

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES

Low-Voltage Switching Components


Features

- Mount in standard 1/2" KO through noise suppressing nylon ring.
- Maximum ambient temp: 140°F (60°C).
- Insulated flame retardant nylon shell.
- Prestripped 5-1/2" (140mm) #22 AWG leads for easy wiring.
- Split coil design energizes ON coil to close line contacts, and OFF coil to open contacts.
- Can be mounted in any position.
- Operates on momentary impulse.
- Draws .520 mA.

CATALOG NUMBER	RATING A.	RATING V.	3RD PARTY COMPLIANCE UL Listed	3RD PARTY COMPLIANCE CSA Listed
MAGNETIC LATCHING RELAY, 24V/24VDC CONTROL				
1070B	20	120/277V	•	•
	20	347V		

CSA listed for 347V.

1070B

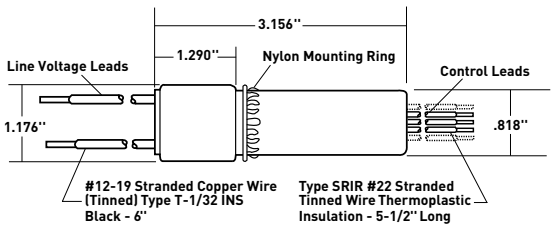


Features

- Available in Despard® interchangeable and heavy-duty toggle versions.
- Side wired screw terminals.
- Heavy-duty toggles recommended where low-voltage switches must match conventional switches.

	COLOR	RATING A.	RATING V.	DESCRIPTION
MOMENTARY CONTACT SWITCHES				
1091I	Ivory	3	24 AC/DC	Despard Interchangeable
1091W	White	3	24 AC/DC	Despard Interchangeable
1091GRY	Gray	3	24 AC/DC	Despard Interchangeable
1050K				Key only for Despard Locking Switch
500K				Key only for Heavy-Duty Locking Switch

Note: When installing low-voltage control wiring, wires should not be bundled or run in parallel with line voltage wires.

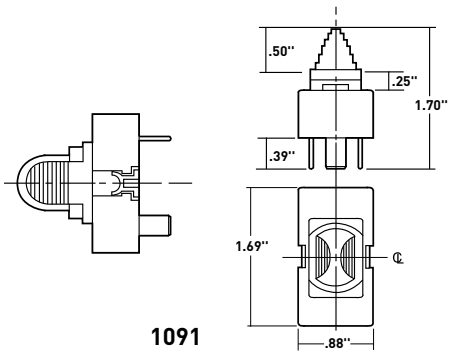

1091

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES – NETWORK WIRING CONNECTIVITY

Keystone Products, Wall Plates & Frames


WP3450LA


WP3481LA


WP3457LA


WP3455LA


KTPDL1W


KS226W
KS426W

Keystone Products

Enhanced Keystone product offering includes jacks and adapters that feature quick, snap-in mounting that saves installation time. A flexible modular design allows for fast, easy configuration. Use with TradeMaster® Keystone Wall Plates.

Keystone Products

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
WP3460_	Keystone RJ45 Category 6, T568A/B Universal Wiring	BK, LA, OR
WP3450_	Keystone RJ45 Category 5e, T568A/B Universal Wiring	BK, LA, OR
WP3425_	Keystone RJ25C 6P/6C Category 3, USOC Wiring	I, LA, W, BR

Keystone Multimedia & Fiber Adapters

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
WP3481_	Keystone Standard F Connector	LA, BK, BR
WP3482_	Keystone Self-Terminating F Connector	LA, BK, BR
KSBNC_	Keystone BNC Connector	I, LA, W
WP3457_	Pair of Keystone Binding Posts, Red/Positive, Black/Negative	LA, BK, BR
KSSV_	Keystone S-Video, 110 Termination	I, LA, W
KSRCAB_	Keystone RCA (Black Insulator) Bulkhead	I, LA, W
KSRCAR_	Keystone RCA (Red Insulator) Bulkhead	I, LA, W
KSRCAY_	Keystone RCA (Yellow Insulator) Bulkhead	I, LA, W
WP3462_	Keystone RCA (Red Insulator) to F Connector	LA, BK, BR
KSSC_	Keystone SC Multimode, Phosphor Bronze Sleeve	I, LA, W
KSST_	Keystone ST Multimode, Phosphor Bronze Sleeve	I, LA, W
WP3455_	Keystone Blank Inserts (Includes 10 Blanks)	LA, BK, BR

Replace _ in Catalog Number with Keystone Color Code to designate color.

Color Codes for Keystone Products

BK**	BR	I	LA	OR**	W
Black	Brown	Ivory	Light Almond	Orange	White

**Each sold as a package of 10.

TradeMaster® Keystone Wall Plates & Decorator Frames

Virtually unbreakable TradeMaster® Keystone Wall Plates provide better coverage with an extra 3/16" width and height than standard wall plates to reduce time-consuming drywall rework. Available with label windows to help make identification easy.

WITHOUT LABEL WINDOWS	AVAILABLE COLORS	DESCRIPTION	WITH LABEL WINDOWS	AVAILABLE COLORS
WP3403_	LA, BK, BR Stainless Steel	3-Port Keystone Wall Plate	**KTPDL1_**	I, LA, W
KTPD4_	I, LA, W, BR	4-Port Keystone Wall Plate	**KTPDL4_**	I, LA, W
KTPD6_	I, LA, W	6-Port Keystone Wall Plate	**KTPDL6_**	I, LA, W
KS226_	I, LA, W, BK, BR	2-Port Keystone Decorator Frame		
KS326_	I, LA, W, BK, BR	3-Port Keystone Decorator Frame		
KS426_	I, LA, W, BK, BR	4-Port Keystone Decorator Frame		

Replace _ in Catalog Number to designate color.

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES – NETWORK WIRING CONNECTIVITY

Frames & Wall Plates

TPD1LA



TPD9LA

Multimedia & Decorator Frames

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
C5EF_	Category 5e Jack and F Connector	I

Each sold as a package of 10.
Replace _ in Catalog Number to designate color.

TradeMaster® Datacom Wall Plates

CATALOG NUMBER	DESCRIPTION	AVAILABLE COLORS
TPD1_	1-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD2_	2-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, LA, W
TPD3_	3-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, W
TPD4_	4-Port TradeMaster Datacom Wall Plate, Single Gang	GRY, I, W
TPD6_	6-Port TradeMaster Datacom Wall Plate, Single Gang	I, LA, W
TPD9_	9-Port TradeMaster Datacom Wall Plate, Double Gang	GRY, LA, W

Replace _ in Catalog Number to designate color.

All devices listed on this page conform to NEMA WD-1 and WD-6.

ELECTRICAL ACCESSORIES – NETWORK WIRING CONNECTIVITY

Patch Panels, 66 Block & Patch Cords




48845CC6



JP24845C5E



12845C5E89

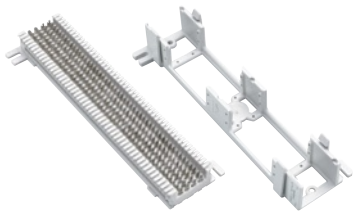

PS665089V*

*Block and bracket pictured separately, product sold together as one catalog number.

Patch Panels

High-performance panels meet the TIA/EIA-568-B.2 standard for connecting hardware, including Addendum 1 for Cat 6 component performance.

Category 6

CATALOG NUMBER	DESCRIPTION	DIMENSIONS	RACK UNITS
24845CC6	24-Port T568A/B Universal Wiring	19" x 1.75"	1
48845CC6	48-Port T568A/B Universal Wiring	19" x 3.50"	2

Category 5e

CATALOG NUMBER	DESCRIPTION	DIMENSIONS	RACK UNITS
24845C5E	24-Port T568A/B Universal Wiring	19" x 1.75"	1
48845C5E	48-Port T568A/B Universal Wiring	19" x 3.50"	2

Dimensions shown are W x H.
One Rack Unit = 1.75" H.

Category 5e Modular IDC Wall-Mount Jack Panels with Stand-Off Legs

CATALOG NUMBER	DESCRIPTION	DIMENSIONS
JP12845C5E	12-Port T568A/ Universal Wiring	10.69" x 3.46" x 3.08"
JP24845C5E	24-Port T568A/ Universal Wiring	10.69" x 3.46" x 3.08"
JP36845C5E	36-Port T568A/ Universal Wiring	10.69" x 6.94" x 3.08"

Category 5e Wall-Mount Patch Panel with 89D Bracket

CATALOG NUMBER	DESCRIPTION	DIMENSIONS
12845C5E89	12-Port T568A/B Universal Wiring	2.25" x 10" x 1.625"

Dimensions shown are W x H x D.

66 Block

Provides flexibility in network interface connections. Used primarily for cross-connections, 66 blocks provide easy connections between customer voice or data networks and telecommunications equipment.


66 Block & Bracket

CATALOG NUMBER	DESCRIPTION
PS665089V	50-Pair 66 Block, Unwired & Mounting Bracket

All devices listed on this page conform to NEMA WD-1 and WD-6.

TECHNICAL RESOURCES



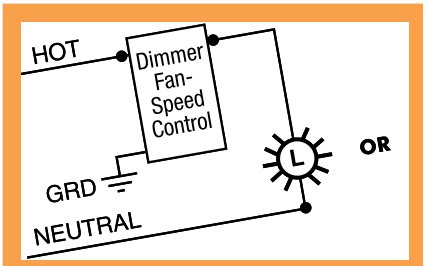

TECHNICAL RESOURCES

Associations, Organizations & Standards	K-2
Symbols	K-4
NEMA Configurations – Straight Blade Devices	K-5
NEMA Configurations – Turnlok® Devices	K-6
UL Changes, Conversion & Wire Spec Chart	K-7
IP Codes & Their Meanings	K-8
Horsepower Ratings for NEMA	K-9
Wiring Diagrams	K-10
Hallway Lights – Light Output Measurements	K-20





TECHNICAL RESOURCES

Associations, Organizations & Standards

For convenience, the following listings define common acronyms for a variety of organizations.

Standards Development Organization

Organizations primarily involved in the development and/or promulgation of standards.

NFPA	National Fire Protection Agency
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers, Inc.
ANSI	American National Standards Institute
CANENA	Consejo de Armonizacion de Normas Electrotecnicas de Naciones America (Council for Harmonization of Electrotechnical Standardization of the Nations of the Americas)
SAE	Society of Automotive Engineers
ISA	Instrument Society of America
SME	Society of Manufacturing Engineers
ISO	International Standards Organization

Codes & Standards

Installation codes and product safety, performance on interchangeability standards.

NEC	National Electrical Code
NOM	Normas Oficiales de Mexicanas (Official Mexican Standard)
NMX	Normas Mexicanas
CEC	Canadian Electrical Code

Industry Associations

Associations of companies or individuals for the purpose of standardization, trade and professional development, etc.

NMDA	National Marine Distributor Association
NEMA	National Electrical Manufacturers Association
ABYC	American Boat and Yacht Council
EIA/TIA	Electronics Industry Association/Telecommunications Industry Association
NAED	National Association of Electrical Distributors
NAW	National Association of Wholesalers
BICSI	Building Industry Consulting Services International
IBI	Intelligent Building Institute
EPRI	Electric Power Research Institute
ESFI	Electrical Safety Foundation International
NEMRA	National Electrical Manufacturers Representatives Association
IAEI	International Association of Electrical Inspectors
IFMA	International Facilities Management Association
BOMA	Building Owner Management Association
SEMI	Semi-Conductor Equipment and Material International
CEMRA	Canadian Electrical Manufacturers Representative Association
NMRA	National Marine Representative Association
EFI	Electro-Federation Incorporated
NECA	National Electrical Contractors Association
IECA	Independent Electrical Contractors Association
ECOC	Electrical Contractors of Canada
CANAME	Camara Nacional de Manufacturas Electricas
HLCA	Home Lighting Control Alliance
USGBC	U.S. Green Building Council

TECHNICAL RESOURCES

Associations, Organizations & Standards

Certification Agencies

Primarily involved in certification of products or manufacturers to standards developed by the certification agency or by others.

UL	Underwriters' Laboratories, Inc.
cUL	Tested to Canadian Safety Standards by Underwriters' Laboratories, Inc.
cULus	Tested to U.S. and Canadian Safety Standards by Underwriters' Laboratories, Inc.
CSA	Canadian Standards Association
ANCE	National Association of Normalization and Certification of the Electrical Sector, (Mexico)
TUV	TUV Rheinland of N.A., Inc.
VDE	Verband Deutscher Elektrotechniker
BSI	British Standards Institute
FM	Factory Mutual
NRTL	Nationally Recognized Testing Laboratories

Government Agencies

OSHA	Occupational Safety and Health Administration
FCC	Federal Communications Commission
DSSC	Defense Supply Center, Columbus
IAPA	Independent Accident and Protection Association (Canada)
LEED	Leadership in Energy and Environmental Design

Copies of standards referred to on the preceding pages may be purchased from the following:

Underwriters' Laboratories, Inc. (UL)
1285 Walt Whitman Road
Melville, NY 11747

333 Pfingston Road
Northbrook, IL 60062

1655 Scott Boulevard
Santa Clara, CA 95050

12 Laboratory Drive
Research Triangle Park, NC 27709

2600 N.W. Lake Road
Camas, WA 98607

The Canadian Standards Association (CSA)
Standards Division
178 Rexdale Boulevard
Rexdale, Ontario
Canada M9W 1R3

The American National Standards Institute (ANSI)
1430 Broadway
New York, NY 10018

National Electrical Manufacturers Association (NEMA)
2101 L Street, NW, Suite 300
Washington, DC 20037

National Fire Protection Association (NFPA)
Batterymarch Park
Quincy, MA 02269

The International Electrotechnical Commission (IEC)
Copies of IEC standards may be obtained from the American National Standards Institute (ANSI) at the above address.

American Boat and Yacht Council, Inc. (ABYC)
P.O. Box 806
Amityville, NY 11701

Asociacion Nacional de Normalizacion y Certificacion del Sector Electrico A.C. (NOM-ANCE)
Insurgentes Sur 664, 3ER Piso
Col. Del Valle
03100 Mexico D.F.
Phone: 011-525-227-1110
Fax: 011-525-227-1177

Occupational Safety and Health Administration
200 Constitution Avenue N.W.
Room 3647
Washington, DC 20210

TECHNICAL RESOURCES

Symbols Electrical Symbols & Abbreviations In Accordance with American National Standards Institute

General Outlets

- Outlet
- Blanked Outlet
- Drop Cord
- Electrical Outlet: for use only when circle used alone might be confused with columns, plumbing symbols, etc.
- Fan Outlet
- Junction Box
- Lamp Holder
- Lamp Holder with Pull Switch
- Pull Switch
- Outlet for Vapor Discharge Lamp
- Exit Light Outlet
- Clock Outlet (Specify Voltage)

Convenience Outlets

- Duplex Convenience Outlet
- Convenience Outlet other than Duplex
  1 = Single, 3 = Triplex, etc.
- Weatherproof Convenience Outlet
- Range Outlet
- Switch and Convenience Outlet
- Radio and Convenience Outlet
- Special Purpose Outlet
- Floor Outlet

Switch Outlets

S	Single Pole Switch
S_2	Double Pole Switch
S_3	Three Way Switch
S_4	Four Way Switch
S_D	Automatic Door Switch
S_E	Electrolier Switch
S_K	Key Operated Switch
S_P	Switch and Pilot Lamp
S_{CB}	Circuit Breaker
S_{WCB}	Weatherproof Circuit Breaker
S_{MC}	Momentary Contact Switch
S_{RC}	Remote Control Switch
S_{WP}	Weatherproof Switch
S_F	Fused Switch
S_{WF}	Weatherproof Fused Switch

Special Outlets

Any Standard Symbol as given above with the addition of a lower case subscript letter may be used to designate some special variation of Standard Equipment of particular interest in a specific set of Architectural Plans. When used they must be listed in the Key of Symbols on each drawing and if necessary further described in the specifications.

Panels, Circuits & Miscellaneous

- Lighting Panel
- Power Panel
- Branch Circuit: Concealed in Ceiling or Wall
- Branch Circuit: Concealed in Floor
- Branch Circuit: Exposed
- Home Run to Panel Board. Indicate number of Circuits by number of arrows.
  Note: Any circuit without further designation indicates a two-wire circuit. For a greater number of wires indicate as follows:
  (3 wires), (4 wires), etc.
- Feeders: **Note:** Use heavy lines and designate by number corresponding to listing in Feeder Schedule.
- Underfloor Duct and Junction Box. Triple System.
  Note: For double or single systems eliminate one or two lines. This symbol is equally adaptable to auxiliary system layouts.
- Generator
- Motor
- Instrument
- Power Transformer. (Or draw to scale.)
- Controller
- Isolating Switch

Auxiliary Systems

- Push Button
- Buzzer
- Bell
- Annunciator
- Outside Telephone
- Interconnecting Telephone
- Telephone Switchboard
- Bell Ringing Transformer
- Electric Door Opener
- Fire Alarm Bell
- Fire Alarm Station
- City Fire Alarm Station
- Fire Alarm Central Station
- Automatic Fire Alarm Device
- Watchman's Station
- Watchman's Central Station
- Horn
- Nurse's Signal Plug
- Maid's Signal Plug
- Radio Outlet
- Signal Central Station
- Interconnection Box
- Battery
- Auxiliary System Circuits
  Note: Any line without further designation indicates System. For a greater number of wires designate with numerals in manner similar to 12-No. 18 W-3/4" C., or designate by number corresponding to listing in Schedule.
- Special Auxiliary Outlets
  Subscript letters refer to notes on plans or detailed description in specifications.

TECHNICAL RESOURCES

NEMA Configurations – Straight Blade Devices

Straight Blade Plugs & Receptacles

		15 AMPERE		20 AMPERE		30 AMPERE		50 AMPERE		60 AMPERE	
		RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING											
125V	1	1-15R	1-15P								
250V	2										
2 POLE, 3 WIRE GROUNDING											
125V	5	5-15R	5-15P	5-20R	5-20P	5-30R			5-50P		
250V	6	6-15R	6-15P	6-20R	6-20P	6-30R		6-50R	6-50P		
277VAC	7	7-15R	7-15P	7-20R	7-20P		7-30P		7-50P		
3 POLE, 3 WIRE NON-GROUNDING											
125/250V	10			10-20R	10-20P	10-30R	10-30P	10-50R	10-50P		
3 POLE, 4 WIRE GROUNDING											
125/250V	14			14-20R	14-20P	14-30R	14-30P	14-50R	14-50P		14-60P
3ø250V	15				15-20P	15-30R	15-30P	15-50R	15-50P	15-60R	15-60P
4 POLE, 4 WIRE NON-GROUNDING											
3øY 120/208V	18			18-20R	18-20P					18-60R	18-60P

Labels and Their Meanings


X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots
Indicate receptacle configurations (female).



Closed Slots
Indicate plug blade configurations (male).



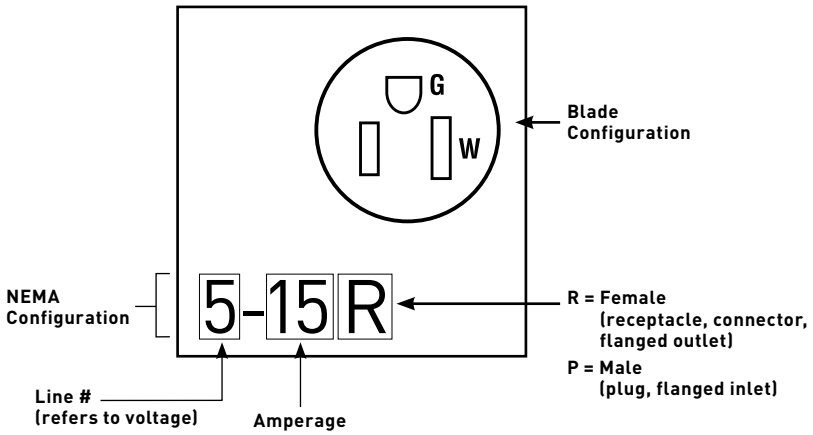

TECHNICAL RESOURCES

NEMA Configurations – Turnlok® Devices

Locking Plugs & Receptacles

	15 AMPERE		20 AMPERE		30 AMPERE	
	RECEPTACLE	PLUG	RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING						
L1 125V	L1-15R	L1-15P				
L2 250V			L2-20P	L2-20P		
2 POLE, 3 WIRE GROUNDING						
L5 125V	L5-15R	L5-15P	L5-20R	L5-20P	L5-30R	5-30P
L6 250V	L6-15R	L6-15P	L6-20R	L6-20P	L6-30R	6-30P
L7 277VAC	L7-15R	L7-15P	L7-20R	L7-20P	L7-30R	7-30P
L24 347VAC			L24-20R	L24-20P		
L8 480VAC			L8-20R	L8-20P	L8-30R	L8-30P
L9 600VAC			L9-20R	L9-20P	L9-30R	L9-30P
3 POLE, 3 WIRE NON-GROUNDING						
L10 125/250V			L10-20R	L10-20P	L10-30R	L10-30P
L11 3ø250V			L11-20R	L11-20P	L11-30R	L11-30P
L12 3ø480V			L12-20R	L12-20P	L12-30R	L12-30P
L13 3ø600V					L13-30R	L13-30P
3 POLE, 4 WIRE NON-GROUNDING						
L14 125/250V			L14-20R	L14-20P	L14-30R	L14-30P
L15 3ø250V			L15-20R	L15-20P	L15-30R	L15-30P
L16 3ø480V			L16-20R	L16-20P	L16-30R	L16-30P
L17 3ø600V					L17-30R	L17-30P
4 POLE, 4 WIRE NON-GROUNDING						
3øY L18 120/208V			L18-20R	L18-20P	L18-30R	L18-30P
3øY L19 277/480V			L19-20R	L19-20P	L19-30R	L19-30P
3øY L20 347/600V			L20-20R	L20-20P	L20-30R	L20-30P
4 POLE, 5 WIRE NON-GROUNDING						
3øY L21 120/208V			L21-20R	L21-20P	L21-30R	L21-30P
3øY L22 277/480V			L22-20R	L22-20P	L22-30R	L22-30P
3øY L23 347/600V			L23-20R	L23-20P	L23-30R	L23-30P

Midget – Locking

	15 AMPERE	
	RECEPTACLE	PLUG
2 POLE, 2 WIRE NON-GROUNDING		
ML1 125V	ML-1R	ML-1P
2 POLE, 3 WIRE GROUNDING		
ML2 125V	ML-2R	ML-2P
3 POLE, 3 WIRE NON-GROUNDING		
ML3 125/250V	ML-3R	ML-3P

Labels and Their Meanings

X, Y, Z	Hot Lead
W	Neutral Lead
G	Grounding Lead

Open Slots
Indicate receptacle configurations (female).



Closed Slots
Indicate plug blade configurations (male).



TECHNICAL RESOURCES

UL Changes, Conversion & Wire Spec Chart

UL Rating Changes

On July 1, 1983, UL cancelled listing of 3 non-NEMA dual-rated configurations and assigned new voltage ratings to them. There is no change in the slot/blade configurations and the catalog numbers for each series are now UL listed under their new voltage ratings. Affected configurations are:

1. 30A, 3 Pole, 3 Wire
not grounding Turnlok®
No. 3330 Series




***Old Rating**
30A, 250V




New Rating
30A,125/250V

2. 20A, 4 Pole, 4 Wire
not grounding Turnlok®
No. 7410 Series




***Old Rating**
20A, 250V
10A, 600V




New Rating
20A, 120/208V
3øY

3. 30A , 4 Pole, 4 Wire
not grounding Turnlok®
No. 3430 Series



***Old Rating**
30A, 600V
30A, 250V



New Rating
30A, 120/208V
3øY

Conversion Chart

Fractions to Decimals to Millimeters

INCHES FRACTION	DECIMAL	MM	INCHES FRACTION	DECIMAL	MM	INCHES FRACTION	DECIMAL	MM	INCHES FRACTION	DECIMAL	MM
1/64	0.0156	0.3969	17/64	0.2656	6.7469	33/64	0.5156	13.0969	49/64	0.7656	19.4469
1/32	0.0312	0.7938	9/32	0.2812	7.1438	17/32	0.5312	13.4938	25/32	0.7812	19.8437
3/64	0.0468	1.1906	19/64	0.2968	7.5406	35/64	0.5468	13.8906	51/64	0.7968	20.2406
1/16	0.0625	1.5875	5/16	0.3125	7.9375	9/16	0.5625	14.2875	13/16	0.8125	20.6375
5/64	0.0781	1.9844	21/64	0.3281	8.3344	37/64	0.5781	14.6844	53/64	0.8281	21.0344
3/32	0.0937	2.3812	11/32	0.3437	8.7312	19/32	0.5937	15.0812	27/32	0.8437	21.4312
7/64	0.1093	2.7781	23/64	0.3593	9.1281	39/64	0.6093	15.4781	55/64	0.8593	21.8281
1/8	0.1250	3.1750	3/8	0.3750	9.5250	5/8	0.6250	15.8750	7/8	0.8750	22.2250
9/64	0.1406	3.5719	25/64	0.3906	9.9219	41/64	0.6406	16.2719	57/64	0.8906	22.6219
5/32	0.1562	3.9688	13/32	0.4062	10.3188	21/32	0.6562	16.6688	29/32	0.9062	23.0188
11/64	0.1718	4.3656	27/64	0.4218	10.7156	43/64	0.6718	17.0656	59/64	0.9218	23.4156
3/16	0.1875	4.7625	7/16	0.4375	11.1125	11/16	0.6875	17.4625	15/16	0.9375	23.8125
13/64	0.2031	5.1594	29/64	0.4531	11.5094	45/64	0.7031	17.8594	61/ 64	0.9531	24.2094
7/32	0.2187	5.5562	15/32	0.4687	11.9062	23/32	0.7187	18.2562	31/32	0.9687	24.6062
15/64	0.2343	5.9531	31/64	0.4843	12.3031	47/64	0.7343	18.6531	63/64	0.9843	25.0031
1/4	0.2500	6.3500	1/2	0.5000	12.7000	3/4	0.7500	19.0500	1	1.0000	25.4000

Wire Specifications

Diameter Ranges of Jacketed Cord in Accordance with Standard "UL62"

TYPE*	AWG SIZE	2 COND.	3 COND.
SV,SVO,SVT,SVTO	18	.220-.255"	.230-.265"
	17	.235-.270"	.250-.285"

TYPE*	AWG SIZE	2 COND.	3 COND.	4 COND.
SJ,SJO,SJT,SJTO	18	.280-.315"	.300-.335"	.325-.365"
	17	.290-.325"	.310-.345"	.340-.380"
	16	.305-.340"	.325-.360"	.350-.395"
	15	.315-.350"	.335-.375"	.370-.415"
	14	.335-.375"	.360-.395"	.390-.435"
	12	.405-.455"	.425-.475"	.465-.520"
	10	.540-.605"	.565-.635"	.625-.700"

TYPE*	AWG SIZE	2 COND.	3 COND.	4 COND.	5 COND.
S,SO,ST,STO	18	.340-.385"	.360-.400"	.385-.430"	.460-.510"
	17	.350-.390"	.370-.415"	.400-.445"	.465-.520"
	16	.365-.410"	.385-.430"	.410-.460"	.490-.550"
	15	.475-.530"	.500-.560"	.540-.610"	.615-.690"
	14	.495-.550"	.520-.575"	.560-.620"	.630-.705"
	12	.565-.625"	.590-.655"	.640-.710"	.700-.770"
	10	.615-.685"	.650-.720"	.700-.775"	.760-.840"
	8	.780-.880"	.830-.930"	.925-1.050"	1.000-1.150"
	6	.920-1.050"	.970-1.100"	1.050-1.200"	1.180-1.330"
	4	1.060-1.210"	1.130-1.280"	1.250-1.450"	
	2	1.210-1.400"	1.300-1.500"	1.450-1.650"	

*Actual sizes will vary by cord manufacturers.

TECHNICAL RESOURCES

IP Codes & Their Meanings

IP Suitability Rating

IP Suitability Ratings are an international system for classifying the degree of protection provided by enclosures of electrical equipment. The higher the number, the greater the degree of protection; they apply ONLY to properly installed equipment. The numerals stand for the following:

1. First Number: Degree of protection for persons against access to hazardous parts inside the enclosure and/or against solid bodies.

2. Second Number: Degree of protection of equipment inside enclosures against damage from the ingress of water.

Example: IP44=Ingress Protection; Solid bodies >=1.0mm; Splashing

$$\underset{\text{Suitability}}{\overline{\text{IP44}}}$$

Meaning for the Protection of Equipment

CODE LETTERS	FIRST NUMBER	SECOND NUMBER
Ingress Protection	Against Ingress of Solid Bodies	Against Ingress of Water with Harmful Effects
IP	0 - Non-protected 1 – >=50 mm diameter 2 – >=12.5 mm diameter 3 – >=2.5 mm diameter 4 – >=1.0 mm 5 – Dust-protected 6 – Dust-tight	0 – Non-protected 1 – Vertically dripping 2 – Dripping (15° Tilted) 3 – Spraying 4 – Splashing 5 – Jetting 6 – Power jetting 7 – Temporary immersion 8 – Continuous immersion

Note: >= denotes greater than or equal to. Dimensions in Inches (mm)

TECHNICAL RESOURCES

Horsepower Ratings for NEMA Configuration Receptacles & Plugs Only

AMPERE RATING	AC VOLTAGE RATING	PHASES	POLES	HORSEPOWER RATING	NEMA DESIGNATION
15	125	1	2	1/2	1-15, L1-15, 5-15, L5-15
	250	1	2	1-1/2#	6-15, L6-15
	277	1	2	2	7-15, L7-15
	125/250	1	3	1-1/2 L-L# 1/2 L-N	14-15
	250	3	3	2	11-15, L11-15, 15-15
	120/208	3	4	2	18-15
20	125	1	2	1	5-20, L5-20
	250	1	2	2#	2-20, L2-20, 6-20, L6-20
	277	1	2	2	7-20, L7-20
	480	1	2	3	L8-20
	125/250	1	3	2 L-L# 1 L-N	10-20, L10-20, 14-20, L14-20
	250	3	3	3	11-20, L11-20, 15-20, L15-20
	480	3	3	5	L12-20, L16-20
	120/208	3	4	2	18-20, L18-20, L21-20
	277/480	3	4	5	L19-20, L22-20
30	125	1	2	2	5-30, L5-30
	250	1	2	2#	2-30, 6-30, L6-30
	277	1	2	3	7-30, L7-30
	480	1	2	5	L8-30
	125/250	1	3	2 L-L# 2 L-N	10-30, L10-30 14-30, L14-30
	250	3	3	3	11-30, L11-30, 15-30, L15-30
	480	3	3	10	L12-30, L16-30
	120/208	3	4	3	18-30, L18-30, L21-30
	277/480	3	4	10	L19-30, L22-30
50	125	1	2	2	5-50
	250	1	2	3	6-50
	277	1	2	5	7-50
	125/250	1	3	3 L-L# 2 L-N	10-50, 14-50
	250	3	3	7-1/2	11-50, 15-50
	120/208	3	4	7-1/2	18-50
60	125/250	1	3	3 L-L# 2 L-N	14-60
	250	3	3	10	15-60
	120/208	3	4	7-1/2	18-60


L-L: Motor connected line-to-line.
L-N: Motor connected line-to-neutral.
#: Also suitable for 208V motor applications at the indicated horsepower rating.

TECHNICAL RESOURCES

Wiring Diagrams – Switches & Receptacles


Switches

Single Pole | Double Pole | 3-Way to 3-Way | 3-Way to 4-Way to 3-Way

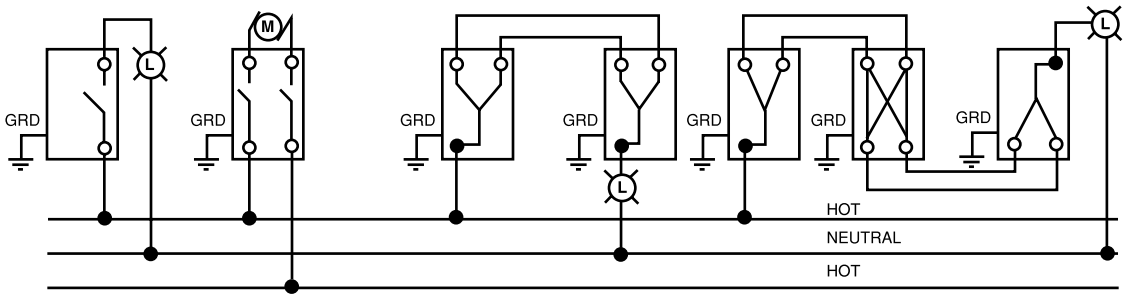


Pilot Light Switch & Lighted Toggle Switch


Single Pole Pilot Light Switch Toggle Glows when Light is On




Single Pole Lighted Toggle Switch Toggle Glows when Switch is Off




Double Pole Pilot Light Switch Toggle Glows when Switch is On



3-Way Lighted Toggle Switch (Two Lighted or Pilots May Be Used)




3-Way Lighted Toggle Switch (Two Lighted or Pilots May Be Used)




Maintained & Momentary Contact

Maintained Contact 3-Position, 2-Circuit Center "Off"

Single Pole Double Throw




Double Pole Double Throw




1222

Momentary Contact Either Direction 3-Position, Center "Off"

Single Pole Double Throw




Double Pole Double Throw




1256

Maintained Contact Either Direction 2-Position, No Center "Off"

Single Pole Double Throw




Double Pole Double Throw




1276

Receptacles


1 Circuit



Split Circuit




1 Circuit



TECHNICAL RESOURCES


Wiring Diagrams – GFCIs

Wiring Diagram GFCI Receptacle, Feed-Thru Installation

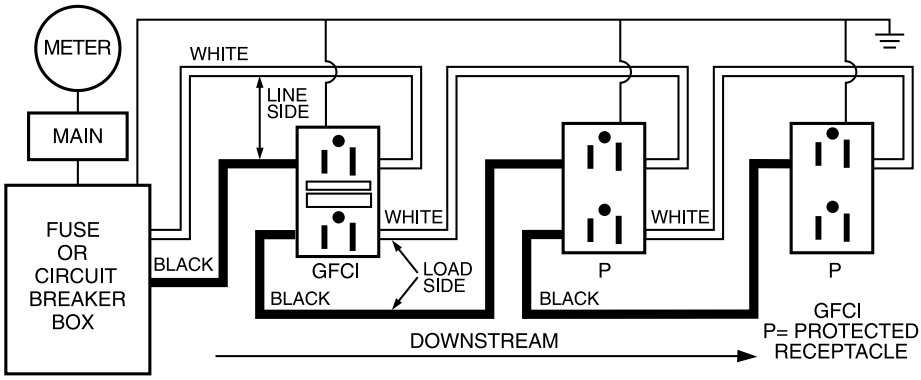

To protect the entire branch circuit the GFCI must be the first receptacle from the fuse or circuit breaker box. Receptacles on the circuit between the GFCI and the box will not be protected, but receptacles downstream from the GFCI will have protection.

Wiring Diagram GFCI Receptacle, Non-Feed-Thru Installation

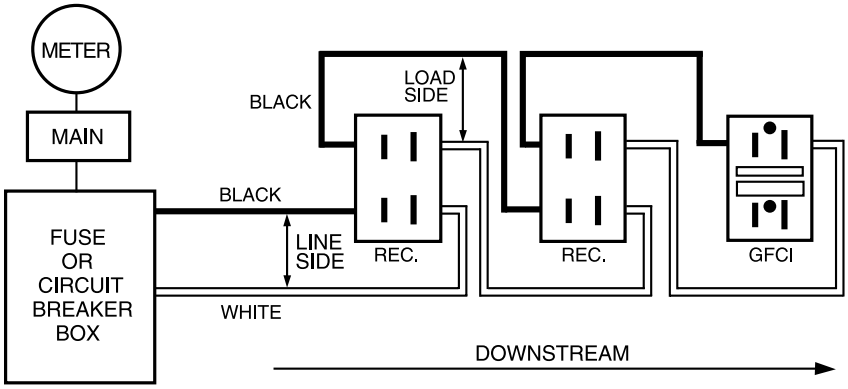


Terminal, or one-outlet-only protection can be achieved on a multi-outlet circuit by connecting the hot and neutral line conductors to the corresponding line side terminals of the GFCI. Only the GFCI receptacle will be protected.

TECHNICAL RESOURCES


Wiring Diagrams – 2 Pole, 2 Wire Non-Grounding; 3 Pole, 3 Wire Non-Grounding

2 Pole, 2 Wire Non-Grounding

125V

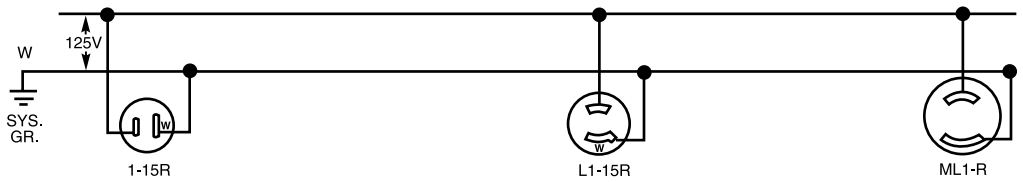


250V

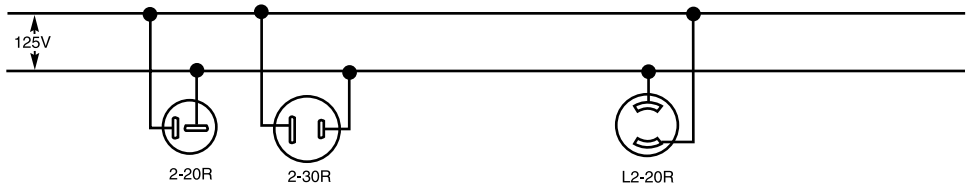


3 Pole, 3 Wire Non-Grounding

125V/250V

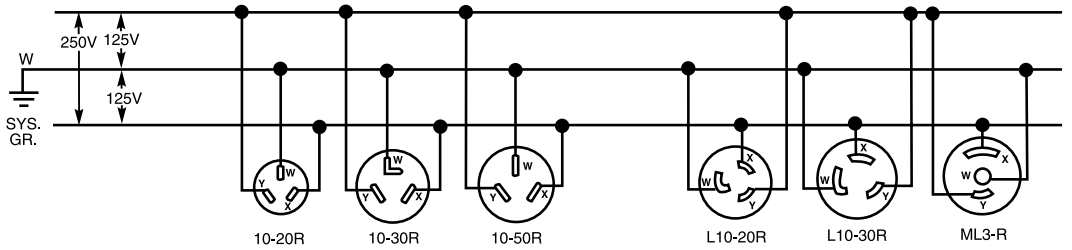

3ø250V

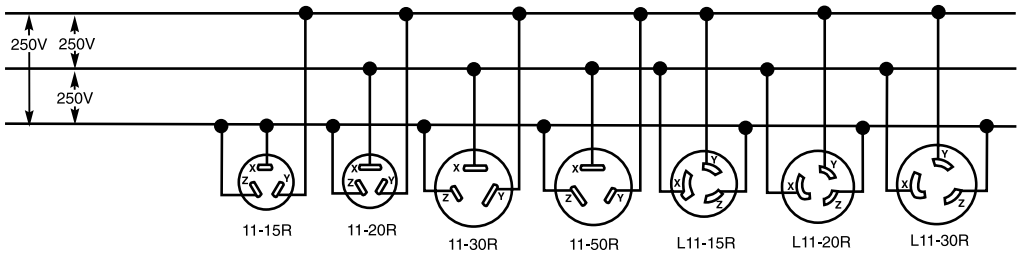


TECHNICAL RESOURCES


Wiring Diagrams – 2 Pole, 3 Wire Grounding

2 Pole, 3 Wire Grounding


125V

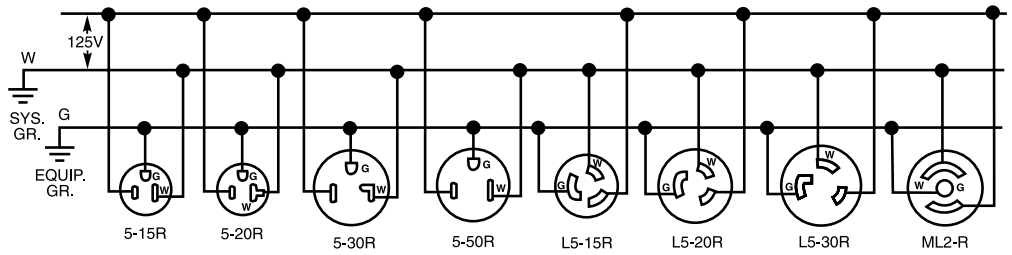


250V

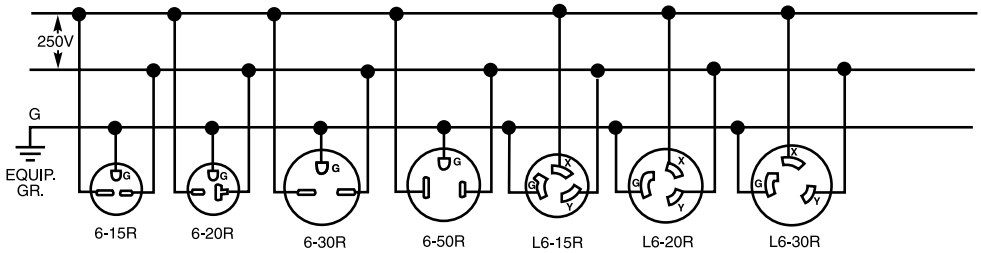

277VAC

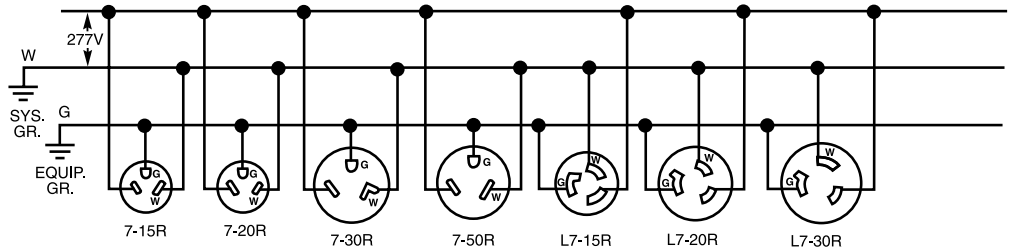

480VAC

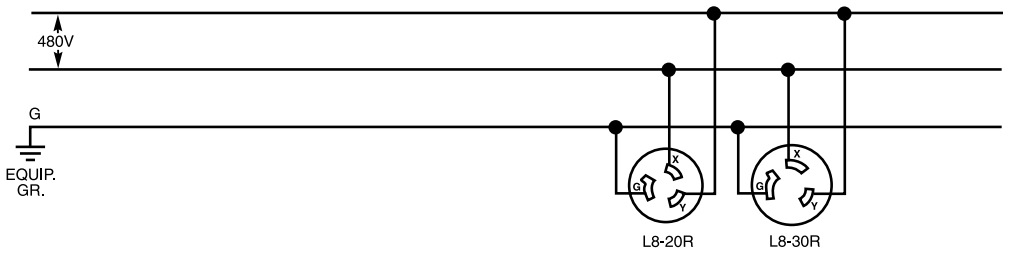


TECHNICAL RESOURCES


Wiring Diagrams – 3 Pole, 4 Wire Grounding

3 Pole, 4 Wire Grounding


125V/250V

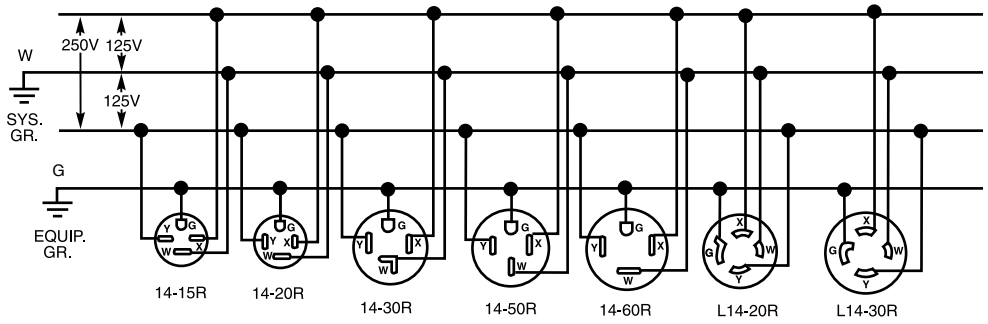


3ø250V

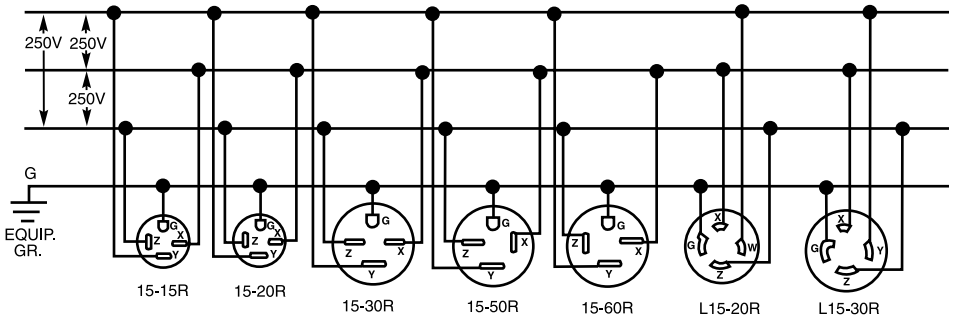

3ø480V

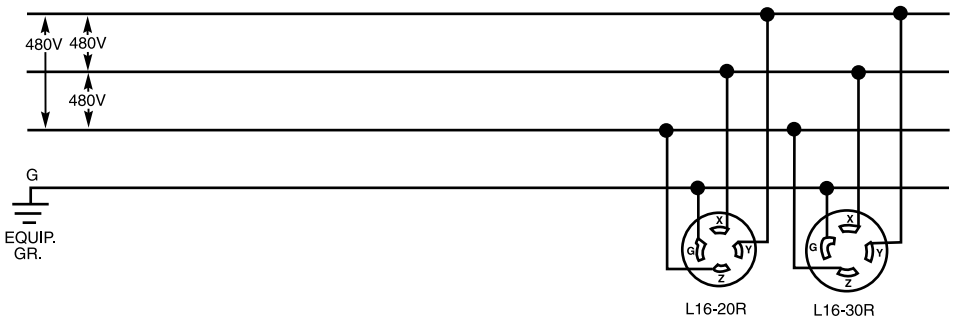

3ø600V

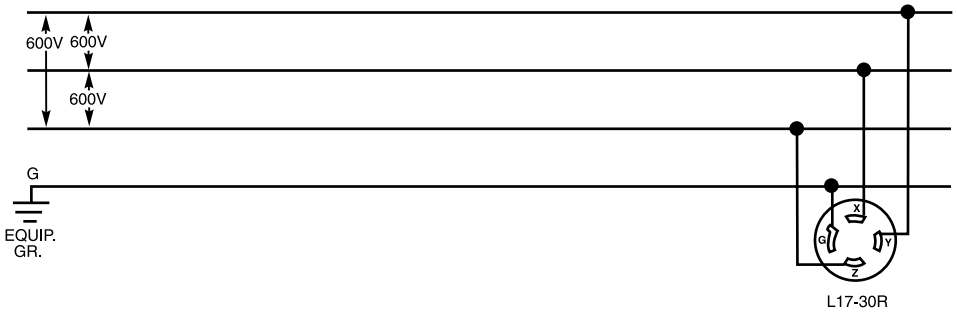


TECHNICAL RESOURCES


Wiring Diagrams – 4 Pole, 4 Wire Non-Grounding

4 Pole, 4 Wire Non-Grounding


3øY120V/208V

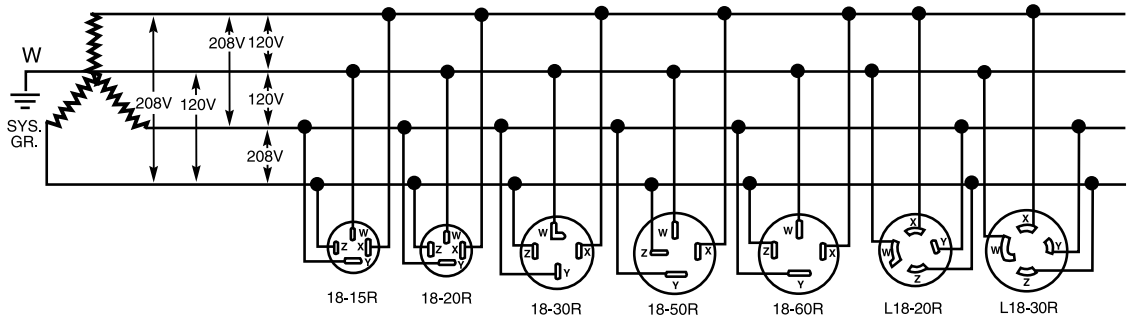

3øY277/480V

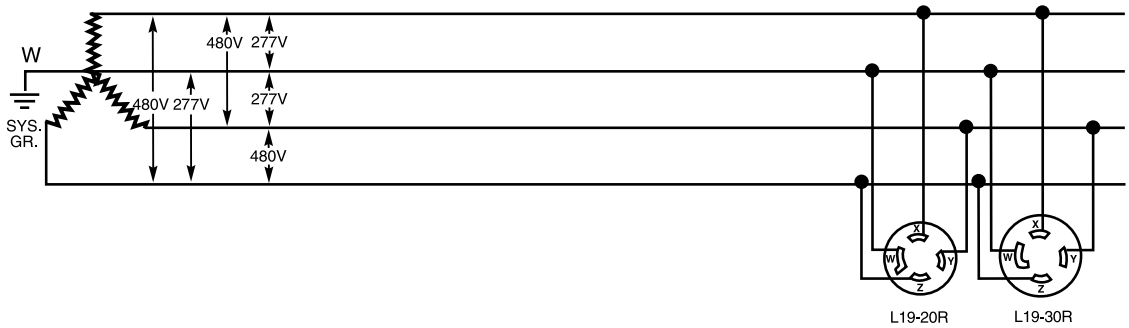

3ø347/600V

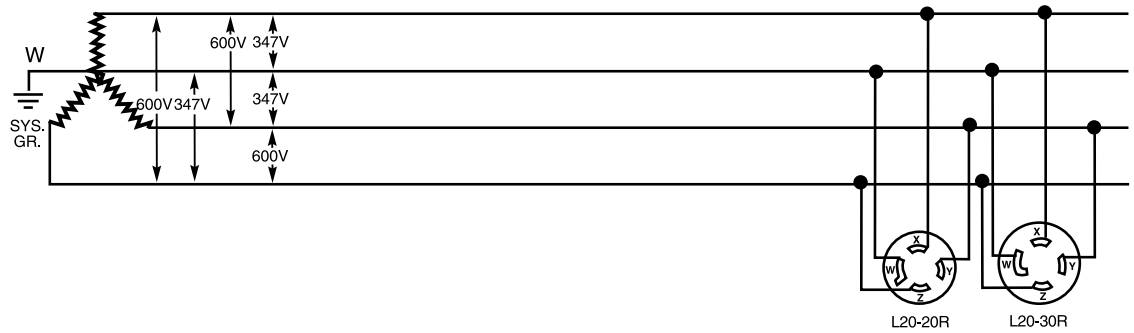


TECHNICAL RESOURCES


Wiring Diagrams – 4 Pole, 5 Wire Grounding

4 Pole, 5 Wire Grounding


3øY120V/208V

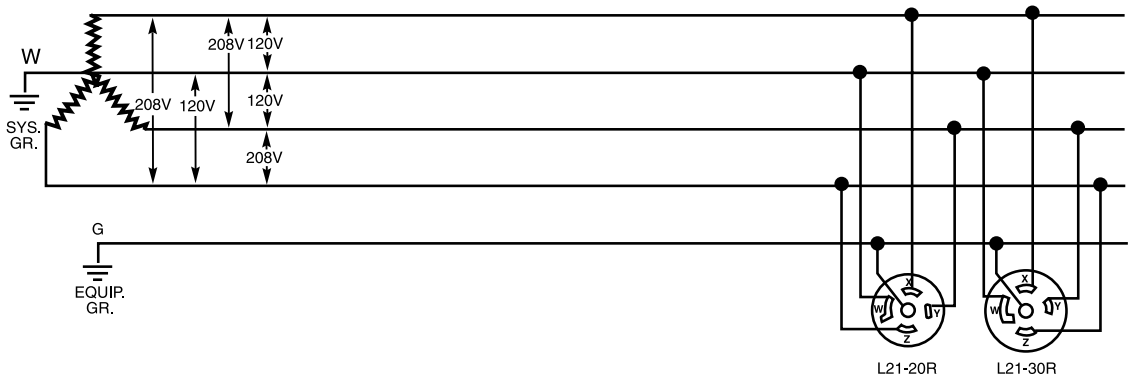

3øY277/480V

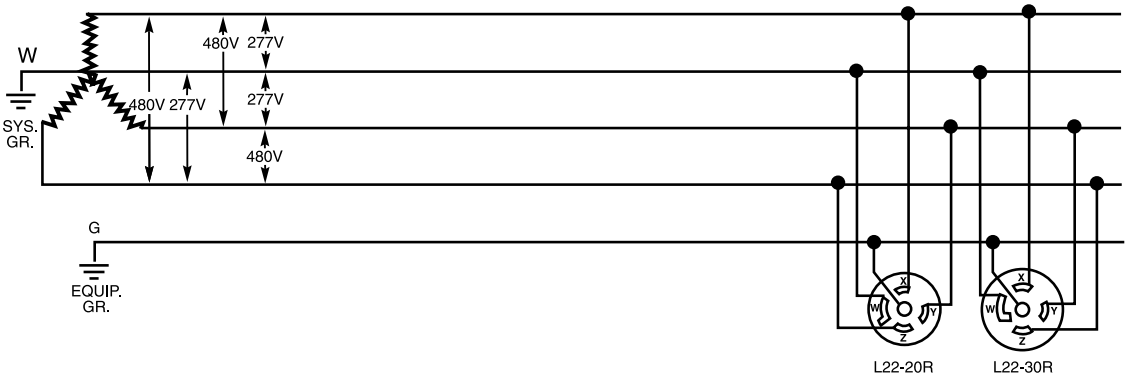


3øY347/600V

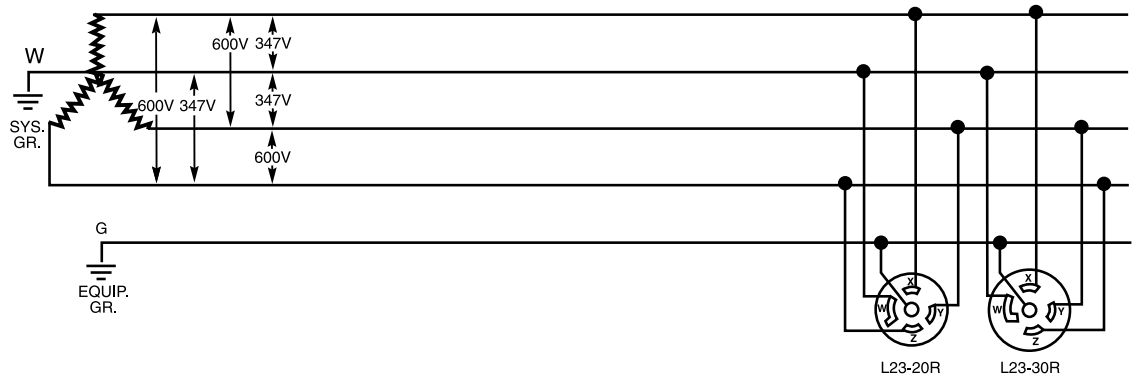


TECHNICAL RESOURCES

Wiring Diagrams – Sensors Connected to Power Packs


1 Sensor, 1 Power Pack
Standard Wiring

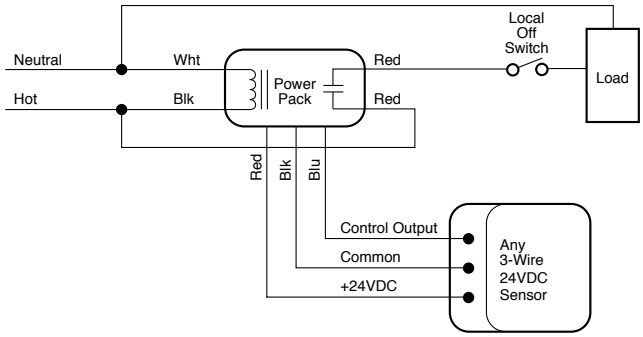


1 Sensor, 1 Power Pack
Bi-Level Lighting

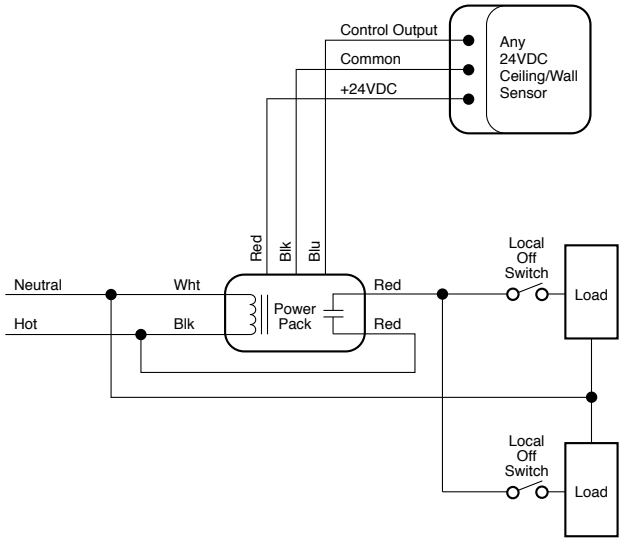

1 Sensor, 1 Power Pack
3-Way Switching

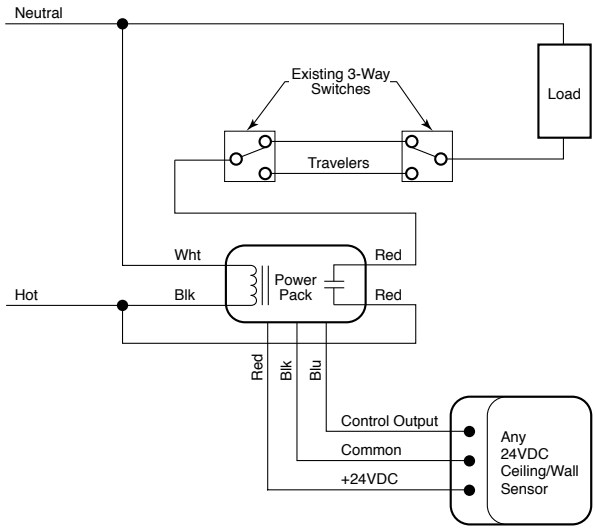


1 Sensor, 1 Power Pack
2 Lighting Loads

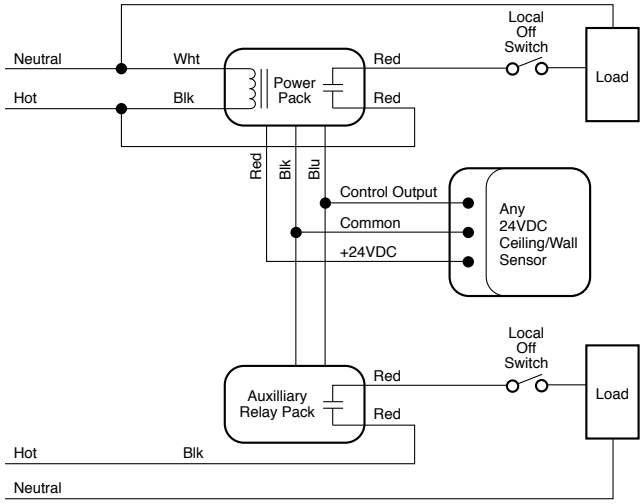


TECHNICAL RESOURCES

Wiring Diagrams – Sensors Connected to Power Packs


1 Sensor & Up to 3 Power Packs

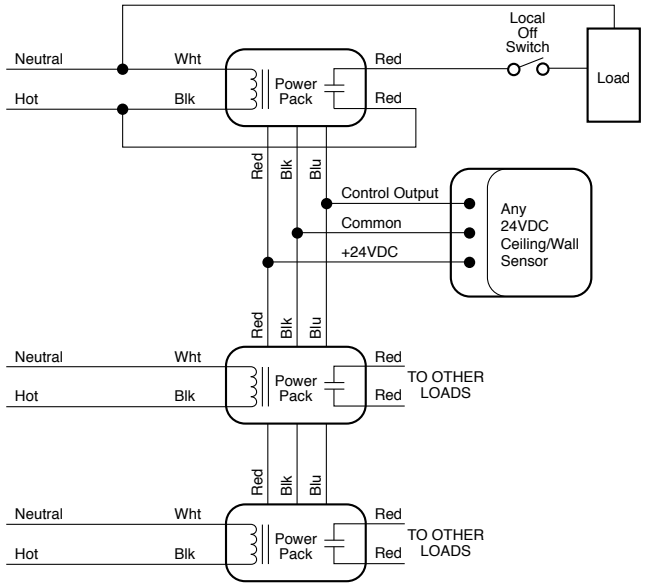

Multiple Sensors, 1 Power Pack

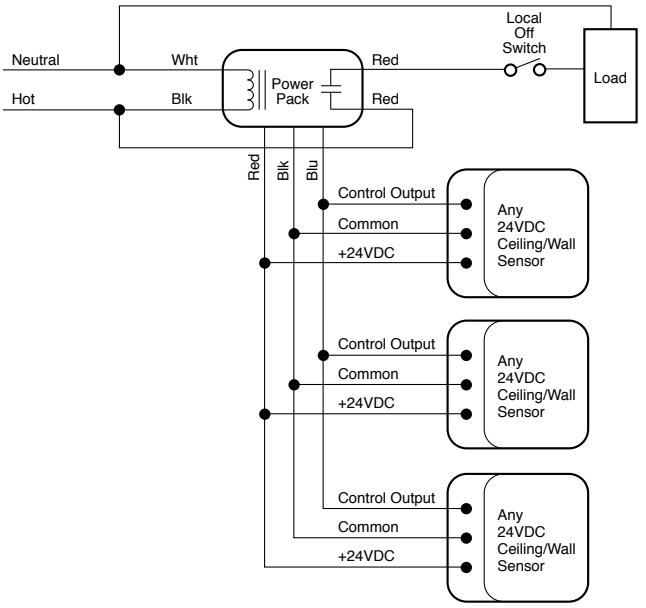


Multiple Sensors, Multiple Power Packs

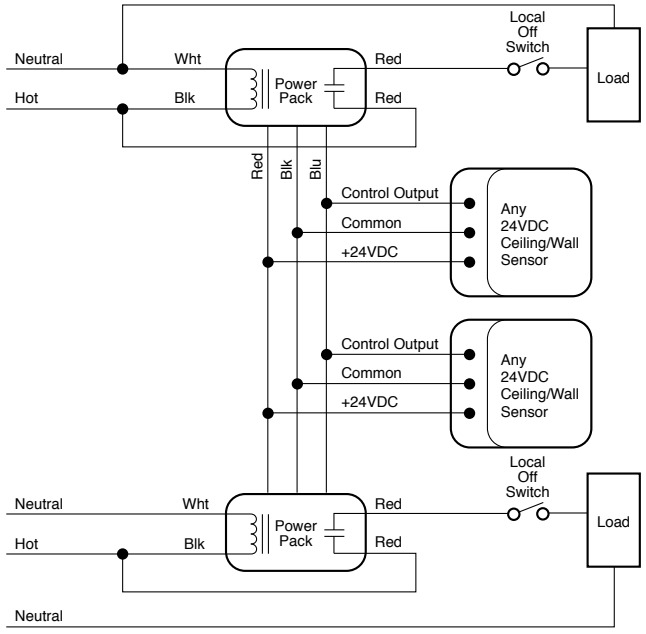


TECHNICAL RESOURCES

Wiring Diagrams – Dimmers & Fan Speed Controls

Single-Pole Wiring

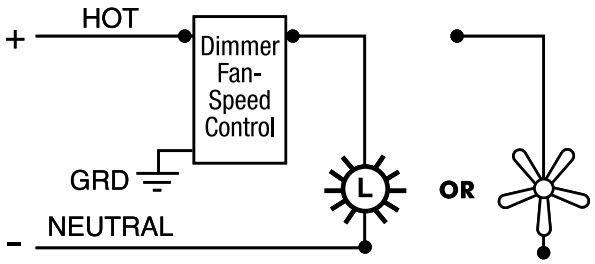


Single-Pole Wiring
Using 3-Way Preset Dimmer

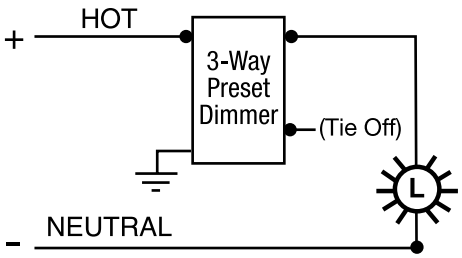


3-Way Wiring

Control Line Side

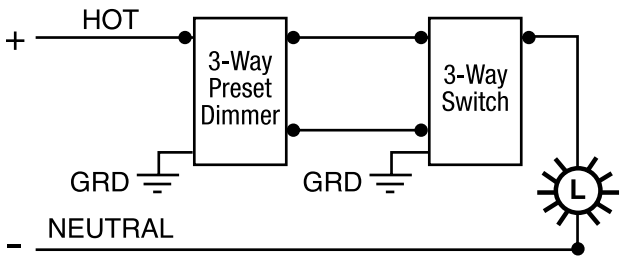


OR

Control Load Side

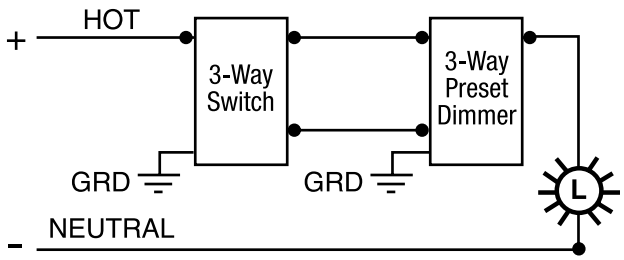


4-Way Wiring

Control Line Side

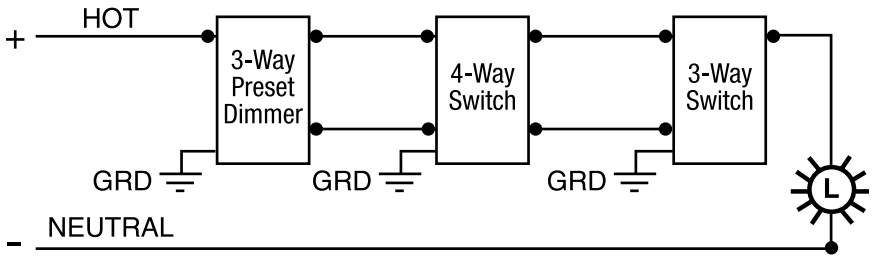

OR


Control Load Side

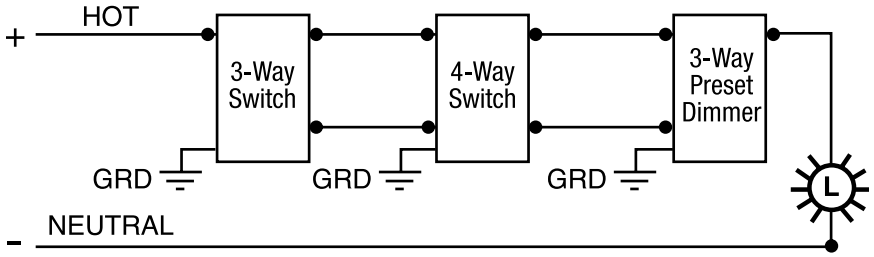

TECHNICAL RESOURCES

Hallway Lights – Light Output Measurements

Standard 4 Watt Incandescent Nightlight

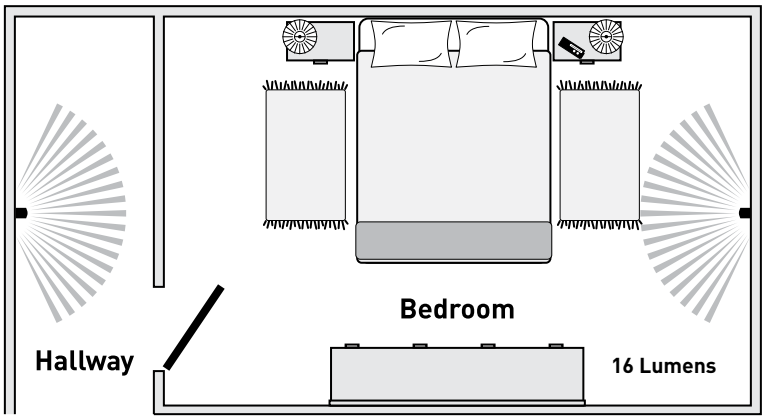

- Light output is adjustable
- Optionals louvers (NTL885TR, NTLFULL)
- Light temperature 6000°K

CATALOG NUMBER	DESCRIPTION	LIGHT OUTPUT IN 1' FCD*
P&S ENHANCED LED NIGHTLIGHTS		
NTL885TR	Adjustable LED Nightlight with Two 15A Tamper-Resistant Outlets and Optional Louver	.09
NTLFULL	Adjustable LED Nightlight and Optional Louver	2.8
NTL873	Adjustable LED Nightlight with Single Pole/3-Way Switch	1.5
PS8HWL	Specification Grade Enhanced Decorator Hallway Light & Single Receptacle	0.2561
1597NTLTRCC4	Combination Enhanced Nightlight/ GFCI (15 Amp)	0.180
2097NTLTR	Combination Enhanced Nightlight/ GFCI (20 Amp)	0.180
P&S LED NIGHTLIGHTS		
TMHWLCC	Decorator Full Hallway Light with Light Sensor	0.1328
TM8HWLCC	Decorator Hallway Light and Single Receptacle	0.1442

*FCD = Foot Candle Distance. 1 Lumen = 1 FCD.

NIGHTLIGHT SETTING	LIGHT OUTPUT	WITH LOUVER
High	30 lumens	10 lumens
Medium	15 lumens	5 lumens
Low	7 lumens	2.5 lumens
Ultra Low	2 lumens	1 lumens
Standard 4 Watt Incandescent Nightlight	16 lumens	—

INDEX

A — C

CAT. NO.	PAGE
A	
ACD1	J-11
ACD3	J-11
ACD201	J-11
ACD203	J-11
AF152TR	C-25
AF202DFW	C-25
AF202TR	C-25
AFGF152TR	C-26
AFGF202DFW	C-26
AFGF202TR	C-26
AX30	D-150, D-159, D-162
AX60	D-150, D-159, D-162
AXD60	D-159, D-162
B	
BOX120	D-114
BOX140	D-114
BOX22	D-114
BOX30	D-114
BOX40	D-114
BOX52	D-114
BOX70	D-114
BOX94	D-114
BZ150	E-21
BZ200	E-21
BZ250	E-21
BZ50	E-21
C	
C118HAC	H-12
C118HGAC	H-12
C118RAC	H-12
C118RGAC	H-12
C118WAC	H-12
C118WACX	H-12
C118WGAC	H-12
C118WGACX	H-12
C5EF	J-16
CA1G	G-7
CA1GL	G-7
CA1GS	G-7
CA1U2681G	G-6
CA126GRY	G-8
CA18G	G-8
CA2U2681G	G-6
CA2G	G-8
CA2GS	G-8
CA262G	G-8
CA268G	G-8
CA26GH	G-7
CA26GV	G-7
CA7GV	G-6
CA721G	G-6
CA723G	G-6
CA72G	G-8
CA8GH	G-6
CA82G	G-8
CA8GJ	G-6
CA8GVFS	G-6
CCGN50250BK	D-109
CD1100	E-48
CD1103P	E-48
CD1600	E-48
CD1603P	E-48
CD2000	E-48
CD2003P	E-48
CD250I	E-8
CD3FB10277	E-52
CD3FB103P277	E-52
CD3FB16	E-52
CD3FB163P	E-52
CD4FB	E-53
CD4FB3P	E-53
CD4FBL	E-53
CD4FBL3P	E-53
CD700	E-48
CD703P	E-48
CDADAPTORKIT	E-49
CDDH16	E-54
CDED20B1	D-178
CDED20C1	D-178
CDED50B1	D-178
CDED50C1	D-178
CDFB10	E-50
CDFB10277	E-50
CDFB103P	E-51
CDFB103P277	E-51
CDFB16	E-50
CDFB163P	E-51
CDFB5	E-50
CDFB53P	E-51
CDFB7277	E-50
CDFB73P277	E-51
CDFB8	E-50
CDFB83P	E-51
CDLV1100	E-49
CDLV1103P	E-49
CDLV1600	E-49
CDLV1603P	E-49
CDLV700	E-49
CDLV703P	E-49
CDSC12	E-54
CDSC6	E-54
CDSD25B1	D-178
CDSD25C1	D-178
CDSD50B1	D-178
CDSD50C1	D-178
CDSD50Y2	D-178
CG10010004	D-106
CG10010005	D-106
CG10011255	D-106
CG10012505	D-106
CG10013755	D-106
CG100451000	D-106
CG10045562	D-106
CG10045625	D-106
CG10045688	D-106
CG10045750	D-106
CG10045812	D-106
CG10045875	D-106
CG10045938	D-106
CG1005624	D-106
CG1006254	D-106
CG1006884	D-106
CG1007504	D-106
CG1008124	D-106
CG1008754	D-106
CG100901000	D-106
CG10090562	D-106
CG10090625	D-106
CG10090688	D-106
CG10090750	D-106
CG10090812	D-106
CG10090875	D-106
CG10090938	D-106
CG1009384	D-106
CG1014	D-108
CG1016	D-108
CG1018	D-108
CG1020	D-108
CG1022	D-108
CG1214	D-108
CG1216	D-108
CG1218	D-108
CG1220	D-108
CG1222	D-108
CG12510005	D-107
CG12511255	D-107
CG12512505	D-107
CG12513755	D-107
CG125451000	D-107
CG125451125	D-107
CG125451250	D-107
CG125451375	D-107
CG12545688	D-107
CG12545812	D-107
CG12545875	D-107
CG1256885	D-107
CG1258125	D-107
CG1258755	D-107
CG125901000	D-107
CG125901125	D-107
CG125901250	D-107
CG125901375	D-107
CG12590688	D-107
CG12590812	D-107
CG12590875	D-107
CG1422	D-108
CG1424	D-108
CG1426	D-108
CG1428	D-108
CG1430	D-108
CG1432	D-108
CG1434	D-108
CG1436	D-108
CG1438	D-108
CG1440	D-108
CG1442	D-108
CG15010005	D-107
CG15011255	D-107
CG15012505	D-107
CG15013755	D-107
CG15013756	D-107
CG15015626	D-107
CG15016886	D-107
CG15018126	D-107
CG150451000	D-107
CG150451125	D-107
CG150451250	D-107
CG150451375	D-107
CG15045688	D-107
CG15045812	D-107
CG15045875	D-107
CG1506885	D-107
CG1508125	D-107
CG1508755	D-107
CG150901000	D-107
CG150901125	D-107
CG150901250	D-107
CG150901375	D-107
CG150901562	D-107
CG150901688	D-107
CG150901812	D-107
CG15090688	D-107
CG15090812	D-107
CG15090875	D-107
CG1630	D-108
CG1634	D-108
CG1636	D-108
CG1638	D-108
CG1640	D-108
CG1642	D-108
CG1830	D-108
CG1834	D-108
CG1836	D-108
CG1838	D-108
CG1840	D-108
CG1842	D-108
CG1844	D-108
CG1846	D-108
CG1848	D-108
CG1850	D-108

INDEX

C

CAT. NO.	PAGE
CG20013756	D-107
CG20014376	D-107
CG20015626	D-107
CG20016886	D-107
CG20018126	D-107
CG20018127	D-107
CG20019387	D-107
CG20020627	D-107
CG20021887	D-107
CG20023127	D-107
CG20024387	D-107
CG2009013756	D-107
CG2009015626	D-107
CG2009016886	D-107
CG2009018126	D-107
CG204	D-108
CG206	D-108
CG208	D-108
CG210	D-108
CG25018127	D-107
CG25019387	D-107
CG25020627	D-107
CG25021887	D-107
CG25023127	D-107
CG25024387	D-107
CG25188	D-106
CG25250	D-106
CG25312	D-106
CG25375	D-106
CG25438	D-106
CG30018127	D-107
CG30019387	D-107
CG30020627	D-107
CG30021887	D-107
CG30023127	D-107
CG30024387	D-107
CG30026259	D-107
CG30028129	D-107
CG30030009	D-107
CG30032509	D-107
CG35031808	D-107
CG35033358	D-107
CG35035308	D-107
CG38188	D-106
CG38250	D-106
CG38312	D-106
CG38375	D-106
CG38438	D-106
CG3890188	D-106
CG3890250	D-106
CG3890312	D-106
CG3890375	D-106
CG3890438	D-106
CG40036909	D-107
CG40038559	D-107
CG40040259	D-107
CG404	D-108
CG406	D-108
CG408	D-108
CG410	D-108
CG411	D-108
CG412	D-108
CG501881	D-106
CG501882	D-106
CG502501	D-106
CG502502	D-106
CG503121	D-106
CG503122	D-106
CG503751	D-106
CG503752	D-106
CG504381	D-106
CG504382	D-106
CG5045188	D-106
CG5045312	D-106
CG5045375	D-106
CG5045438	D-106
CG5045500	D-106
CG5045562	D-106
CG5045625	D-106
CG505002	D-106
CG505003	D-106
CG505622	D-106
CG505623	D-106
CG506252	D-106
CG506253	D-106
CG506883	D-106
CG507503	D-106
CG508123	D-106
CG5090188	D-106
CG5090250	D-106
CG5090312	D-106
CG5090375	D-106
CG5090438	D-106
CG5090500	D-106
CG5090562	D-106
CG5090625	D-106
CG604	D-108
CG606	D-108
CG608	D-108
CG610	D-108
CG612	D-108
CG614	D-108
CG7510004	D-106
CG751882	D-106
CG752502	D-106
CG753122	D-106
CG753752	D-106
CG754382	D-106
CG7545500	D-106
CG7545562	D-106
CG7545625	D-106
CG7545688	D-106
CG7545750	D-106
CG7545812	D-106
CG755002	D-106
CG755003	D-106
CG755622	D-106
CG755623	D-106
CG755624	D-106
CG756252	D-106
CG756253	D-106
CG756254	D-106
CG756883	D-106
CG756884	D-106
CG757503	D-106
CG757504	D-106
CG758123	D-106
CG758124	D-106
CG758754	D-106
CG7590500	D-106
CG7590562	D-106
CG7590625	D-106
CG7590688	D-106
CG7590750	D-106
CG7590812	D-106
CG759384	D-106
CG809	D-108
CG811	D-108
CG812	D-108
CG814	D-108
CG816	D-108
CG818	D-108
CG820	D-108
CGN1001000	D-109
CGN100437	D-109
CGN100437M	D-110
CGN100437NM	D-111
CGN100500	D-109
CGN100500M	D-110
CGN100500NM	D-111
CGN100562	D-109
CGN100562M	D-110
CGN100562NM	D-111
CGN100625	D-109
CGN100625BK	D-109
CGN100625M	D-110
CGN100625NM	D-111
CGN100687	D-109
CGN100687BK	D-109
CGN100687M	D-110
CGN100687NM	D-111
CGN100750	D-109
CGN100750BK	D-109
CGN100750M	D-110
CGN100750NM	D-111
CGN100812	D-109
CGN100812BK	D-109
CGN100812M	D-110
CGN100812NM	D-111
CGN100875	D-109
CGN100875BK	D-109
CGN100875M	D-110
CGN100875NM	D-111
CGN100901000	D-109
CGN10090437	D-109
CGN10090437NM	D-111
CGN10090500	D-109
CGN10090500NM	D-111
CGN10090562	D-109
CGN10090562M	D-110
CGN10090625	D-109
CGN10090625M	D-110
CGN10090625NM	D-111
CGN10090687	D-109
CGN10090687M	D-110
CGN10090687NM	D-111
CGN10090750	D-109
CGN10090750M	D-110
CGN10090750NM	D-111
CGN10090812	D-109
CGN10090875	D-109
CGN10090875M	D-110, D-111
CGN1251000	D-109
CGN1251125	D-109
CGN1251250	D-109
CGN125750	D-109
CGN125875	D-109
CGN125901000	D-109
CGN125901125	D-109
CGN125901250	D-109
CGN12590750	D-109
CGN12590875	D-109
CGN25075	D-109
CGN25135	D-109
CGN25200	D-109
CGN38125	D-109
CGN38187	D-109
CGN38250	D-109
CGN38312	D-109
CGN38375	D-109
CGN50062	D-109
CGN50125	D-109
CGN50187	D-109
CGN50187M	D-110
CGN50187NM	D-111
CGN50250	D-109
CGN50250M	D-110
CGN50250NM	D-111
CGN50312	D-109
CGN50312BK	D-109
CGN50312M	D-110
CGN50312NM	D-111
CGN50375	D-109
CGN50375BK	D-109

INDEX

C

CAT. NO.	PAGE
CGN50375M	D-110
CGN50375NM	D-111
CGN5042UF	D-109
CGN50437	D-109
CGN50437BK	D-109
CGN50437M	D-110
CGN50437NM	D-111
CGN50500	D-109
CGN50500BK	D-109
CGN50500M	D-110
CGN50562	D-109
CGN50562M	D-110
CGN5064UF	D-109
CGN5090187M	D-110
CGN5090187NM	D-111
CGN5090250M	D-110
CGN5090250NM	D-111
CGN5090312M	D-110
CGN5090312NM	D-111
CGN5090375M	D-110
CGN5090375NM	D-111
CGN509042UF	D-109
CGN5090437M	D-110
CGN5090437NM	D-111
CGN5090500M	D-110
CGN5090562M	D-110
CGN509064UF	D-109
CGN75187	D-109
CGN75187BK	D-109
CGN75187M	D-110
CGN75187NM	D-111
CGN75250	D-109
CGN75250BK	D-109
CGN75250M	D-110
CGN75250NM	D-111
CGN75375	D-109
CGN75375BK	D-109
CGN75375M	D-110
CGN75375NM	D-111
CGN7542UF	D-109
CGN75437	D-109
CGN75437BK	D-109
CGN75437M	D-110
CGN75437NM	D-111
CGN75500	D-109
CGN75500BK	D-109
CGN75500M	D-110
CGN75500NM	D-111
CGN75562	D-109
CGN75562BK	D-109
CGN75562M	D-110
CGN75562NM	D-111
CGN75625	D-109
CGN75625BK	D-109
CGN75625M	D-110
CGN75625NM	D-111
CGN7564UF	D-109
CGN75687	D-109
CGN75687M	D-110
CGN7590250M	D-110
CGN7590250NM	D-111
CGN7590375M	D-110
CGN7590375NM	D-111
CGN759042UF	D-109
CGN7590437M	D-110
CGN7590437NM	D-111
CGN7590500M	D-110
CGN7590500NM	D-111
CGN7590562M	D-110
CGN7590562NM	D-111
CGN7590625M	D-110
CGN7590625NM	D-111
CGN759064UF	D-109
CGN7590687M	D-110
CGSS1001000	D-112
CGSS1001000M	D-113
CGSS100562	D-112
CGSS100562M	D-113
CGSS100625	D-112
CGSS100625M	D-113
CGSS100687M	D-113
CGSS100688	D-112
CGSS100750	D-112
CGSS100750M	D-113
CGSS100812	D-112
CGSS100812M	D-113
CGSS100875	D-112
CGSS100875M	D-113
CGSS100937M	D-113
CGSS100938	D-112
CGSS1251000	D-112
CGSS1251000M	D-113
CGSS1251125	D-112
CGSS1251125M	D-113
CGSS1251250	D-112
CGSS1251250M	D-113
CGSS1251375	D-112
CGSS1251375M	D-113
CGSS125688	D-112
CGSS125688M	D-113
CGSS125812	D-112
CGSS125812M	D-113
CGSS125875	D-112
CGSS125875M	D-113
CGSS1501000	D-112
CGSS1501000M	D-113
CGSS1501125	D-112
CGSS1501125M	D-113
CGSS1501250	D-112
CGSS1501250M	D-113
CGSS1501375	D-112
CGSS1501375M	D-113
CGSS150688	D-112
CGSS150688M	D-113
CGSS150812	D-112
CGSS150812M	D-113
CGSS150875	D-112
CGSS150875M	D-113
CGSS2001375	D-112
CGSS2001375M	D-113
CGSS2001562	D-112
CGSS2001562M	D-113
CGSS2001688	D-112
CGSS2001688M	D-113
CGSS2001812	D-112
CGSS2001812M	D-113
CGSS2001938	D-112
CGSS2001938M	D-113
CGSS2002062	D-112
CGSS2002062M	D-113
CGSS2002188	D-112
CGSS2002188M	D-113
CGSS2002312	D-112
CGSS2002312M	D-113
CGSS2002438	D-112
CGSS2002438M	D-113
CGSS2501812	D-112
CGSS2501812M	D-113
CGSS2501938	D-112
CGSS2501938M	D-113
CGSS2502062	D-112
CGSS2502062M	D-113
CGSS2502188	D-112
CGSS2502188M	D-113
CGSS2502312	D-112
CGSS2502312M	D-113
CGSS2502438	D-112
CGSS2502438M	D-113
CGSS3002635	D-112
CGSS3002635M	D-113
CGSS3002812	D-112
CGSS3002812M	D-113
CGSS3003000	D-112
CGSS3003000M	D-113
CGSS3003250	D-112
CGSS3003250M	D-113
CGSS38188	D-112
CGSS38250	D-112
CGSS38250M	D-113
CGSS38312	D-112
CGSS38312M	D-113
CGSS38375	D-112
CGSS38375M	D-113
CGSS38438	D-112
CGSS38438M	D-113
CGSS50188	D-112
CGSS50250	D-112
CGSS50250M	D-113
CGSS50312	D-112
CGSS50312M	D-113
CGSS50375	D-112
CGSS50375M	D-113
CGSS50438	D-112
CGSS50438M	D-113
CGSS50500	D-112
CGSS50500M	D-113
CGSS50562	D-112
CGSS50562M	D-113
CGSS50625	D-112
CGSS50625M	D-113
CGSS75500	D-112
CGSS75500M	D-113
CGSS75562	D-112
CGSS75562M	D-113
CGSS75625	D-112
CGSS75625M	D-113
CGSS75687M	D-113
CGSS75688	D-112
CGSS75750	D-112
CGSS75750M	D-113
CGSS75812	D-112
CGSS75812M	D-113
CH250I	E-7
CI205	E-17
CI2051	E-17
CI300	E-17
CI3001	E-17
CI305	E-17
CI3051	E-17
CI355	E-17
CI3551	E-17
CR12L123N25F20	D-175
CR12L123N25F20B	D-175
CR12L123N25R20	D-175
CR12L123N30F20	D-175
CR12L123N30F20B	D-175
CR12L123N35F20	D-175
CR12L123N50F20	D-175
CR12L123N50F20B	D-175
CR12L123N50R20	D-175
CR12L124N25F16	D-175
CR12L124N35F16	D-175
CR12L124N35F16B	D-175
CR12L143N30F15	D-175
CR12L143N30F15B	D-175
CR12L143N40F15	D-175
CR12L143N50F15	D-175
CR12L143N50F15B	D-175
CR12L144N35F12	D-175
CR12L163N25F10	D-175
CR12L163N25F10B	D-175
CR12L163N35F10	D-175
CR12L163N35F10B	D-175
CR12L163N50F10	D-175

INDEX

C — F

CAT. NO.	PAGE
CR12L163N50F10B	D-175
CR12L164N35F08	D-175
CR12L164N50F08	D-175
CR12L164N50F08B	D-175
CR14L103N30F25	D-177
CR14L103N30F25B	D-177
CR14L103N50F25	D-177
CR14L103N60F25	D-177
CR14L104N30F20	D-177
CR14L104N30F20B	D-177
CR14L104N40F20	D-177
CR14L104N40F20B	D-177
CR14L104N50F20	D-177
CR14L123N30F20B	D-177
CR14L123N40F20	D-177
CR14L123N40F20B	D-177
CR14L123N50F20	D-177
CR14L123N50F20B	D-177
CR14L124N20F16	D-177
CR14L124N30F16	D-177
CR14L124N30F16B	D-177
CR14L124N40F16	D-177
CR14L124N40F16B	D-177
CR14L124N50F16	D-177
CR14L124N50F16B	D-177
CR14L143N30F15	D-177
CR14L144N30F12	D-177
CR14L144N40F12	D-177
CR14L163N100F10	D-177
CR14L163N70F10	D-177
CR14L163N70F10	D-177
CR14L163N70F10B	D-177
CR14R104N30F20	D-177
CR14R104N60F20B	D-177
CR14R124N30F16	D-177
CR14R143N100F15	D-177
CR14S104N40F20	D-177
CR14S123N50F20	D-177
CR14S123N50F20B	D-177
CR14S124N30F16	D-177
CR14S124N40F16B	D-177
CR14S124N50F16	D-177
CR14S144N30F12	D-177
CR14S144N50F12	D-177
CR15	B-22
CR20	B-22
CR5266X	D-5
CR5269X	D-5
CR6200	B-47
CR6300	B-47
CR6307	B-12
CR6360	D-44
CR6361	D-44
CR6364	D-45
CR6365	D-45
CR6369	D-45
CR6370	D-44
CR6375	D-45
CR7716N	D-44, D-45, D-50
CR7717N	D-44, D-45, D-50
CRB5262	B-28
CRB5362	B-28
CRCD123G25R15	D-173
CRCD123G25R20	D-173
CRCD123G25T15	D-173
CRCD123G35R15	D-173
CRCD123G35R20	D-173
CRCD123G35T15	D-173
CRCD123G50R15	D-173
CRCD123G50R20	D-173
CRCD123G50T15	D-173
CRCD123N25F20	D-173
CRCD123N25L15	D-173
CRCD123N25L20	D-173
CRCD123N25R15	D-173
CRCD123N25R20	D-173
CRCD123N25S15	D-173
CRCD123N25S20	D-173
CRCD123N25T15	D-173
CRCD123N35F20	D-173
CRCD123N35G15	D-173
CRCD123N35G20	D-173
CRCD123N35L15	D-173
CRCD123N35L20	D-173
CRCD123N35R15	D-173
CRCD123N35R20	D-173
CRCD123N35S15	D-173
CRCD123N35S20	D-173
CRCD123N35T15	D-173
CRCD123N50F20	D-173
CRCD123N50G15	D-173
CRCD123N50G20	D-173
CRCD123N50L15	D-173
CRCD123N50L20	D-173
CRCD123N50R15	D-173
CRCD123N50R20	D-173
CRCD123N50S15	D-173
CRCD123N50S20	D-173
CRCD123N50T15	D-173
CRCD163N25F10	D-173
CRCD163N25R10	D-173
CRCD163N25T10	D-173
CRCD163N35F10	D-173
CRCD163N35R10	D-173
CRCD163N35T10	D-173
CRCD163N50F10	D-173
CRCD163N50R10	D-173
CRCD163N50T10	D-173
CRL1420C	D-27
CRL1420P	D-27
CRL1430C	D-34
CRL1430P	D-34
CRL2030RBC	D-23, D-35, D-42, D-50
CRL2030RBP	D-23, D-35, D-42, D-50
CRL515C	D-21
CRL515P	D-21
CRL520C	D-23
CRL520P	D-23
CRL520R	D-23, D-25, D-26, D-30, D-31
CRL530C	D-30
CRL530P	D-30
CRL620C	D-24
CRL620P	D-24
CRL630C	D-31
CRL630P	D-31
CS1200	E-4
CS15AC1	A-15
CS15AC3	A-15
CS20AC1	A-15
CS20AC3	A-15
CS500	E-4
CS6360	D-44
CS6361	D-44
CS6364	D-45
CS6365	D-45
CS6369	D-45
CS6370	D-44
CS6375	D-45
CS6377	D-44
CS8164	D-45
CS8165	D-45
CS8169	D-45
CS8175	D-45
CS8177	D-45
CS8264	D-44
CS8265	D-44
CS8269	D-44
CS8275	D-44
CS8364	D-45
CS8365	D-45
CS8369	D-45
CS8375	D-45
CS8464	D-44
CS8465	D-44
CS8469	D-44
CS8475	D-44
CSB15AC1	A-14
CSB15AC2	A-14
CSB15AC3	A-14
CSB15AC4	A-14
CSB20AC1	A-14
CSB20AC2	A-14
CSB20AC3	A-14
CSB20AC4	A-14
CT1	H-7
CX105	E-16
CX1051	E-16
CX1053	E-16
CX1054	E-16

D

D0531	B-13, D-10
D0533	B-13, D-10
D0551	B-13, D-10
D0553	B-13, D-10
D0631	B-13, D-10
D0633	B-13, D-10
D0651	B-13, D-10
D0653	B-13, D-10
D0731	D-10
D0751	D-10
D1861	B-13, D-10
DC1	D-50
DR1103P	E-32
DR703P	E-32
DRCL453P	E-32
DRDH163PV	E-32
DRLV1103P	E-32
DRLV703P	E-32
DRSC53PV	E-32
DSW100I	E-11
DSW200I	E-11
DSW301I	E-13
DSW302I	E-13
DT300	E-19
DT305	E-19
DT355	E-19

E

EHU15AN	B-84, D-4, D-5, D-6
EOHR101I	E-15
EOHR102I	E-15
EOPC100	E-14
EORS101I	E-15
EORS102I	E-15
EOSW101I	E-14
EOSW102I	E-14
EOSW111I	E-14
EOSW112I	E-14
EWS100W	E-14
EXT1	H-2
EXT2	H-2

F

FBOX1	G-10
FB1TRDRB	H-13
FB1TRDRN	H-13
FB1TRSRB	H-13
FB1TRSRN	H-13
FB2TRDR2B	H-14
FB2TRDR2N	H-14

INDEX

F — I

CAT. NO.	PAGE
FB2TRDRKS4B	H-14
FB2TRDRKS4N	H-14
FC22	D-121
FC22GL	B-84, D-4, D-5, D-35, D-51, D-114
FC30	D-121
FC30GL	B-84, D-4, D-5, D-35, D-51, D-114
FC30LB	D-121
FC40	D-121
FC40GL	B-84, D-4, D-5, D-35, D-51, D-114
FC40LB	D-121
FC050LB	D-117
FC050OF	D-117
FC050U	D-117
FC050UU	D-117
FC52	D-121
FC52GL	B-84, D-4, D-5, D-35, D-51, D-114
FC52LB	D-121
FC062LB	D-117
FC062OF	D-117
FC062U	D-117
FC062UU	D-117
FC70	D-121
FC70GL	D-35, D-51, D-114
FC70LB	D-121
FC075LB	D-117
FC075OF	D-117
FC075U	D-117
FC075UU	D-117
FC94	D-121
FC94GL	D-35, D-51, D-114
FC94LB	D-121
FC100LB	D-117
FC100OF	D-117
FC100UU	D-117
FC125LB	D-117
FC125OF	D-117
FC125U	D-117
FC125UU	D-117
FC150LB	D-117
FC150OF	D-117
FC150U	D-117
FC150UU	D-117
FC175LB	D-117
FC175OF	D-117
FC175U	D-117
FC175UU	D-117
FC200LB	D-117
FC200OF	D-117
FC200U	D-117
FC200UU	D-117
FC250LB	D-117
FC250OF	D-117
FC250U	D-117
FC250UU	D-117
FC300LB	D-117
FC300OF	D-117
FC300U	D-117
FC350LB	D-117
FC350OF	D-117
FCHL075U	D-120
FCHL075UU	D-120
FCHL100U	D-120
FCHL100UU	D-120
FCHL125U	D-120
FCHL125UU	D-120
FCHL150U	D-120
FCHL150UU	D-120
FCHL175U	D-120
FCHL200UU	D-120
FCHL250U	D-120
FCHL250UU	D-120
FCHL300UU	D-120
FCHL350UU	D-120
FCSD22	D-121
FCSD30	D-121
FCSD30LB	D-121
FCSD40	D-121
FCSD52	D-121
FCSD52LB	D-121
FCSD70	D-121
FCSD70LB	D-121
FCSD94	D-121
FCSD94LB	D-121
FD11	D-144
FD12	D-144
FD13	D-144
FD21	D-144
FD22	D-144
FD23	D-144
FDC21	D-144
FDC22	D-144
FDC23	D-144
FO22	D-144
FR050LB	D-119
FR050OF	D-119
FR050U	D-119
FR050UU	D-119
FR062LB	D-119
FR062OF	D-119
FR062U	D-119
FR062UU	D-119
FR075LB	D-119
FR075OF	D-119
FR075U	D-119
FR075UU	D-119
FR100LB	D-119
FR100OF	D-119
FR100U	D-119
FR100UU	D-119
FR125LB	D-119
FR125OF	D-119
FR125U	D-119
FR150LB	D-119
FR150OF	D-119
FR150U	D-119
FR150UU	D-119
FR175OF	D-119
FR175U	D-119
FR175UU	D-119
FR200OF	D-119
FR200U	D-119
FR200UU	D-119
FR250OF	D-119
FR250U	D-119
FR250UU	D-119
FR300OF	D-119
FR300U	D-119
FR300UU	D-119
FR350OF	D-119
FR350U	D-119
FS050LB	D-118
FS050OF	D-118
FS050U	D-118
FS050UU	D-118
FS062LB	D-118
FS062OF	D-118
FS062U	D-118
FS062UU	D-118
FS075OF	D-118
FS075U	D-118
FS100LB	D-118
FS100OF	D-118
FS100U	D-118
FS100UU	D-118
FS125LB	D-118
FS125OF	D-118
FS125U	D-118
FS125UU	D-118
FS150LB	D-118
FS150OF	D-118
FS150U	D-118
FS150UU	D-118
FS175LB	D-118
FS175OF	D-118
FS175U	D-118
FS175UU	D-118
FS200LB	D-118
FS200OF	D-118
FS200U	D-118
FS200UU	D-118
FS250LB	D-118
FS250OF	D-118
FS250U	D-118
FS250UU	D-118
FS300LB	D-118
FS300OF	D-118
FS300U	D-118
FS300UU	D-118
FS350LB	D-118
FS350OF	D-118
FS350U	D-118
FS350UU	D-118
FSHL075U	D-120
FSHL075UU	D-120
FSHL100U	D-120
FSHL100UU	D-120
FSHL125U	D-120
FSHL125UU	D-120
FSHL150U	D-120
FSHL150UU	D-120
FSHL200UU	D-120
FSHL250UU	D-120
FSHL300UU	D-120
FSHL350UU	D-120
FSHL400UU	D-120
FS2	J-10
FS4	J-10
FS5	J-10

G

GASKET1	I-38
GASKET2	G-23
GASKET3726	G-23
GASKET3780	G-23
GASKET38	G-23

H

HB350WL3	E-20
HBP111L7	E-20
HBP112L7	E-20
HCL453PMMTC	E-28
HCL453PMMW	E-28
HDH163PMMTC	E-28
HDH163PMMW	E-28
HDHKIT	E-28
HMKIT	E-28
HMRKIT	E-28, F-3
HMRKITWH	F-3
HMRTC	E-28, F-3
HMRW	E-28, F-3
HP30EX	A-27, D-169

I

IG26262HG	B-72
IG26362HG	B-72
IG4700	B-100, D-21
IG4710	B-100, D-21

INDEX

I — L

CAT. NO.	PAGE
IG4760	B-100, D-22
IG5261	B-97
IG5262	B-97
IG5262ISP	B-87
IG5362	B-97
IG5362SP	B-87
IG5662	B-97
IG5862	B-97
IG8200	B-54
IG8200ISP	B-90
IG8300	B-54
IG8300ISP	B-90
IG8301	B-55
IG8800	B-54
IGL1420R	B-100, D-27
IGL1430R	B-100, D-34
IGL1520R	B-100, D-27
IGL1530R	B-100, D-34
IGL1620R	B-100, D-27
IGL2120R	B-100, D-29
IGL2130R	B-100, D-37
IGL2220R	B-100, D-29
IGL2230R	B-100, D-37
IGL2320R	B-100, D-29
IGL2330R	B-100, D-37
IGL520P	D-23
IGL520R	B-100, D-23, D-25, D-26, D-30, D-31
IGL530R	D-30
IGL620R	B-100, D-24
IGL630R	D-31
IGL720R	B-100, D-24
IGL820R	B-100, D-25

J

CAT. NO.	PAGE
JP12845C5E	J-17
JP24845C5E	J-17
JP36845C5E	J-17

K

CAT. NO.	PAGE
K1	I-16
K2	I-16
K3	I-16
K4	I-16
KS226	J-15
KS326	J-15
KS426	J-15
KSBNC	J-15
KSRCAB	J-15
KSRCAR	J-15
KSRCAY	J-15
KSSC	J-15
KSST	J-15
KSSV	J-15
KTPD4	J-15
KTPD6	J-15
KTPDL1	J-15
KTPDL4	J-15
KTPDL6	J-15

L

CAT. NO.	PAGE
L0115	D-20
L1020C	D-26
L1020FI	D-26
L1020FO	D-26
L1020P	D-26
L1020R	D-26
L1030C	D-33
L1030FI	D-33
L1030FO	D-33
L1030P	D-33
L1030R	D-33
L1120C	D-26
L1120FO	D-26
L1120P	D-26
L1120R	D-26
L1130C	D-33
L1130FI	D-33
L1130FO	D-33
L1130P	D-33
L1130R	D-33
L1220C	D-26
L1220FI	D-26
L1220FO	D-26
L1220P	D-26
L1220R	D-26
L1230C	D-33
L1230FI	D-33
L1230FO	D-33
L1230P	D-33
L1230R	D-33
L1330C	D-33
L1330FI	D-33
L1330FO	D-33
L1330P	D-33
L1330R	D-33
L1420C	D-27
L1420CGCM	D-39
L1420FI	D-27
L1420FO	D-27
L1420P	D-27
L1420PGCM	D-39
L1420R	D-27
L1430C	D-34
L1430CGCM	D-39
L1430FI	D-34
L1430FIKIT	G-17, D-34
L1430FO	D-34
L1430P	D-34
L1430PGCM	D-39
L1430R	D-34
L1520C	D-27
L1520CBK	D-27
L1520FI	D-27
L1520FO	D-27
L1520P	D-27
L1520PBK	D-27
L1520R	D-27
L1530C	D-34
L1530FI	D-34
L1530FIBK	D-34
L1530FO	D-34
L1530FOBK	D-34
L1530P	D-34
L1530R	D-34
L15AN	D-40, D-51
L15RBC	D-5, D-35, D-42, D-50
L15RBP	D-5, D-35, D-42, D-50
L1620C	D-27
L1620FI	D-27
L1620FO	D-27
L1620P	D-27
L1620R	D-27
L1630C	D-35
L1630FI	D-35
L1630FO	D-35
L1630P	D-35
L1630R	D-35
L1730C	D-35
L1730FI	D-35
L1730FO	D-35
L1730P	D-35
L1730R	D-35
L1820C	D-28, D-36
L1820FI	D-28, D-36
L1820FO	D-28, D-36
L1820P	D-28, D-36
L1820R	D-28, D-36
L1830C	D-36
L1830FI	D-36
L1830FO	D-36
L1830P	D-36
L1830R	D-36
L1920C	D-28, D-36
L1920FI	D-28, D-36
L1920FO	D-28, D-36
L1920P	D-28, D-36
L1920R	D-28, D-36
L1930C	D-36
L1930FI	D-36
L1930FO	D-36
L1930P	D-36
L1930R	D-36
L2020C	D-28, D-36
L2020FI	D-28, D-36
L2020FO	D-28, D-36
L2020P	D-28, D-36
L2020R	D-28, D-36
L2030C	D-36
L2030FI	D-36
L2030F0	D-36
L2030P	D-36
L2030R	D-36
L20303AN	D-40, D-51
L203045AN	D-40, D-51
L2030RBC	D-23, D-26, D-35, D-42, D-50
L2030RBP	D-23, D-26, D-35, D-42, D-50
L2120C	D-29
L2120FI	D-29
L2120FO	D-29
L2120P	D-29
L2120R	D-29
L2130C	D-37
L2130FI	D-37
L2130FO	D-37
L2130P	D-37
L2130R	D-37
L2220C	D-29
L2220FI	D-29
L2220FIBK	D-29
L2220FO	D-29
L2220FOBK	D-29
L2220P	D-29
L2220R	D-29
L2230C	D-37
L2230FI	D-37
L2230FO	D-37
L2230P	D-37
L2230R	D-37
L2320C	D-29
L2320FI	D-29
L2320FO	D-29
L2320P	D-29
L2320R	D-29
L2330C	D-37
L2330FO	D-37
L2330P	D-37
L2330R	D-37
L3720C	D-25
L3720CGCM	D-39
L3720FO	D-25
L3720P	D-25
L3720PGCM	D-39
L3720R	D-25
L520C	D-23, D-25, D-30, D-31, D-32
L520CBK	D-23
L520CGCM	D-39
L520FI	D-23, D-24, D-25, D-30, D-31, D-32
L520FO	D-23, D-24, D-25, D-30, D-31, D-32

INDEX

L — P

CAT. NO.	PAGE
L520P	D-23, D-25, D-30, D-31, D-32
L520PBK	D-23, D-25
L520PGCM	D-39
L520R	D-23, D-25, D-26, D-30, D-31, D-32
L530C	D-30
L530CGCM	D-39
L530FI	D-30
L530FO	D-30
L530P	D-30
L530PGCM	D-39
L530R	D-30
L620C	D-24
L620CGCM	D-39
L620FI	D-24
L620FO	D-24
L620P	D-24
L620PGCM	D-39
L620R	D-24
L630C	D-19
L630CGCM	D-39
L630FI	D-31
L630FO	D-31
L630P	D-19
L630PGCM	D-39
L630R	D-31
L720C	D-24
L720FI	D-24
L720FO	D-24
L720GCM	D-39
L720P	D-24
L720PGCM	D-39
L720R	D-24
L730C	D-31
L730CGCM	D-39
L730FI	D-31
L730FO	D-31
L730P	D-31
L730PGCM	D-39
L730R	D-31
L820C	D-25
L820FI	D-25
L820FO	D-25
L820P	D-25
L820R	D-25
L830C	D-32
L830FI	D-32
L830FO	D-32
L830P	D-32
L830R	D-32
L920C	D-25
L920FI	D-25, D-31, D-32
L920FO	D-25, D-31, D-32
L920P	D-25
L920R	D-25
L930C	D-32
L930FI	D-32
L930FO	D-32
L930P	D-32
L930R	D-32
LLRKV	E-44
LRKV	E-44
LS1000	E-41
LS1000P	E-41
LS1003P	E-41
LS600	E-41
LS600P	E-41
LS603P	E-41
LSCL450	E-42
LSCL453P	E-42
LSCLDC163P	E-42, E-43
LSDC163PV	E-43
LSDC16V	E-43
LSDD300	E-44
LSDH16V	E-43
LSDS300PV	E-44
LSDV25V	E-43
LSLV600	E-41
LSLV600P	E-41
LSLV603P	E-41
LSSC5	E-43
LSSC5P	E-43
LT30F1	D-31
LT30F0	D-31
LTB100SS	D-115
LTB125SS	D-115
LTB150SS	D-115
LTB200SS	D-115
LTB38SS	D-115
LTB50SS	D-115
LTB75SS	D-115
LVDIV1	H-5
M	
M118W	H-4
ML1113	D-46
ML1133	D-46
ML114	D-46
ML115	D-46
ML2113	D-46
ML2133	D-46
ML214	D-46
ML215	D-46
ML3113	D-46
ML3133	D-46
ML314	D-46
ML315	D-46
MSP050	D-126
MSP075	D-126
MSP100	D-126
MSP125	D-126
MSP150	D-126
MSP175	D-126
MSP200	D-126
N	
NTL81TR	B-10
NTL873	B-10
NTL873AMBERWCC6	B-10
NTL885TR	B-10
NTL885TRAMBERWCC6	B-10
NTLFULL	B-10
NTLFULLAMBERWCC6	B-10
NTLFULLTC	B-10
P	
P0501	D-125
P0751	D-125
P1001	D-125
P100ND	H-5
P100WD	H-5
P108N	H-4
P108W	H-4
P116W	H-4
P118R	H-3
P118RN	H-3
P122B	H-6
P122C	H-3
P122N	H-3
P122R	H-3
P122RN	H-3
P1501	D-125
P2001	D-125
P235RAC	H-3
P235RACMH	H-3
P242RRD	H-8
P242SRD	H-8
P2501	D-125
P3001	D-125
P3501	D-125
P3502	D-125
P354RACMH	H-3
PAR1	G-22
PDV2B	H-5
PH122B	H-6
PH122R	H-3
PJ100	D-122
PJ25	D-122
PJ37	D-122
PJ50	D-122
PJ62	D-122
PJ75	D-122
PJSC14I	I-22
PJSC1I	I-22
PJSC7W	I-22
PJSC26I	I-22
PJSC8I	I-22
PJSE14I	I-22
PJSE1I	I-22
PJSE26I	I-22
PJSE7W	I-22
PJSE8I	I-22
PL1002	D-122
PL1251	D-122
PL1501	D-122
PL1502	D-122
PL2002	D-122
PL204L	C-24
PL2502	D-122
PL3002	D-122
PLS1820F	D-70
PLS1820M	D-70
PLS182F	D-70
PLS182MBK	D-70
PLS1840F	D-70
PLS1840M	D-70
PLV1B	H-5
PLV1R	H-5
PLV1S	H-5
PLV1W	H-5
PLV2B	H-5
PLV2W	H-5
PLV3W	H-5
PM0501	D-123
PM0751	D-123
PM0752	D-123
PM1001	D-123
PM1002	D-123
PM1501	D-123
PM1502	D-123
PM1KIT	D-123
PM2001	D-123
PM2002	D-123
PM2501	D-123
PM2502	D-123
PM3001	D-123
PM3002	D-123
PM3501	D-123
PM3502	D-123
PP21	I-29
PP210	I-29
PP22	I-29
PP23	I-29
PP24	I-29
PP25	I-29
PP26	I-29
PP27	I-29
PP28	I-29
PP29	I-29
PP31	I-29
PP310	I-29
PP32	I-29
PP33	I-29

INDEX

P

CAT. NO.	PAGE
PP34	I-29
PP35	I-29
PP36	I-29
PP37	I-29
PP38	I-29
PP39	I-29
PP41	I-29
PP410	I-29
PP42	I-29
PP43	I-29
PP44	I-29
PP45	I-29
PP46	I-29
PP47	I-29
PP48	I-29
PP49	I-29
PP51	I-29
PP510	I-29
PP52	I-29
PP53	I-29
PP54	I-29
PP55	I-29
PP56	I-29
PP57	I-29
PP58	I-29
PP59	I-29
PS0501	D-124
PS0502	D-124
PS0622	D-124
PS0751	D-124
PS0752	D-124
PS084AM	D-140
PS1	B-16, B-17, B-95
PS1001	D-124
PS1002	D-124
PS100FSS	D-156
PS100SS	D-150
PS100SSAX	D-150
PS100SSAX3	D-150
PS100SSAXRC	D-150
PS100SSRC	D-150
PS103AM	D-140
PS104AM	D-140
PS10PC	B-16, B-17, B-95
PS123AM	D-140
PS124AM	D-140
PS1251	D-124
PS143AM	D-140
PS144AM	D-140
PS14WT	D-144
PS14WTAM	D-139
PS1501	D-124
PS1502	D-124
PS154S	C-24
PS15AC1	A-20
PS15AC1CPL	A-20
PS15AC1CSL	A-20
PS15AC1L	A-20
PS15AC2	A-20
PS15AC3	A-20
PS15AC3CPL	A-20
PS15AC3CSL	A-20
PS15AC3L	A-20
PS15AC4	A-20
PS15WT	D-144
PS15WTAM	D-139
PS163AM	D-140
PS16CLF	D-69
PS16CLM	D-69
PS2001	D-124
PS2002	D-124
PS204S	C-24
PS20AC1	A-19, A-20
PS20AC1CPL	A-20
PS20AC1CPL7	A-20
PS20AC1CSL	A-20
PS20AC1KL	A-20
PS20AC1L	A-20
PS20AC2	A-20
PS20AC2CPL	A-20
PS20AC2HP	A-27, D-169
PS20AC2KL	A-20
PS20AC2L	A-20
PS20AC3	A-20
PS20AC3CPL	A-20
PS20AC3CSL	A-20
PS20AC3KL	A-20
PS20AC3L	A-20
PS20AC3RPL7	A-20
PS20AC4	A-20
PS20AC4IL	A-20
PS20AC4KL	A-20
PS20FB	D-64
PS20MBBK	D-64
PS2501	D-124
PS2502	D-124
PS27WT	D-144
PS27WTAM	D-139
PS29WT	D-144
PS29WTAM	D-139
PS3001	D-124
PS3002	D-124
PS30AC1	A-20
PS30AC1RPL	A-20
PS30AC2	A-20
PS30AC2HP	A-27, D-169
PS30AC2RPL	A-20
PS30AC3	A-20
PS30AC3RPL	A-20
PS30FSS	D-156
PS30RSAX	D-150
PS30SSAX	D-150
PS30SSAX3	D-150
PS30SSAXRC	D-150
PS30SSRC	D-150
PS3100B6W	D-86, D-100
PS3100B7W	D-86, D-100
PS3100C4W	D-86, D-100
PS3100C4WL	D-86
PS3100C4WR	D-86
PS3100C6W	D-86, D-100
PS3100C6WL	D-86
PS3100C6WR	D-86
PS3100C7W	D-86, D-100
PS3100C7WL	D-86
PS3100C7WR	D-86
PS3100MIR4W	D-81
PS3100MIR6W	D-81, D-100
PS3100MIR7W	D-81, D-100
PS3100P4W	D-81, D-86, D-100
PS3100P4WR	D-86
PS3100P6W	D-81, D-86, D-100
PS3100P7W	D-81, D-86, D-100
PS3100P7WR	D-86
PS3100R4W	D-86, D-100
PS3100R4WL	D-86
PS3100R6W	D-86, D-100
PS3100R6WL	D-86
PS3100R7W	D-86, D-100
PS3100R7WL	D-86
PS3125B4W	D-88, D-102
PS3125B6W	D-88, D-102
PS3125B9W	D-88, D-102
PS3125C4W	D-88, D-102
PS3125C6W	D-88, D-102
PS3125C9W	D-88, D-102
PS3125P4W	D-88, D-102
PS3125P6W	D-88, D-102
PS3125P9W	D-88, D-102
PS3125R4W	D-88, D-102
PS3125R6W	D-88, D-102
PS3125R9W	D-88, D-102
PS316B6S	D-90
PS316C4S	D-90
PS316C4W	D-87, D-101
PS316C6S	D-90
PS316C6W	D-87, D-101
PS316C9W	D-87, D-101
PS316P4S	D-90
PS316P4W	D-87, D-101
PS316P6S	D-90
PS316P6W	D-87, D-101
PS316P9W	D-87, D-101
PS316R4W	D-87, D-101
PS316R6S	D-90
PS316R6W	D-87, D-101
PS316R9W	D-87, D-101
PS320B6S	D-89, D-103
PS320C4S	D-89, D-103
PS320C4W	D-85, D-100
PS320C4WR	D-85
PS320C5W	D-85, D-100
PS320C5WR	D-85
PS320C6S	D-89, D-103
PS320C6W	D-85, D-100
PS320C6WR	D-85
PS320C7W	D-85, D-100
PS320C7WR	D-85
PS320MIR4W	D-81
PS320MIR6W	D-81
PS320MIR7W	D-81
PS320P4S	D-89, D-103
PS320P4W	D-81, D-85, D-100
PS320P4WR	D-85
PS320P5S	D-89, D-103
PS320P5W	D-85, D-100
PS320P5WR	D-85
PS320P6S	D-89, D-103
PS320P6W	D-81, D-85, D-100
PS320P6WR	D-85
PS320P7W	D-81, D-85, D-100
PS320P7WR	D-85
PS320R4W	D-85, D-100
PS320R4WL	D-85
PS320R5S	D-89, D-103
PS320R5W	D-85, D-100
PS320R5WL	D-85
PS320R6S	D-89, D-103
PS320R6W	D-85, D-100
PS320R6WL	D-85
PS320R7W	D-85, D-100
PS320R7WL	D-85
PS330B4S	D-89, D-103
PS330B6S	D-89, D-103
PS330B7S	D-89, D-103
PS330C4S	D-89, D-103
PS330C4W	D-85, D-100
PS330C4WL	D-85
PS330C6S	D-89, D-103
PS330C6W	D-85, D-100
PS330C6WL	D-85
PS330C7S	D-89, D-103
PS330C7W	D-85, D-100
PS330C7WL	D-85
PS330C7WR	D-85
PS330FMIR6W	D-76, D-100
PS330MIR4W	D-81, D-100
PS330MIR6W	D-81
PS330MIR7W	D-81
PS330P4S	D-89, D-103
PS330P4W	D-81, D-85, D-100
PS330P6S	D-89, D-103
PS330P6W	D-76, D-81, D-85, D-100

INDEX

P

CAT. NO.	PAGE
PS330P7S	D-89, D-103
PS330P7W	D-81, D-85, D-100
PS330P7WR	D-85
PS330R4S	D-89, D-103
PS330R4W	D-85, D-100
PS330R4WL	D-85
PS330R6S	D-89, D-103
PS330R6W	D-85, D-100
PS330R7W	D-85, D-100
PS330R7WL	D-85
PS332B4S	D-90
PS332C4S	D-90, D-101
PS332C4W	D-87
PS332C6S	D-101
PS332C6W	D-87
PS332C9S	D-101
PS332C9W	D-87
PS332P4S	D-90, D-101
PS332P4W	D-87
PS332P6S	D-101
PS332P6W	D-87
PS332P9W	D-87
PS332P9S	D-101
PS332R4S	D-90, D-101
PS332R4W	D-87
PS332R6S	D-101
PS332R6W	D-87
PS332R9S	D-101
PS332R9W	D-87
PS3501	D-124
PS3502	D-124
PS360B4W	D-86, D-100
PS360B6S	D-89, D-103
PS360B6W	D-86, D-100
PS360B7S	D-89, D-103
PS360C4W	D-86, D-100
PS360C4WL	D-86
PS360C4WR	D-86
PS360C6S	D-89, D-103
PS360C6W	D-86, D-100
PS360C6WR	D-86
PS360C7S	D-89, D-103
PS360C7W	D-86, D-100
PS360C7WL	D-86
PS360C7WR	D-86
PS360FMIR6W	D-76, D-100
PS360MIR4W	D-81
PS360MIR6W	D-81, D-100
PS360MIR7W	D-81, D-100
PS360P4W	D-81, D-86, D-100
PS360P6S	D-89, D-103
PS360P6W	D-76, D-81, D-86, D-100
PS360P6WR	D-86
PS360P7S	D-89, D-103
PS360P7W	D-81, D-86, D-100
PS360P7WR	D-86
PS360R4W	D-86, D-100
PS360R6S	D-89, D-103
PS360R6W	D-86, D-100
PS360R7S	D-89, D-103
PS360R7W	D-86, D-100
PS360R7WL	D-86
PS363B6S	D-90
PS363C4W	D-88, D-102
PS363C6S	D-90
PS363C6W	D-88, D-102
PS363P4W	D-88, D-102
PS363P6S	D-90
PS363P6W	D-88, D-102
PS363R4W	D-88, D-102
PS363R6S	D-90
PS363R6W	D-88, D-102
PS371510	A-21
PS371530	A-21
PS372010	A-21
PS372010KL	A-21
PS372010L	A-21
PS372030	A-21
PS372030L	A-21
PS3F	D-66
PS3M	D-66
PS4001	D-124
PS4002	D-124
PS40CLL3RBK	D-67
PS40FB	D-64
PS40FCBK	D-66
PS40FRBBK	D-65
PS40FRSBBK	D-65
PS40MB	D-64
PS40MC	D-66
PS40MRBBK	D-65
PS40MRSBBK	D-65
PS40WTCL	D-67
PS40WTCS	D-67
PS4100B12W	D-86, D-100
PS4100B5W	D-86, D-100
PS4100B7W	D-86, D-100
PS4100B9W	D-86, D-100
PS4100C12W	D-86, D-100
PS4100C12WL	D-86
PS4100C12WR	D-86
PS4100C5W	D-86, D-100
PS4100C5WL	D-86
PS4100C5WR	D-86
PS4100C7W	D-86, D-100
PS4100C7WL	D-86
PS4100C9W	D-86, D-100
PS4100C9WL	D-86
PS4100C9WR	D-86
PS4100FMIR12W	D-76, D-100
PS4100FMIR5W	D-76, D-100
PS4100FMIR7W	D-76, D-100
PS4100FMIR9W	D-76, D-100
PS4100MIR12W	D-81, D-100
PS4100MIR5W	D-81, D-100
PS4100MIR7W	D-81, D-100
PS4100MIR9W	D-81, D-100
PS4100P12W	D-76, D-81, D-86, D-100
PS4100P5W	D-76, D-81, D-86, D-100
PS4100P7W	D-76, D-81, D-86, D-100
PS4100P9W	D-76, D-81, D-86, D-100
PS4100R12W	D-86, D-100
PS4100R5W	D-86, D-100
PS4100R5WL	D-86
PS4100R7W	D-86, D-100
PS4100R7WL	D-86
PS4100R9W	D-86, D-100
PS4125B9W	D-88, D-102
PS4125C9W	D-88, D-102
PS4125P9W	D-88, D-102
PS4125R9W	D-88, D-102
PS416B6S	D-90
PS416B9S	D-90
PS416C6S	D-90
PS416C6W	D-87, D-101
PS416C9S	D-90
PS416C9W	D-87, D-101
PS416P6S	D-90
PS416P6W	D-87, D-101
PS416P9S	D-90
PS416P9W	D-87, D-101
PS416R6S	D-90
PS416R6W	D-87, D-101
PS416R9S	D-90
PS416R9W	D-87, D-101
PS420B5S	D-89, D-103
PS420B7S	D-89, D-103
PS420B9S	D-89, D-103
PS420C12S	D-89, D-103
PS420C12W	D-85, D-100
PS420C12WR	D-85
PS420C5W	D-85, D-100
PS420C5WR	D-85
PS420C7S	D-89, D-103
PS420C7W	D-85, D-100
PS420C7WR	D-85
PS420C9S	D-89, D-103
PS420C9W	D-85, D-100
PS420C9WR	D-85
PS420FMIR12W	D-76, D-100
PS420FMIR5W	D-76, D-100
PS420FMIR7W	D-76, D-100
PS420FMIR9W	D-76, D-100
PS420MIR12W	D-81, D-100
PS420MIR5W	D-81, D-100
PS420MIR7W	D-81, D-100
PS420MIR9W	D-81, D-100
PS420P12S	D-89, D-103
PS420P12W	D-76, D-81, D-85, D-100
PS420P5W	D-76, D-81, D-85, D-100
PS420P5WR	D-85
PS420P7S	D-89, D-103
PS420P7W	D-76, D-81, D-85, D-100
PS420P9S	D-89, D-103
PS420P9W	D-76, D-81, D-85, D-100
PS420P9WR	D-85
PS420R12S	D-89, D-103
PS420R12W	D-85, D-100
PS420R12WL	D-85
PS420R5S	D-89, D-103
PS420R5W	D-85, D-100
PS420R7S	D-89, D-103
PS420R7W	D-85, D-100
PS420R9S	D-89, D-103
PS420R9W	D-85, D-100
PS430171	D-62
PS430244	D-62, D-69
PS430245	D-69
PS430246	D-62
PS430B12S	D-89, D-103
PS430B5S	D-89, D-103
PS430B7S	D-89, D-103
PS430B9S	D-89, D-103
PS430C12S	D-89, D-103
PS430C12W	D-85, D-100
PS430C12WL	D-85
PS430C12WR	D-85
PS430C3W	D-85, D-100
PS430C3WR	D-85
PS430C5S	D-89, D-103
PS430C5W	D-85, D-100
PS430C5WL	D-85
PS430C7S	D-89, D-103
PS430C7W	D-85, D-100
PS430C7WR	D-85
PS430C9S	D-89, D-103
PS430C9W	D-85, D-100
PS430C9WR	D-85
PS430FMIR12W	D-76, D-100
PS430FMIR3W	D-76, D-100
PS430FMIR5W	D-76, D-100
PS430FMIR7W	D-76, D-100
PS430FMIR9W	D-76, D-100
PS430MIR3W	D-81, D-100
PS430MIR5W	D-81, D-100

INDEX

P

CAT. NO.	PAGE
PS430MIR7W	D-81, D-100
PS430MIR9W	D-81, D-100
PS430P12W	D-76, D-85
PS430P12WR	D-85
PS430P3W	D-76, D-81, D-85, D-100
PS430P3WR	D-85
PS430P5S	D-89, D-103
PS430P5W	D-76, D-81, D-85, D-100
PS430P7S	D-89, D-103
PS430P7W	D-76, D-81, D-85, D-100
PS430P7WR	D-85
PS430P9S	D-89, D-103
PS430P9W	D-76, D-81, D-85, D-100
PS430P9WR	D-85
PS430R12S	D-89, D-103
PS430R12W	D-85, D-100
PS430R3W	D-85, D-100
PS430R3WL	D-85
PS430R5S	D-89, D-103
PS430R5W	D-85, D-100
PS430R7S	D-89, D-103
PS430R7W	D-85, D-100
PS430R9S	D-89, D-103
PS430R9W	D-85, D-100
PS430R9WL	D-85
PS432C6S	D-101
PS432C6W	D-87, D-101
PS432C9S	D-101
PS432C9W	D-87, D-101
PS432P6S	D-101
PS432P6W	D-87, D-101
PS432P9S	D-101
PS432P9W	D-87, D-101
PS432R6S	D-101
PS432R6W	D-87, D-101
PS432R9S	D-101
PS432R9W	D-87, D-101
PS45FR2SBBK	D-68
PS45FRBBK	D-68
PS45FRSBBK	D-68
PS45MR2SBBK	D-68
PS45MRBBK	D-68
PS45MRSBBK	D-68
PS460B12S	D-89, D-103
PS460B12W	D-86, D-100
PS460B5S	D-89, D-103
PS460B5W	D-86, D-100
PS460B7S	D-89, D-103
PS460B7W	D-86, D-100
PS460B9S	D-89, D-103
PS460B9W	D-86, D-100
PS460C12S	D-89, D-103
PS460C12W	D-86, D-100
PS460C12WL	D-86
PS460C12WR	D-86
PS460C5S	D-89, D-103
PS460C5W	D-86, D-100
PS460C7S	D-89, D-103
PS460C7W	D-86, D-100
PS460C9S	D-89, D-103
PS460C9W	D-86, D-100
PS460C9WR	D-86
PS460FMIR12W	D-76, D-100
PS460FMIR5W	D-76, D-100
PS460FMIR7W	D-76, D-100
PS460FMIR9W	D-76, D-100
PS460MIR12W	D-81, D-100
PS460MIR5W	D-81, D-100
PS460MIR7W	D-81, D-100
PS460MIR9W	D-81, D-100
PS460P12S	D-89, D-103
PS460P12W	D-76, D-81, D-86, D-100
PS460P12WR	D-86
PS460P5S	D-89, D-103
PS460P5W	D-76, D-81, D-86, D-100
PS460P7S	D-89, D-103
PS460P7W	D-76, D-81, D-86, D-100
PS460P9S	D-89, D-103
PS460P9W	D-76, D-81, D-86, D-100
PS460R12S	D-89, D-103
PS460R12W	D-86, D-100
PS460R5S	D-89, D-103
PS460R5W	D-86, D-100
PS460R5WL	D-86
PS460R7S	D-89, D-103
PS460R7W	D-86, D-100
PS460R9S	D-89, D-103
PS460R9W	D-86, D-100
PS463B11S	D-90
PS463B3S	D-90
PS463B6S	D-90
PS463B7S	D-90
PS463B9S	D-90
PS463C11S	D-90
PS463C3S	D-90
PS463C6S	D-90
PS463C7S	D-90
PS463C9S	D-90
PS463P11S	D-90
PS463P3S	D-90
PS463P6S	D-90
PS463P7S	D-90
PS463P9S	D-90
PS463R11S	D-90
PS463R3S	D-90
PS463R6S	D-90
PS463R7S	D-90
PS463R9S	D-90
PS463R3S	D-90
PS463R6S	D-90
PS463R7S	D-90
PS463R9S	D-90
PS463C11S	D-90
PS463C11W	D-88, D-102
PS463C3S	D-90
PS463C3W	D-88, D-102
PS463C6S	D-90
PS463C6W	D-88, D-102
PS463C7S	D-90
PS463C7W	D-88, D-102
PS463C9S	D-90
PS463C9W	D-88, D-102
PS463P11S	D-90
PS463P11W	D-88, D-102
PS463P3S	D-90
PS463P3W	D-88, D-102
PS463P6S	D-90
PS463P6W	D-88, D-102
PS463P7S	D-90
PS463P7W	D-88, D-102
PS463P9S	D-90
PS463P9W	D-88, D-102
PS463R11S	D-90
PS463R11W	D-88, D-102
PS463R3S	D-90
PS463R3W	D-88, D-102
PS463R6S	D-90
PS463R6W	D-88, D-102
PS463R7S	D-90
PS463R7W	D-88, D-102
PS463R9S	D-90
PS463R9W	D-88, D-102
PS4720SSAN	D-40
PS5100B5W	D-86, D-100
PS5100B7W	D-86, D-100
PS5100B9W	D-86, D-100
PS5100C5W	D-86, D-100
PS5100C5WL	D-86
PS5100C5WR	D-86
PS5100C7W	D-86, D-100
PS5100C7WL	D-86
PS5100C9W	D-86, D-100
PS5100C9WL	D-86
PS5100C9WR	D-86
PS5100FMIR5W	D-76, D-100
PS5100FMIR7W	D-76, D-100
PS5100FMIR9W	D-76, D-100
PS5100MIR5W	D-81, D-100
PS5100MIR7W	D-81, D-100
PS5100MIR9W	D-81, D-100
PS5100P5W	D-76, D-81, D-86, D-100
PS5100P5WR	D-86
PS5100P7W	D-76, D-81, D-86, D-100
PS5100P7WR	D-86
PS5100P9W	D-76, D-81, D-86, D-100
PS5100P9WR	D-86
PS5100R5W	D-86, D-100
PS5100R5WL	D-86
PS5100R7W	D-86, D-100
PS5100R7WL	D-86
PS5100R9W	D-86, D-100
PS5125B6W	D-88, D-102
PS5125B9W	D-88, D-102
PS5125C6W	D-88, D-102
PS5125C9W	D-88, D-102
PS5125P6W	D-88, D-102
PS5125P9W	D-88, D-102
PS5125R6W	D-88, D-102
PS5125R9W	D-88, D-102
PS515CCLB	D-11
PS515PCLB	D-11
PS516C6W	D-87, D-101
PS516C9W	D-87, D-101
PS516P6W	D-87
PS516P9W	D-87, D-101
PS516R6W	D-87, D-101
PS516R9W	D-87, D-101
PS520710	D-69
PS520B5S	D-89, D-103
PS520B7S	D-89, D-103
PS520B9S	D-89, D-103
PS520CCLB	D-11
PS520C5S	D-89, D-103
PS520C5W	D-85, D-100
PS520C5WR	D-85
PS520C7S	D-89, D-103
PS520C7W	D-85, D-100
PS520C7WR	D-85
PS520C9S	D-89, D-103
PS520C9W	D-85, D-100
PS520C9WR	D-85
PS520MIR9W	D-81
PS520PCLB	D-11
PS520P5W	D-85, D-100
PS520P5WR	D-85
PS520P7W	D-85, D-100
PS520P7WR	D-85
PS520P9W	D-81, D-85, D-100
PS520P9WR	D-85
PS520R5S	D-89, D-103
PS520R5W	D-85, D-100
PS520R7W	D-85, D-100
PS520R9S	D-89, D-103
PS520R9W	D-85, D-100
PS5262	B-35
PS5266HGAN	B-84, D-4

INDEX

P

CAT. NO.	PAGE
PS5266SSAN	D-6
PS5266X	D-3, D-5
PS5266XGCM	D-7, D-11
PS5266XGCMAN	D-11
PS5266XHG	B-84, D-4
PS5269X	D-3, D-5
PS5269XGCM	D-7, D-11
PS5269XHG	B-84, D-4
PS530B5S	D-89, D-103
PS530B7S	D-89, D-103
PS530B9S	D-89, D-103
PS530C5S	D-89, D-103
PS530C5W	D-85, D-100
PS530C5WL	D-85
PS530C5WR	D-85
PS530C7W	D-85, D-100
PS530C7WL	D-85
PS530C7WR	D-85
PS530C9S	D-89, D-103
PS530C9W	D-85, D-100
PS530C9WL	D-85
PS530C9WR	D-85
PS530FMIR7W	D-76, D-100
PS530FMIR9W	D-76, D-100
PS530MIR5W	D-81, D-100
PS530MIR7W	D-81, D-100
PS530MIR9W	D-81, D-100
PS530P5S	D-89, D-103
PS530P5W	D-81, D-85
PS530P5WR	D-85
PS530P7S	D-89, D-103
PS530P7W	D-76, D-81, D-85, D-100
PS530P7WR	D-85
PS530P9S	D-89, D-103
PS530P9W	D-76, D-81, D-85, D-100
PS530P9WR	D-85
PS530R5S	D-89, D-103
PS530R5W	D-85, D-100
PS530R5WL	D-85
PS530R7W	D-85, D-100
PS530R7WL	D-85
PS530R9S	D-89, D-103
PS530R9W	D-85, D-100
PS530R9WL	D-85
PS532B6S	D-90
PS532B9S	D-90
PS532C6S	D-90, D-101
PS532C6W	D-87
PS532C9S	D-90, D-101
PS532C9W	D-87
PS532P6S	D-90, D-101
PS532P6W	D-87
PS532P9S	D-90, D-101
PS532P9W	D-87
PS532R6S	D-90, D-101
PS532R6W	D-87
PS532R9S	D-90, D-101
PS532R9W	D-87
PS5362	B-35
PS5364Y	D-12
PS5366HGAN	B-84, D-4
PS5366SSAN	D-6
PS5366X	D-5
PS5366XGCM	D-7, D-11
PS5366XGCMAN	D-11
PS5366XHG	B-84, D-4
PS5369X	D-5
PS5369XGCM	D-7
PS5369XHG	B-84, D-4
PS5369Y	D-12
PS5464Y	D-12
PS5466HGAN	B-84, D-4
PS5466SSAN	D-6
PS5466X	D-5
PS5466XGCM	D-7
PS5466XHG	B-84, D-4
PS5469X	D-5
PS5469XGCM	D-7
PS5469XHG	B-84, D-4
PS5469Y	D-12
PS560B5S	D-89, D-103
PS560B5W	D-86, D-100
PS560B7S	D-89, D-103
PS560B7W	D-86, D-100
PS560B9S	D-89, D-103
PS560B9W	D-86, D-100
PS560C5S	D-89, D-103
PS560C5W	D-86, D-100
PS560C5WL	D-86
PS560C5WR	D-86
PS560C7S	D-89, D-103
PS560C7W	D-86, D-100
PS560C7WL	D-86
PS560C7WR	D-86
PS560C9S	D-89, D-103
PS560C9W	D-86, D-100
PS560FMIR5W	D-76, D-100
PS560FMIR7W	D-76, D-100
PS560FMIR9W	D-76, D-100
PS560MIR5W	D-81, D-100
PS560MIR7W	D-81, D-100
PS560MIR9W	D-81, D-100
PS560P5S	D-89, D-103
PS560P5W	D-76, D-81, D-86, D-100
PS560P5WR	D-86
PS560P7S	D-89, D-103
PS560P7W	D-76, D-81, D-86, D-100
PS560P7WR	D-86
PS560P9S	D-89, D-103
PS560P9W	D-76, D-81, D-86, D-100
PS560P9WR	D-86
PS560R5S	D-89, D-103
PS560R5W	D-86, D-100
PS560R5WL	D-86
PS560R7S	D-89, D-103
PS560R7W	D-86, D-100
PS560R7WL	D-86
PS560R9S	D-89, D-103
PS560R9W	D-86, D-100
PS563B3S	D-90
PS563B6S	D-90
PS563B7S	D-90
PS563B9S	D-90
PS563B11S	D-90
PS563C11W	D-88, D-102
PS563C3S	D-90
PS563C3W	D-88, D-102
PS563C6S	D-90
PS563C6W	D-88, D-102
PS563C7S	D-90
PS563C7W	D-88, D-102
PS563C9S	D-90
PS563C9W	D-88, D-102
PS563P11S	D-90
PS563P11W	D-88, D-102
PS563P3S	D-90
PS563P3W	D-88, D-102
PS563P6S	D-90
PS563P6W	D-88, D-102
PS563P7S	D-90
PS563P7W	D-88, D-102
PS563P9S	D-90
PS563P9W	D-88, D-102
PS563R11S	D-90
PS563R11W	D-88, D-102
PS563R3S	D-90
PS563R3W	D-88, D-102
PS563R3S	D-90
PS563R6W	D-88, D-102
PS563R6S	D-90
PS563R7W	D-88, D-102
PS563R7S	D-90
PS563R9W	D-88, D-102
PS5666HGAN	B-84, D-4
PS5666SSAN	D-6
PS5666X	D-5
PS5666XGCM	D-7
PS5666XHG	B-84, D-4
PS5666Y	D-12
PS5669X	D-5
PS5669XGCM	D-7
PS5669XHG	B-84, D-4
PS5669Y	D-12
PS5766X	B-18, D-5
PS5866X	B-18, D-5
PS5965Y	D-12
PS5969Y	D-12
PS6	B-16, B-17, B-95
PS60FSS	D-156
PS60SS	D-150
PS60SSAX	D-150
PS60SSAX3	D-150
PS60SSAXRC	D-150
PS60SSRC	D-150
PS665089V	J-17
PS7	B-16, B-17, B-95
PS7L	B-16, B-17, B-95
PS7P	B-16, B-17, B-95
PS811120I	A-18
PS81120I	A-18
PS8115	B-84, D-4
PS8119	B-84, D-4
PS8200H	B-57
PS8300H	B-57
PS862	H-16
PS862KIT	H-16
PS862TRC	H-16
PS862TRCAL	H-16
PS862TRGFIC	H-16
PS862TRGFICAL	H-16
PS862TRT	H-16
PS862TRTAL	H-16
PS862TRTGFI	H-16
PS862TRTGFIAL	H-16
PS863TRC	H-17
PS863TRCAL	H-17
PS863TRGFIC	H-17
PS863TRGFICAL	H-17
PS895C	H-17
PS895CAL	H-17
PS895GFIC	H-17
PS895GFICAL	H-17
PS895T	H-17
PS895TAL	H-17
PS895TGFI	H-17
PS895TGFIAL	H-17
PS8C	B-16, B-17, B-95
PS8HWL	K-20
PS8P	B-16, B-17 , B-95
PSAD100125	D-97
PSAD100150	D-97
PSAD1002	D-97
PSAD2034	D-97
PSAD2050	D-97
PSAD301	D-97
PSAD3034	D-97
PSAD3050	D-97
PSAD601	D-97
PSAD60125	D-97

INDEX

P

CAT. NO.	PAGE
PSAD60150	D-97
PSBB1001W	D-86, D-96, D-97, D-100
PSBB1002W	D-96, D-97
PSBB201SP	D-89, D-96, D-97
PSBB201W	D-85, D-89, D-96, D-97, D-100, D-103
PSBB202W	D-85, D-89, D-96, D-97, D-100, D-103
PSBB301SP	D-89, D-96, D-97
PSBB301W	D-85, D-89, D-96, D-97, D-100, D-103
PSBB601W	D-86, D-89, D-96, D-97, D-100, D-103
PSBBN201W	D-85, D-89, D-96, D-100, D-103
PSBBN202W	D-85, D-87, D-89, D-90,D-96, D-100, D-101, D-103
PSBBN301W	D-85, D-87, D-89, D-90, D-96, D-100, D-101, D-103
PSBBN601W	D-86, D-88, D-89, D-90, D-96, D-100, D-102, D-103
PSCP100	D-97
PSCP320	D-97
PSCP3430	D-97
PSCP420	D-97
PSCP520	D-97
PSCP530	D-97
PSCP60	D-97
PSDS100 (AX)	D-160, D-163
PSDS100	D-159
PSDS100AX	D-159
PSDS100AXRC	D-159, D-162
PSDS100AXSR	D-162
PSDS100RC	D-159, D-162
PSDS100SR	D-162
PSDS30 (AX)	D-160, D-163
PSDS30	D-159
PSDS30AX	D-159
PSDS30AX3	D-159
PSDS30AX3SR	D-162
PSDS30AXRC	D-159, D-162
PSDS30AXSR	D-162
PSDS30RC	D-159, D-162
PSDS30SR	D-162
PSDS60 (AX)	D-160, D-163
PSDS60	D-159
PSDS60AX	D-159
PSDS60AXRC	D-159, D-162
PSDS60AXSR	D-162
PSDS60HP (AX)	D-160, D-163
PSDS60HP	D-159
PSDS60HPAX	D-159
PSDS60HPAXRC	D-159, D-162
PSDS60HPAXSR	D-162
PSDS60HPRC	D-159, D-162
PSDS60HPSR	D-162
PSDS60RC	D-159, D-162
PSDS60SR	D-162
PSFFCBK	D-66
PSGRIPKIT1	D-144
PSGRIPKIT2	D-144
PSGRIPKIT3	D-144
PSL515C	D-21
PSL515CGCM	D-38
PSL515P	D-21
PSL515PGCM	D-38
PSL615C	D-22
PSL615CGCM	D-38
PSL615P	D-22
PSL615PAN	D-22, D-40
PSL615PGCM	D-38
PSL715C	D-22
PSL715CGCM	D-38
PSL715P	D-22
PSL715PAN	D-22, D-40
PSL715PGCM	D-38
PSM2FBK	D-61
PSM2MBK	D-61
PSMADFMBK	D-61
PSMADMFBK	D-61
PSMFCBK	D-61
PSMFR	D-62
PSMFRSBK	D-62
PSMMBK	D-66
PSMMCBK	D-61
PSMMR	D-62
PSMMRSBK	D-62
PSPTBK	D-66
PSWALLKIT	D-144
PT15AC1	A-23
PT15AC1WSL	A-23
PT15AC3	A-23
PT15AC3WSL	A-23
PT1597I	C-3
PT1597HGNTLTRI	B-78, C-17
PT1597HGTRI	B-75, C-15
PT1597NTLTRNAW	C-11
PT1597HGTRWRI	C-16
PT1597HGW	B-74, C-14
PT1597NAW	C-10
PT1597TRI	C-4
PT2097	C-3
PT2097HG	B-74, C-14
PT2097HGNAI	B-79, C-20
PT2097HGNTLTRI	B-78, C-17
PT2097HGNTLTRNAI	B-80, C-20
PT2097HGTRI	B-75, C-15
PT2097NTLTRNAI	B-80, C-20
PT2097HGNTLTRNAI	B-80, C-20
PT2097HGTRNAI	B-80, C-20
PT2097HGTRWRI	C-16
PT2097NAW	C-10
PT2097NTLTRI	C-5
PT2097TR	C-4
PT2097TRNAI	C-11
PT20AC1	A-22, A-23
PT20AC1ISL	A-23
PT20AC3	A-23
PT20AC3ISL	A-23
PT2601	A-17
PT2603	A-17
PT2621	A-17
PT2623	A-17
PT2625	A-17
PT26252	B-38
PT26252CD	B-44
PT26252SCCTI	B-44
PT2626	A-17
PT26262HGI	B-69
PT26352	B-38
PT26352SCCTI	B-44
PT26352CD	B-44
PT26362HGI	B-69
PT26352	B-38
PT5262	B-29
PT5262A	B-44
PT5262CD	B-32
PT5262SCCH	B-32
PT5262SP	B-91
PT5362	B-29
PT5362A	B-44
PT5362CD	B-32
PT5362SCCH	B-32
PT5362SP	B-91
PT8200I	B-59
PT8200HI	B-49
PT8200ISP	B-64, B-93
PT8200ILI	B-62
PT8300	B-59
PT8300H	B-49
PT8300IL	B-62
PT8300SP	B-64, B-93
PTIG26262	B-99
PTIG26362	B-99
PTIG5262	B-99
PTIG5262WSP	B-91
PTIG5362	B-99
PTIG5362ISP	B-91
PTIG8200	B-54
PTIG8200OSP	B-66, B-92
PTIG8300	B-54
PRIG8300SP	B-66, B-93
PTJ5	A-16, A-23
PTRA6SOL	B-21, C-14, C-20
PTRA6SOLB25	B-21
PTRA6SOLBP	B-21
PTRA6SOLG	B-21
PTRA6SOLNA	B-21
PTRA6STR	B-21, C-14, C-20
PTRA6STRB25	B-21
PTRA6STRBP	B-21
PTRA6STRG	B-21
PTRA6STRNABL	B-21
PTS6SOL3	A-16, A-23
PTS6SOL3277	A-16, A-23
PTS6SOL3BP	A-16, A-23
PTS6SOL4	A-16, A-23
PTS6SOL4277	A-16, A-23
PTS6SOL4BP	A-16, A-23
PTS6STR3	A-16, A-23
PTS6STR3277	A-16, A-23
PTS6STR3277BP	A-16, A-23
PTS6STR3BP	A-16, A-23
PTS6STR4	A-16, A-23
PTS6STR4277	A-16, A-23
PTS6STR4277BP	A-16, A-23
PTS6STR4BP	A-16, A-23
PTTESTER	B-21
PTTR15HACUSB	B-83, B-116
PTTR15ACUSB	B-111
PTTR20HACUSB	B-83, B-116
PTTR20ACUSB	B-111
PTTR26262	B-39
PTTR26262CD	B-44
PTTR26262HGI	B-70
PTTR26262SCCTI	B-44
PTTR26262SCI	B-40
PTTR26362	B-39
PTTR26362HGI	B-70
PTTR26362SC	B-40
PTTR26362SCCTI	B-44
PTTR5262	B-30
PTTR5262CD	B-32
PTTR5262ISP	B-92
PTTR5262SC	B-34
PTTR5262SCCH	B-32
PTTR5362	B-30
PTTR5362CD	B-32
PTTR5362ISP	B-92
PTTR5362SC	B-34
PTTR5362SCCH	B-32
PTTR62I	B-46
PTTR62HI	B-60
PTTR63	B-46
PTTR63H	B-60
PTTR8200I	B-50
PTTR8200PI	B-63
PTTR8200WSP	B-65, B-94
PTTR8300	B-50
PTTR8300ISP	B-65, B-94

INDEX

P — S

CAT. NO.	PAGE
PTTR8300PI	B-63
PTWSP250I	E-9
PW101I	E-10
PW201I	E-10
PW301	E-12
PW302	E-12
R	
R26USBAC	B-104
R26USBAC6	B-103
R26USBCC	B-104
R25USBCC6	B-103
R1000IV	E-40
R1000PIV	E-40
R1003PIV	E-40
R600IV	E-40
R600PIV	E-40
R603PIV	E-40
R885TRWCC6	B-12
RC1	H-8
RC2	H_8
RCD11	A-11
RCD113	A-11
RCD33	A-11
RCD38TR	A-11
RCDLM	A-10
RH1103PTC	E-29
RH1103PW	E-29
RH250I	E-7
RH373PTC	E-31
RH373PW	E-31
RH4FBL3PTC	E-30, E-31
RH4FBL3PW	E-30, E-31
RH703PTC	E-29
RH703PW	E-29
RH703PTUTC	E-30
RH703PTUW	E-30
RHCL453PTC	E-30
RHCL453PW	E-30
RHKIT	E-29
RHL743PTC	E-31
RHL743PW	E-31
RRKCLGV	E-40
RRKIV	E-40
RRW600VTC	E-5
RRW600UTC	E-5
RRW600U	E-5
RS100	D-150, D-159, D-162
RS100AX	D-150, D-159, D-162
RS250I	E-6
RS30	D-150, D-159, D-162
RS30AX	D-159, D-162
RS30AX3	D-159, D-162
RS60	D-159, D-162
RS60AX	D-159, D-162
RS60HP	D-150, D-159, D-162
RS60HPAX	D-150, D-159, D-162
RT100I	E-24
RT2I	E-23
RT200I	E-24
RT50I	E-23
RW600BTC	E-5
RWC826USB	B-102
RWP26	I-3, I-4
RWP262	I-3, I-4
RWP263	I-3, I-4
RWP264	I-3, I-4
RWP265	I-3, I-4
RWP266	I-3, I-4
RWU600B	E-5
S	
S109FAN	H-10
S116FAN	H-10
S116W	H-4
S118B50	H-6
S118R	H-2
S118RS	H-7
S118S50	H-6
S118W	H-4
S120277347EP	E-21
S120BFAN	H-10
S120HAC	H-11
S120HGAC	H-11
S120JAC	H-11
S120JFAN	H-10
S120JGAC	H-11
S120RAC	H-11
S120RACS	H-11
S120RFAN	H-10
S120RGAC	H-11
S122B	H-6
S122R	H-2
S122RS	H-7
S122S50	H-6
S122W	H-4
S232W	H-4
S235RAC	H-2
S235RACMH	H-2
S235RACS	H-7
S235RACSMH	H-7
S235S50AC	H-6
S2347	D-41
S2348DF	D-41
S352W	H-4
S354RAC	H-2
S354RACS	H-7
S354S50AC	H-6
S468RAC	H-2
S468RACS	H-7
S468S50AC	H-6
S4418BAC	H-8
S4421RAC	H-8
S4421SAC	H-8
S4435RAC	H-8
S4435SAC	H-8
S384C	I-10
S3862C	I-11
S3863C	I-11
S3713	B-12
S3713TR	B-12
S3733	B-12
S3733SS	B-12
S40	D-121
S752WCC10	J-5
S80	D-121
SA1	I-5
SA126	I-12
SA13	I-8
SA14	I-9
SA155CC10	J-7
SA2	I-5
SA23	I-8
SA24	I-9
SA26	I-7
SA262	I-7
SA3	I-5
SA399BKCC10	J-7
SA4	I-5
SA440CC10	J-7
SA4421RAC	H-8
SA540CC10	J-7
SA7	I-10
SA716	I-11
SA78	I-14
SA8	I-6
SA82	I-6
SA840CC10	J-7
SA993BKCC10	J-7
SB1BZ	I-5
SB1CH	I-5
SB1PB	I-5
SB2BZ	I-5
SB2CH	I-5
SB2PB	I-5
SB3BZ	I-5
SB3CH	I-5
SB3PB	I-5
SB4PB	I-5
SB5PB	I-5
SB6PB	I-5
SB7PB	I-10
SB8BZ	I-6
SB8CH	I-6
SB8PB	I-6
SB13BZ	I-8
SCK0751	D-127
SCK1001	D-127
SCK1251	D-127
SCK1501	D-127
SCK1502	D-127
SCK1751	D-127
SCK2002	D-127
SCK2501	D-127
SCK2502	D-127
SCK3001	D-127
SCK3002	D-127
SCK3501	D-127
SDV2B	H-5
SH122B	H-6
SLV1B	H-5
SLV1R	H-5
SLV1S	H-5
SLV1W	H-5
SLV2B	H-5
SLV2W	H-5
SLV3W	H-5
SS7	B-13, D-51
SS701	B-13
SS702	B-13
SS8	D-51
SSMF	D-150
SSMF2	D-150
S50BRACKET	H-6
SB13CH	I-8
SB13PB	I-8
SB18PB	I-12
SB23BZ	I-8
SB23CH	I-8
SB23PB	I-8
SB26BZ	I-7
SB26CH	I-7
SB26PB	I-7
SB28PB	I-12
SB33PB	I-8
SB82BZ	I-6
SB82CH	I-6
SB82PB	I-6
SB83PB	I-6
SB84PB	I-6
SB126PB	I-12
SB182PB	I-15
SB262PB	I-7
SB263PB	I-7
SB264PB	I-7
SB826PB	I-14
SL1	I-5
SL2	I-5
SL3	I-5
SL4	I-5
SL7	I-10
SL8	I-6
SL12	I-34

INDEX

S

CAT. NO.	PAGE
SL13	I-8
SL14	I-9
SL23	I-8
SL24	I-9
SL26	I-7
SL82	I-6
SL262	I-7
SMTE14I	I-32
SP1	I-5
SP2	I-5
SP3	I-5
SP4	I-5
SP5	I-5
SP6I	I-5
SP7	I-10
SP8	I-6
SP11	I-34
SP12	I-34
SP13	I-8
SP14	I-9
SP17	I-14
SP18	I-12
SP21I	I-34
SP23	I-8
SP24	I-9
SP26	I-7
SP28	I-12
SP33	I-8
SP38	I-12
SP43	I-8
SP44	I-9
SP60I	I-34
SP72	I-10
SP78	I-14
SP82	I-6
SP83	I-6
SP84	I-6
SP112	I-14, I-36
SP126	I-12
SP128	I-14, I-36
SP138	I-14
SP147I	I-15
SP148	I-15
SP182	I-15
SP226	I-12
SP262	I-7
SP263I	I-7
SP264	I-7
SP265I	I-7
SP266	I-7
SP326	I-12
SP703	I-11
SP720	I-10
SP732	I-34
SP826	I-14
SP1214I	I-14, I-36
SP1226	I-14, I-36
SP1262	I-12
SP1426	I-15
SP2262	I-13
SPJ1	I-19
SPJ2	I-19
SPJ3	I-19
SPJ4	I-19
SPJ7	I-19
SPJ8	I-19
SPJ11I	I-36
SPJ13	I-20
SPJ18	I-21
SPJ26	I-20
SPJ82	I-19
SPJ113	I-21
SPJ126	I-21
SPJ138	I-21
SPJ262	I-20
SPJ263	I-20
SPJ264	I-20
SPJ826I	I-21
SPJ1426	I-21
SPO1	I-19
SPO2	I-19
SPO8	I-19
SPO13	I-20
SPO18	I-21
SPO23	I-20
SPO26	I-20
SPO82	I-19
SPO113	I-21
SPO138	I-21
SPO262	I-20
SPO1326	I-21
SS1	I-5
SS1GBRED	I-24
SS1214	I-14, I-36
SS1226	I-14, I-36
SS1262	I-12
SS1426	I-15
SS14114	I-15
SS14814	I-15
SS2	I-5
SS3	I-5
SS4	I-5
SS5	I-5
SS6	I-5
SS7	I-10
SS8	I-6
SS8EE	I-23
SS8ERED	I-23
SS8ES	I-23
SS8IG	I-23
SS11	I-34
SS12	I-34
SS13	I-8
SS13.5	I-8
SS14	I-9
SS14.5	I-9
SS17	I-14
SS18	I-12
SS21	I-34
SS23	I-8
SS23.5	I-8
SS24	I-9
SS26	I-7
SS26IG	I-23
SS28	I-12
SS33	I-8
SS33.5	I-8
SS34	I-9
SS38	I-12
SS38.5	I-12
SS38PB	I-12
SS43	I-8
SS44	I-9
SS48	I-12
SS53	I-8
SS63	I-8
SS72	I-10
SS73	I-10
SS78	I-14
SS82	I-6
SS82IG	I-23
SS83	I-6
SS84	I-6
SS85	I-6
SS86	I-6
SS113	I-14
SS114	I-13
SS126	I-12
SS128	I-14, I-36
SS138	I-14
SS147	I-15
SS148	I-15
SS182	I-15
SS214	I-13
SS226	I-12
SS262	I-7
SS263	I-7
SS264	I-7
SS265	I-7
SS266	I-7
SS267	I-7
SS268	I-7
SS282	I-15
SS314	I-13
SS326	I-12
SS601	I-5
SS602	I-5
SS701	I-11
SS702	I-11
SS703	I-11
SS705	I-11
SS710	I-11
SS716	I-11
SS717	I-18
SS720	I-10
SS721	I-10
SS723	I-10
SS724	I-10
SS725	I-10
SS727	I-18
SS730	I-34
SS736	I-34
SS740	I-17
SS741	I-36
SS742	I-36
SS743	I-17
SS746	I-17
SS747	I-17
SS748	I-17
SS751	I-35
SS752	I-35
SS753	I-35
SS754	I-35
SS760	I-18
SS771	I-18
SS772	I-18
SS785	I-35
SS787	I-35
SS791	I-36
SS792	I-36
SS826	I-14
SS6013	I-8
SS6023	I-8
SS8148	I-15
SSJ1	I-19
SSJ2	I-19
SSJ3	I-19
SSJ7	I-19
SSJ8	I-19
SSJ13	I-20
SSJ18	I-21
SSJ26	I-20
SSJ82	I-19
SSJ126	I-21
SSJ262	I-20
SSJ263	I-20
SSK1	I-16
SSK2	I-16
SSK3	I-16
SSK12	I-16
SSK13	I-16
SSK22	I-16
SSK32	I-16
SSK33	I-16

INDEX

S — T

CAT. NO.	PAGE
SSN14	I-30
SSN15	I-30
SSN85	I-30
SSO1	I-19
SSO2	I-19
SSO3	I-19
SSO4	I-19
SSO7	I-19
SSO8	I-19
SSO11	I-36
SSO12	I-36
SSO13	I-20
SSO14	I-20
SSO18	I-21
SSO23	I-20
SSO24	I-20
SSO26	I-20
SSO28	I-21
SSO33	I-20
SSO82	I-19
SSO83	I-19
SSO114	I-21
SSO126	I-21
SSO138	I-21
SSO262	I-20
STB38SF	D-115
STB50SF	D-115
STB75SF	D-115
STB100SF	D-115
STB125SF	D-115
STB150SF	D-115
STB200SF	D-115
STB250SF	D-115
STB300SF	D-115
STB4538SF	D-115
STB4550SF	D-115
STB4575SF	D-115
STB9050SF	D-115
STB9075SF	D-115
STB45100SF	D-115
STB45125SF	D-115
STB45200SF	D-115
STB45250SF	D-115
STB45300SF	D-115
STB90100SF	D-115
STB90125SF	D-115
STB90150SF	D-115
STB90200SF	D-115
STB90300SF	D-115
STBN38SF	D-115
STBN50SF	D-115
STBN75SF	D-115
STBN100SF	D-115
STBN125SF	D-115
STBN150SF	D-115
STBN200SF	D-115

T

CAT. NO.	PAGE
TM8LOCATOR	A-2
T1000	E-39
T1000L	E-39
T1003	E-39
T1003LI	E-39
T600	E-39
T600L	E-39
T603	E-39
T603LI	E-39
TD1103P	E-33
TD703P	E-33
TDDH163P	E-34
TDFB83P	E-34
TDLV1103P	E-34
TDLV703P	E-34
TLV1000	E-39
TLV1003I	E-39
TLV600	E-39
TLV603I	E-39
TM1542BOX	H-15
TM1542TRBR	H-15
TM1542TRCF	H-15
TM1542TRGRY	H-15
TM1542TRLA	H-15
TM1542TRW	H-15
TM8113WCC	A-11
TM811DTMAI	A-8
TM811DTMOI	A-8
TM8USB	B-105
TM8USB4	B-106
TM826USB	B-104
TM83USBICC6	A-12, B-107
TM870	A-7
TM870ISL	A-9
TM870NA	A-7
TM870S	A-9
TM870STMWCC6	A-8
TM873	A-7
TM873ISL	A-9
TM873NA	A-7
TM873S	A-9
TM874	A-7
TM874ISL	A-9
TM874S	A-9
TM8HWLCC	K-20
TM8LMCC8	E-44
TMHWLCC	K-20
TP1	I-5
TP11	I-34
TP113	I-14
TP12	I-34
TP126	I-12
TP13	I-8
TP138	I-14

CAT. NO.	PAGE
TP14	I-9
TP18	I-12
TP1ERED	I-23
TP2	I-5
TP226	I-12
TP23	I-8
TP24	I-9
TP26	I-7
TP262	I-7
TP263	I-7
TP264	I-7
TP265	I-7
TP266	I-7
TP26CO	I-24
TP26ERED	I-24
TP26IG	I-23
TP28	I-12
TP2ERED	I-23
TP3	I-5
TP4	I-5
TP5	I-5
TP6	I-5
TP60I	I-34
TP7	I-10
TP703	B-13, I-11
TP720	I-10
TP724	B-13, I-10
TP7CO	I-24
TP7IG	I-23
TP8	I-6
TP82	I-6
TP826	I-14
TP82ERED	I-23
TP8CO	I-24
TP8EMPOWER	I-24
TP8ERED	I-23
TP8GFI	I-24
TP8IG	I-23
TPCATV	I-33
TPCATV2	I-33
TPD1	J-16
TPD2	J-16
TPD3	J-16
TPD4	J-16
TPD6	J-16
TPD9	J-16
TPJ1	I-19
TPJ113	I-21
TPJ126	I-21
TPJ13	I-20
TPJ18	I-21
TPJ2	I-19
TPJ26	I-20
TPJ262	I-20
TPJ263	I-20
TPJ264	I-20

CAT. NO.	PAGE
TPJ3	I-19
TPJ4	I-19
TPJ7	I-19
TPJ8	I-19
TPJ82	I-19
TPJ826	I-21
TPTE1	I-31
TPTE2	I-31
TPTELTV	I-33
TR15	B-23
TR15HUSBAC6	B-81, B-113
TR15HUSBAC	B-83, B-115
TR15HUSBCC6	B-81, B-113
TR15HUSBCC	B-83, B-115
TR15USBAC	B-110
TR15USBAC6	B-108
TR15USBCC	B-110
TR15USBCC6	B-108
TR20	B-23
TR20HUSBAC6	B-81, B-113
TR20HUSBAC	B-83, B-115
TR20HUSBCC6	B-81, B-113
TR20HUSBCC	B-83, B-115
TR20USBAC6	B-108
TR20USBCC6	B-108
TR20USBAC	B-110
TR20USBCC	B-110
TR26242	B-24
TR26252	B-24
TR26261	B-42
TR26261HG	B-68
TR26262	B-39
TR26262CD	B-43
TR26262CH	B-43
TR26262HG	B-70
TR26262HGPI	B-71
TR26342	B-24
TR26352	B-24
TR26361	B-42
TR26361HG	B-68
TR26362	B-39
TR26362CD	B-43
TR26362CH	B-43
TR26362HG	B-70
TR26362HGPI	B-71
TR5251	B-26
TR5252	B-23, B-30
TR5261USB	B-112
TR5262CD	B-31
TR5262CH	B-31
TR5262SP	B-88
TR5262USB	B-109
TR5361USB	B-112
TR5362CD	B-31
TR5362CH	B-31
TR5362SP	B-88

INDEX

T — 0

CAT. NO.	PAGE
TR5362USB	B-109
TR5351	B-26
TR5352	B-23
TR5362	B-30
TR62	B-46
TR62H	B-60
TR63	B-46
TR63H	B-60
TR8200HI	B-50, B-58
TR8200HUSB	B-82, B-114
TR8200PI	B-53
TR8200SP	B-89
TR8201	B-52
TR8300H	B-50, B-58
TR8300HUSB	B-82, B-114
TR8300ISP	B-89
TR8300PI	B-53
TR8301	B-52
TRIG26262	B-98
TRIG26262HGI	B-73
TRIG26362	B-98
TRIG26362HG	B-73
TRIG5262	B-98
TRIG5262WSP	B-88
TRIG5362ISP	B-88
TRIG8200	B-56
TRIG8200WSP	B-89
TRIG8300	B-56
TRIG8300ISP	B-89
TSC5	E-39
TSD4FBL3P	E-36
TSD703P	E-33
TSD1103P	E-33
TSDCL303P	E-33
TSDLV703P	E-34
TSDLV1103P	E-34
TSDFB83P	E-34
TSDDH163P	E-34
TSD703PTU	E-35
TSDKIT	E-38
TSDSSL7PA	E-37
TV1WBK	H-18
TV1WLA	H-18
TV1WMLVKIT	H-18
TV1WMTVSSWCC2	H-18
TV1WTVSSBK	H-18
TV1WTVSSLA	H-18
TV1WTVSSW	H-18
TV1WW	H-18
TV2MBK	H-18
TV3WBK	H-18
TV3WLA	H-18
TV3WMTTVSSW	H-18
TV3WTVSSBK	H-18
TV3WTVSSLA	H-18
TV3WTVSSW	H-18
TV3WW	H-18

W

CAT. NO.	PAGE
WDT100	E-4
WIUC10FRED	G-4
WIUC1FRHSL	G-4
WIUC20FRED	G-4
WIUC21FRED	G-4
WIUCAST1	G-5
WIUCAST2	G-5
WIUCED10	G-3
WIUCED10D	G-3
WIUCED10S	G-3
WIUCED20	G-3
WIUED10PK	G-3
WIUED20PK	G-3
WIUCFR10PK	G-4
WIUCFR20PK	G-4
WMTE14I	I-32
WP1	G-15
WP13	G-14
WP2	G-15
WP23	G-14
WP26	G-15
WP26L	G-15
WP3425	J-15
WP3450	J-15
WP3455	J-15
WP3457	J-15
WP3460	J-15
WP3481	J-15
WP3482	J-15
WP7	D-51, G-15
WP8	D-51, G-15
WPB1	G-21
WPB11	G-21
WPB12	G-21
WPB13	G-21
WPB2	G-21
WPB23	G-17
WPB232	G-18
WPB24	G-17
WPB242	G-18
WPB25	G-17
WPB252	G-18
WPB26	G-17
WPB262	G-18
WPB272	G-18
WPB276	G-18
WPB282	G-18
WPB287	G-18
WPB3	G-21
WPB33	G-17
WPB332	G-18
WPB34	G-17
WPB342	G-18
WPB35	G-17
WPB352	G-18
WPB36	G-17
WPB362	G-18
WPB373	G-19
WPB382	G-18
WPB387	G-18
WPBD23	G-19
WPBD252	G-19
WPBD33	G-19
WPBD352	G-19
WPBD43	G-19
WPBD452	G-19
WPBJ22	G-22
WPBL100	G-23
WPBP100	G-23
WPBP50	G-23
WPBP75	G-23
WPD8	G-15
WPEX1	G-23
WPEX2	G-23
WPEX3	G-23
WPEX4	G-23
WPEX5	G-23
WPEX6	G-23
WPFLDKIT	G-20
WPG1	D-9, D-48, G-2
WPG2	D-23, D-24, D-25, D-26, ... D-28, D-30, D-31, D-32,D-33, D-34, D-35, D-36,D-42 D-43, G-2
WPGAS100	G-23
WPGAS101	G-23
WPGASR101	G-23
WPGFIKIT	G-20
WPH1L	G-15
WPH26	G-15
WPH7L	G-15
WPH8	G-15
WPH8L	G-15
WPLEDBR	G-22
WPLEDKITBR	G-22
WPLKIT1	G-22
WPLKIT2	G-22
WPOUTKIT	G-20
WPRB1	G-21
WPRB11	G-21
WPRB12	G-21
WPRB13	G-21
WPRB25	G-20
WPRB35	G-20
WR20TR	B-27
WR5262	B-33
WR5362	B-33
WR5662	B-33
WR5862	B-33
WS1100TC	E-45
WS1100W	E-45
WS1103PTC	E-45
WS1103PW	E-45
WS250I	E-9
WS301I	E-12
WS4FBL3PTC	E-46
WS4FBL3PW	E-46
WS700TC	E-45
WS700W	E-45
WS703PTC	E-45
WS703PW	E-45
WSCL450TC	E-46
WSCL450W	E-46
WSCL453PTC	E-46
WSCL453PW	E-46
WSCL453TC	E-46
WSCL453W	E-46
WSDH16TC	E-45
WSDH16W	E-45
WSKIT	E-45
WSKITP	E-45
WSLV700TC	E-45
WSLV700W	E-45
WSLV703PTC	E-45
WSLV703PW	E-45
WSP200	E-4
WSP200I	E-9
WSP251I	E-12
WSP301I	E-12
WSP321I	E-12
WSSC53PTC	E-45
WSSC53PW	E-45
WT100562M	D-116
WT100562NM	D-116
WT100625M	D-116
WT100625NM	D-116
WT100750M	D-116
WT100750NM	D-116
WT100812M	D-116
WT100875M	D-116
WT100875NM	D-116
WT1100	E-18
WT1105	E-18
WT2200	E-18
WT2205	E-18
WT2250	E-18
WT2255	E-18
WT50312M	D-116
WT50312NM	D-116
WT50375M	D-116
WT50375NM	D-116
WT50437M	D-116
WT50437NM	D-116
WT50500M	D-116
WT50562M	D-116
WT600	E-18

INDEX

0 — 2

CAT. NO.	PAGE
WT605	E-18
WT75375M	D-116
WT75437M	D-116
WT75437NM	D-116
WT75500M	D-116
WT75500NM	D-116
WT75562M	D-116
WT75562NM	D-116
WT75625M	D-116
WT75625NM	D-116
WT75687M	D-116
WWP10CCV2	F-2, F-3
WWP20CCV2	F-2, F-3
WWP30CCV2	F-2, F-3
WWRL10WHCCV2	F-2, F-3
WWRL50WHCCV2	F-2, F-3
0	
0 221 71	D-164
0 221 79	D-164
0 221 88	D-164
0 227 00	D-164
1	
10020	J-6
10027	J-6
10028	J-6
10045	J-5
1008316	J-4
10085	J-5
101	J-7
1031	B-13, D-10
1033	D-10
1050K	J-14
1051	B-13, D-10
1053	B-13, D-10
1070B	J-14
1091I	J-14
111GMC	J-7
111MC	J-7
114GMC	J-7
1200	A-2
1201	A-2
1205A	A-2
1206A	A-2
1221	A-28, D-170
1222	A-28, D-170
1225	A-28, D-170
1226	A-28, D-170
1227	A-28, D-170
1228	A-28, D-170
123P	J-7
123PQC	J-8
125	J-8
1250	A-28, D-170
1251	A-28, D-170
1255	A-28, D-170
1256	A-28, D-170
1264	J-8
1275	A-28, D-170
1276	A-28, D-170
128	J-8
12845C5E89	J-17
13053UN	J-3
13057UN	J-3
1333	J-11
1354	J-12
13741	J-9
1406	J-8
1431	B-13, D-10
1432	J-11
1433	J-11
1433P	D-136
1447	D-136
1448	D-136
1449	D-136
1451	B-13, D-10
14629	D-13
1482ICC10	J-8
1498	A-28, D-170
1498NT	A-28, D-170
14W07	D-141
14W33	D-141
14W33AM	D-139
14W33GCM	D-141
14W47	D-141
14W47AM	D-139
14W47GCM	D-141
14W48	D-141
14W48AM	D-139
14W49	D-141
14W49AM	D-139
15W07	D-141
15W33	D-141
15W33AM	D-139
15W33GCM	D-141
15W47	D-141
15W47AM	D-138, D-139
15W47GCM	D-141
15W48	D-141
15W48AM	D-139
15W49	D-141
15W49AM	D-139
15010	H-25, H-27
15040	H-25, H-27
1532	J-11
1533	D-136
1542TRDR	H-15
1542TRFBA	H-15
1542TRFM	H-15
1547	D-136
1548	D-136
1549	D-136
1575	J-11
1594CMA	C-22
1594CMM	C-22
1594CS1A	C-23
1594CS1M	C-23
1594PC2A	C-23
1594PC2M	C-23
1594PC6M	C-23
1594TC2A	C-23
1594TC2M	C-23
1594TL2A	C-23
1594TL2M	C-23
1594TPA	C-21
1597	C-3
1597HGTR	B-75, C-15
1597HGTRA	B-77, C-18
1597NTLTR	C-5, F-3
1597HGI	B-74, C-14
1597HGTRWRI	C-16
1597IGHGTRO	B-76, C-19
1597IGTRI	C-9
1597SWTTR	A-13, C-8
1597TR	C-4, C-7
1597TRWR	C-6
1597TRA	C-7
1597TRNA	C-11
1597TRWRNA	C-12
168950	J-2
19062	J-5
19980PG	J-4
2	
2005	J-6
2006	J-6
201	J-5
20403N	D-48
20414	D-48
20414N	D-48
20415	D-48
20415N	D-48
20416N	D-48
20417N	D-48
20418	D-48
20443N	D-48
20444N	D-48
20445N	D-48
20446N	D-48
2087I	C-13
2094PC2A	C-23
2094PC2M	C-23
2094TL2A	C-23
2094TL2M	C-23
2097	C-3
2097HG	B-74, C-14
2097HGNTLTR	B-78, C-17
2097HGTR	B-75, C-15
2097HGTRNAI	B-80, C-20
2097NA	C-10
2097NTLTRI	C-5, F-3, K-20
2097HGNAI	B-79, B-80, C-20
2097HGTRAI	B-77, C-18
2097HGTRWRI	C-16
2097IGHGTRI	B-76, C-19
2097IGTRI	C-9
2097TR	C-4, C-7
2097TRA	C-7
2097TRNAI	C-11
2097TRWR	C-6
2097TRWRNA	C-12
21414	D-48
21415	D-48
21420	D-48
21426	D-48
21426S	D-48
2151RED	I-38
2152	I-38
2156	I-38
220	J-2
22200	H-22, H-26, H-27
226PAW	J-9
23000	D-47
23000G	D-47
23000HG	D-47
23002N	D-47
23005N	D-47
23035N	D-47
23050	D-47
23054N	D-47
23056N	D-47
2434	D-137
2447	D-137
2449	D-137
24845C5E	J-17
24845CC6	J-17
24W34	D-142
24W34AM	D-139
24W47	D-142
24W47AM	D-139
24W49	D-142
24W49AM	D-139
25250	D-49
2534	D-137
2536	J-3
2537	J-3
25414	D-49
25414N	D-49
25415	D-49
25415N	D-49
2547	D-137
2549	D-137
25W34	D-142

INDEX

2 — 3

CAT. NO.	PAGE
25W34AM	D-139
25W47	D-142
25W47AM	D-139
25W49	D-142
25W49AM	D-139
2601347I	A-17
2601I	A-17
2603347I	A-17
2603I	A-17
2604I	A-17
2608	D-137
2621	A-17
2621347I	A-17
2622	A-17
2623	A-17
2623347I	A-17
2624	A-17
26242	B-37
2624347I	A-17
2625	A-17
26252	B-38
26252CD	B-43
26252CH	B-43
26262HG	B-69
2626I	A-17
2628I	A-17
2629I	A-17
26342	B-37
26352	B-38
26352CD	B-43
26352CH	B-43
26362HG	B-69
26400	D-48, D-49
26401	D-48, D-49
26402	D-48, D-49
26404	D-48, D-49
26414	D-48
26415	D-48
26415A	D-48
26420	D-48
26426	D-48
26427	D-48
2647	D-137
2648	D-137
2649	D-137
26514	D-49
26514A	D-49
26515	D-49
26515A	D-49
26520	D-49
26526	D-49
26527	D-49
26652I	B-38
26661	B-41
2674	D-137
2675	D-137
2676	D-137
26852	B-38
26861	B-41
26CATVI	I-33
26TE14I	I-31
26TE16I	I-31
26TE24I	I-32
26TELTVICC10	I-33
26W08	D-143
26W08AM	D-139
26W47	D-142
26W47AM	D-139
26W48	D-142
26W48AM	D-139
26W49	D-142
26W49AM	D-139
26W74	D-143
26W74AM	D-139
26W75	D-143
26W75AM	D-139
26W76	D-143
26W76AM	D-139
2708	D-137
272	J-4
272WH6	J-4
274	J-4
2747	D-137
2748	D-137
2749	D-137
276WH	J-4
276WH6	J-4
2774	D-137
2775	D-137
2776	D-137
277FL	J-4
278FL	J-4
27W08	D-143
27W08AM	D-139
27W47	D-142
27W47AM	D-139
27W48	D-142
27W48AM	D-139
27W49	D-142
27W49AM	D-139
27W74	D-143
27W74AM	D-139
27W75	D-143
27W75AM	D-139
27W76	D-143
27W76AM	D-139
280WH	J-4
280WH6	J-4
282	J-4
284	J-4
2847	D-137
2848	D-137
2849	D-137
2874	D-137
2875	D-137
2876	D-137
2877	D-137
288	J-4
28W08	D-143
28W08AM	D-139
28W09	D-143
28W09AM	D-139
28W47	D-142
28W47AM	D-139
28W48	D-142
28W48AM	D-139
28W49	D-142
28W49AM	D-139
28W74	D-143
28W74AM	D-139
28W75	D-143
28W75AM	D-139
28W76	D-143
28W76AM	D-139
28W77	D-143
28W77AM	D-139
2947	D-137
2948	D-137
2949	D-137
2974	D-137
2975	D-137
2976	D-137
2977	D-137
29816C2	J-4
29W08	D-143
29W08AM	D-139
29W09	D-143
29W09AM	D-139
29W47	D-142
29W47AM	D-139
29W48	D-142
29W48AM	D-139
29W49	D-142
29W49AM	D-139
29W74	D-143
29W74AM	D-139
29W75	D-143
29W75AM	D-139
29W76	D-143
29W76AM	D-139
29W77	D-143
29W77AM	D-139
3	
3050	D-145
3051BK	D-145
3052BK	D-145
3054BK	D-145
3055BK	D-145
3056BK	D-145
3057BK	D-145
3058BK	D-145
3059	D-145
3059F	D-145
3060BK	D-145
3061BK	D-145
3090	D-145
3099	D-145
3099F	D-145
31528	J-5
3200	D-145
3232	B-3
32324	B-3
3232MH	B-3
3232S	B-3
3232TR	B-4
3232TRNA	B-4
3232TRS	B-4
3232TRWR	B-5
3241BK	D-145
3241WBK	D-145
325	J-10
3251BK	D-145
3251WBK	D-145
326	I-37, J-10
3260BK	D-145
3260WBK	D-145
3261BK	D-145
3261WBK	D-145
3262BK	D-145
3262WBK	D-145
3263BK	D-145
3263WBK	D-145
3265BK	D-145
3267BK	D-145
3267WBK	D-145
327	I-37, J-10
3300	D-145
3330	D-41
33300	H-22, H-26
33303	H-24, H-27
3330G	D-41
33310	H-22, H-26, H-27
3331G	D-41
3331SS	D-41
3333SS	D-41
3334SS	D-41
3335SS	D-41
3352F	J-5
340	I-37
342	I-37, J-12
3430	D-43
3431G	D-43
3431SS	D-43

INDEX

3 — 6

CAT. NO.	PAGE
3433SS	D-43
3434SS	D-43
3435SS	D-43
347	I-37, J-12
348	I-37, J-12
3703	G-9
3703TCW	G-9
3710	G-9
3710FS	D-51
3720	G-9
3720FS	D-51
3722FS	D-51
3723	G-9
3723FS	G-9
3726SC	G-11
3760	D-51, G-11
3762	D-44
3763M	D-44
3764	D-45
3765	D-45
3769	D-45
3770SC	G-11
3771	D-44
3775	D-45
3777	D-44
3778	G-7
3780	G-11
3780SC	G-11
3780SCFBX	G-10
3780SCMH	G-10
3795	G-9
3796	G-13
3797	G-13
3801	B-13
3802	B-13
3804	B-13
3820	B-13
3822	B-13
3830	B-13
384	I-10
385	B-13
3852	B-13
3854	B-13
385440	B-13
3860	B-13
3861	B-13, D-13
3862	I-11
3864	B-13
3864NA	B-13
3867	D-13
3869	B-13, D-13
3870	B-13
388	B-13
3884	B-13
388440	B-13
3890	B-13
3894	B-13
3901W	J-3
4	
4017CC10	J-6
415	B-11
420	B-11
420H	B-85
423	J-2
43308	J-6
43379	D-13
43399	D-13
44400	H-24, H-27
4510	G-13
4511	G-13
4512	G-13
4515	G-14
4515FS	G-14
4515FSGAS	G-14
4515GAS	G-14
4516	G-14
4550	D-22
4560	D-22
4600	G-12
46001P	G-12
460026P	G-12
46007P	G-12
46008P	G-12
4609	G-12
464	J-3
465	J-3
466	J-3
467	J-3
4700	D-21
4710	D-21
4715SS	D-21
4716SS	D-21
4750	D-22
4760	D-22
4792	D-21
48643	J-7
4867Y	D-8
48845C5E	J-17
48845CC6	J-17
4887Y	D-8
4AP	B-11, B-85
4RBC	H-11
4RBCW	H-11
4SBC	H-8
4SBCW	H-8
5	
500K	J-14, A-20
509	I-39
510	I-39
511	I-39
512	I-39
513	I-39
51980	D-104
52029	D-90
5251	B-25
5251SSWB	B-25
5258	B-25
5261	B-36
5262	B-29
5262A	B-45
5262CD	B-31
5262CH	B-31
5262SP	B-87
5276BK	D-8
5278SS	D-9
5278SSBK	D-9
5279SS	D-9
5279SSBK	D-9
528I	I-39
5290	B-29
5296BK	D-8
531S	I-39
532S	I-39
533D	I-39
5351	B-25
5358	B-25
5361	B-36
5362	B-29
5362A	B-45
5362CD	B-31
5362CH	B-31
5362SP	B-87
S5371	B-25
5374BK	D-8
5378SS	D-9
5379SS	D-9
5406BK	J-2
5478SS	D-9
5479SS	D-9
55015	H-24, H-27
55020	H-24, H-27
55025	H-24, H-27
55500	H-25
55501	H-23, H-26, H-27
55528	H-24, H-27
5651	B-25
5658	B-25
5662	B-35
5662A	B-45
5666BK	D-8
5669BK	D-8
5671	B-36
5678SS	D-9
5679SS	D-9
5740	B-13
5741AN	B-13, D-13
5745AN	B-13, D-13
5746AN	B-13, D-13
575	J-2
5750	B-13
5751AN	B-13, D-13
5760	B-13
5761AN	B-13, D-13
5762	B-18
5765BK	D-8
5850	B-22
5851	B-25
5858	B-25
5862	B-35
5862A	B-45
5864BK	D-8
5866BK	D-8
5871	B-36
5890	B-29
5SC	J-9
6	
6098PG	J-4
60W33	D-141
60W33DPLX	D-141
60W47	D-141
60W47DPLX	D-141
60W48	D-141
60W48DPLX	D-141
60W49	D-141
60W49DPLX	D-141
61	J-5
6207	B-12
63	J-8
6307	B-12
6500	D-144
653	J-2
65501	H-25, H-26, H-27
65505	H-25
65521	H-23, H-26, H-27
65W34	D-142
65W34DPLX	D-142
65W47	D-142
65W47DPLX	D-142
65W49	D-142
65W49DPLX	D-142
660G	A-3
660GMH	A-3
660ISLG	A-4
660NAG	A-3
660SG	A-4
663G	A-3
663ISLG	A-4
663SG	A-4
664G	A-3
664SG	A-4
670	A-6

INDEX

6 — 9

CAT. NO.	PAGE
6700	D-144
670G	A-5
671	A-5
671TR	A-5
67705	H-25
67W08	D-143
67W47	D-142
67W48	D-142
67W49	D-142
67W74	D-143
67W75	D-143
67W76	D-143
68	J-8
6800	D-144
680I	A-6
680IG	A-6
6810	B-18
681I	A-6
690	A-6
690G	A-5
691	A-5
691TR	A-5
692	A-6
692G	A-5
693	A-6
693G	A-5
695	A-6
695G	A-5
696	A-6
696G	A-5
697	J-9
697RI	J-9
699CC25	J-9
69W08	D-143
69W09	D-143
69W47	D-142
69W48	D-142
69W49	D-142
69W74	D-143
69W75	D-143
69W76	D-143
69W77	D-143

7

CAT. NO.	PAGE
7070PG	J-4
7070PG	J-4
7088	B-18, D-13
7090M	J-4
7090MH	J-4
7090PG	J-4
7101	D-20
7102	D-20
7210	D-20
7251DF	B-13, D-13
7310	D-41
7311G	D-41
7311SS	D-41
7311SSBK	D-41
7313SS	D-41
7313SSBK	D-41
735CC10	J-9
7379	D-45
738	J-2
7408SS	D-42
7409SS	D-42
7410	D-42
7410G	D-42
7411G	D-42
7411SS	D-42
7413G	D-42
7413SS	D-42
7420	G-13
7425Y	D-23, D-24, D-28, D-30, D-51, G-12
7427	D-46
7506	D-20
7526	D-20
7535	D-20
7547DF	D-20
7554SS	D-41
7555G	D-41
7555SS	D-41
7556SS	D-41
7557SS	D-41
7572G	D-41
7580	D-41
7580G	D-41
7582	D-41
7621	B-18
7764	D-45
7765	D-45
7770	D-44, D-45, D-51, G-12
77700	H-24
77702	H-23, H-26, H-27
77705	H-24,H-27
77706	H-25, H-27
77708	H-25, H-26
779CC5	J-9
7801P	A-25, D-167
7802MD	A-25, D-167
7803MD	A-24, A-25, D-166, D-167
7803W	A-25, D-167
7806P	A-25, D-167
7812EX	A-25, D-167
7812PMD	A-25, D-167
7813EX	A-25, D-167
7813PMD	A-25, D-167
7830	A-25, D-167
7832MD	A-25, D-167
7833MD	A-25, D-167
7842MD	A-26, D-168
7843MD	A-26, D-168
7860	A-27, D-169
7862	A-27, D-169
7862R	A-27, D-169
7863	A-27, D-169
7863R	A-27, D-169
7958P	D-45
799K	A-20

8

CAT. NO.	PAGE
8052CC10	J-5
80700I	I-37, J-10
8101	J-5
8200	B-59
8200H	B-49
8200IL	B-62
8200SP	B-90
8200WMRI	B-61
8201	B-51
8284	B-51
8300	B-59
8300H	B-49
8300IL	B-62
8300IMR	B-61
8300SP	B-90
8301	B-51
8302AN	B-13, D-13
83300	H-22, H-26, H-27
8384	B-51
83CC4	J-7
8462N	B-13
84BKCC20	J-7
85502	H-23, H-26
8601	J-6
8678	J-6
8681	J-8
8694	J-6
8800	B-59
8801	B-51
885	B-6
885S	B-6
885TR	B-7
885TRNAI	B-8
885TRSI	B-8
885TRWR	B-9

9

CAT. NO.	PAGE
975ABDCC10	J-5
9880	J-5
9977	B-18, D-13



designed to be better.™

legrand®

Electrical Wiring Systems

60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us

Canada
1.800.723.5175; 905.738.9195
www.legrand.ca

Costa Rica
+506.298.56.04; +506.239.71.13
www.legrand.cr

FOLLOW US